

EMC TEST REPORT
For
Guangdong Paipai Communications Technology Co.,Ltd
Lithium Ion Battery

Model No.: XS,5S,6,6S Plus,7,7 Plus,8,8 Plus,X,XR,XS MAX,11,11pro,
11promax,12mini,12,12pro max,13mini,13,13pro,13pro max,14,14plus,14pro,
14pro max,15,15plus,15pro,15pro max,6Plus,SE2,SE3

Prepared for : Guangdong Paipai Communications Technology Co.,Ltd
Address : No. 60 hua FA South Road, Nanyuan community, Nanyuan
Street, Futian District, Shenzhen City, 1901, Block A, Block B,
Block A, Feiyang times

Prepared by : Shenzhen ATL Testing Technology Co., Ltd.
Address : Room 201, Building 1, Anxu Business Park, No. 35-1, Xiangyin
Road, Nanlian Community, Longgang Street, Longgang
District, Shenzhen

Web : www.atllab.org
Mail : atl@atllab.org

Date of receipt of test sample : Oct. 08, 2023
Number of tested samples : 1
Serial number : Prototype
Date of Test : Oct. 08, 2023- Oct. 13, 2023
Date of Report : Oct. 13, 2023



EMC TEST REPORT**EN IEC 61000-6-3:2021**

Emission standard for residential, commercial and light-industrial environments

EN IEC 61000-6-1:2019

Immunity for residential, commercial and light-industrial environments

Report Reference No.: ATL20231008879E01**Date Of Issue.....: Oct. 13, 2023****Testing Laboratory Name.....: Shenzhen ATL Testing Technology Co., Ltd.****Address.....: Room 201, Building 1, Anxu Business Park, No. 35-1, Xiangyin Road, Nanlian Community, Longgang Street, Longgang District, Shenzhen****Testing Location/ Procedure: Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐****Applicant's Name.....: Guangdong Paipai Communications Technology Co.,Ltd****Address.....: No. 60 hua FA South Road, Nanyuan community, Nanyuan Street, Futian District, Shenzhen City, 1901, Block A, Block B, Block A, Feiyang times****Test Specification:****Standard: EN IEC 61000-6-3:2021
EN IEC 61000-6-1:2019****Test Report Form No.....: ATLEMC-1.0****TRF Originator.....: Shenzhen ATL Testing Technology Co., Ltd.****Master TRF: Dated 2015-03****SHENZHEN ATL TESTING TECHNOLOGY CO., LTD. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN ATL TESTING TECHNOLOGY CO., LTD. is acknowledged as copyright owner and source of the material. SHENZHEN ATL TESTING TECHNOLOGY CO., LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description.....: Lithium Ion Battery**Trade Mark.....: N/A****Model/ Type Reference: XS****Ratings: Battery : 3.81V==12.5Whr****Result: Positive****Compiled by:**

Rose Fang / File administrators

Supervised by:

Jane He / Technique principal

Approved by:

July Yan / Manager

This report shall not be reproduced except in full, without the written approval of Shenzhen ATL Testing Technology Co., Ltd.



EMC -- TEST REPORT**Test Report No. :** ATL20231008879E01Oct. 13, 2023

Date of issue

Type / Model..... : XS**EUT..... :** Lithium Ion Battery**Applicant..... :** **Guangdong Paipai Communications Technology Co.,Ltd****Address..... :** No. 60 hua FA South Road, Nanyuan community, Nanyuan Street, Futian District, Shenzhen City, 1901, Block A, Block B, Block A, Feiyang times**Manufacturer..... :** **Guangdong Paipai Communications Technology Co.,Ltd****Address..... :** No. 60 hua FA South Road, Nanyuan community, Nanyuan Street, Futian District, Shenzhen City, 1901, Block A, Block B, Block A, Feiyang times**Factory..... :** **Guangdong Paipai Communications Technology Co.,Ltd****Address..... :** No. 60 hua FA South Road, Nanyuan community, Nanyuan Street, Futian District, Shenzhen City, 1901, Block A, Block B, Block A, Feiyang times**Test Result** according to the standards on page 6: **Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENT

Test Report Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	6
1.1. Description of Standards and Results.....	6
1.2. Description of Performance Criteria	7
2. GENERAL INFORMATION	8
2.1. Description of Device (EUT)	8
2.2. Description of Test Facility	8
2.3. Statement of the measurement uncertainty.....	8
2.4. Measurement Uncertainty	8
3. MEASURING DEVICE AND TEST EQUIPMENT	9
3.1. Conducted Disturbance	9
3.2. Disturbance Power	9
3.3. Radiated Electromagnetic Disturbance	9
3.4. Radiated Disturbance (Electric Field)	9
3.5. Harmonic Current.....	9
3.6. Voltage fluctuation and Flicker	9
3.7. Electrostatic Discharge.....	10
3.8. RF Field Strength Susceptibility	10
3.9. Electrical Fast Transient/Burst	10
3.10. Surge	10
3.11. Conducted Susceptibility.....	10
3.12. Power Frequency Magnetic Field Susceptibility.....	10
3.13. Voltage Dips	11
3.14. Voltage Short Interruptions	11
4. RADIATED EMISSION MEASUREMENT	12
4.1. Block Diagram of Test Setup	12
4.2. Test Standard	12
4.3. Radiated Emission Limits	12
4.4. EUT Configuration on Test	13
4.5. Operating Condition of EUT	13
4.6. Test Procedure	13
4.7. Test Results	13
5. ELECTROSTATIC DISCHARGE IMMUNITY TEST	16
5.1. Block Diagram of Test Setup	16
5.2. Test Standard	16
5.3. Severity Levels and Performance Criterion	16
5.4. EUT Configuration on Test	16
5.5. Operating Condition of EUT	16
5.6. Test Procedure	17
5.7. Test Results	17
6. RF FIELD STRENGTH SUSCEPTIBILITY TEST	19
6.1. Block Diagram of Test	19
6.2. Test Standard	19
6.3. Severity Levels and Performance Criterion	19
6.4. EUT Configuration on Test	20
6.5. Operating Condition of EUT	20
6.6. Test Procedure	20
6.7. Test Results	20
7. MAGNETIC FIELD SUSCEPTIBILITY TEST	22
7.1. Block Diagram of Test Setup	22
7.2. Test Standard	22
7.3. Severity Levels and Performance Criterion	22
7.4. EUT Configuration on Test	22
7.5. Test Procedure	23

7.6. Test Results	23
8. PHOTOGRAPH	25
9. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	26
10. MANUFACTURER/ APPRVAL HOLDER DECLARATION	28

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION (EN IEC 61000-6-3:2021)			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	EN 55032:2015/A11:2020	Class B	N/A
Conducted disturbance at telecommunication port	EN 55032:2015/A11:2020	Class B	N/A
Radiated disturbance	EN 55032:2015/A11:2020	Class B	PASS
Harmonic current emissions	EN IEC 61000-3-2:2019/A1:2021	Class A	N/A
Voltage fluctuations & flicker	EN 61000-3-3:2013/A2:2021	-----	N/A
IMMUNITY (EN IEC 61000-6-1:2019)			
Description of Test Item	Basic Standard	Performance Criteria	Results
Electrostatic discharge (ESD)	EN 61000-4-2:2009	B	PASS
Radio-frequency, Continuous radiated disturbance	EN 61000-4-3:2006/A2:2010	A	PASS
Electrical fast transient (EFT)	EN 61000-4-4:2012	B	N/A
Surge (Input a.c. power ports)	EN 61000-4-5:2014/A1: 2017	B	N/A
Radio-frequency, Continuous conducted disturbance	EN 61000-4-6:2014/AC: 2015	A	N/A
Power frequency magnetic field	EN 61000-4-8:2010	A	PASS
Voltage dips, >95% reduction	EN IEC 61000-4-11:2020	B	N/A
Voltage dips, 30% reduction		C	N/A
Voltage interruptions		C	N/A
N/A is an abbreviation for Not Applicable.			

1.2. Description of Performance Criteria

General Performance Criteria

Examples of functions defined by the manufacturer to be evaluated during testing include, but are not limited to, the following:

- essential operational modes and states;
- tests of all peripheral access (hard disks, floppy disks, printers, keyboard, mouse, etc.);
- quality of software execution;
- quality of data display and transmission;
- quality of speech transmission.

1.2.1. Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacture when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

1.2.2. Performance criterion B

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacture, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operation state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

1.2.3. Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacture's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : Lithium Ion Battery

Model Number : XS

Power Supply : Battery : 3.81V==12.5Whr

EUT Clock Frequency : $\leq$ 108MHz

2.2. Description of Test Facility

Site Description

Test Lab. : Shenzhen ATL Testing Technology Co., Ltd.
Add. : Room 201, Building 1, Anxu Business Park, No. 35-1,
Xiangyin Road, Nanlian Community, Longgang Street,
Longgang District, Shenzhen
Our laboratories are accredited and approved by the following
approval agencies according to ISO/IEC 17025.
FCC Registration Number: 802773;
IC Registration Number: 010276817-001

2.3. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the ATL quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

2.4. Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	:	30MHz~200MHz	$\pm 2.96\text{dB}$	(1)
		200MHz~1000MHz	$\pm 3.10\text{dB}$	(1)
Conduction Uncertainty	:	150kHz~30MHz	$\pm 1.63\text{dB}$	(1)
Power disturbance	:	30MHz~300MHz	$\pm 1.60\text{dB}$	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3. MEASURING DEVICE AND TEST EQUIPMENT

3.1. Conducted Disturbance

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2023/09/18
2	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2023/09/18
3	Artificial Mains	ROHDE & SCHWARZ	ENV216	101288	2023/09/18
4	EMI Test Software	AUDIX	E3	N/A	2023/09/18

3.2. Disturbance Power

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2023/09/18
2	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2023/09/18
3	Absorbing clamp	ROHDE & SCHWARZ	MDS 21	4033	2023/09/18
4	EMI Test Software	AUDIX	E3	N/A	2023/09/18

3.3. Radiated Electromagnetic Disturbance

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2023/09/18
2	Triple-loop Antenna	EVERFINE	LLA-2	11050003	2023/09/18
3	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2023/09/18
4	EMI Test Software	AUDIX	E3	N/A	2023/09/18

3.4. Radiated Disturbance (Electric Field)

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2023/09/18
2	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2023/09/18
3	Log per Antenna	SCHWARZBECK	VULB9163	9163-470	2023/09/18
4	Amplifier	Compliance Direction	PAP-0102	21001	2023/09/18
5	Spectrum Analyzer	Agilent	E4407B	MY41440754	2023/09/18
6	Horn Antenna	ETS.LINDGREN	3115	00034771	2023/09/18
7	EMI Test Software	AUDIX	E3	N/A	2023/09/18

3.5. Harmonic Current

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power Analyzer Test System	Voltech	PM6000	20000670053	2023/09/18

3.6. Voltage fluctuation and Flicker

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power Analyzer Test System	Voltech	PM6000	20000670053	2023/09/18

3.7. Electrostatic Discharge

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ESD Simulator	KIKUSUI	KC001311	KES4021	2023/09/18

3.8. RF Field Strength Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	SIGNAL GENERATOR	HP	8648A	625U00573	2023/09/18
2	Amplifier	AR	500A100	17034	2023/09/18
3	Amplifier	AR	100W/1000M 1	17028	2023/09/18
4	Isotropic Field Monitor	AR	FM2000	16829	2023/09/18
5	Isotropic Field Probe	AR	FP2000	16755	2023/09/18
6	Bi-conic Antenna	EMCO	3108	9507-2534	2023/09/18
7	By-log-periodic Antenna	AR	AT1080	16812	2023/09/18
8	EMS Test Software	ROHDE & SCHWARZ	ESK1	N/A	2023/09/18

3.9. Electrical Fast Transient/Burst

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Electrical fast transient(EFT)generator	3CTEST	EFT-4021	EC0461044	2023/09/18
2	Coupling Clamp	3CTEST	EFTC	EC0441098	2023/09/18

3.10. Surge

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Surge test system	3CTEST	SG-5006G	EC5581070	2023/09/18
2	Coupling/decoupling network	3CTEST	SGN-5010G	ECS5591033	2023/09/18

3.11. Conducted Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Conducted Immunity Test System	FRANKONIA	CIT-10	126A1195	2023/09/18
2	Coupling/decoupling network	FRANKONIA	CDN-M2+M3	A2210177	2023/09/18

3.12. Power Frequency Magnetic Field Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power frequency mag-field generator System	EVERFINE	EMS61000-8 K	906003	2023/09/18

3.13.Voltage Dips


Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2023/09/18

3.14.Voltage Short Interruptions

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2023/09/18

4. RADIATED EMISSION MEASUREMENT

4.1. Block Diagram of Test Setup

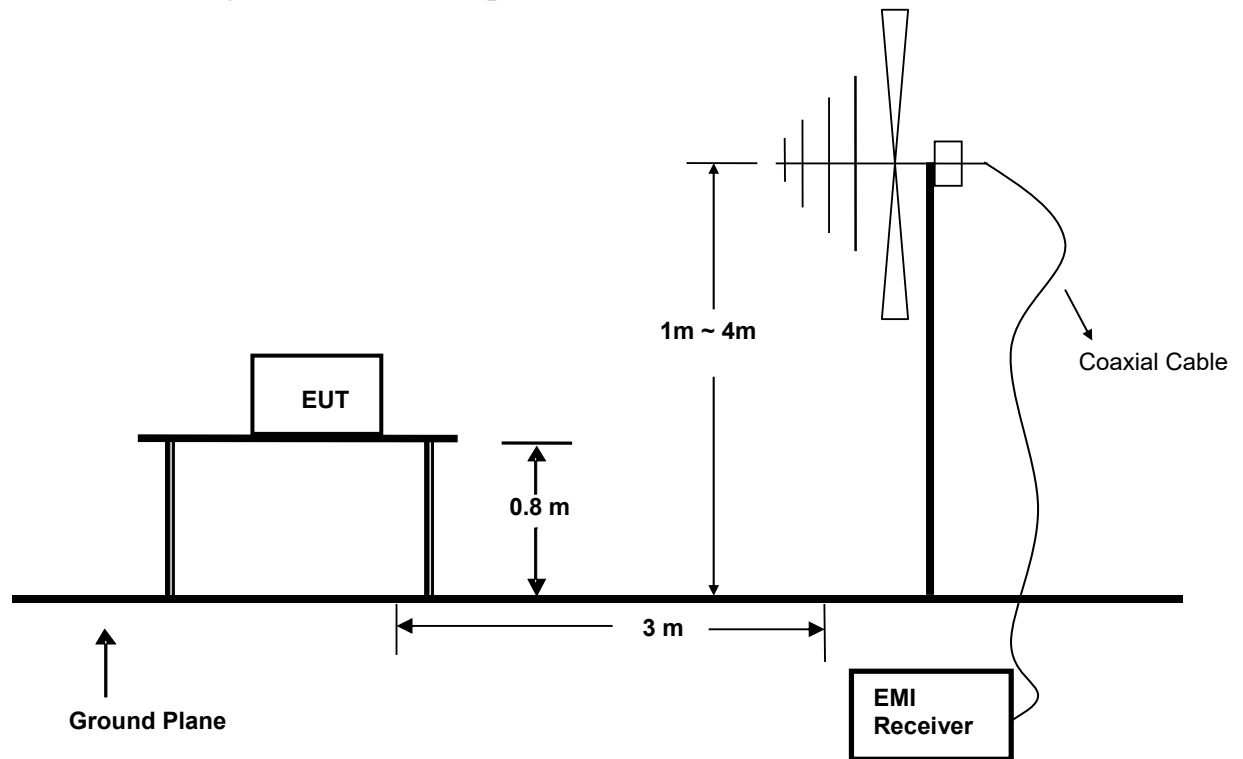

4.2. Test Standard

EN IEC 61000-6-3:2021 (EN 55032:2015/A11:2020)

4.3. Radiated Emission Limits

EN 55032 Limits:

All emanations from a class B device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT (dB μ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47

Note: (1) The smaller limit shall apply at the combination point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.

4.4. EUT Configuration on Test

The EN 55032 regulations test method must be used to find the maximum emission during radiated emission measurement.

4.5. Operating Condition of EUT

4.5.1. Turn on the power.

4.5.2. After that, let the EUT work in test mode (ON) and measure it.

4.6. Test Procedure

The EUT is placed on a turntable, which is 0.8 meter high above the ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. By-log antenna (calibrated by Dipole Antenna) is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

The bandwidth of the Receiver is set at 120kHz.


The frequency range from 30MHz to 1000MHz is investigated.

4.7. Test Results

PASS


The test result please refer to the next page.

Model No.	XS	Test Date	Oct. 10, 2023
Environmental Conditions	24°C, 56% RH	Test Mode	ON
Pol	Vertical	Detector Function	Quasi-peak
Test Engineer	Kano	Distance	3m

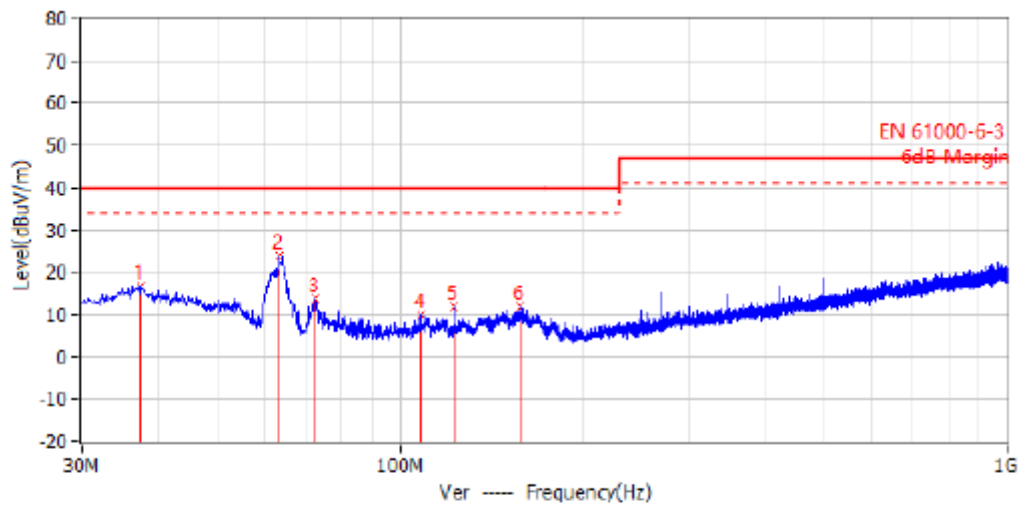

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	37.396MHz	40.0	16.8	-23.2	33.4	-16.6	PK	Ver	100.0	0.0
2*	63.344MHz	40.0	23.8	-16.2	42.0	-18.2	PK	Ver	100.0	44.0
3*	72.801MHz	40.0	13.6	-26.4	33.6	-20.0	PK	Ver	100.0	323.0
4*	108.206MHz	40.0	9.9	-30.1	28.9	-19.0	PK	Ver	100.0	177.0
5*	122.756MHz	40.0	12.0	-28.0	29.7	-17.7	PK	Ver	100.0	96.0
6*	158.283MHz	40.0	11.7	-28.3	27.1	-15.4	PK	Ver	100.0	0.0


Model No.	XS	Test Date	Oct. 10, 2023
Environmental Conditions	24°C, 56% RH	Test Mode	ON
Pol	Horizontal	Detector Function	Quasi-peak
Test Engineer	Kano	Distance	3m

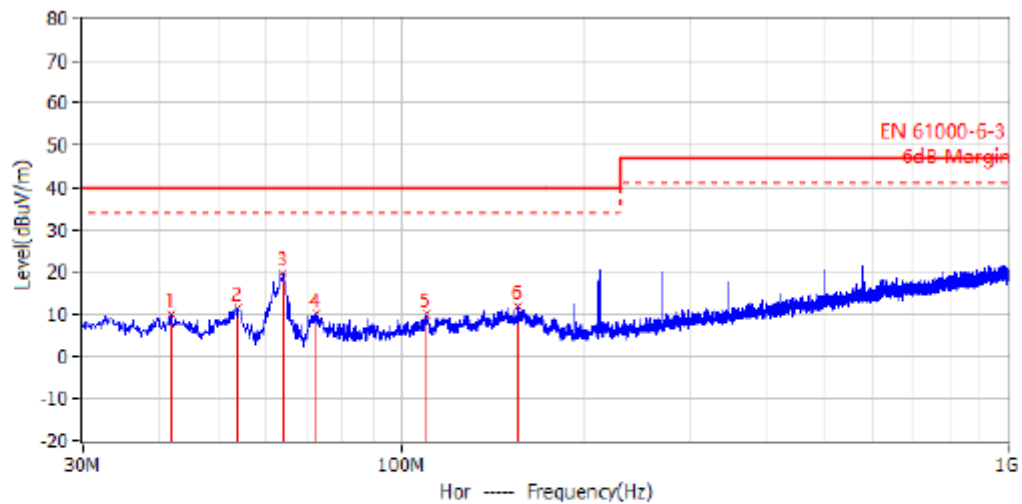

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	41.883MHz	40.0	10.0	-30.0	26.6	-16.6	PK	Hor	100.0	0.0
2*	54.008MHz	40.0	11.3	-28.7	28.4	-17.1	PK	Hor	100.0	335.0
3*	64.071MHz	40.0	19.8	-20.2	38.2	-18.4	PK	Hor	100.0	189.0
4*	72.559MHz	40.0	10.1	-29.9	30.1	-20.0	PK	Hor	100.0	97.0
5*	110.146MHz	40.0	9.8	-30.2	28.6	-18.8	PK	Hor	100.0	0.0
6*	155.858MHz	40.0	11.9	-28.1	27.3	-15.4	PK	Hor	100.0	62.0

5. ELECTROSTATIC DISCHARGE IMMUNITY TEST

5.1. Block Diagram of Test Setup

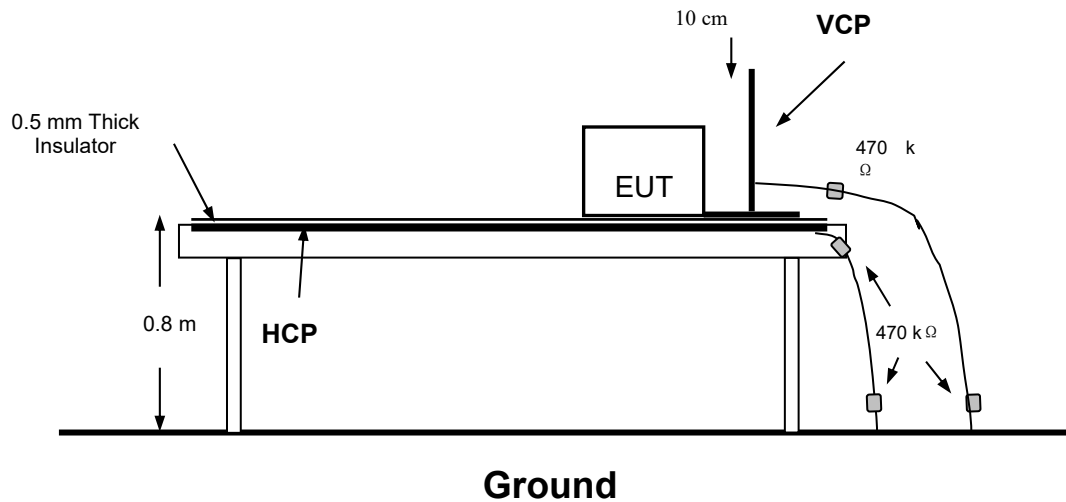

5.2. Test Standard

EN IEC 61000-6-1:2019 (EN 61000-4-2:2009,
Severity Level: 3 / Air Discharge: ± 8 KV, Level: 2 / Contact Discharge: ± 4 KV)

5.3. Severity Levels and Performance Criterion

5.3.1. Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	± 2	± 2
2.	± 4	± 4
3.	± 6	± 8
4.	± 8	± 15
X	Special	Special

5.3.2. Performance Criterion: **B**

5.4. EUT Configuration on Test

The configuration of EUT is listed in Section 3.7.

5.5. Operating Condition of EUT

5.5.1. Setup the EUT as shown in Section 5.1.

5.5.2. Turn on the power of all equipments.

5.5.3. Let the EUT work in test mode (On) and measure it.

5.6. Test Procedure

5.6.1. Air Discharge

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed

5.6.2. Contact Discharge

All the procedure shall be same as Section 5.6.1. Except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

5.6.3. Indirect Discharge For Horizontal Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

5.6.4. Indirect Discharge For Vertical Coupling Plane

At least 10 single discharge (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

5.7. Test Results

PASS

Please refer to the following pages

Electrostatic Discharger Test Results

Standard	☐ IEC 61000-4-2 ☒ EN 61000-4-2		
Applicant	Guangdong Paipai Communications Technology Co.,Ltd		
EUT	Lithium Ion Battery	Temperature	24℃
M/N	XS	Humidity	53%
Criterion	B	Pressure	1021mbar
Test Mode	ON	Test Date	Oct. 10, 2023
Test Engineer	Kano		

Air Discharge

Test Points	Test Levels			Results		
	± 2KV	± 4KV	± 8KV	Passed	Fail	Performance Criterion
Front	☒	☒	☒	☒	☐	☐ A ☒ B
Back	☒	☒	☒	☒	☐	☐ A ☒ B
Left	☒	☒	☒	☒	☐	☐ A ☒ B
Right	☒	☒	☒	☒	☐	☐ A ☒ B
Top	☒	☒	☒	☒	☐	☐ A ☒ B
Bottom	☒	☒	☒	☒	☐	☐ A ☒ B

Contact Discharge

Test Points	Test Levels		Results		
	± 2 KV	±4 KV	Passed	Fail	Performance Criterion
Front	☒	☒	☒	☐	☐ A ☒ B
Back	☒	☒	☒	☐	☐ A ☒ B
Left	☒	☒	☒	☐	☐ A ☒ B
Right	☒	☒	☒	☐	☐ A ☒ B
Top	☒	☒	☒	☐	☐ A ☒ B
Bottom	☒	☒	☒	☐	☐ A ☒ B

Discharge To Horizontal Coupling Plane


Side of EUT	Test Levels		Results		
	± 2 KV	± 4 KV	Passed	Fail	Performance Criterion
Front	☒	☒	☒	☐	☐ A ☒ B
Back	☒	☒	☒	☐	☐ A ☒ B
Left	☒	☒	☒	☐	☐ A ☒ B
Right	☒	☒	☒	☐	☐ A ☒ B

Discharge To Vertical Coupling Plane

Side of EUT	Test Levels		Results		
	± 2 KV	± 4 KV	Passed	Fail	Performance Criterion
Front	☒	☒	☒	☐	☐ A ☒ B
Back	☒	☒	☒	☐	☐ A ☒ B
Left	☒	☒	☒	☐	☐ A ☒ B
Right	☒	☒	☒	☐	☐ A ☒ B

6. RF FIELD STRENGTH SUSCEPTIBILITY TEST

6.1. Block Diagram of Test

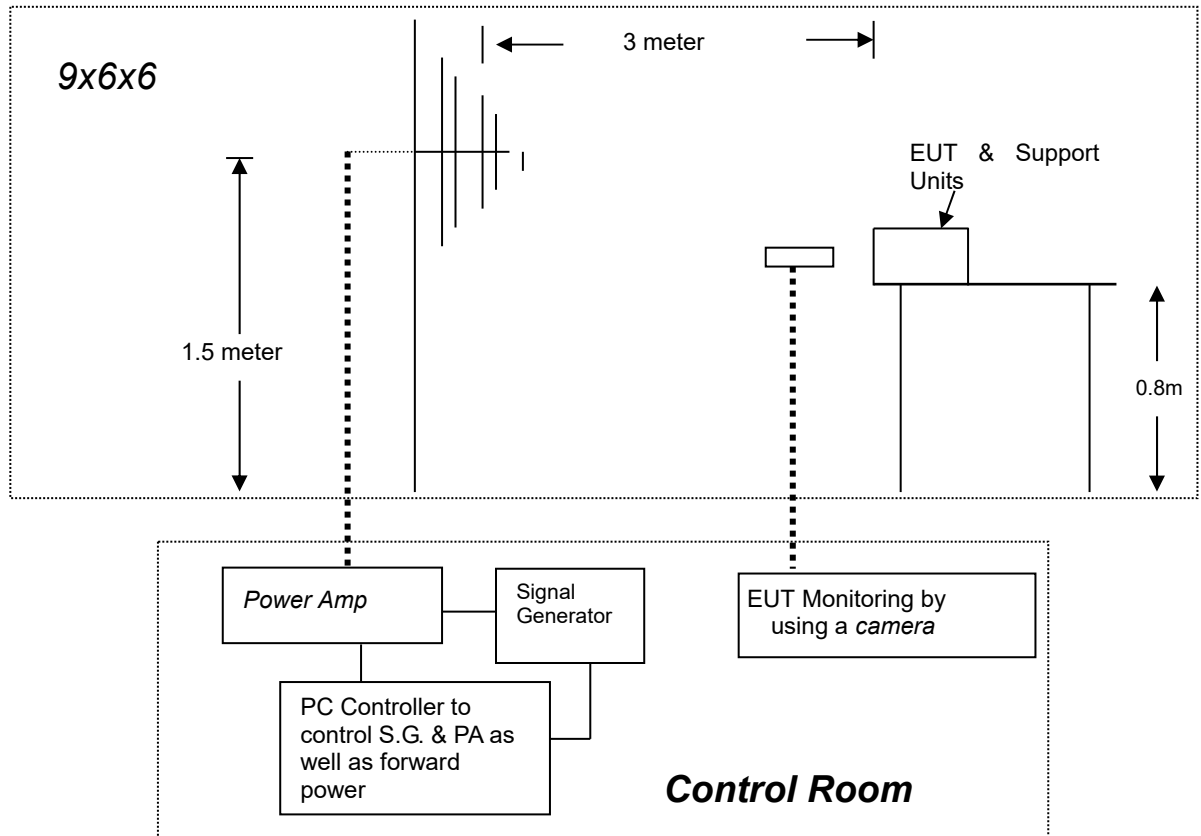

6.2. Test Standard

EN IEC 61000-6-1:2019

(EN 61000-4-3:2006/A2:2010 Severity Level: 2, 3V / m)

6.3. Severity Levels and Performance Criterion

6.3.1. Severity Levels

Level	Field Strength (V/m)
1.	1
2.	3
3.	10
X.	Special

6.3.2. Performance Criterion: A

6.4. EUT Configuration on Test

The configuration of the EUT is same as Section 3.8.

6.5. Operating Condition of EUT

Same as radiated emission measurement, which is listed in Section 5.5, except the test setup replaced as Section 6.1.

6.6. Test Procedure

The EUT are placed on a table, which is 0.8 meter high above the ground. The EUT is set 3 meters away from the transmitting antenna, which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna is set on test. Each of the four sides of the EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD Recording is used to monitor its screen. All the scanning conditions are as following:

Condition of Test	Remark
-----	-----
1. Fielded Strength	3V/m (Severity Level 2)
2. Radiated Signal	Unmodulated
3. Scanning Frequency	80-1000MHz
4. Sweep time of radiated	0.0015 Decade/s
5. Dwell Time	3 Sec.

6.7. Test Results

PASS

Please refer to the following page.

RF Field Strength Susceptibility Test Results

Standard	☐ IEC 61000-4-3 ☒ EN 61000-4-3		
Applicant	Guangdong Paipai Communications Technology Co.,Ltd		
EUT	Lithium Ion Battery	Temperature	24℃
M/N	XS	Humidity	53%
Field Strength	3 V/m	Criterion	A
Test Mode	ON	Test Engineer	Kano
Frequency Range	80 MHz to 1000 MHz	Test Date	Oct. 10, 2023
Modulation	☐ None ☐ Pulse ☒ AM 1KHz 80%		
Steps	1%		

	Horizontal	Vertical
Front	PASS	PASS
Right	PASS	PASS
Rear	PASS	PASS
Left	PASS	PASS


Test Equipment:

1. Signal Generator: 2031 (MARCONI)
2. Power Amplifier: 500A100 & 100W/1000M1 (A&R)
3. Power Antenna: 3108 (EMCO) & AT1080 (A&R)
4. Field Monitor: FM2000 (A&R)

Note:

7. MAGNETIC FIELD SUSCEPTIBILITY TEST

7.1. Block Diagram of Test Setup

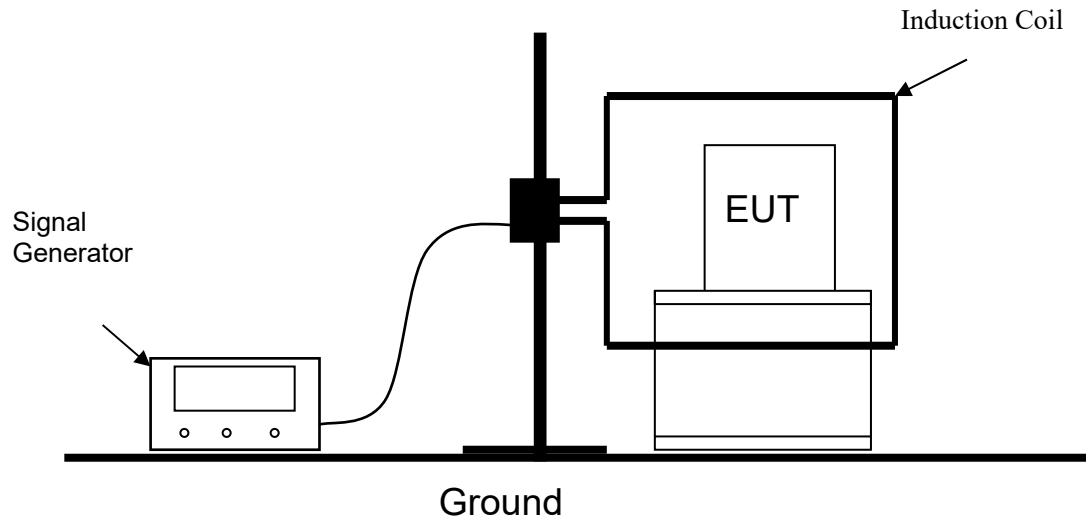

7.2. Test Standard

EN IEC 61000-6-1:2019

(EN 61000-4-8:2010, Severity Level: Level 2, 3A / m)

7.3. Severity Levels and Performance Criterion

7.3.1. Severity Levels

Level	Field Strength (A/m)
1	1
2	3
3	10
4	30
5	100
X	Special

7.3.2. Performance Criterion: A

7.4. EUT Configuration on Test

The configuration of the EUT is same as Section 3.12.

7.5. Test Procedure

The EUT is placed in the middle of a induction coil (1*1m), under which is a 1*1*0.1m (high) table, this small table is also placed on a larger table, 0.8 m above the ground. Both horizontal and vertical polarization of the induction coil is set on test, so that each side of the EUT is affected by the magnetic field. Also can reach the same aim by change the position of the EUT.

7.6. Test Results

PASS.

Please refer to the following page.

Magnetic Field Immunity Test Result

Standard	☐ IEC 61000-4-8 ☒ EN 61000-4-8		
Applicant	Guangdong Paipai Communications Technology Co.,Ltd		
EUT	Lithium Ion Battery	Temperature	24℃
M/N	XS	Humidity	53%
Test Mode	ON	Criterion	A
Test Engineer	Kano	Test Date	Oct. 10, 2023

Test Level (A/M)	Testing Duration	Coil Orientation	Criterion	Result
3	5 mins	X	A	PASS
3	5 mins	Y	A	PASS
3	5 mins	Z	A	PASS

Note:

8. PHOTOGRAPH

Photo of Radiated Measurement



9. EXTERNAL AND INTERNAL PHOTOS OF THE EUT



Fig. 1

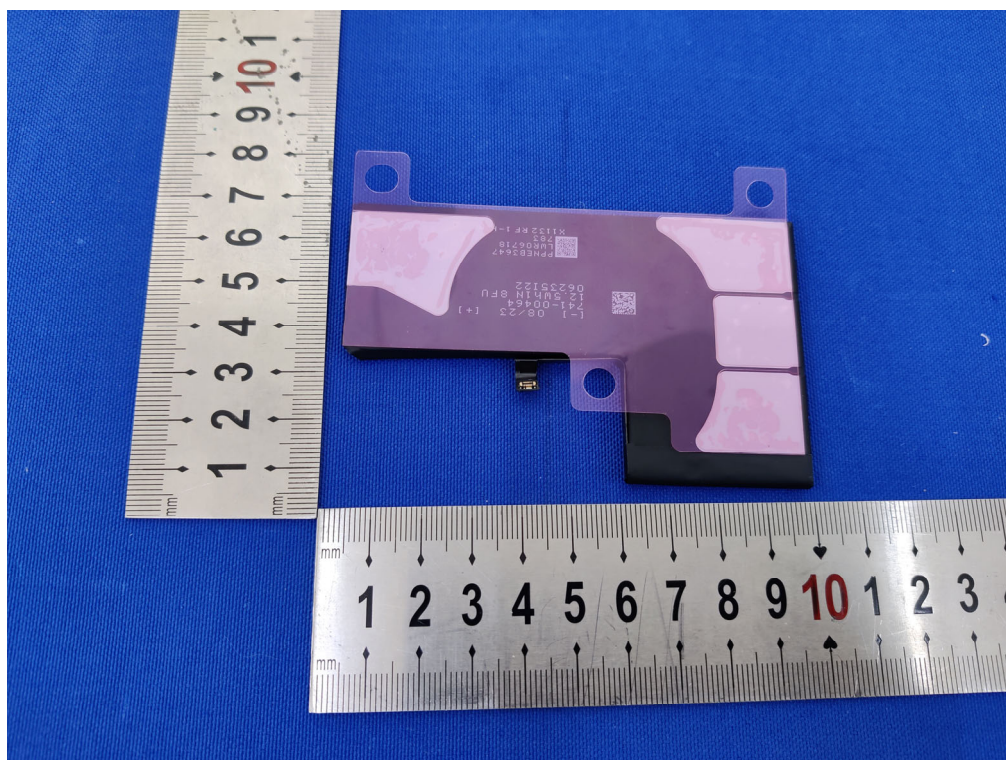


Fig. 2

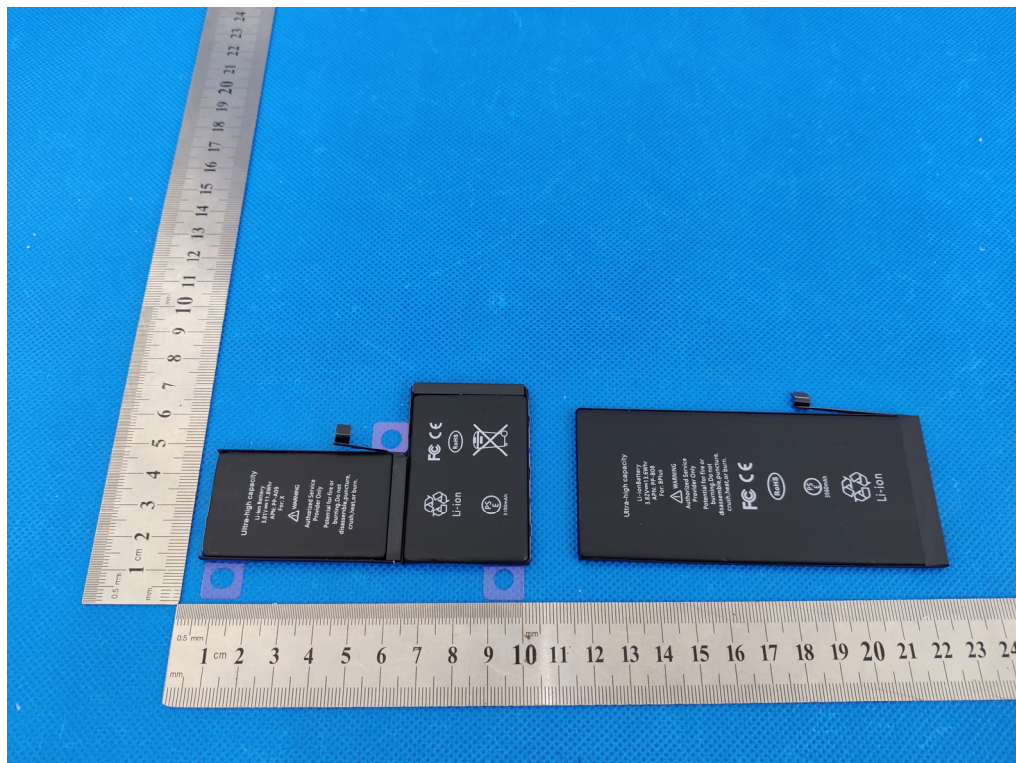


Fig. 3

10. MANUFACTURER/ APPROVAL HOLDER DECLARATION

The following identical model(s)

5S	6	6S Plus	7
7 Plus	8	8 Plus	X
XR	XS MAX	11	11pro
11promax	12mini	12	12pro max
13mini	13	13pro	13pro max
14	14plus	14pro	14pro max
15	15plus	15pro	15pro max
6Plus	SE2	SE3	---

Belong to the tested device :

Product description : Lithium Ion Battery

Model name : XS

Remark: PCB board, structure and internal of these model(s) are the same,
So no additional models were tested.

-----THE END OF REPORT-----