Test Report Number: SZHH02167324

Applicant: INTERGEARS INTERNATIONAL LIMITED
RM1203, SHI CHANG PLAZA
NO.58 XINYUAN ROAD, JIADING DISTRICT,
SHANGHAI, CHINA 201805

Date: Apr 02, 2026

Attn: SEAN ZHANG

Sample Description:

Four (4) pieces of submitted sample said to be :

Item Name	:	**VINYL FIGURES** **Michael Myers 3" Vinyl Figures**
Item No.	:	**H8M001A**
SKU No.	:	H8M001A
LOT No.	:	TR NG5-34377-2026
P. O. No.	:	34377
Labelled Age Group	:	Not Specified
Applicant Specified Age Grading for Testing	:	Over 6 years
Packaging Provided by Applicant	:	No
Manufacturer	:	Dongguan Xingzhan Plastic Co., Ltd.
Country of Destination	:	US
Date Sample Received	:	Mar 23, 2026
Testing Period	:	Mar 23, 2026 ~ Apr 02, 2026

Tests conducted:

As requested by the applicant, refer to attached page(s) for details.

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Test Report Number: SZHH02167324

Executive Summary	**Conclusion**
U.S. CFR Title 16 (CPSC Regulations) Mechanical and physical test	Pass
U.S. ASTM F963-23 Physical and mechanical tests Excluding requirement of section 5, 6 and 7.	Pass
U.S. CFR Title 16 (CPSC Regulations) Part 1500.3(c)(6)(vi) flammability test on rigid and pliable solids	Pass
U.S. ASTM F963-23 Flammability test of materials other than textile materials	Pass
U.S. ASTM F963-23 Section 4.3.8 on Phthalate content	Pass
U.S. Consumer Product Safety Improvement Act 2008 Title I, Sec 108(a) & (b)(3) and U.S. 16 CFR Part 1307 for Prohibition of Children's Toys and Child Care Articles Containing Specified Phthalates	Pass
Applicant's requirement on phthalate content	Pass
U.S. ASTM F963-23 Section 4.3.5.1 on total Lead content in surface coating	Pass
U.S. ASTM F963-23 Section 4.3.5.2 on total Lead content in substrate	Pass
Applicant's requirement on Bisphenol A Content	Pass
Applicant's requirement on Lead content (listed chemical under California Proposition 65)	Pass
U.S. Consumer Product Safety Improvement Act 2008 Title I, Section 101(15 USC 1278a) for total Lead content in surface coating	Pass

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Test Report Number: SZHH02167324

Executive Summary	**Conclusion**
U.S. Consumer Product Safety Improvement Act 2008 Title I, Section 101(15 USC 1278a) for Total Lead content in substrate	Pass
U.S. ASTM F963-23 on Heavy elements test in non-surface coating	Pass
U.S. ASTM F963-23 on Heavy elements test in surface coating	Pass
U.S. ASTM F963-23 on Heavy elements test in non-surface coating(modelling clay)	Pass
Applicant's requirement on phthalate content	Pass
Applicant's requirement on Lead content	Pass
Total Cadmium content requirements in Minnesota Statutes, Chapter 325E Section 3892 Lead and Cadmium in Consumer Products; Prohibition (HF2310 & HF 4)	Pass
Total Lead content requirements in Minnesota Statutes, Chapter 325E Section 3892 Lead and Cadmium in Consumer Products; Prohibition (HF2310 & HF 4)	Pass
Client Test Protocol for Toys-Games	Pass

Remark:
1=No package was provided for review.
2=As requested by the applicant, the labeling requirement was not assessed.

Authorized by:
For Intertek Testing Services Shenzhen Ltd.

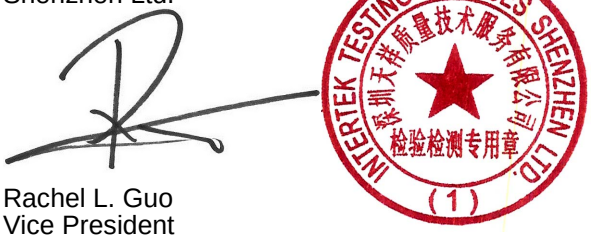

Rachel L. Guo
Vice President

Should you have any query on this report, please click the link below:
https://verifyindex.intertek.com.cn/home/index?id=hl_report_verify

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Tests Conducted



Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Tests Conducted

Component List

No.	Test Component Description(s)
(1)	Brown coating on plastic (hair of figure).
(2)	Coatings on plastic (face feature, body, weapon of figure, date code of base).
(3)	White plastic (hair, head, body, limbs, weapon of figure).
(4)	Black plastic (base).
(5)	White plastic with coatings (hair, head, body, limbs, weapon of figure).

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Tests Conducted

Test data

1 Physical and Mechanical Test

Test requirement: U.S. Code of Federal Regulations Title 16 Part 1500.50, the hazards of sharp points, sharp edge and small parts are assessed both before and after applicable use and abuse tests.

	No. of Sample Tested	Sharp Point (1500.48)	Sharp Edge (1500.49)	Small Part (1501)
As received	2	P	NA	NA
Impact (1500.53(b))	1	P	NA	NA
Flexure (1500.53(d))	0	NA	NA	NA
Torque (1500.53(e))	1	P	NA	NA
Tension (1500.53(f))	1	P	NA	NA
Compression (1500.53(g))	1	P	NA	NA

Abbreviation: P = Pass F = Fail NA= Not Applicable NR=Not Requested

2 Physical and Mechanical Tests

Test standard: ASTM Standard Consumer Safety Specification for Toy Safety F963-23.

The submitted samples were undergone the use and abuse tests in accordance with The Federal Hazardous Substances Act (FHSA), Title 16, Code of Federal Regulations:

Test	FHSA	Parameter
Impact test	Section 1500.53(b)	4 x 3.0 ft
Torque test	Section 1500.53(e)	4 in-lbf
Tension test	Section 1500.53(f)	15 lbf
Compression test	Section 1500.53(g)	30 lbf

The submitted samples were undergone the tests in accordance with section 8.5 through section 8.16 and 8.20 through 8.30 on normal use, abuse and specific tests for different types of toys whichever is applicable.

Section	Requirement	Result
4.1	Material quality	P
4.3.7	Stuffing Materials	NA
4.5	Sound-Producing Toys	NA
4.6	Small Objects	NA
4.7	Accessible Edges	P
4.8	Projections (except bath toy projections)	NA
4.8.1	Bath Toy Projections	NA

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Test Report Number: SZHH02167324

Tests Conducted

Section	Requirement	Result
4.9	Accessible Points	P
4.10	Wires or Rods	NA
4.11	Nails and Fasteners	NA
4.12	Plastic Film	NA
4.13	Folding Mechanisms and Hinges	NA
4.14	Cords, Straps, and Elastics	NA
4.15	Stability and Overload Requirements	NA
4.16	Confined Spaces	NA
4.17	Wheels, Tires and Axles	NA
4.18	Holes, Clearance, and Accessibility of Mechanisms	NA
4.19	Simulated Protective Devices	NA
4.20.1	Pacifiers with Rubber Nipples	NA
4.20.2	Toy Pacifiers	NA
4.21	Projectile Toys	NA
4.22	Teethers and Teething Toys	NA
4.23	Rattles	NA
4.24	Squeeze Toys	NA
4.25	Battery-Operated Toys	NA
4.26	Toys Intended to Be Attached to a Crib or Playpen	NA
4.27	Stuffed and Beanbag-Type Toys	NA
4.28	Stroller and Carriage Toys	NA
4.29	Art Materials	NA
4.30	Toy Gun Marking	NA
4.31	Balloons	NA
4.32	Certain Toys with Nearly Spherical Ends	NA
4.33	Marbles	NA
4.34	Balls	NA
4.35	Pompoms	NA
4.36	Hemispheric-Shaped Objects	NA
4.37	Yo-Yo Elastic Tether Toys	NA
4.38	Magnets	NA
4.39	Jaw Entrapment in Handles and Steering Wheels	NA

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Tests Conducted

Section	Requirement	Result
4.40	Expanding Materials	NA
4.41	Toy Chests	NA
5	Labelling Requirement (as applicable)	NR
6	Instructional Literature (as applicable)	NR
7	Producer's Markings (as applicable)	
7.1	Name and Address of producer/distributor	NR
7.2	Battery-Powered Ride-on Toy	NA
7.3	Toy chests	
7.3.1	Name and address of manufacturer/distributor/seller	NA
7.3.2	Code mark	NA

Abbreviation: P = Pass **F = Fail** NA= Not Applicable NR=Not Requested

Remark: As requested by the applicant, the requirement of section 5, 6 and 7 were not assessed.

3 Flammability Test

Test requirement: U.S. Code of Federal Regulations Title 16 Part 1500.44 for rigid and pliable solids.

Result: Ignited but self-extinguished before burn rate could be determined.

4 Flammability Test

Test requirement: Section 4.2 of the ASTM Standard Consumer Safety Specification on Toy Safety F963-23, the sample was tested according to Annex A5 Flammability Testing Procedure for Solids and Soft Toys.

Result: Ignited but self-extinguished before burn rate could be determined.

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

5 Phthalate Content (U.S. ASTM F963-23 Section 4.3.8)

As per Section 4.3.8 of the ASTM Standard Consumer Safety Specification on Toy Safety F963-23, test method CPSC-CH-C1001-09.4 was used and followed by Gas Chromatographic-Mass Spectrometric (GC-MS) analysis.

Test Item	CAS No.	Result					Units	D.L.	Limit
		1+2	3+4	-	-	-			
Dibutyl phthalate (DBP)	84-74-2	ND	ND	-	-	-	%	0.01	0.1
Di-(2-ethylhexyl) phthalate (DEHP)	117-81-7	ND	ND	-	-	-	%	0.01	0.1
Benzyl butyl phthalate (BBP)	85-68-7	ND	ND	-	-	-	%	0.01	0.1
Di-isononyl phthalate (DINP)	28553-12-0 68515-48-0	ND	ND	-	-	-	%	0.01	0.1
Di-isobutyl phthalate (DIBP)	84-69-5	ND	ND	-	-	-	%	0.01	0.1
Di-n-pentyl phthalate (DPENP)	131-18-0	ND	ND	-	-	-	%	0.01	0.1
Di-n-hexyl phthalate (DnHP/DHEXP)	84-75-3	ND	ND	-	-	-	%	0.01	0.1
Di-cyclohexyl phthalate (DCHP)	84-61-7	ND	ND	-	-	-	%	0.01	0.1

Remarks:
D.L. = Detection Limit
ND = Not Detected
Tested Components: See component list in the last section of this report.

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

6 Phthalate Content (U.S. CPSIA Section 108(a) & (b)(3) and U.S. 16 CFR Part 1307)

With reference to CPSC-CH-C1001-09.4, by Gas Chromatographic-Mass Spectrometric (GC-MS) analysis.

Test Item	CAS No.	Result					Units	D.L.	Limit
		1+2	3+4	-	-	-			
Dibutyl phthalate (DBP)	84-74-2	ND	ND	-	-	-	%	0.01	0.1
Di-(2-ethylhexyl) phthalate (DEHP)	117-81-7	ND	ND	-	-	-	%	0.01	0.1
Benzyl butyl phthalate (BBP)	85-68-7	ND	ND	-	-	-	%	0.01	0.1
Di-isononyl phthalate (DINP)	28553-12-0 68515-48-0	ND	ND	-	-	-	%	0.01	0.1
Di-isobutyl phthalate (DIBP)	84-69-5	ND	ND	-	-	-	%	0.01	0.1
Di-n-pentyl phthalate (DPENP)	131-18-0	ND	ND	-	-	-	%	0.01	0.1
Di-n-hexyl phthalate (DnHP/DHEXP)	84-75-3	ND	ND	-	-	-	%	0.01	0.1
Di-cyclohexyl phthalate (DCHP)	84-61-7	ND	ND	-	-	-	%	0.01	0.1

Remarks:
D.L. = Detection Limit
ND = Not detected

The above limit was quoted according to U.S. Consumer Product Safety Improvement Act 2008 Title I, Sec 108(a) & (b)(3) and U.S. 16 CFR Part 1307 for Prohibition of Children's Toys and Child Care Articles Containing Specified Phthalates.
Tested Components: See component list in the last section of this report.

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

7 Phthalate Content

By solvent extraction and followed by Gas Chromatographic-Mass Spectrometric (GC-MS) analysis.

Test Item	CAS No.	Result					Units	D.L.	Limit
		1+2	3+4	-	-	-			
Dibutyl phthalate (DBP)	84-74-2	ND	ND	-	-	-	mg/kg	100	1000
Di-(2-ethylhexyl) phthalate (DEHP)	117-81-7	ND	ND	-	-	-	mg/kg	100	1000
Benzyl butyl phthalate (BBP)	85-68-7	ND	ND	-	-	-	mg/kg	100	1000
Di-isononyl phthalate (DINP)	28553-12-0 68515-48-0	ND	ND	-	-	-	mg/kg	100	1000
Di-n-pentyl phthalate (DPENP)	131-18-0	ND	ND	-	-	-	mg/kg	100	1000
Di-n-hexyl phthalate (DnHP/DHEXP)	84-75-3	ND	ND	-	-	-	mg/kg	100	1000
Di-cyclohexyl phthalate (DCHP)	84-61-7	ND	ND	-	-	-	mg/kg	100	1000
Di-isobutyl phthalate (DIBP)	84-69-5	ND	ND	-	-	-	mg/kg	100	1000
Di-n-octyl phthalate (DnOP)	117-84-0	ND	ND	-	-	-	mg/kg	100	1000

Remarks:
D.L. = Detection Limit
ND = Not detected
Tested Components: See component list in the last section of this report.

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

8 Total Lead (Pb) Content in Surface Coating (U.S. ASTM F963-23 Section 4.3.5.1)

With reference to Section 4.3.5 of the ASTM Standard Consumer Safety Specification on Toy Safety F963-23, test method CPSC-CH-E1003-09.1 was used and total Lead content was determined by Inductively Coupled Plasma - Optical Emission Spectrometry.

Test Item	Result					Units	D.L.	Limit
	1+2	-	-	-	-			
Lead (Pb)	ND	-	-	-	-	mg/kg	10	90

Remarks:
D.L. = Detection Limit
ND = Not detected
Tested Components: See component list in the last section of this report.

9 Total Lead (Pb) Content in Substrate (U.S. ASTM F963-23 Section 4.3.5.2)

With reference to Section 4.3.5 of the ASTM Standard Consumer Safety Specification on Toy Safety F963-23, test method CPSC-CH-E1001-08.3 or/and CPSC-CH-E1002-08.3 were used and total Lead content was determined by Inductively Coupled Plasma - Optical Emission Spectrometry and/or Atomic Absorption Spectrometry.

Test Item	Result					Units	D.L.	Limit
	3+4	-	-	-	-			
Lead (Pb)	ND	-	-	-	-	mg/kg	10	100

Remarks:
D.L. = Detection Limit
ND = Not Detected
Tested Components: See component list in the last section of this report.

10 Bisphenol A (BPA) Content

By solvent extraction and followed by Liquid Chromatographic / Tandem Mass Spectrometer (LC/MS/MS) analysis.

Test Item	CAS No.	Result					Units	D.L.	Limit
		5	-	-	-	-			
Bisphenol A (BPA)	80-05-7	ND	-	-	-	-	mg/kg	0.1	3

Remarks:
D.L. = Detection Limit
ND = Not detected

Tested Components: See component list in the last section of this report.

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

11 Total Lead Content

With reference to CPSC-CH-E1002-08.3 and/or CPSC-CH-E1001.08.3 and/or CPSC-CH-E1003-09.1 and followed by Inductively Coupled Argon Plasma Spectrometry.The limit was quoted from the Consent Judgment No. RG- 356892 settled by superior court of the State of California for the county of Alameda, for toys based on the California Proposition 65.

Surface coating

Test Item	Result					Units	D.L.	Requirement
	1+2	-	-	-	-			
Lead (Pb)	ND	-	-	-	-	mg/kg	10	90

Non-surface coating(Substrate)

Test Item	Result					Units	D.L.	Requirement
	3+4	-	-	-	-			
Lead (Pb)	ND	-	-	-	-	mg/kg	10	100

Remarks:
D.L. = Detection Limit

ND = Not detected

Tested Components: See component list in the last section of this report.

12 Total Lead (Pb) Content in Surface Coating (U.S. 16 CFR Part 1303 and CPSIA Section 101(15 USC 1278a))

As per Standard Operating Procedure for Determining Lead (Pb) in paint and other similar surface coatings, test method CPSC-CH-E1003-09.1 was used and total Lead content was determined by Inductively Coupled Plasma - Optical Emission Spectrometry.

Test Item	Result					Units	D.L.	Limit
	1+2	-	-	-	-			
Lead (Pb)	ND	-	-	-	-	mg/kg	10	90

Remarks:
D.L. = Detection Limit
The above limit was quoted according to U.S. 16 CFR Part 1303 and U.S. Consumer Product Safety Improvement Act 2008 Title I, Section 101(15 USC 1278a) for total Lead content in surface coating.

ND = Not detected
Tested Components: See component list in the last section of this report.

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

13 Total Lead (Pb) Content in Substrate (U.S. CPSIA Section 101(15 USC 1278a))

As per Standard Operating Procedures for Determining total Lead (Pb) in children's products, test methods CPSC-CH-E1002-08.3 and/or CPSC-CH-E1001-08.3 were used and total Lead content was determined by Inductively Coupled Plasma - Optical Emission Spectrometry and/or Atomic Absorption Spectrometry.

Test Item	Result					Units	D.L.	Limit
	3+4	-	-	-	-			
Lead (Pb)	ND	-	-	-	-	mg/kg	10	100

Remarks:
D.L. = Detection Limit
The above limit was quoted according to U.S. Consumer Product Safety Improvement Act 2008 Title I, Section 101(15 USC 1278a) for total Lead content in substrate.

ND = Not detected
Tested Components: See component list in the last section of this report.

14 Heavy Elements Analysis in Non-Surface Coating(except modelling clay) (U.S. ASTM F963-23)

Total Heavy Elements Content (As per Section 4.3.5 of the ASTM Standard Consumer Safety Specification on Toy Safety F963-23, test method Section 8.3.1 of ASTM F963-23 were used and total heavy elements content were determined by Inductively Coupled Argon Plasma Spectrometry.)

Test Item	Result					Units	D.L.	Limit
	3+4	-	-	-	-			
Barium (Ba)	ND	-	-	-	-	mg/kg	10	1000(soluble)
Lead (Pb)	ND	-	-	-	-	mg/kg	10	90(soluble)
Cadmium (Cd)	ND	-	-	-	-	mg/kg	5	75(soluble)
Selenium (Se)	ND	-	-	-	-	mg/kg	10	500(soluble)
Antimony (Sb)	ND	-	-	-	-	mg/kg	10	60(soluble)
Chromium (Cr)	ND	-	-	-	-	mg/kg	10	60(soluble)
Mercury (Hg)	ND	-	-	-	-	mg/kg	10	60(soluble)
Arsenic (As)	ND	-	-	-	-	mg/kg	5	25(soluble)

Remarks:
D.L. = Detection Limit
ND = Not Detected
Tested Components: See component list in the last section of this report.

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

15 Heavy Elements Analysis in Surface Coating (U.S. ASTM F963-23)

Total Heavy Elements Content (As per Section 4.3.5 of the ASTM Standard Consumer Safety Specification on Toy Safety F963-23, test method Section 8.3.1 of ASTM F963-23 were used and total heavy elements content were determined by Inductively Coupled Argon Plasma Spectrometry.)

Test Item	Result					Units	D.L.	Limit
	1+2	-	-	-	-			
Barium (Ba)	26	-	-	-	-	mg/kg	10	1000(soluble)
Lead (Pb)	ND	-	-	-	-	mg/kg	10	90(soluble)
Cadmium (Cd)	ND	-	-	-	-	mg/kg	5	75(soluble)
Selenium (Se)	ND	-	-	-	-	mg/kg	10	500(soluble)
Antimony (Sb)	ND	-	-	-	-	mg/kg	10	60(soluble)
Chromium (Cr)	ND	-	-	-	-	mg/kg	10	60(soluble)
Mercury (Hg)	ND	-	-	-	-	mg/kg	10	60(soluble)
Arsenic (As)	ND	-	-	-	-	mg/kg	5	25(soluble)

Remarks:
D.L. = Detection Limit
ND = Not Detected
Tested Components: See component list in the last section of this report.

16 Heavy Elements Analysis in Non-Surface Coating(modelling clay) (U.S. ASTM F963-23)

Total Heavy Elements Content: As per Section 4.3.5 of the ASTM Standard Consumer Safety Specification on Toy Safety F963-23, test method Section 8.3.1 of ASTM F963-23 were used and total heavy elements content were determined by Inductively Coupled Plasma - Optical Emission Spectrometry.

Test Item	Result					Units	D.L.	Limit
	3+4	-	-	-	-			
Barium (Ba)	ND	-	-	-	-	mg/kg	10	250(soluble)
Lead (Pb)	ND	-	-	-	-	mg/kg	10	90(Soluble)
Cadmium (Cd)	ND	-	-	-	-	mg/kg	5	50(soluble)
Selenium (Se)	ND	-	-	-	-	mg/kg	10	500(soluble)
Antimony (Sb)	ND	-	-	-	-	mg/kg	10	60(soluble)
Chromium (Cr)	ND	-	-	-	-	mg/kg	10	25(soluble)
Mercury (Hg)	ND	-	-	-	-	mg/kg	10	25(soluble)
Arsenic (As)	ND	-	-	-	-	mg/kg	5	25(soluble)

Remarks:
D.L. = Detection Limit
ND = Not detected
Tested Components: See component list in the last section of this report.

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

17 Phthalate Content

By solvent extraction and Gas Chromatographic-Mass Spectrometric (GC-MS) analysis.

Test Item	CAS No.	Result					Units	D.L.	Limit
		1+2	3+4	-	-	-			
Dibutyl phthalate (DBP)	84-74-2	ND	ND	-	-	-	mg/kg	100	1000
Di-(2-ethylhexyl) phthalate (DEHP)	117-81-7	ND	ND	-	-	-	mg/kg	100	1000
Benzyl butyl phthalate (BBP)	85-68-7	ND	ND	-	-	-	mg/kg	100	1000
Di-isononyl phthalate (DINP)	28553-12-0 68515-48-0	ND	ND	-	-	-	mg/kg	100	1000
Di-n-hexyl phthalate (DnHP/DHEXP)	84-75-3	ND	ND	-	-	-	mg/kg	100	1000
Di-isodecyl phthalate (DIDP)	26761-40-0 68515-49-1	ND	ND	-	-	-	mg/kg	100	1000

Remarks:
D.L. = Detection Limit
ND = Not detected
Tested Components: See component list in the last section of this report.

18 Total Lead (Pb) Content

Acid digestion method was used and total Lead content was determined by Inductively Coupled Argon Plasma Spectrometry.

Test Item	Result					Units	D.L.	Limit
	1+2	-	-	-	-			
Lead (Pb)	ND	-	-	-	-	mg/kg	10	40

Remarks:
D.L. = Detection Limit
ND = Not Detected
Tested Components: See component list in the last section of this report.

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

19 Total Cadmium(Cd) Content (U.S. Minnesota HF 2310 & HF 4)

With reference to Section 8.3.1 of ASTM F963-23, followed by Inductively Coupled Argon Plasma Spectrometry.

Test Item	Result					Units	D.L.	Limit
	1+2	3+4	-	-	-			
Cadmium (Cd)	ND	ND	-	-	-	mg/kg	5	75

Remarks:
D.L. = Detection Limit
The limit was quoted according to Minnesota Statutes, Chapter 325E Section 3892 Lead and Cadmium in Consumer Products; Prohibition (HF2310 & HF 4) for Cadmium content.

ND = Not Detected
Tested Components: See component list in the last section of this report.

20 Total Lead(Pb) Content (U.S. Minnesota HF 2310 & HF 4)

With reference to CPSC-CH-E1002-08.3 and/or CPSC-CH-E1001.08.3 and/or CPSC-CH-E1003-09.1, followed by Inductively Coupled Argon Plasma Spectrometry.

Test Item	Result					Units	D.L.	Limit
	1+2	3+4	-	-	-			
Lead (Pb)	ND	ND	-	-	-	mg/kg	10	90

Remarks:
D.L. = Detection Limit
The limit was quoted according to Minnesota Statutes, Chapter 325E Section 3892 Lead and Cadmium in Consumer Products; Prohibition (HF2310 & HF 4) for Lead content.

ND = Not detected
Tested Components: See component list in the last section of this report.

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Client Toys-Games
Version: 2.0
Issue Date: Mar 20, 2026

Attribute	Citation / Method	Requirements	Results
Supplemental			
CA Prop 65 Supplemental (State of California)	ITS-00008-US	Consent Judgment of related court cases based on California Proposition 65.	See Supplemental protocol CA Prop 65
Battery Operated Products Supplemental	Client - Battery Operated Products Supplemental	For all products that use batteries, whether batteries are included or not.	NA
Beauty - Cosmetics	Client - Cosmetics	Cosmetic shall meet all applicable requirements specified in the protocol.	NA
Note: Additional cost, sample size & TAT may be required if testing to one or more supplemental protocols is necessary. Please refer to the above referenced supplemental protocol(s) for additional information.			
Packaging Labeling			
Packaging Labeling Requirement	Fair Packaging and Labeling Act / 16 CFR 500	Product Identifications; manufacturer, or distributer's name & address (city, state, & zip code); Net quantity of contents; Country of origin; and UPC bar code information must present on the packaging. NOTE: Any product that is using Client private brands including, but not limited to Series 8, Room2Room, Verge, High Five, 5Style should bear packaging labeling as "Distributed by 1616 Holdings, Inc. 701 Market Street, Suite 200, Philadelphia, PA. 19106"	NR
Tracking Number	CPSIA / ASTM F963	All products must have a tracking number on the packaging. If the product contains Client private brand name or it is distributed by 1616 Holdings, Inc, tracking number must be in the format listed in as NNMMDDYY format. The name of the city of Manufacturing site of this product must be presented on the packaging. NOTE: Tracking number must be in the format as follows: NNMMDDYY. Here, NN is the abbreviation of 2 digits of vendor name; MM- 2 digit of month; DD- 2 digit of date; YY- last 2 digits of year. Example: TRACKING NUMBER: RZ031524 For 1616 Holdings distributed by: - Present and correct format: List Present and correct format and Pass - Present and not correct format: Present, not in correct format and Fail (List what is listed) - Not present any tracking #: Fail.	NR

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

<table>
<tr><th>Attribute</th><th>Citation / Method</th><th>Requirements</th><th>Results</th></tr>
<tr><td></td><td></td><td>For non 1616 Holdings,
- A tracking number must be present. (Data only, no pass or fail)
- If a tracking number is present in any format: Vendor Tracking Number
Present. Data.
- If no tracking number is present: No Tracking Number Found. Data

Vendor branded / distributed by Items:
Must have traceable tracking information and can be in vendor's own format.</td><td></td></tr>
<tr><td>Suffocation Warning Label (If applicable)</td><td>Five states' law of suffocation warning label on polybag / 16 CFR 1250 / ASTM F963, Section 4.12</td><td>Any packaging poly bag with opening size of 5 inches or more must have suffocation warning statement in English on the poly bag. The Poly bag much have punched holes. The average thickness of the poly bag must be at least 0.0015 inches.
The opening of the poly bag must be taped to indicate the opening.

Equilateral Triangle with exclamation mark
WARNING: RISK OF SUFFOCATION
Plastic Bags can be dangerous. To avoid danger of suffocation, keep this plastic bag away from babies and children. Do not use this bag in cribs, beds, carriages, or playpens. This bag is not a toy.

The warning shall be printed clearly so as to prevent the ink from smearing, or upon a gummed label securely attached to the plastic bag and shall be printed in a prominent place with legible bold face type which shall be contrasted by typography, layout or color from the contents of the bag and from other printed matter on the bag, if any.

The size of the print shall be as follows. If the total length and width of the bag is more than 40 inches, the warning shall be repeated at intervals of 20-inches or less.

<table><tr><td>Total length and width of bag (X)</td><td>Size of print</td></tr><tr><td>X ≥ 60 inches</td><td>≥ 24 point</td></tr><tr><td>40 ≤ X < 60 inches</td><td>≥ 18 point</td></tr><tr><td>25 ≤ X < 40 inches</td><td>≥ 14 point</td></tr><tr><td>X < 25 inches</td><td>≥ 10 point</td></tr><tr><td>Bags intended for freshly clean clothes</td><td>≥ 36 point</td></tr></table>
NOTE:
1) The requirement for bags intended for freshly clean clothes is per state of Virginia.</td><td>NR</td></tr>
</table>

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Attribute	Citation / Method	Requirements	Results
		2) Lab to document following for polybag: - Make Pass or Fail decision based on if bag - does not meet regulatory requirements. - List bag opening dimensions, - List If warning present or not - List bag thickness.	
Packaging Labeling, & Product labeling if applicable			
Law label (Any plush toy, stuffed children items)	Multiple states' labeling laws	Law label must include the statement of "All New Materials" on the label. Only one URN (Uniform Registration number) is required on the law label. License number of States of North Carolina and Massachusetts must be renewed each year (You may renew your license number through these states' website); manufacturer / Importer Identity, content of filling materials and COO must be presented on the law label. NOTE: Filled material is to be checked at shipment inspection for the confirmation that the product is made of "all new materials".	NR
Sewn in Label / Heat Seal Label	FTC 19 CFR 134 / 16 CFR 303 / 16 CFR 423	If product contains fabric, with the intent for more than a onetime use, a sewn in label or heat seal label must be present. If the item is distributed by 1616 Holdings Inc, Five Below's RN number 163199 must be presented on the sewn in label. NOTE: - Client accepts either one of these two labeling formats - Country of Origin, Fiber Count, Care instructions, and Registration #/ importer or manufacturer name & address must be present on the label if the item is not distributed by 1616 Holdings Inc..	NR
Labeling Requirement for Toys	16 CFR 1250 / ASTM F963	Shall meet all applicable requirements specified in the Standard.	NR
Hazardous Magnet Warning Label	16 CFR 1250 / ASTM F963, Section 4.38 & 5.16	Toys age grade 3 years under, should not have any loose hazardous magnet. Toys age grade 3+, up to 14 years, If product contains loose hazardous magnets, magnet warning label must be on the packaging. NOTE: - The wordings of Warning Label: Equilateral Triangle with exclamation mark - WARNING: This product contains small magnet(s). Swallowed Magnets can stick together across intestines causing serious infections and death. Seek immediate medical attention if magnet(s) are swallowed or inhaled.	NR
Small Parts Warning Label	16 CFR 1250 / ASTM F963, Section 4.6 / 16 CFR 1501 / 16 CFR	Toys of age grade 3 years under, should not contains small parts. Toys of age 3 + to 6, that contain small parts (fits into Federal small parts cylinder), Small part choking hazard warning label must present on packaging.	NR

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Attribute	Citation / Method	Requirements	Results
	1500.19	NOTE: - Warning Label: Equilateral Triangle with exclamation mark - WARNING: Choking Hazard—Small parts Not for Children under 3 years	
Small Balls Warning Label	16 CFR 1250 / 16 CFR 1500.19 / ASTM F963, Section 4.34	Toys of age grade 3 years under, should not contains any small balls. Toys of age 3 + to 8 years, that contain small ball, Small ball choking hazard warning label must present on the packaging. NOTE: - Warning Label:Equilateral Triangle with exclamation mark - WARNING: Choking Hazard— This toy contains a small ball. Not for children under 3 years	NR
Ingredient And Label Review Science Kits and Craft / DIY	ASTM F963 / 16 CFR 1500.83(a)(23)	List of ingredients must be on the instructions, packaging, or separate sheet of paper. Must comply with the hazardous substance and labeling requirements NOTE: Applicable but not limited to science kits, slime, craft/DIY	NA
Age Grade	16 CFR 1250 / CPSC Age Determination Guidelines / ASTM F963, Section 5.2	All products must be tested according to either appropriate age grade, as determined by CPSC age grade guideline. NOTE: The Age Grade must be present on the front of the packaging,	Labelled age grade: Not specified Appropriate age grade: Over 6 years Test age grade: Over 6 years (See remark 1)
Toy Gun Marking	15 CFR 1150 / 16 CFR 1250 / ASTM F963, Section 4.30	Sample must meet the requirements defined in 15 CFR 1150. NOTE: The color of the toy gun must be bright enough to differentiate from a real gun.	NR
Labeling for Art Materials	16 CFR 1250 / ASTM F963, Section 4.29.2 & 5.12 / 16 CFR 1500.14(b)(8) / ASTM D4236	Toy and components of toy that is art material as defined by 16 CFR 1500.14(b)(8) shall meet the labeling requirements in accordance with ASTM D4236: "Conforms to ASTM D4236".	NR
Water Beads Labeling	16 CFR 1250.4(d)	Water bead toys, packaging of water bead toys, and the container of water beads, if provided shall meet the marking, labeling, and instructional literature requirements in the Standard to minimize the risk of children ingesting, inserting, aspirating, and choking on	NR

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Attribute	Citation / Method	Requirements	Results
		water beads. Note: - Warning for Water Bead not Contained in Toys and Their Packaging 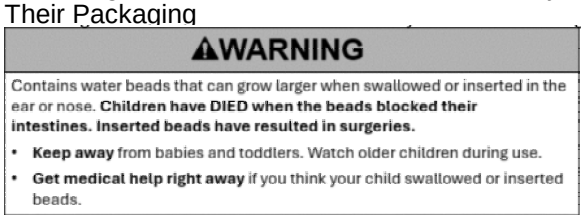 **⚠WARNING** Contains water beads that can grow larger when swallowed or inserted in the ear or nose. **Children have DIED when the beads blocked their intestines. Inserted beads have resulted in surgeries.** • **Keep away** from babies and toddlers. Watch older children during use. • **Get medical help right away** if you think your child swallowed or inserted beads. - Warning for Water Beads Contained in Toys and Their Packaging 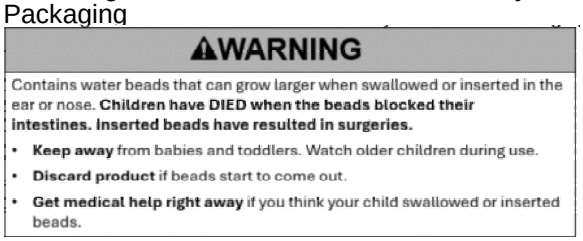 **⚠WARNING** Contains water beads that can grow larger when swallowed or inserted in the ear or nose. **Children have DIED when the beads blocked their intestines. Inserted beads have resulted in surgeries.** • **Keep away** from babies and toddlers. Watch older children during use. • **Discard product** if beads start to come out. • **Get medical help right away** if you think your child swallowed or inserted beads. - Instructions shall have the same warning labels that must appear on the product packaging, with similar formatting requirements, but without the need to be in color. However, the signal word and safety alert symbol shall contrast with the background of the signal word panel, and the warnings shall contrast with the background of the instructional literature	
Neck Floats Labeling	16 CFR 1250.5(d)	Neck floats and the packaging of neck floats shall meet the marking, labeling, and instructional literature requirements in the Standard to reduce the risk of children drowning while using a neck float. EFFECTIVE DATE: Jun 15, 2026	NR
CPSIA Tracking Label for Toys and Children's Product	16 CFR 1250 / ASTM F963, Section 5.1.2 / Consumer Product Safety Improvement Act of 2008 (CPSIA)	Toy and children's products ages 12 and under must have a CPSIA tracking label on the product as well as the packaging. CPSIA tracking label must have manufacturing location (name of the city) of the product being made in addition to Five Below's tracking number identified in the eft notes area. NOTE: Tracking number must be in the format as follows: NNMMDDYY. Here, NN is the abbreviation of 2 digits of vendor name; MM- 2 digit of month; DD- 2 digit of date; YY- last 2 digit of year. (Tracking label on product can be waived if the product is too small).	NR
LED Safety Test	Five Below's requirement / IEC 62471	LED light shall comply with all applicable requirements. NOTE: Not applicable for status LEDs used only to indicate ON/OFF.	NR
Battery Statement for Battery Operated Toys	Client Requirement	Battery statement such as "Requires two (2) 1.5 V alkaline AA batteries (not included)" must present on the Principal display panel of packaging.	NR

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Attribute	Citation / Method	Requirements	Results
		NOTE: See Five Below's Corporate Product Advisory & Warning Label Specifications, section 3.6, for the proper warning label per battery type.	
Federal Communications Commission (FCC)	47 CFR 15	If product is subject to FCC certification: FCC ID & FCC Logo must be presented on packaging If product is subject to FCC verification only, FCC warning statement must present on packaging	NR
Self-Pressurized Container Warning Label	16 CFR 1500.130	Self-pressurized containers must conform to the labeling requirements defined by 16 CFR 1500.130	NR
Accuracy of Instructions	Five Below Corporate Policy	The instructions of the product should be easy to understand and present all applicable warning labels, item name, distributor/importer's name and address, COO, and UPC bar coding. Instructions must be consistent with the sample performance.	NR
US EPA TSCA Title VI labeling requirement and California CARB Phase II Requirements for Formaldehyde	15 U.S.C. Section 2697 EPA TSCA Title VI Requirements for Formaldehyde emission & Title 17 / CA Code of Regulations, section 93120.7(d)	Vendor must provide a completed and approved sample declaration form if composite wood is present in the product. Sections A, B, C and D must be completed. - An acceptable label must be present on the product and/or the outer packaging Label must be either a stamp, tag, or sticker Documentation and Label Review if any of the toy are made of composite wood. NOTE: Effective March 22nd, 2019. The Label must include: Name of fabricator or responsible party; Date of production for the finished goods; Statement of compliance which should say: This product complies with EPA TSCA Title VI requirement for Formaldehyde emission.	NR
Marking of Toy, Look-alike and Imitation Firearms	16 CFR 1272	Toy, look-alike and imitation firearms shall be marked with one of the CPSC approved markings.	NR
Flammability and Labeling for Material Used in Upholstered Furniture (State of California)	California Requirements.	Upholstered furniture shall meet all applicable requirements.	NR
Labeling for Indoor Upholstered Furniture	16 CFR 1640	Upholstered seating furniture for indoor use shall be included the statement "Complies with U.S. CPSC requirements for upholstered furniture flammability" on a permanent label located on the product.	NR
Packaging Chemical Test Requirements			
CA Prop 65 Review	https://oehha.ca.gov/proposition-65	All packaging should be reviewed against the requirements of California Proposition 65 to determine if	NR

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Attribute	Citation / Method	Requirements	Results
		additional testing or labeling is required	
Ortho Phthalate Test of Packaging Materials	TPCH 2021	Review the package to ensure that the following ortho phthalate does not exceed 100 ppm: - Bis(2-ethylhexyl)phthalate (117-81-7) - Butyl benzyl phthalate (85-68-7) - Dicyclohexyl phthalate (84-61-7) - Diethyl phthalate (84-66-2) - Diisobutyl phthalate (84-89-5) - Diisodecyl phthalate (26761-40-0) - Diisononyl phthalate (28553-12-0) - Dimethyl phthalate (131-11-3) - Di-n-butyl phthalate (84-74-2) - Di-n-hexyl phthalate (84-75-3) - Di-n-octyl phthalate (117-84-0) - Dipentyl phthalate (131-18-0) NOTE: Any plastic-coated packaging materials that include poly bag, PVC, PET, or vinyl coated card, component that is exposed to the customers are subject to this 12Ps phthalate test.	NR
Heavy Metal of Packaging / Toxic in Packaging	TPCH CONEG	The Lead, Cadmium, Mercury, and Hexavalent Chromium in any packaging shall not exceed 100 ppm.	NR
Polyfluoroalkyl (PFAS) Substance in Packaging Test	TPCH 2021	There shall be no detectable PFAS in package or packaging component. No Perfluoroalkyl and polyfluoroalkyl should be detected.	NR
Product Chemical Test Requirements			
Chemical Requirement for Toys	16 CFR 1250 / ASTM F963	Shall meet all applicable requirements specified in the Standard.	P (See test data)
CA Prop 65 Review	https://oehha.ca.gov/proposition-65 / Client's Requirements	Review the sample to ensure that the phthalate content of the product of DEHP, BBP, DBP, DINP, DIDP, and DNHP does not exceed 1000 PPM. NOTE: Perform testing based on the type of plastic and vinyl materials, where applicable.	P (See test data)
10P Phthalate Test	16 CFR 1250 / ASTM F963, Section 4.3.8 / 16 CFR 1307 / CPSIA-8	All toys and children items must be tested for the following 10P Phthalate test: DBP, BBP, DEHP, DINP, DPENP, DHEXP, DCHP, DIBP, DNOP, and DNHP. Note: The limit must not exceed 1000ppm each.	P (See test data)
Illinois Lead Level	Illinois Lead Poisoning Prevention Act	Lead content of product shall not exceed 40 ppm.	P (See test data)
Lead content of surface coatings	16 CFR 1250 / 16 CFR 1303 / CPSIA-8 / ASTM F963, Section 4.3.5.1 / CA Prop 65	The lead content of surface coatings should not exceed 90 ppm.	P (See test data)
Lead Content in	16 CFR 1250 /	Toy shall not contain Lead or Lead compounds in which	P

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Attribute	Citation / Method	Requirements	Results
Accessible Component Parts	ASTM F963, Section 4.3.5.2 / CPSIA-8	the Lead content is in excess of 0.01% (100 ppm) of the weight of the component.	(See test data)
Total Lead and Cadmium in Consumer Products	Minnesota Statutes, Chapter 325E Section 3892 (HF 2310) / Client's Requirements	Products covered by the regulation, shall not exceed 90 ppm total lead and 75 ppm total cadmium for accessible surface coatings and substrates. Note: Does not apply to covered products containing lead or cadmium, or both, when regulation is preempted by federal law Test to strictest limit of Lead and Cadmium based on Federal and States regulations. NOTE: All covered products including, jewelry; toys; cosmetics and personal care products; puzzles, board games, card games, and similar games; play sets and play structures; outdoor games; school supplies; pots and pans; cups, bowls, and other food containers, craft supplies and jewelry-making supplies; chalk, crayons, paints, and other art supplies; fidget spinners; costumes, costume accessories, and children's and seasonal party supplies; keys, key chains, and key rings; clothing, footwear, headwear, and accessories	P (See test data)
Soluble Heavy Metal Content in Surface Coating	16 CFR 1250 / ASTM F963 Section 4.3.5.1 (2) & 8.3.2	Sample shall not contain compounds of which the metal content of the soluble material exceeds levels by weight (mg/kg) of the contained solid. This includes: Pigments, film solids and driers. Antimony (Sb) 60, Arsenic (As) 25 Barium (Ba) 1000, Cadmium (Cd) 75, Chromium (Cr) 60, Lead (Pb) 90, Mercury (Hg) 60, Selenium (Se) 500.	P (See test data)
Soluble Heavy Metal Content in Substrate	16 CFR 1250 / ASTM F963 Section 4.3.5.2 (2) (b) & 8.3.4.3	All accessible substrates, before and after testing, must have soluble heavy metals content comply with the limits specified in Table 1 of the standard. Antimony (Sb) 60, Arsenic (As) 25, Barium (Ba) 1000, Cadmium (Cd) 75, Chromium (Cr) 60, Lead (Pb) 90, Mercury (Hg) 60, Selenium (Se) 500. NOTE: - If substrates that contain less than the total limit of Antimony (Sb) 60, Arsenic (As) 25, Barium (Ba) 1000, Cadmium (Cd) 75, Chromium (Cr) 60, Lead (Pb) 90, Mercury (Hg) 60, Selenium (Se) 500, do not need to be tested for the soluble content. - Report actual results and include data table within the report. Component testing is allowed.	P (See test data)
Water Beads - Acrylamide Limit	16 CFR 1250.4(c)(2)	Water beads shall not have more than 325 µg acrylamide extractable from 100 small water beads (defined as <4 mm in all dimensions of the bead prior to hydration) or	NA

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Attribute	Citation / Method	Requirements	Results
		from one large water bead. (defined as ≥ 4 mm in any dimension of the bead prior to hydration) EFFECTIVE DATE: Mar 12, 2026	
Formaldehyde (For textile)	AATCC 112	Recommended for textile. Shall not exceed below limits. - Baby (up to 36 months of age): Not detected (< 16 ppm) - Direct contact with skin: 75 ppm - Without direct contact with skin: 300 ppm - Decoration material: 300 ppm	NA
Formaldehyde (For leather)	ISO 17226	Recommended for leather. Shall not exceed below limits. - Baby (up to 36 months of age): < 10 ppm - Direct contact with skin: 75 ppm - Without direct contact with skin: 300 ppm - Decoration material: 300 ppm	NA
pH Value	AATCC 81 (Textile) / ASTM D2810 (Leather)	Recommended for textile and leather: - Baby (up to 36 months of age): 4.0 - 7.5 - Direct contact with skin: 4.0 - 7.5 - Without direct contact with skin: 4.0 - 9.0 - Decoration material (non-leather): 4.0 - 9.0 - Leather: 3.5 - 7.5	NA
BPA Test (If any parts of the item is made of PC, PVC or Epoxy resin or Recycled materials)	CA Prop 65 / Client's Requirements	BPA content must be less than 3 ppm. If test failed, vendor needs to contact Client QA for further decision. If Client allow vendor to use CA Prop 65 warning label, the label should read (Yellow Equilateral Triangle with Black Outline and Black Exclamation Point) Warning: This product can expose you to chemicals including Bisphenol A, which is known to the State of California to cause cancer. For more information go to www P65 Warnings.ca.gov *The use of a Cal Prop 65 warning must be pre-approved by Five Below. Note: Either this test is conducted, or factory provides letter of guarantee on company letter head confirming that item does not contain any components made of PC, PVC, Epoxy resin or recycled materials. The Letter must be attached to the final issued test report.	P (See test data)
Electrical/Electronic / Battery Testing			
UL Test	UL Standard	For any electric operated products with a voltage of 30W or higher NOTE: Mandatory for the power cord	NA
Battery Compartment Safety Test of Battery Operated Products	16 CFR 1250 / ASTM F963, Section 4.25 / Five Below's requirement.	Samples shall meet the requirements intended to minimize the risk or injury associated with battery leakage, over-heating, explosion, fire and choking. Testing must be carried out twice with two different brands of batteries (Energizer and Duracell).	NA

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Attribute	Citation / Method	Requirements	Results
		Product must also include applicable battery instructions and warnings. Batteries that fit completely within the small parts test cylinder must not be accessible before or after abuse testing. Must not be accessible without the use of a coin, screwdriver, or any common household tools. NOTE: - See Five Below's Corporate Product Advisory & Warning Label Specifications, section 3.6, for the proper warning label per battery type. - Battery marking is to present in the battery compartment. Battery warning label is to present in the adjacent area of battery compartment.	
Electrically Operated Products	16 CFR 1250 / ASTM F963, Section 4.4 / 16 CFR 1505	Toys operating from nominal 120V branch circuits must conform to the requirements of 16 CFR 1505.	NA
Motor Operated Toys	ASTM F963	All motor operated toys must have over-heat protection built in with the circuit so that the product will not over-heat when the stall current is high or designed with a clutch to prevent high stall current from happening. NOTE: Motor operated products must test for FCC for regulatory compliance.	NA
Rated Voltage	Visual	Report rated voltage per claim or battery chemistry. Must agree with number of cells, chemistry and interconnection.	NA
FCC Test-Documentation Review	ASTM F963 / 47 CFR Part 15	All times that carry a frequency must test for FCC for regulatory compliance. All mandatory warning labels and FCC warning labels must be present on the product as well as the instructions. NOTE: Applicable to, but not limited to, R/C items, Bluetooth items, remote controls and any toy product with a frequency.	NA
ESD (Electrical static Discharge test)	IEC 61000	8 kV through the air. 4kV in direct contact with product. The product should not malfunction. NOTE: This requirement is applicable to all battery operated, electronic hand held toy/game or children items.	NA
Microbiological Testing			
USP 61 & 62 Microbial Limit Test	16 CFR 1250 / ASTM F963 Section 4.3.6.3 and 8.4.1 / USP 61 & 62	Cosmetics, Liquids, Pastes, Putties, Gels, and Powders used in toys (excluding art material) shall not be contaminated with Salmonella, E. Coli, Pseudomonas aeruginosa, or Staphylococcus aureus. Subject to requirements of <5,000 cfu/ml (<500 cfu/ml for	NA

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Attribute	Citation / Method	Requirements	Results
		cosmetics intended for use with the eyes and baby products)	
Liquid Toxicity	16 CFR 1500.231 (For children's item) / GC/MS / Client's Requirements	The following should not be detected in the liquid: Propylene Glycol Content 12% be regarded as effective as antifreeze; Ethylene Glycol, Diethylene Glycol, Methanol mercury, Methylene Chloride, Petroleum Distillates, Benzene, Turpentine, Toluene, Xylene NOTE: Applicable for toys that contain water	NA
Art Material (LHAMA) Documentation Review	16 CFR 1500.14 (b)(8) / ASTM D4236 / 16 CFR 1250 / ASTM F963, Section 4.29	Samples must meet the requirements intended to minimize the potential risks associated with the use of art materials that present chronic, long- term health hazards. NOTE: - Test document is good for 5 years. - Label on the packaging: "Conforms to ASTM D4236"	NA
Toxicological Risk Assessment Documentation Review	16 CFR 1500.3 / 16 CFR 1250 / ASTM F963, Section 4.3.1	For products intended to be used by children, including toys and parts of toys, must not be toxic (acute), a skin irritant, eye irritant, corrosive, or a strong sensitizer. Toxicological Risk Assessment (TRA) must be conduct to substantiate the compliance regulations for the following components: 1. High Risk Materials: toy cosmetics, liquids, pastes, putties, gels, and powders that are being contacted with the child's face 2. Other materials bearing a "non-toxic" claim on samples and/or packaging NOTE: Test document is good for 5 years.	NA
Total Plate Count and Total Coliform	16 CFR 1250 / ASTM F963, Section 4.3.6.1 / USP 1231 / 40 CFR 141.63 / Bacteriological Analytical Manual (BAM)	Process water used in manufacturing and filling of toys shall meet the requirement: - < 10 CFU/ml of heterotrophic plate count - Absence of coliform bacteria	NA
Preservative Effectiveness-Documentation Review	16 CFR 1250 / ASTM F963, Section 4.3.6.4 & 8.4.2 / USP 51	The formulations used to prevent microbial degradation in cosmetics must be tested for microbial control and preservative effectiveness. NOTE: Test report is good for 6 months	NA
Hazardous Substances in Liquid – Documentation Review	16 CFR 1500.14 (a) (1-5)	To identify the presence of potentially hazardous ingredients, all liquid components and liquid-filled items designed or intended to be used by individuals over 8 years old containing substances exceeding the following limits require special labeling: a. 10% or more by weight of ethylene glycol	NA

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Attribute	Citation / Method	Requirements	Results
		b. 10% or more by weight of diethylene glycol c. 4% or more by weight of methanol d. 10% or more by weight of petroleum distillates e. 5% or more by weight of benzene f. 10% or more by weight of turpentine g. 10% or more by weight of toluene h. 10% or more by weight of xylene Note: Test report is acceptable for one year	
Hazardous Liquids – Documentation Review	16 CFR 1500.231 / Client's Requirements	To identify the presence of potentially hazardous ingredients, all liquid components and liquid-filled items intended or likely to be used by children 8 years or under must comply with this requirement. The following chemicals must not be present: 1. Ethylene glycol 2. Diethylene glycol 3. Methanol 4. Mercury 5. Methylene chloride 6. Petroleum distillates 7. Toluene 8. Xylene 9. Benzene 10. Turpentine	NA
Labeling of Hazardous Substances	16 CFR 1500.3(b)(14)(i) / 16 CFR 1500.14(b)(1-5) / 16 CFR 1500.121	Applicable to acute toxicity, skin irritant, eye irritant, corrosive, strong sensitizer, extremely flammable, flammable, combustible and hazardous substances requiring special labeling according to 16 CFR 1500.14 (b)(1-5). Product containing hazardous substances must conform to and be consistent with the labeling requirements as defined by 16 CFR 1500.3(b)(14)(i) and special labeling requirement according to 16 CFR 1500.14(b)(1-5).	NA
Performance Test			
Safety Requirement for Toys	16 CFR 1250 / ASTM F963	Shall meet all applicable requirements specified in the Standard.	P
Water Beads - Size Limit	16 CFR 1250.4(c)(1)	Water beads as received or water beads removed from a toy, which fit entirely inside the small parts cylinder in their dehydrated (pre-expanded) shall, after expansion, remain whole while completely passing through the funnel test gauge or sieve test gauge, under its own weight, when tested in accordance with the Standard. EFFECTIVE DATE: Mar 12, 2026	NA
Neck Floats - Minimum	16 CFR 1250.5(c)(2)	Neck floats shall demonstrate a minimum upward buoyancy equal to or greater than 30 percent the	NA

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Attribute	Citation / Method	Requirements	Results
Buoyancy		expected weight capacity of the neck float, and neck floats utilizing inherently buoyant components shall lose no more than 5 percent of their initial buoyancy, when tested in accordance with the Standard. EFFECTIVE DATE: Jun 15, 2026	
Neck Floats - Restraint System	16 CFR 1250.5(c)(3)	Restraint systems used to attach the neck float to the body or to connect components of the neck float together shall require the release of the fastening mechanism to have either a double-action release system that requires two distinct, but simultaneous actions to release, or a single- action release system that requires a minimum of 50 N to release. The restraint system and its closing means (for example, buckle) shall not part or slip more than 1 in. (25 mm). The anchorages shall not separate from their attachment points. EFFECTIVE DATE: Jun 15, 2026	NA
Neck Floats - Neck Opening Test	16 CFR 1250.5(c)(4)	The neck opening of the neck float shall not admit the passage of a specified head probe when tested in accordance with the Standard. EFFECTIVE DATE: Jun 15, 2026	NA
Fiber Composition (If applicable)	AATCC 20 / AATCC 20A	Textile product (For fiber labeling): - Single fiber: No tolerance - Blended fiber: +/- 3% Textile component of non-textile product (If claimed): - If percentage of fiber is specified: Recommend following the tolerance applied for textile product. - If percentage of fiber is not specified: Report actual fiber composition (qualitative) of the textile component. Shall meet label claims (If applicable). NOTE: 1) Select above requirement(s) as applicable. 2) For textile items requiring content, care label must be verified.	NA
Flammability for Indoor Upholstered Furniture	16 CFR 1640 / California Technical Bulletin 117- 2013	Upholstered seating furniture for indoor use shall comply with the flammability test specified by California Technical Bulletin 117-2013.	NA
Flammability of Solids	16 CFR 1500.44 / 16 CFR 1500.3 / ASTM F963, Section 4.2 & Annex A5	Test the flammability of product. Flammability should not be more than 0.1 inch per second	P
Flammability of Liquid (If applicable)	16 CFR 1500.3(c)(6) / 16 CFR 1500.43(a)	Classification of flashpoint: - Extremely flammable: At or below 20°F (-6.7°C); - Flammable: Above 20°F (-6.7°C) and below 100°F (37.8°C); - Combustible: At or above 100°F (37.8°C) to and including 150°F (65.6°C);	NA

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Tests Conducted

Attribute	Citation / Method	Requirements	Results
		- Non-Combustible: Above 150°F (65.6°C). NOTE: Extremely flammable, flammable and combustible liquid shall comply with the labeling requirement in accordance with 16 CFR 1500.3(b)(14).	
Flammability of Self- Pressurized Containers	16 CFR 1500.3(6)(viii) / 16 CFR 1500.45	Self-pressurized containers intended for children 8 years and under must not be flammable when tested to the standards of 16 CFR 1500.45. Self-pressurized containers intended for children 8 years and older must be either classified as flammable or extremely flammable. Must be labeled to the standards of hazardous substances.	NA
Flammability of Vinyl Plastic Film	16 CFR 1611	Vinyl plastic film of wearing apparel shall not exceed 1.2 in./sec. of average rate of burning.	NA
Flammability of Fabric Used in Toy	16 CFR 1250 / ASTM F963, Section 4.2 / 16 CFR 1610	The fabric used in Toy should meet 16 CFR 1610 standard.	NA
Functional Test of Product	Manual	Test the product function under normal use condition to see whether the product perform normal function.	P
Physical Properties			
Dimensions	Manual / Measurement	All Dimensions must comply with claimed and approved sample	See remark 1
Total Weight	Manual / Measurement	The Total Weight must comply with claimed and approved sample	See remark 1
Functionality and Workmanship			
Claims Verification	Client's Requirements	Verify the products claims on packaging such as outdoor safe, water resistant, water proof, wicking, stain resistant, material claim etc.	NR
Function Test	Visual / Manual	Operate and test the products functions and features as listed or intended by end user. Add batteries and operate if needed.	P
Workmanship Check	Visual / Manual	Check the workmanship of the product to ensure there are no visual defects. Example: scratch marks, color difference, pilings etc.	P

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn

Tests Conducted

Supplemental protocol—CA Prop 65
Version 48

Products	Case	Requirement	Labeling	Result
Toys: designed for or reasonable used by children from 6 to 12 years old.	RG-356892	Lead: Each accessible surface Coating ≤ 0.009% (90ppm) Each accessible substrate ≤ 0.01% (100ppm) Method: By EPA 3050B	No warning label is provided.	P (See test data)

IMPORTANT NOTE: The information presented under the "Requirements / Limits" column of this protocol is for information only and does not replace the content of the standard. Details of the requirements should be referred to the original standards.
REMARK: Additional tests may be incurred subject to the final samples reviewed by Intertek.
KEY: : Mandatory Requirement : Additional charge items

Results Key:
P= Pass
F= Fail
NA = Not Applicable
NC= Not Conducted

****

End of report

*The statements of conformity reported have considered the decision rule agreed, namely that Intertek have taken account of measurement uncertainty as calculated by Intertek, and applied according to ILAC-G8:09/2019-(Non-binary acceptance based on guard band **w** = **U**) except designation from the customer, regulation or test specification. This decision rule only applies to the numeric test results. Full details of our agreed decision rules and the associated risk can be viewed: https://www.intertek.com.cn/diypage/upload/SZ-AP15-HLS-QA.pdf.*

The sample(s) and sample information hereto are provided by the client who shall be solely responsible for the authenticity and integrity thereof. The results shown in this report relate only to the sample(s) received and tested. It is not intended to be a recommendation for any particular course of action. Intertek does not accept a duty of care or any other responsibility to any person other than the Client in respect of this report and only accepts liability to the Client insofar as is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations either express or implied with respect to this report save as provided for in those terms and conditions. We have aimed to conduct the review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or wilful misconduct. This report shall not be reproduced unless with prior written approval from Intertek.

Intertek Testing Services Shenzhen Ltd.
深圳天祥质量技术服务有限公司

West Side of 1/F and 3,4,5/F of Bldg. 1, 1-5/F of Bldg. 3, Yuanzheng Science and Technology Industrial Park, No.4012, Wuhe Ave. North, Bantian Street, Longgang District, Shenzhen, China
深圳市龙岗区坂田街道五和大道北 4012 号元征科技工业园 1 号楼 3、4、5 层及 1 楼西侧半层和 3 号楼整栋 1-5 层

Tel:+86755 26020111
www.intertek.com
www.intertek.com.cn