



公司简介

INTURSTING

深圳市世纪奥柯电子是一家集智能家居产品、安防报警监控产品、遥控类产品订做开发、生产和销售于一体的高新技术供应商，我们致力于打造遥控产品成品及其零配件、生产工具、辅助设备一站式采购基地。公司立足于亚洲最大的电子市场——深圳，依托珠江三角洲沿海地区经济发达优势、技术优势和思想意识及接受能力超前优势，以贴近市场、方便用户为准则，开发出具有一定科技含量、成熟稳定、方便易用、适合于大众消费的高新产品，并以此为基础不断发展全球业务网络，建立了良好的产品开发体系、生产体系、销售体系、服务体系等。

我们专门生产无线遥控、防盗报警系列产品，本公司产品分为以下系列：

- 1、无线遥控组件：无线发射模块、带编码发射模块、无线接收模块、超外差接收模块等，频率可订做。
- 2、无线遥控开关：12伏1至12路固定码/学习码遥控开关、220伏1-7路固定码/学习码遥控开关，特殊功能可根据要求定做。可设计硬件电路和软件程序。
- 3、无线遥控器：普通遥控器、金属边框遥控器、2262固定码遥控器、1527学习码遥控器、大功率遥控器，滚动码遥控器；款式多多、外观精美、质量上乘。
- 4、遥控器拷贝系列：遥控器拷贝机、各种拷贝机型遥控器；可复制除多种滚动码遥控器以及的大多数其他无线遥控器。
- 5、防盗报警器及配件：各种高中低档防盗报警主机，门磁/红外探测器/烟雾、燃气探测器等
- 6、开发定做产品：各种娱乐产品配件，遥控窗帘、遥控电机、卷帘门控制器、电控锁控制器等特殊规格产品。

公司专业人才众多、技术力量雄厚，秉承“务实、创新、高效、团结”的经营理念，热切欢迎海内外顾客光临惠顾

Enterprise profile

Century Aoke manufactures remote control systems of the highest quality and technical sophistication. Our goal is to provide products which meet the demands of the individuals and companies who use them. We have been manufacturing remote control systems more than ten years. Century Aoke provides service from initial product concept, through product selection and design, manufacturing and delivery. This allows us to maintain close contact with our customers throughout all phases and helps us provide you with quality products designed to fit your specific needs. We have many standard remote control enclosures and models that can be used for OEM applications. We manufacture radio frequency systems. We can also design custom remote control solutions for your specific application requirements using new molds and tooling, new PCB, custom IC and programming, custom artwork, custom color.

Detail information about our products:

1. Wireless remote control RF Transmitter and receiver module: wireless transmitter module with code, wireless receiver module, super-heterodyne receiver module (we can customize the frequency as our client's requirement)
2. Wireless remote control switch: 12V 1-12 way fixed code, learning code remote control switch, 220V 1-7 way fixed code, learning code remote control switch, (we can customize the special function as your requirement, we can also customize hardware circuit and software program)
3. Remote control: ordinary remote control, 2262 fixed code remote control, 1527 learning code remote control, high frequency remote control, rolling code remote control, (More styles of our products, excellent quality and elegant shape)
4. Remote control copy series: remote control duplicator, various kinds of copy remote control, it can copy many kinds of rolling code remote control and most any other remote controls.
5. Alarm system and fitting: various of high, middle and low alarm system hosts, door magnetic, IR detectors, Smoke detectors, Gas detectors.
6. Automotive electronics product: Original auto remote control, auto remote control refitting suites, car reversing aid system, auto alarm.
7. Customized and develop new products: entertainment products' fitting, curtain remote control, motor remote control, gate controller, electrically controlled lock controlled and other special products.









Corporate
presentation
公司展示
无线遥控专业制造
Wireless remote control professional manufacturing



Production
Production workshop



Production
Equipment
生产设备

无线遥控专业制造
Wireless remote control professional manufacturing

金属遥控器

Metal shell wireless remote control



型号 Model	按键数 Key number	尺寸 Size	频率 RF Frequency	工作电流 Operating Current	发射距离 Radio Signal Range	调制方式 Modulation	编码芯片 IC	速率Mbps Operating Frequency	工作电压 Operating Voltage	重量 Weight
AK-SF02	2	58.7*30*13.5mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC12V	25 (g)
AK-SF04	4	58.7*30*13.5mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC12V	25 (g)
AK-J027-1	1	60*31*11mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC6V	28 (g)
AK-J027-2	2	60*31*11mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC6V	28 (g)
AK-J027-3	3	60*31*11mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC6V	28 (g)
AK-J027-4	4	60*31*11mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC6V	28 (g)
AK-1304	4	67.9*37.4*15.6mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC6V	50 (g)
AK-0923-2	2	56*29.8*13.5mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC12V	30 (g)
AK-0923-4	4	56*29.8*13.5mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC12V	30 (g)
AK-1001	4	55*37*9mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC12V	35 (g)
AK-1090	4	65*35.5*15mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC12V	32 (g)
AK-F629	4	54.5*33.8*12.4mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC12V	20 (g)
AK-029	4	55*30*12mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC12V	28 (g)
AK-074	4	56.5*32*11mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC6V	20 (g)
AK-J001A	4	70*25*15mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC6V	35 (g)
AK-J105	3	64.4*31.8*13mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC12V	35 (g)
AK-J004	2	53*32*12.5mm	315/433.92MHz	≤12mA	50M	ASK/OOK	EV1527, HCS301	1.2-2.4	DC6V	25 (g)
AK-J5-J1	4	57*32.5*14.5mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC12V	40 (g)
AK-J062	4	59*30*15mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC12V	30 (g)
AK-J042	4	90*60*12.4mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC12V	40 (g)
AK-J028	2	53*32*12.5mm	315/433.92MHz	≤12mA	50M	ASK/OOK	EV1527, HCS301	1.2-2.4	DC6V	25 (g)
AK-J100	4	82.9*33.5*14.3mm	315/433.92MHz	≤12mA	500M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC12V	34 (g)
AK-J081	4	56.8*15.5*14mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC-12V	40 (g)
AK-817A	4	58*38*15mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC-12V	31 (g)
AK-J060	4	60*35*12mm	315/433.92MHz	≤12mA	50M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC12V	25 (g)

高压控制器

HV controller



适用范围:

采用智能微处理器智能控制, 可应用于车库门控制、灯光控制、遥控窗帘、门禁系统、各种电机控制系统等, 具有按照简单安全可靠等特点。

Applicable scope:

The intelligent microprocessor intelligent control, can be used in garage door control, lighting control, remotecontrol curtains, access control systems, motor control system, easy to install and reliable.

技术参数	Specification
工作电压: AC85-220V	Operating voltage: AC85-220V
静态工作电流: ≤10mA	IDDQ: ≤10mA
工作温度: -40℃~+80℃	Operating Temperature: -40℃~+80℃
接收灵敏度: ≥-100dB	Receiver sensitivity: ≥-100dB
工作频率: 315/433MHz (其他频率可定做)	Operating Frequency: 315/433MHz (customized)
最大负载: ≤30A	Load Rating: ≤30A/circuit
工作方式: 点动、自锁、互锁可调	Working mode: Momentary, Toggle, Latching(adjustable)
输出方式: 触点输出(可控制交、直流)/带电压输出可选	Output mode: contact output(AC and DC)/with voltage output optional

大功率遥控器

High power wireless remote control



型号 Model	按键数 Key number	尺寸 Size	频率 RF Frequency	工作电流 Operating Current	发射距离 Radio Signal Range	调制方式 Modulation	编码芯片 IC	速率Kbps Operating Frequency	工作电压 Operating Voltage	重量 Weight
AK1000-F	1, 2, 3, 4, 5, 6, 8	91*39.5*15mm	315/433.92MHz	25mA	300-500M	ASK/OOK	SCT2260, EV1527	1.2-2.4	DC12V	31(g)
AK-CBF	1, 2, 3, 4, 5, 6	95*30*11mm	315/433.92MHz	25mA	100M	ASK/OOK	SCT2260, EV1527	1.2-2.4	DC12V	35(g)
AK3000-1	1, 2, 3, 4, 6, 8, 12	136*42.2*25mm	315/433.92MHz	85mA	1000M	ASK/OOK	PT2264, EV1527	1.2-2.4	DC9V	90(g)
AK-1000-1B	1	106*37*12mm	315/433.92MHz	17mA	500M	ASK/OOK	PT2262, EV1527, HC304	1.2-2.4	DC12V	56(g)
AK1000-1/2/4/6/8	1, 2, 4, 6, 8	85*36.8*16mm	315/433.92MHz	35mA	500M	ASK/OOK	SCT2260, EV1527	1.2-2.4	DC12V	56(g)
AK7002(-1/2)	1, 2	59*30*15mm	315/433.92MHz	17mA	500M	ASK/OOK	SCT2260, EV1527	1.2-2.4	DC12V	45(g)
AK7003(-3/4)	3, 4	59*30*15mm	315/433.92MHz	17mA	500M	ASK/OOK	SCT2260, EV1527	1.2-2.4	DC12V	45(g)
AK-ABC-3	3	122.3*46.7*24mm	315/433.92MHz	15mA	100M	ASK/OOK	SCT2260, EV1527	1.2-2.4	DC12V	58(g)
AK-1000-6C, 12C	6C, 12C	97*50*14.7mm	315/433.92MHz	35mA	1000M	ASK/OOK	PT2262, EV1527	1.2-2.4	DC12V	52(g)
AK12-2/6/8/12	2, 6, 8, 12	108.5*49.7*17mm	315/433.92MHz	45mA	500M	ASK/OOK	SCT2260, EV1527	1.2-2.4	DC12V	90(g)
AK-1000-12A/15B	12, 15	115*50*15mm	315/433.92MHz	17mA	300M	ASK/OOK	SCT2260, EV1527	1.2-2.4	DC12V	56(g)
AK3500-1/2/4/6/8/12	1, 2, 4, 6, 8, 12	136*40*25mm	315/433.92MHz	110mA	2000M	ASK/OOK	PT2264, EV1527	1.2-2.4	DC9V	90(g)
AK-1000-15F/18F	15, 18	131.7*53*15.3mm	315/433.92MHz	15-35mA	500M	ASK/OOK	SCT2260, EV1527, MCU	1.2-2.4	DC12V	65(g)
New AK-4000-2	2	136*42.2*25mm	315/433.92MHz	85mA	2000M	ASK/OOK	PT2264, EV1527	1.2-2.4	DC9V	90(g)
AK-16	16	127*49.8*17mm	315/433.92MHz	35mA	500M	ASK/OOK	SCT2260, EV1527	1.2-2.4	DC12V	56(g)
AK-2500-LED	6	138*42.2*25mm	315/433.92MHz	100mA	1500M	ASK/OOK	PT2264, EV1527	1.2-2.4	DC9V	90(g)

拷贝型遥控器

Remote Copy Series

适用范围:


道闸、车库门、汽车/摩托车等无线遥控器的复制与再生。

Applicable scope:

Swing Gate, Sliding Gate, Rolling Gate, , garge doors, car/motorcycle wireless remote replication and regeneration.

固定码 (芯片类型2260、2262、2264)、学习码遥控器。

HT-12E/AX5326-3/AX5326-4/AX5026/PT262/PT242/HT600/HT680/HT6207/HT6207/HT6010/HT6012/HT6014/MC145026/HT640/EV1527/527/PT260/SMC918/SMC926/HT12D/PT240B.

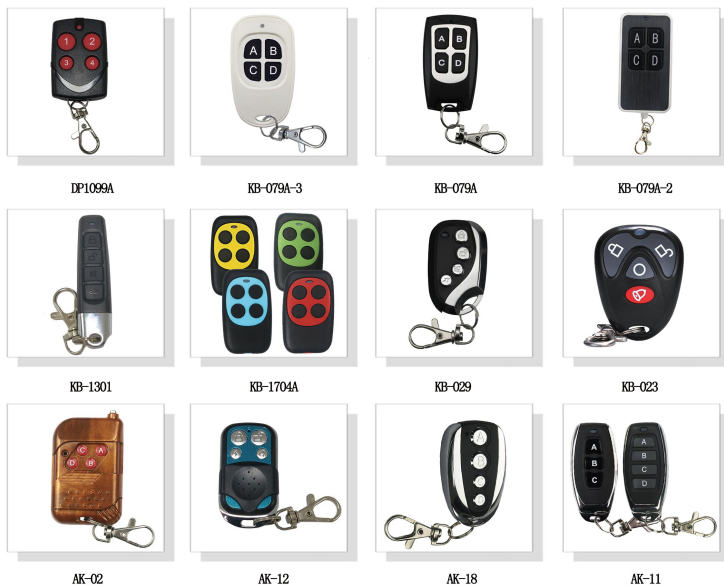

拷贝机

Remote control copying machine

<p>Decoding machine</p>  <p>AK-JMQ</p>	<ol style="list-style-type: none"> 1、测试遥控器地址码 / 数据位 / 振荡阻值 2、遥控信号解析和存储功能 3、扫描功能 4、自选编码功能 5、发射功能 	<p>Frequency tester</p>  <p>AK-CPY</p>	<p>准确的测试出遥控器的频率</p> <p>工作电压: DC7.5V-10V.</p> <p>待机电流: 40mA</p> <p>工作电流: 50mA</p>
<p>Copy machine</p>  <p>H618</p>	<ol style="list-style-type: none"> 1. 频率指示 (25MHz ~ 1GHz) 2. 数据检测, 数据比较 3. 拷贝固定码遥控器 4. 拷贝滚动码遥控器 5. 拷贝部分原车遥控 6. 读写/拷贝 RFID 卡 7. 遥控器再生功能 8. 通过USB进行网上升级程序 9. 中英双语语言支持 	<p>Assistant tool</p>  <p>618PRO</p>	<ol style="list-style-type: none"> 1. 上百种智能卡生成 2. 2000多种普通遥控器生成 3. 防盗芯片生成、复制 4. 支持遥控功率检测 5. 不分频率、滚动码滚动码 6. 支持27MHz-1Ghz的遥控 7. 频率测量精度可达2KHz 8. ASK、FSK遥控器的数据检测 9. 智能卡解锁, 特殊复制。 10. 支持更多功能开发

低压控制器

Low voltage controller



技术参数	Specification
工作电压: DC12V (其他: 3V/6V/9V/24V等支持定做)	Operating voltage: DC12V (such as: 3V/6V/9V/24V(customized))
静态工作电流: $\leq 10\text{mA}$	IDDQ: $\leq 10\text{mA}$
工作温度: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$	Operating Temperature: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
接收灵敏度: $\geq -95\text{dB}$	Receiver sensitivity: $\geq -95\text{dB}$
工作频率: 315/433MHz (其他频率可定做)	Operating Frequency: 315/433MHz (customized)
最大负载: $\leq 10\text{A}/30\text{A}$	Load Rating: $\leq 10\text{A}/30\text{A}/\text{circuit}$
工作方式: 点动、自锁、互锁可调	Working mode: Momentary, Toggle, Latching (adjustable)
输出方式: 触点输出 (可控制交、直流)	Output mode: contact output (AC and DC)