Anhui Yushuo Photoelectric Technology Co., Ltd.
Contact No:+86-0551-65353043，+86-13855186461 Email:sarah@ahysled.com Website:www.ahsyled.com
Address: Building 23, Phase I, MAX Science and Technology Park, No. 588 Tianshi Road, Shushan District, Hefei City, Anhui Province,China




# COMPANY PROFILE

## ABOUT US

Anhui Yushuo Photoelectric Technology Co., Ltd., is a professional manufacturer and developer of LED display screens in Hefei, since 2007.Yushuo Photoelectric focus on screen display equipment system solutions, We provide indoor and outdoor LED display screens ,LED poster, rental LED display screens, COB LED screen, transparent grille LED screen, floor tile screen and various of other LED display screens.

In 2019, the company became the provincial scientific and technology innovation listed enterprises in Anhui Equity Exchange Center, stock code: 630095.

We are always committed to provide high-quality hardware and software. Our excellent pre-sales and after-sales service will make win-win cooperation for all customers.

*Yushuo, Light up the world!*






Anhui Yushuo Photoelectric Technology Co., Ltd.
Contact No:+86-0551-65353043，+86-13855186461 Email:sarah@ahysled.com Website:www.ahsyled.com
Address: Building 23, Phase I, MAX Science and Technology Park, No. 588 Tianshi Road, Shushan District, Hefei City, Anhui Province,China

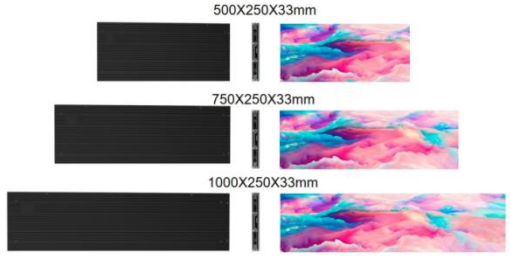
## COB Indoor LED Display Screen

| Cabinet Size | Pixel Pitch | Module Size | Pixel Density | Cabinet Resolution | Brightness | Refresh Rate | LED Package | Cabinet Weight |
|---|---|---|---|---|---|---|---|---|
| 600*337.5mm/600*675mm  | P0.62 | 150*168.75mm | 640000 | 480*270/480*540 | 600cd/m² | ≥3840Hz | COB | 7.9 KG（600*675 mm） / 4 KG（600*337.5 mm） |
| | P0.78 | 150*168.75mm | 409600 | 384*216/384*432 | 600cd/m² | ≥3840Hz | COB | |
| | P0.93 | 150*168.75mm | 568888 | 320*360/320*720 | 600cd/m² | ≥3840Hz | COB | |
| | P1.25 | 150*168.75mm | 320000 | 240*270/240*540 | 600cd/m² | ≥3840Hz | COB | |
| | P1.56 | 150*168.75mm | 204800 | 192*216/192*432 | 600cd/m² | ≥3840Hz | COB | |


## SMD Indoor LED Display Screen

| Cabinet Size | Pixel Pitch | Module Size | Pixel Density | Cabinet /Module Resolution | Brightness | Refresh Rate | LED Package | Cabinet Weight |
|---|---|---|---|---|---|---|---|---|
| 640*480mm  | P1.25 | 320*160mm | 640000 | 512*384 | 500-800cd/m² | ≥3840Hz | SMD1010 | 7.2KG |
| | P1.53 | 320*160mm | 422626 | 416*312 | 500-800cd/m² | ≥3840Hz | SMD1212 | 7.2KG |
| | P1.86 | 320*160mm | 289000 | 344*258 | 500-800cd/m² | ≥3840Hz | SMD1515 | 7.2KG |
| | P2.50 | 320*160mm | 160000 | 256*192 | 500-800cd/m² | ≥3840Hz | SMD2020 | 7.2KG |
| 600*337.5mm  | P1.25 | 300*168.75mm | 640000 | 480*270 | 500-800cd/m² | ≥3840Hz | SMD1010 | 6.9KG |
| | P1.56 | 300*168.75mm | 409600 | 384*216 | 500-800cd/m² | ≥3840Hz | SMD1212 | 6.9KG |
| | P1.87 | 300*168.75mm | 284444 | 320*180 | 500-800cd/m² | ≥3840Hz | SMD1515 | 6.9KG |

Anhui Yushuo Photoelectric Technology Co., Ltd.
Contact No:+86-0551-65353043，+86-13855186461 Email:sarah@ahysled.com Website:www.ahsyled.com
Address: Building 23, Phase I, MAX Science and Technology Park, No. 588 Tianshi Road, Shushan District, Hefei City, Anhui Province,China

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 640*360mm  | P1.25 | 320*180mm | 640000 | 512*384 | 500-800cd/m² | ≥3840Hz | SMD1010 | 5.1KG |
| | P1.53 | 320*180mm | 422626 | 418*236 | 500-800cd/m² | ≥3840Hz | SMD1212 | 5.1KG |
| | P1.86 | 320*180mm | 289000 | 344*192 | 500-800cd/m² | ≥3840Hz | SMD1515 | 5.1KG |
| 1000x250x33mm/750x250x33mm/500x250x33mm   | P1.56 | 250*250mm | 409600 | 160*160 | 600cd/m² | ≥3840Hz | SMD1212(GOB) | 2.9KG/4.5KG/ 5.8KG |
| | P1.95 | 250*250mm | 262144 | 128*128 | 800cd/m² | ≥3840Hz | SMD1515 | |
| | P2.5 | 250*250mm | 160000 | 100*100 | 800cd/m² | ≥3840Hz | SMD1515 | |
| | P2.604 | 250*250mm | 147456 | 96*96 | 800cd/m² | ≥3840Hz | SMD1515 | |
| | P2.976 | 250*250mm | 112896 | 84*84 | 800cd/m² | ≥3840Hz | SMD1515 | |
| | P3.91 | 250*250mm | 65336 | 64*64 | 1000cd/m² | ≥3840Hz | SMD2020 | |

## SMD Outdoor LED Display Screen

| Cabinet Size | Pixel Pitch | Module Size | Pixel Density | Module Resolution | Brightness | Refresh Rate | Scan Model | Cabinet Weight |
|---|---|---|---|---|---|---|---|---|
| 960*960mm  | P2.5 | 320*160mm | 160000 | 128*64 | 5000cd/m² | ≥3840Hz | 1/16 | 16.8kg |
| | P3 | 320*160mm | 105688 | 104*52 | 5000cd/m² | ≥3840Hz | 1/13 | 16.8kg |
| | P4 | 320*160mm | 62500 | 32*16 | 5000cd/m² | ≥3840Hz | 1/10 | 16.8kg |
| | P5 | 320*160mm | 40000 | 64*32 | 5500cd/m² | ≥3840Hz | 1/8 | 16.8kg |
| | P6.67 | 320*160mm | 22477 | 48*24 | 6000cd/m² | ≥3840Hz | 1/6 | 16.8kg |
| | P8 | 320*160mm | 15625 | 40*20 | 5500cd/m² | ≥3840Hz | 1/5 | 16.8kg |
| | P10 | 320*160mm | 10000 | 32*16 | 4000cd/m² | ≥3840Hz | 1/4 | 16.8kg |


Anhui Yushuo Photoelectric Technology Co., Ltd.
Contact No:+86-0551-65353043，+86-13855186461 Email:sarah@ahysled.com Website:www.ahsyled.com
Address: Building 23, Phase I, MAX Science and Technology Park, No. 588 Tianshi Road, Shushan District, Hefei City, Anhui Province,China

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 1000*1000mm  | P3.91 | 500*250mm | 65536 | 128*64 | 6000cd/m² | ≥3840Hz | 1/16 | 22.5kg |
| | P4.81 | 500*250mm | 43264 | 104*52 | 6000cd/m² | ≥3840Hz | 1/13 | 22.5kg |
| | P6.25 | 500*250mm | 25600 | 80*40 | 6000cd/m² | ≥3840Hz | 1/8 | 22.5kg |
| | P7.81 | 500*250mm | 16384 | 64*32 | 6000cd/m² | ≥3840Hz | 1/8 | 22.5kg |
| | P10.42 | 500*250mm | 9216 | 48*24 | 6000cd/m² | ≥3840Hz | 1/8 | 22.5kg |

## Indoor Rental LED Display Screen

| Cabinet Size | Pixel Pitch | Module Size | Pixel Density | Module Resolution | Brightness | Refresh Rate | LED Package | Cabinet Weight |
|---|---|---|---|---|---|---|---|---|
| 500*500mm/ 500*1000mm  | P1.56 | 250*250mm | 409600 | 160*160 | ≥800cd/m² | ≥7680Hz | SMD1212 | 7.2KG/12.5KG |
| | P1.95 | 250*250mm | 262144 | 128*128 | ≥800cd/m² | ≥7680Hz | SMD1515 | |
| | P2.6 | 250*250mm | 147456 | 96*96 | ≥800cd/m² | ≥7680Hz | SMD1515 | |
| | P2.97 | 250*250mm | 112896 | 84*84 | ≥800cd/m² | ≥7680Hz | SMD1515 | |
| | P3.91 | 250*250mm | 65536 | 64*64 | ≥800cd/m² | ≥7680Hz | SMD2020 | |

## Outdoor Rental LED Display Screen

| Cabinet Size | Pixel Pitch | Module Size | Pixel Density | Module Resolution | Brightness | Refresh Rate | LED Package | Cabinet Weight |
|---|---|---|---|---|---|---|---|---|
| 500*1000mm/500*500mm  | P2.6 | 250*250mm | 147456 | 96*96 | ≥4500cd/m² | ≥3840Hz | SMD1415 | 7.5KG/ 13.5KG |
| | P2.97 | 250*250mm | 112896 | 84*84 | ≥4500cd/m² | ≥3840Hz | SMD1415 | |
| | P3.91 | 250*250mm | 65536 | 64*64 | ≥4500cd/m² | ≥3840Hz | SMD1921 | |

Anhui Yushuo Photoelectric Technology Co., Ltd.
Contact No:+86-0551-65353043，+86-13855186461 Email:sarah@ahysled.com Website:www.ahsyled.com
Address: Building 23, Phase I, MAX Science and Technology Park, No. 588 Tianshi Road, Shushan District, Hefei City, Anhui Province,China

## Floor Tiles LED Display Screen

| Cabinet Size | Pixel Pitch | Module Size | Pixel Density | Module Resolution | Brightness | Refresh Rate | LED Package | Cabinet Weight |
|---|---|---|---|---|---|---|---|---|
| 500*1000mm  | P2.97 | 250*250mm | 112896 | 84*84 | 1200-2500cd/m² | ≥3840Hz | SMD1415 | 25KG |
| | P3.91 | 250*250mm | 65536 | 64*64 | 1200-2500cd/m² | ≥1920Hz | SMD1415 | 25KG |
| | P4.81 | 250*250mm | 43264 | 52*52 | 1200-2500cd/m² | ≥1920Hz | SMD1921 | 25KG |

## Transparent Grille LED Display Screen

| Cabinet Size | Pixel Pitch | Module Size | Pixel Density | Cabinet Resolution | Brightness | Refresh Rate | LED Package | Cabinet Weight |
|---|---|---|---|---|---|---|---|---|
| 1000*1000mm/ 1000*500mm  | P2.8-5.6 | 500*125mm | 61952 | 352*176 | 800-5000cd/m² | ≥1920Hz | SMD1921 | 3KG |
| | P3.9-7.8 | 500*125mm | 32768 | 256*128 | 800-5000cd/m² | ≥1920Hz | SMD1921 | 6.5KG |
| | P7.81 | 500*125mm | 8192 | 128*32 | 5000cd/m² | ≥1920Hz | SMD3535 | 8.5KG |
| | P15.625 | 500*125mm | 4096 | 64*32 | 8000-12000cd/m² | ≥1920Hz | SMD3535 | 9.5KG |

## Transparent LED Display Film

| Size | Pixel Pitch | LED Package | Module Resolution | Pixel Density | Brightness | Refresh Rate | Transparency | Module Weight |
|---|---|---|---|---|---|---|---|---|
| 960mm*230mm/1440*230mm  | P6.25 | SMD2121 | 160*64 | 25600 | 2000/4000cd/m² | ≥3840Hz | 90% | 1.3KG |
| | P8 | SMD2121 | 125*50 | 15625 | 2000/4000cd/m² | ≥3840Hz | 92% | 1.3KG |
| | P10 | SMD2121 | 100*40 | 10000 | 2000/4000cd/m² | ≥3840Hz | 94% | 1.3KG |
| | P20 | SMD2121 | 50*20 | 2500 | 2000/4000cd/m² | ≥3840Hz | 95% | 1.3KG |

Anhui Yushuo Photoelectric Technology Co., Ltd.
Contact No:+86-0551-65353043，+86-13855186461 Email:sarah@ahysled.com Website:www.ahsyled.com
Address: Building 23, Phase I, MAX Science and Technology Park, No. 588 Tianshi Road, Shushan District, Hefei City, Anhui Province,China

## LED Advertising Poster

| Size | Pixel Pitch | Cabinet Size | Module Resolution | IP Rating | Brightness | Refresh Rate | Communication method | Weight |
|---|---|---|---|---|---|---|---|---|
| 640*1920mm  | P1.25 | 640*480mm | 512*1536 | IP5X | ≥500cd/m² | ≥3840Hz | WiFi | 48KG |
| | P1.53 | 640*480mm | 416*1248 | IP5X | ≥500cd/m² | ≥3840Hz | WiFi | 48KG |
| | P1.86 | 640*480mm | 352*946 | IP5X | ≥500cd/m² | ≥3840Hz | WiFi | 48KG |
| | P2.5 | 640*480mm | 256*704 | IP5X | ≥500cd/m² | ≥3840Hz | WiFi | 48KG |

## LED Interactive Flat Panel/All-in-one Machine



| Size | Resolution | Operate System | Windows OPS | LED pixel pitch | Infrared Touch | Refresh |
|---|---|---|---|---|---|---|
| 136 inch | 1920*1080 | Android System/ OPS system can choose | Can be choose | P1.5mm | Can be Choose | ≥3840Hz |
| 145 inch | 1920*1080 | | Can be choose | P1.6mm | | ≥3840Hz |
| 165 inch | 1920*1080 | | Can be choose | P1.8mm | | ≥3840Hz |
| 180 inch | 1920*1080 | | Can be choose | P1.6mm | | ≥3840Hz |

## Stadium LED display

1600*900mm 

| Pixel Pitch | Resolution | Module Size | IP Rating | Brightness | Refresh Rate | LED Package | Weight |
|---|---|---|---|---|---|---|---|
| P6.25 | 128*144 | 400*300mm | IP65 | 6500cd/m² | ≥3840Hz | SMD2727 | 45KG |
| P8.33 | 96*108 | 400*300mm | IP65 | 6500cd/m² | ≥3840Hz | SMD2727 | 45KG |
| P10 | 80*90 | 400*300mm | IP65 | 6500cd/m² | ≥3840Hz | SMD2727 | 45KG |