www.gmaxtech.com

G-MAX Technology Co., Ltd.

聖弘電子科技(東莞)有限公司

UNIT 902, 9TH FLOOR, BUILDING 28, EAST DISTRICT OF TIAN AN SHEN CHUANG VALLEY,
NO.179, DONG SHEN ROAD, YAN TIAN, FENG GANG TOWN,
DONG GUAN CITY, GUANG DONG PROVINSE, CHINA

廣東省東莞市鳳崗鎮東深路鳳崗段179號

深創谷東區28號樓902室

+86-769-82082789 82082786 82081166 82081199

UNIT 902, 9TH FLOOR, BUILDING 28, EAST DISTRICT OF TIAN AN SHEN CHUANG VALLEY, NO.179, DONG SHEN ROAD, YAN TIAN, FENG GANG TOWN, DONG GUAN CITY, GUANG DONG PROVINSE, CHINA

sales@gmaxtech.com

www.gmaxtech.com





ISO9001

BSCI

G-MAX TECHNOLOGY CO., LTD.

www.gmaxtech.com

Product Contents

HDMI VIDEO WALL ----------01

HDMI EXTENDER ----------02 - 06

HDMI WIRELESS ----------07

HDMI SPLITTER ----------08 - 10

HDMI SWITCH ----------11 - 14

HDMI SWITCH /KVM SWITCH ----------15 - 18

8K SERIES ----------19 - 20

HDMI CONVERTER / AUDIO ----------21 - 23

AUDIO CONVERTER ----------24 - 28

CONVERTER / HUB ----------29 - 30

DOCKING STATION ----------31 - 32

VIDEO CAPTURE ----------33

DOCKING STATION ----------34

SDI CONVERTER / SPLITTER ----------35

USB CHARGER STATION ----------36

HDMI VIDEO WALL

VW-02

2X2 4K60HZ VIDEO WALL CONTROL HDMI LOOP OUT,AUDIO EXTRACTOR RS232




Features

- Allows one HDMI input to be freely arranged on to four 4K displays.
- Can be cascaded to create up to 2X2 Video Wall (4-displays)
- Supports 4K x 2K@24/25/30Hz/60HZ
- HDCP compliant
- Outputs video signal to 4 displays with a full image
- Input PC resolutions : from VGA~WUXGA & HDTV from 480i~1080p & 4K2K@24/25/30Hz/60HZ
- Supports all digital audio modes
- Can be controlled from anywhere using a tablet or any other 3 party control system using RS-232 and Telnet.


RS232 · AUDIO BREAKOUT · HDCP · HDMI 2.0 · 4K 60Hz 4:2:0 · IR Remote control


Connection Diagram

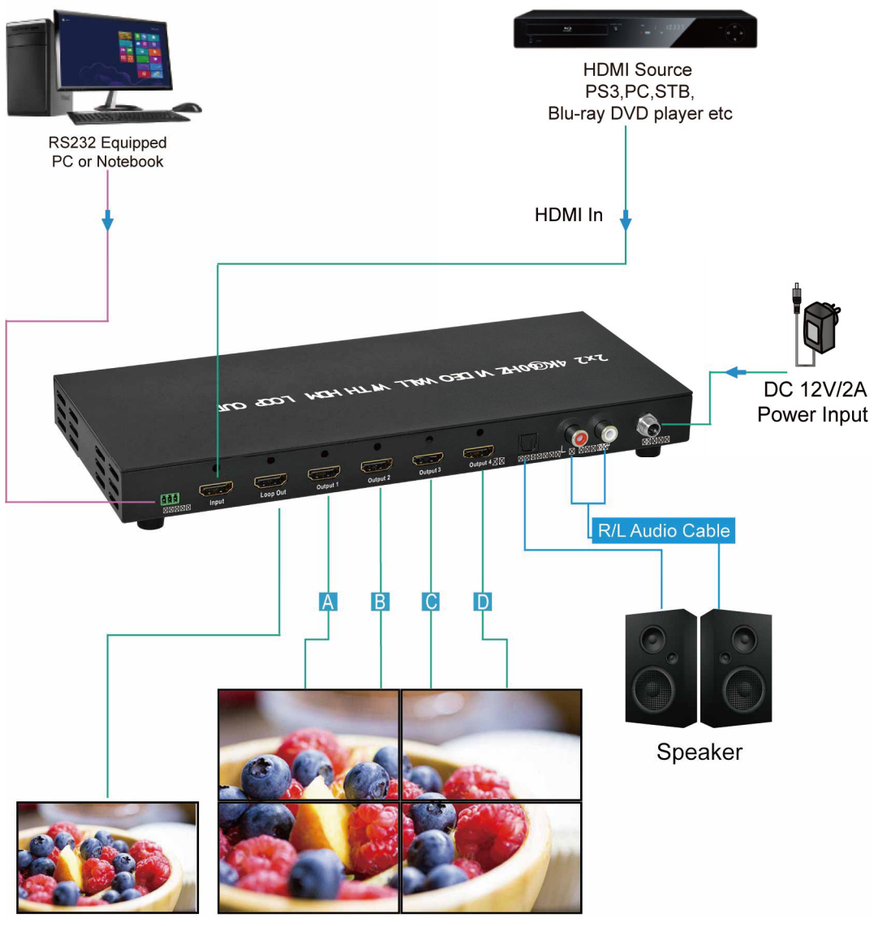

HDMI Extender over

HDMI via Single CAT5e/6 UTP/STP Extension: With fully automatic adjustment of feedback, equalization, and amplification depending on cabling length

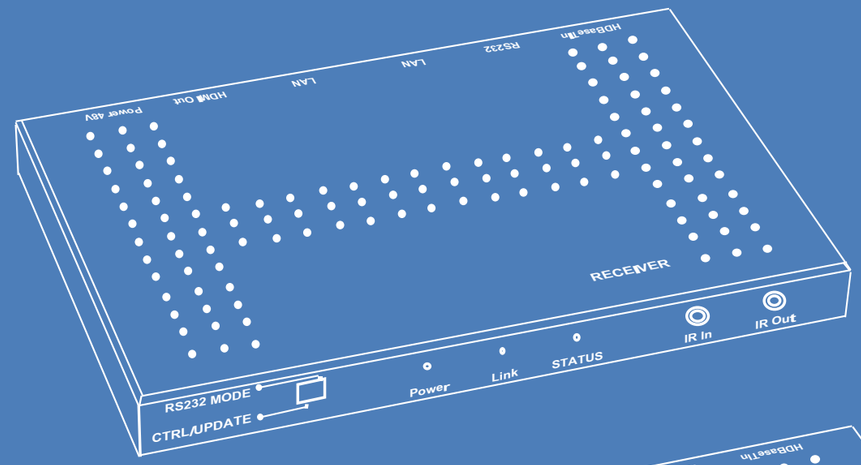

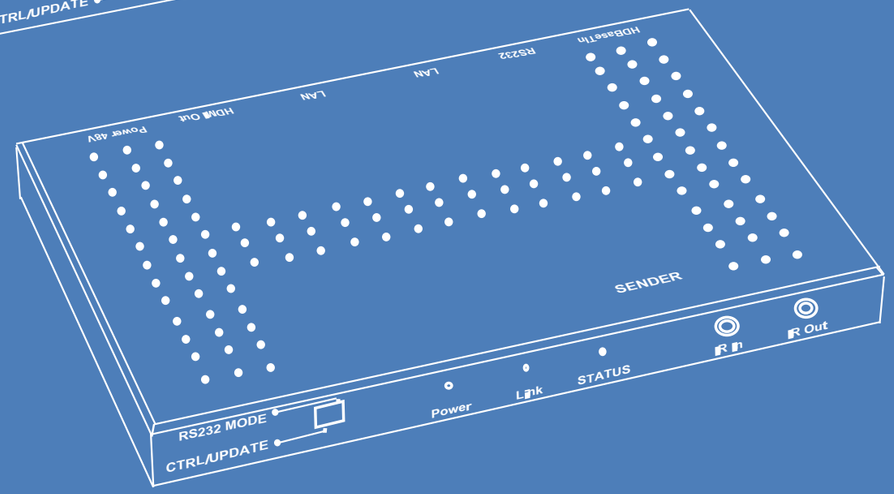

HM-ET21A

HDMI 2.0 4K60HZ 50M EXTENDER WITH UHD AND POC



HM-ET21AR

HDMI 2.0 EXTENDER WITH ADUIO



HM-CV045KP

HDMI REPEATER 4K@60HZ YUV 4:4:4



HM-CV045KA

HDMI 4K2K REPEATER 4K@60HZ YUV 4:4:4



HM-ET104

HDMI UTP EXTENDER 1X4 SPLITTER WITH AUDIO EXTRACTION



HM-ET108

HDMI UTP EXTENDER 1X8 SPLITTER WITH AUDIO EXTRACTION



HM-CV045H

HDMI 2.1 REPEATER 8K@60HZ



DP-R8K

DP1.4 REPEATER 8K@30HZ



HM-ET06

HDMI 1080P 60M EXTENDER OVER CAT5/5E/6



HM-ET15

4K30HZ HDMI 50M EXTENDER OVER CAT6/6A CABLE SUPPORT POC



HM-ET18

4K30HZ HDMI FIBER EXTENDER WITH RS232



C-05H

TYPE-C REPEATER



HM-ET07

HDMI 1080P OVER IP 100M EXTENDER BY CAT5E/6 CABLE SUPPORT RS232 AND BI-DIRECTIONAL IR



HM-ET08

HDMI 1080P OVER IP 20KM EXTENDER BY OPTICAL CABLE SUPPORT RS232 AND BI-DIRECTIONAL IR



HM-ET09

HDMI 1080P OVER IP KVM 100M EXTENDER BY CAT5E/6 CABLE AND BI-DIRECTIONAL IR



HM-ET10

HDMI 1080P OVER IP KVM 20KM EXTENDER BY OPTICAL CABLE WITH BI-DIRECTIONAL IR



HM-ET11

HDMI 1080P OVER IP KVM 100M EXTENDER BY CAT5E/6 WITH LED AND BI-DIRECTIONAL IR



HM-ET12

HDMI 1080P OVER IP 100M EXTENDER BY CAT5E/6 CABLE WITH LED, RS232 AND BI-DIRECTIONAL IR



HM-ET14

HDMI 1080P OVER IP 100M EXTENDER BY CAT5E/6 CABLE WITH BI-DIRECTIONAL IR



VGA-ET02

VGA UTP EXTENDER WITH AUDIO



VSP102

VGA UTP EXTENDER 1X2 SPLITTER WITH AUDIO



VSP104

VGA UTP EXTENDER 1X4 SPLITTER WITH AUDIO



HM-ET60L

30M/60M 1080P HDMI EXTENDER WITH POC



HM-ET60LR

60M 1080P HDMI UTP EXTENDER WITH LOOP OUT & IR & POC



HM-ET120L

120M 1080P HDMI UTP EXTENDER WITH LOOP OUT



HM-ET150LR

150M 1080P HDMI UTP EXTENDER WITH LOOP OUT & KVM



HM-ET104PL

50M 1080P HDMI UTP EXTENDER 1X4 SPLITTER WITH EDID



HM-ET108PL

50M 1080P HDMI UTP EXTENDER 1X8 SPLITTER WITH EDID



HM-W08A

4K30HZ WIRELESS HDMI TRANSMITTER AND RECEIVER






Features

Wireless HDMI extender is a private protocol-based end-to-end solutiondesigned for interactive, multi-room wireless display and home video distribution, allowing end-users to play any video remotely on another screen with no discernible lag even if the devices are located in a different room.

- Supports 4K30 high-definition resolution, which has four times more pixels than 1080p, delivering exceptionally clear pictures, rich details, and texture, which will bring you a cinematic experience in the big size TV; enjoy your wireless video anywhere.
- TX supports 4K60 HDR loop-out function for vivid playback. Remark: HDR in use when TX standalone only.
- Support IR back control function for 20KHz-60KHz remote signal.
- Support transmitter and receiver will connect automatically, Plug and Play. No setting, APP free
- Support 1TX to 4RX
- Support the fast 802.11ac MIMO technology which increases Wi-Fi speeds by allowing a pair of wireless devices to simultaneously send or receive multiple data streams.
- Built-in high-efficiency Wi-Fi module and 2*5db high-sensitive antennas create a stronger connection over a long stance, ensuring the Wi-Fi transmission distance up to 150 meters.
- No worries about the data security, supports AES 128-bit security encryption and WPA2/WPA-PSK/WPA2-PSK authentication protocol to protect data. HDCP supported to protect the content

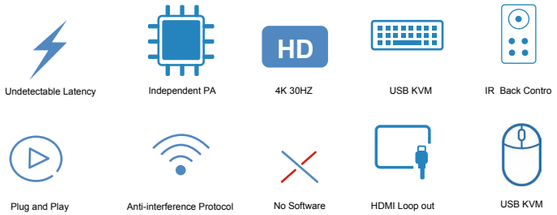

HM-W06

1080P DIGITAL SIGNAGE FOR SMALL BUSINESS



USB KVM Supported + IR Extended Function

Plug the mouse and keyboard on the receiver to remotely control the video source in another room. The USB data of the mouse/keyboard is sent wireless to TX which in turn outputs the data to the video source connected to it.



Simple-playing on a smart phone


Connect transmitter to a game console or gaming PC. Games can be streamed and played on a smartphone inserted in a virtual reality headset, creating wearable cinema 3D experience. End-to-end latency is only 60ms

High Security Protection

No worries about the data security, HM-W08 support AES 128-bit security encryption and WPA2/WPA-PSK/WPA2-PSK authentication protocol to protect data. It also support HDCP to protect the content.

HDMI Splitter

ALLOWS ONE HDMI INPUT TO BE FREELY ARRANGED ON TO FOUR 4K DISPLAYS.

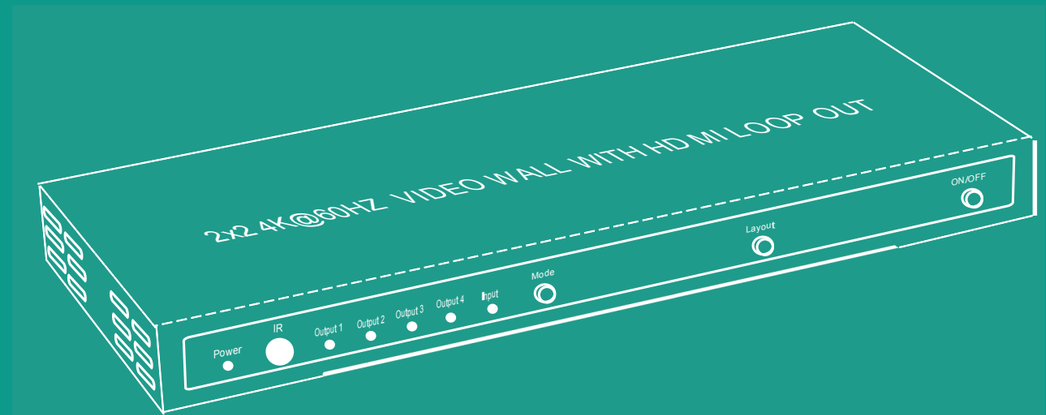

HM-SP102SS

1X2 HDMI 2.0 4K@60HZ/HDCP 2.2 SPLITTER



HM-SP104S

1X4 HDMI 2.0 4K@60HZ/HDCP 2.2 SPLITTER



Features

- Supports HDMI 2.0, HDCP 2.2
- Supports Resolution up to 3840x2160@60Hz
- Support deep color 8/10/12bit
- Supports 1 input, 16 output
- Supports 3D, HDR
- Supports EDID,RS232
- Supports IR Remote Control
- Support audio format DTS-HD/Dolby-trueHD/DTS/Dolby-AC3/DSD
- Support displaying single source, multi-output high-definition signal source from DVD player A / V receiver, set-top box

HM-SP116

1X16 HDMI 2.0 4K 60HZ/HDCP 2.2 SPLITTER



Features

- Disc over the full potential of UHD - IT supports 4K2K(60Hz)
- Divides an HDMI video signal into up to 8 playback device (E.G.TV, monitor, projector)
- Easy connection of 8 playback devices to 1 HDMI Input sou
- Supports 4K, full HD, full 3d, 4K2K video
- Supports 21:9 wide -angle cinema format
- Supports high dyamic range (HDR) video
- Ulltra slim metal housing, black

HDR UHD | 3D | HDMI 2.0 | 4K 60HZ 4:2:4 | HDCP 2.2 | 25MHZ - 600MHZ | HDR10

HM-SP102S



HM-SP108S

1X8 HDMI 2.0 4K@60HZ/HDCP 2.2 SPLITTER



HM-SP102D

1X2 HDMI2.0 4K60HZ HDR SPLITTER PIGTAIL



HM-SP104EA

1X4 HDMI2.0 & HDCP2.2 SPLITTER WITH AUDIO EXTRACTOR; RS232 AND EDID



HM-SP102E

1X2 HDMI 2.0 & HDCP2.2 SPLITTER WITH EDID



HM-SP104E

1X4 HDMI 2.0 & HDCP2.2 SPLITTER WITH EDID



HM-SP102EA

1X2 HDMI2.0 & HDCP2.2 SPLITTER WITH AUDIO EXTRACTOR; RS232 AND EDID



HM-SP108EA

1X8 HDMI2.0 & HDCP2.2 SPLITTER WITH AUDIO EXTRACTOR; RS232 AND EDID



Features

- Digital Distribution: 1 HDMI Sources to 2/4/8 HDMI Displays
- HDR10 (High Dynamic Range): More life-like images through a greater range of luminance levels
- HDCP2.2 and HDMI Licensing: Fully licensed and compatible with HDCP 2.2 and HDMI latest technologies
- Ultra HD/4K Resolution: 4096x2160 or 3840x2160 30Hz at 4:4:4 and 60Hz at 4:4:4
- 3D Ready: Capability to pass 3D stereoscopic signal formats
- Resolution Support: SD, HD, and VESA up to UHD/4K
- Deep Color Support: Up to UHD/4K 30Hz 4:4:4/12 bits or 60Hz 4:4:4/8 bit
- EDID Control: Internal library with 15 EDID handshakes
- Lossless Compressed Digital Audio: Dolby TrueHD, Dolby Digital Plus,DTS-HD Master Audiomand Dolby Atmos
- I2C Communication: EDID and HDCP buffering from Display to Source


HM-SP108E

1X8 HDMI 2.0 & HDCP2.2 SPLITTER WITH EDID



HDMI SWITCH

HDMI SWITCH MULTI-VIEWER
HDMI 2.0 4K 30HZ KVM MATRIX SWITCH 4:4:4

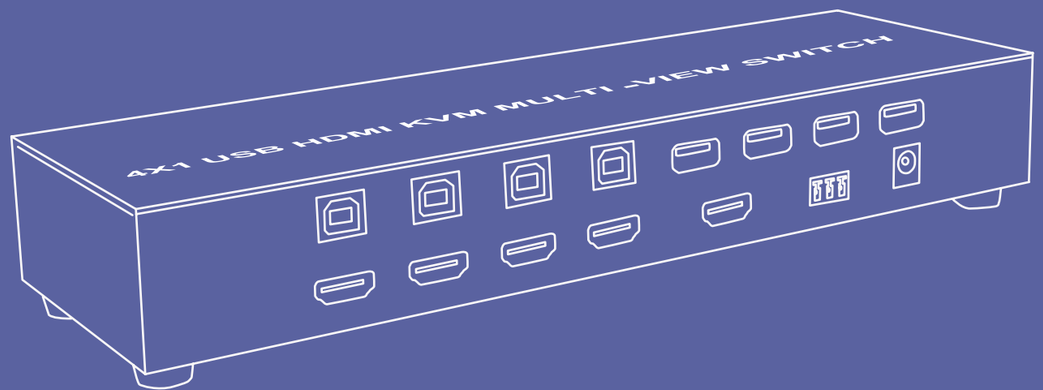

HM-MKM401

HDMI 4X1 QUAD MULTI-VIEWER ROAMING MOUSE SEAMLESS SWITCH

NEW




Features

- A KVM switch without the video switching - Users can see all the connected 4 computers on 1 HD display with Quad mode.
- To control four computers using one USB mouse, USB keyboard console.
- Seamless Switching automatically between computers once mouse cursor crosses display borders(Seamless Cursor Switching)
- Support HDMI 1080P@60HZ and PC's UXGA 1920X1080 resolutions



Connection Diagram

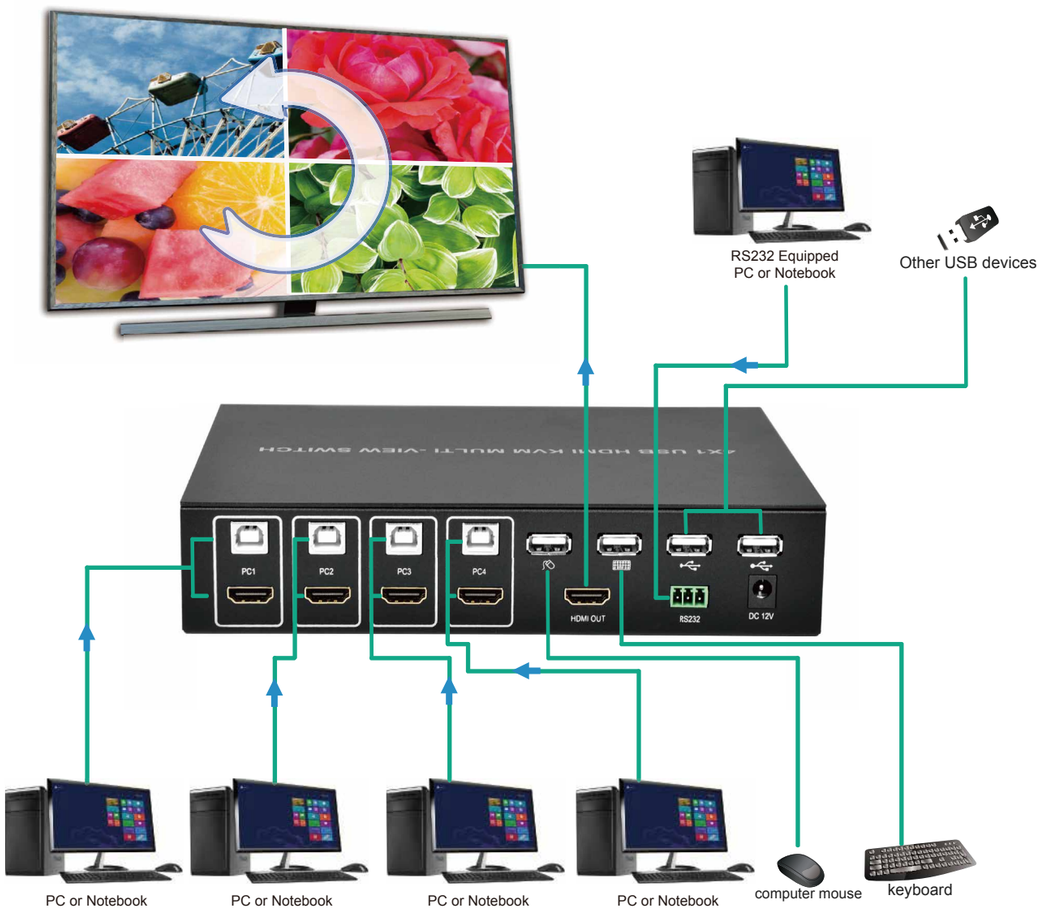

HM-SW501P

3X1/5X1 HDMI 4K2K SWITCHER



HM-SW301P



HM-SW201A

2X1 4K60HZ HDMI SWITCHER WITH ARC AND AUDIO EXTRACTOR

NEW



HM-SW401S

HDMI 4X1 QUAD MULTI-VIEWER WITH SEAMLESS SWITCHER



HM-SW401F

HDMI 4X1QUAD MULITI-VIEWER WITH SEAMLESS SWITCH

NEW



HM-SW401H

HDMI 2.0 4X1 SWITCHER WITH AUDIO EXTRACTION

NEW



YD-HM-SW401S

HDMI 4X1 QUAD MULTI-VIEWER WITH SEAMLESS SWITCHER



HM-MT402H

HDMI 2.0 4X2 MATRIX SWITCHER WITH AUDIO EXTRACTION

NEW



HM-MT404A

HDMI2.0 4x4 MATRIX SWITCH WITH 4 SPDIF OUT EDID, RS232

NEW



DP-BI1221

DP 1.4 Bi-DIRECTION SWITCH



HM-SW301A

3 PORTS HDMI SWITCH 4K 60HZ HDCP 2.2

NEW



Aluminium + Plastic



HM-SW301B



HM-SW301D

HM-MT402A

HDMI 4X2 MATRIX SWITCHER WITH AUDIO EXTRACTION

NEW



HM-MT404AR

HDMI2.0 4x4 MATRIX SWITCH WITH 4 SPDIF OUT EDID, RS232, WEB GUI CONTROL

NEW



HM-BI1221H

HDMI 8K BI-DIRECTION SWITCH



HM-BI221 4K



HM-SW501A

5 PORTS HDMI SWITCH 4K 60HZ HDCP 2.2

NEW



HM-201EARC

2X1 4K HDMI EARC ADAPTER

NEW



Aluminium

HM-SW301C

TYPE-C + 2PORT HDMI 2.0 TO HDMI SWITCH

NEW



KVMCD

TYPE-C TO 3DP KVM SWITCH WITH USB 3.0

NEW



HM-VHCD501

HDMI / DP / VGA / TYPE-C TO HDMI SWITCH WITH RS232

NEW



HM-401EARC

4X1 4K HDMI EARC ADAPTER

NEW



U3-204A

USB 3.0 SWITCH

NEW



KVMCH

TYPE-C TO 3HDMI KVM SWITCH WITH USB 3.0

NEW



Features

- Supports 4K ultra HD (3840x2160) at 60Hz 4:4:4 Output to a displayport monitor
- Works with Mac or PC computers, tablets, Chromebook, mobile phones
- Any device that supports displayport Alt-Mode over USB-C.even if using a Mac combined with a PC
- Plenty of USB (TYPE-A) space with 4 x USB 2.0 HDI Device port 2 x HIGH-SPEED USB 3.0 ports
- Front -panel button/hotkey for easy computer selection and function

KVM | USB 4 x USB 2.0 2 x USB 3.0 | 4K 60HZ4:4:4 | HDMI 2.0
PD | HOT KEY | Type-c 2 X Type - C | DP1.4

201DKVM

2-Port USB DP Cable KVM Switch with Audio

NEW



HM-KVM201

2X1 USB HDMI 2.0 KVM SIWTCH 4K2K



201HKVM

2-Port USB HDMI Cable KVM Switch with Audio

NEW



HM-KVM401

4X1 USB HDMI 2.0 KVM SIWTCH 4K2K



DP-KVM201K

2X1 DP1.2&USB2.0 KVM SWITCH 4K2K



DP-KVM401K

4X1 DP1.2&USB2.0 KVM SWITCH 4K2K



HM-KVM2

2X1 KVM SWITCH WITH SINGLE HDMI

NEW



HM-KVM2-2

2 IN 2 OUT 4K 60HZ HDMI 2.0 KVM SWITCH

NEW



HM-KVM2-3

2 IN 3 OUT 4K 60HZ HDMI 2.0 KVM SWITCH

NEW



HM-KVM2-4

2 IN 4 OUT 4K 60HZ HDMI 2.0 KVM SWITCH

NEW



HM-KVM4

4X1 KVM SWITCH WITH SINGLE HDMI

NEW



HM-KVM4-2

4 IN 2 OUT 4K 60HZ HDMI 2.0 KVM SWITCH

NEW



HM-KVM4-3

4 IN 3 OUT 4K 60HZ HDMI 2.0 KVM SWITCH

NEW



HM-KVM4-4

4 IN 4 OUT 4K 60HZ HDMI 2.0 KVM SWITCH

NEW



DP-KVM2-2

2 IN 2 OUT 8K DISPLAYPORT 1.4 KVM SWITCH

NEW



DP-KVM2-3

2 IN 3 OUT 8K DISPLAYPORT 1.4 KVM SWITCH

NEW



DP-KVM2-4

2 IN 4 OUT 8K DISPLAYPORT 1.4 KVM SWITCH

NEW



DP-KVM4-2

4 IN 2 OUT 8K DISPLAYPORT 1.4 KVM SWITCH

NEW



DP-KVM4-3

4 IN 3 OUT 8K DISPLAYPORT 1.4 KVM SWITCH

NEW



DP-KVM4-4

4 IN 4 OUT 8K DISPLAYPORT 1.4 KVM SWITCH

NEW



8K SERIES

HM-SW201H

HDMI 2.1 8K 2X1 SWITCH

NEW



HM-SW301H

HDMI 2.1 8K 3X1 SWITCH

NEW



HM-SP102ER

8K HDMI 2.1 1X2 SPLITTER WITH AUDIO EXTRACTOR

NEW



Connection Diagram



HM-301HA

8K HDMI 3X1 SWITCH

NEW



HM-101E

8K HDMI 2.1 CONVERTER WITH AUDIO

NEW



HM-SP104SK

8K HDMI 2.1 1X4 SPLITTER

NEW



HM-MT402EA

8K HDMI 2.1 4X2 MATRIX SWITCHER eARC AUDIO EXTRACTION

NEW



HM-101EA

8K HDMI 2.1 AUDIO EXTRACTOR

NEW




HM-102EA


8K HDMI 2.1 AUDIO EXTRACTOR WITH HDMI AUDIO OUTPUT

NEW



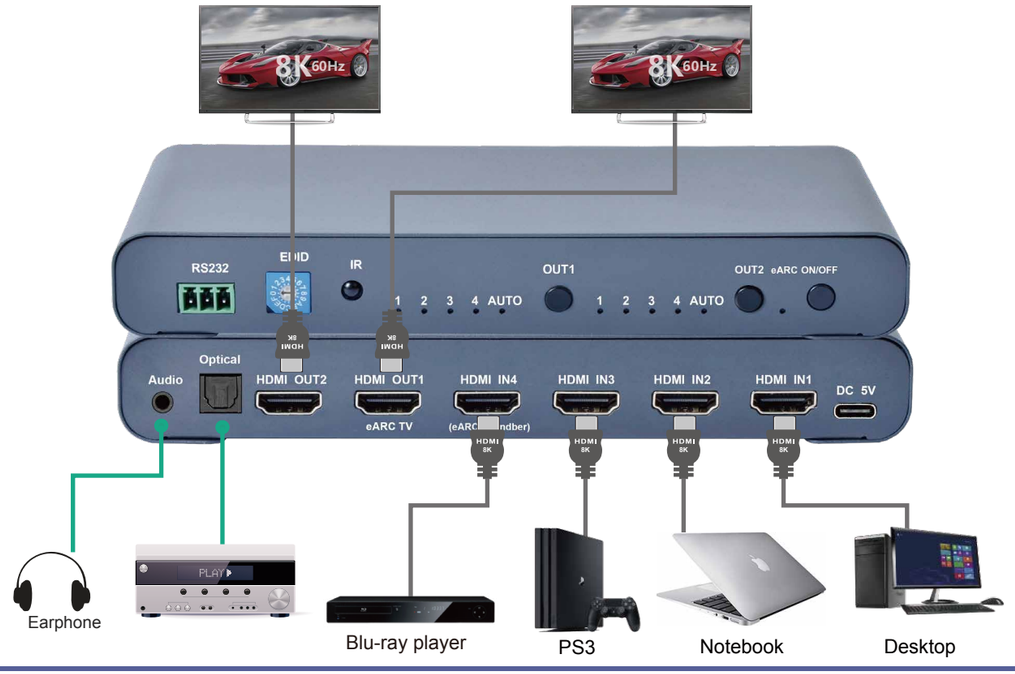

HDMI CONVERTER

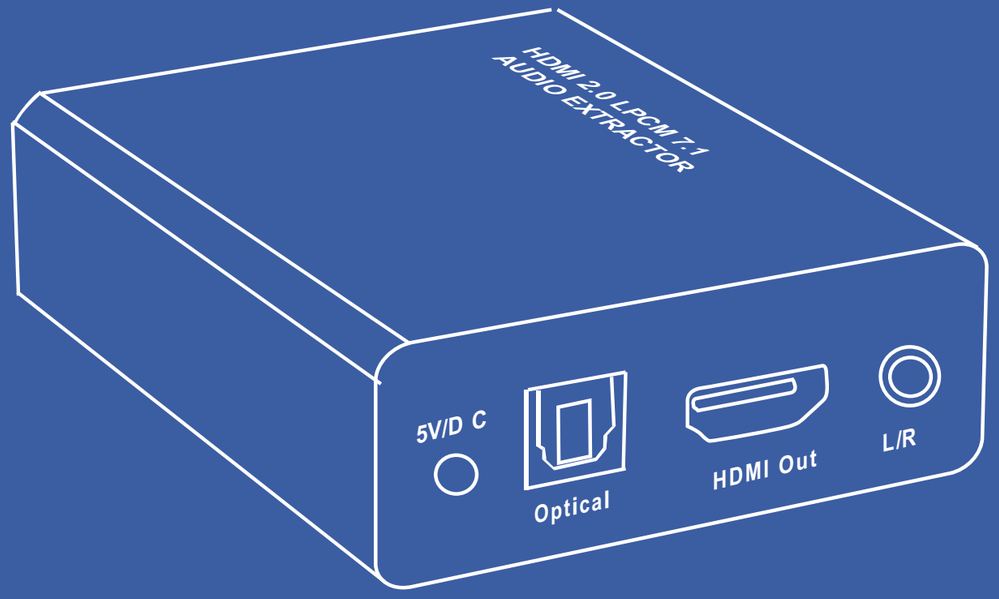

HM-CV025A

HDMI TO VGA CONVERTER +AUDIO

NEW



HM-CV041A

SCART + HDMI TO HDMI CONVERTER



SC-HM

SCART TO HDMI SCALER CONVERTER

NEW



HM-SC

HDMI TO SCART SCALER CONVERTER

NEW



SC-HDA

SCART TO HDMI CONVERTER WITH STEREO

NEW



HM-CV043

HDMI TO SCART CONVERTER

NEW



HM-CV030A

VGA + AUDIO TO HDMI CONVERTER



HM-CV050C

MINI COMPOSITE RCA CVBS AV TO HDMI CONVERTER



HM-CV046

MINI HDMI TO AV CONVERTER



HM-CV049

MINI VGA + AUDIO TO HDMI CONVERTER



HM-CV032K

HDMI 4K2K AUDIO INSERTER



HM-CV035K

HDMI 4K2K LPCM 2CH AUDIO EXTRACTOR



HM-CV033K

HDMI 4K2K LPCM7.1 AUDIO EXTRACTOR




HM-CV051

HDMI 2.0 LPCM7.1 AUDIO EXTRACTOR



AUDIO CONVERTER

AUDIO CONVERTER DAC 96K/ 192 K
OPTICAL SPLITTER / SWITCH
AMP / CONVERTER
SPEAKER CONTROL

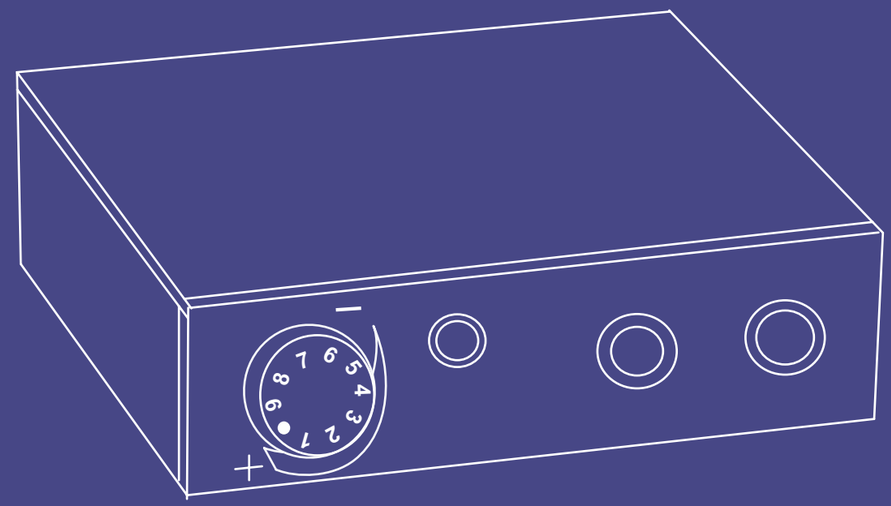

GEN-320

3-WAY AUDIO SWITCH

NEW



GEN-318

STEREO AUX/PHONO INPUT CONTROL

NEW



GEN-319

PROFESSIONAL PHONO & MICROPHONE PREAMP

NEW



GEN-323

DIGITAL AUDIO CONVERTER | 2-WAY - DIGITAL RCA (S/PDIF) + TOSLINK

NEW



GEN-321

4-WAY AUDIO SWITCH

NEW



GEN-317

PROFESSIONAL MOVING MAGNET PREAMP

NEW



GEN-322

DIGITAL AUDIO CONVERTER | 1-WAY - TOSLINK | DIGITAL RCA (S/PDIF)

NEW



GEN-324

DIGITAL AUDIO CONVERTER | 2-WAY - DIGITAL RCA (S/PDIF) + TOSLINK DIGITAL RCA

NEW



GEN-325

STEREO TO DIGITAL AUDIO CONVERTER | 1-WAY - 2X RCA (STEREO) | DIGITAL RCA (S/PDIF) + TOSLINK

NEW



UDA-04

384K DAC HEADPHONE AMPLIFIER



AMP-02

PORTABLE HEADPHONE AMPLIFIER



AMP-01

PHONO PREAMP



GEN-326

DIGITAL TO STEREO AUDIO CONVERTER | 1-WAY - DIGITAL RCA (S/PDIF) + TOSLINK | 2X RCA (STEREO)

NEW



Features

- Chipset : ALC4042
- Output voltage : 2vrms
- Minimum driven impedance : 12 ohms
- Maximum headphone driver output power : 125mW @ 32 ohms
- Frequency Response : DC-22 kHz(44.1 kHz sample rate) DC-22 kHz(48 kHz sample rate) DC-22 kHz(88.2 kHz sample rate) DC-22 kHz(96 kHz sample rate)



Headphone



Microphone



Speaker

Features

- Chipset : OPA1642+AD8397
- Power supply : MiNi USB Port
- Frequency response : 0Hz~20KHz
- SNR : >108dB
- Charging time : <12H
- Drive ability : 16~150 OHM
- Maximum Output power : 270mW(32 ohm THD <1%) 450mW(16 ohm THD <1%)



1400mAH



Headphone



Speaker

HM-CV042

HI-END GROUND ISOLATOR





DAC-01

AUDIO CONVERTER S/PDIF DIGITAL TO ANALOG



DAC-02

DIGITAL TO ANALOG AUDIO CONVERTER 192K



DAC-04

192KHZ DIGITAL TO ANALOG AUDIO CONVERTER



ADC-01

AUDIO CONVERTER ANALOG TO S/PDIF DIGITAL



HM-CV039

COAXIAL TO TOSLINK AUDIOCONVERTER



HM-CV039

TOSLINK TO COAXIAL AUDIO CONVERTER



OP-SP102

AUDIO SPLITTER TOSLINK S/PDIF DIGITAL 2 PORTS



OP-SP104

AUDIO SPLITTER TOSLINK S/PDIF DIGITAL 4 PORTS



DAC-01A

DIGITAL TO ANALOG AUDIO CONVERTER WITH 3.5MM



OP-SW201

AUDIO SWITCH TOSLINK S/PDIF DIGITAL 2 PORTS



OP-SW401

AUDIO SWITCH TOSLINK S/PDIF DIGITAL 4 PORTS



AMP-03

22W PREMIUM DESKTOP AUDIO AMPLIFIER




GEN-270

2 WAYS SPEAKER WITH VOLUME CONTROL



Connection Diagram

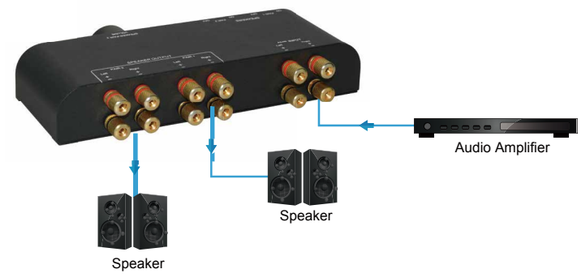

GEN-266

2 WAYS SPEAKER CONTROL CLIP



GEN-267

2 WAYS SPEAKER CONTROL CINCH



GEN-268

4 WAYS SPEAKER CONTROL CLIP




GEN-269

4 WAYS SPEAKER CONTROL CINCH



DISPLAYPORT CONVERTER/HUB

DP1.4 SPECIFICATION COMPLIANT SINGLE DP OUTPUT
8K@30HZ, 7680X4320P/30HZ
DUAL DP OUTPUT 4K 60HZ, 3840X2160P/60HZ
TRIPLE DP OUTPUT 4K 60HZ+4K30HZ+4K30HZ
SUPPORT HDR10, 3D, HDCP2.2
SUPPORT SST AND MST

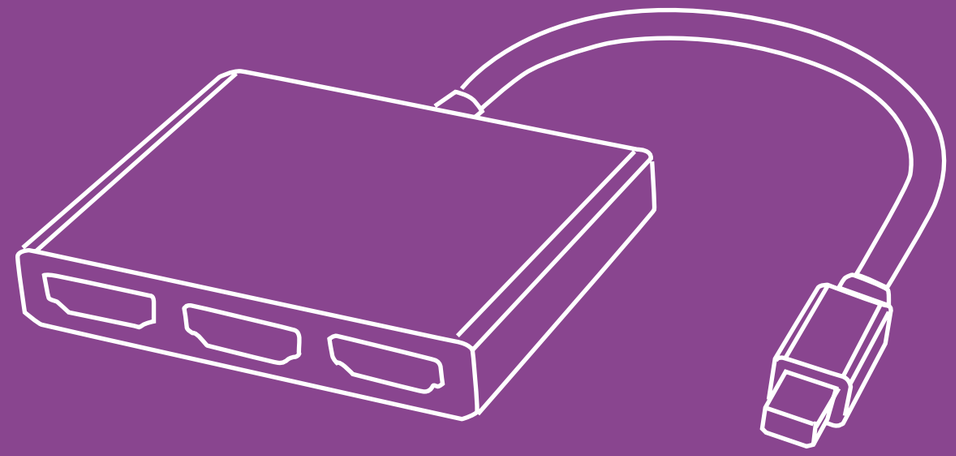

C-HD

TYPE-C TO HDMI 8K ADAPTER NEW



C-DP

TYPE-C TO DISPLAYPORT 8K ADAPTER NEW



C-2HD

TYPE-C TO 2 HDMI 8K ADAPTER NEW



C-2DP

TYPE-C TO 2 DISPLAYPORT 8K ADAPTER NEW



DP-2HD

DP TO 2 HDMI 8K ADAPTER NEW



DP-2DP

DP TO 2 DISPLAYPORT 8K ADAPTER NEW



GEN-246

TYPE-C TO VGA ADAPTER FULL HD 1080P



GEN-249

TYPE-C TO HDMI ADAPTER 4K 30HZ



GEN-250

TYPE-C MULTIPORT VGA ADAPTER WITH VGA, USB 3.0, PD



GEN-251

TYPE-C MULTIPORT HDMI ADAPTER WITH HDMI, USB 3.0, PD



GEN-298

EXTERNAL USB3.0 TYPE-A TO 2 X USB TYPE-A + 4 SLOT SD CARD READER



GEN-294

TYPE-C MULTIPORT ADAPTER WITH HDMI 2.0, 3XUSB 3.0,SD/TF CARDS, 100W PD



CPD-7IN1

TYPE-C 7IN1 DOCKING STATION ADAPTE



CPD-8IN1

8K TYPE-C 8IN1 DOCKING STATION ADAPTE



C-8IN1

TYPE-C 8IN1 DOCKING STATION ADAPTE



C-13IN1

TYPE-C 13IN1 DOCKING STATION ADAPTE



C-12IN1

TYPE-C 12IN1 DOCKING STATION ADAPTE



Connection Diagram



C-18IN1

TYPE-C 13IN1 DOCKING STATION ADAPTE




CPD-15IN1

TYPE-C 15IN1 DOCKING STATION ADAPTE



Connection Diagram

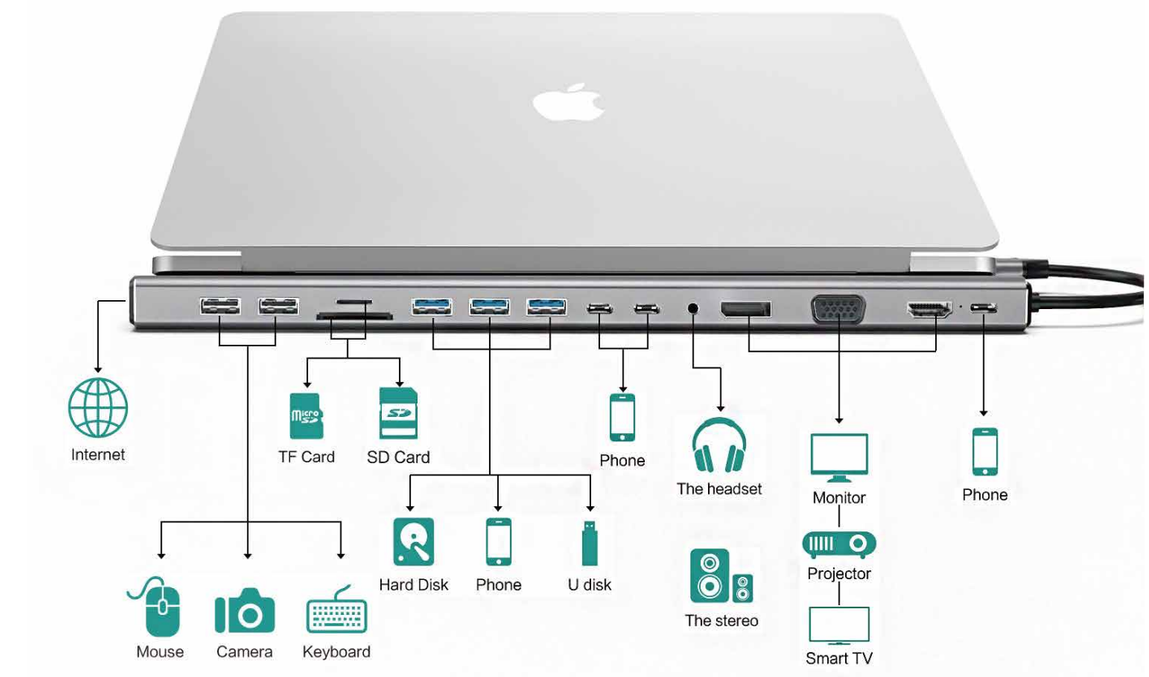

GEN-301VCL

4K 3X1 HDMI SWITCH WITH USB 3.0 VIDEO CAPTURE

NEW



GEN-401VCL

HDMI 4X1 QUAD MULTI-VIEWER SEAMLESS SWITCHER WITH USB3.0 VIDEO CAPTURE


NEW



Features

- Maximum Single Link Range:1920x1080@60
- Compliant with HDMI 1.3a, HDCP 1.4
- Supports up to 1080p60 High Definition resolution
- Support 4 by 1 Quad Multi-viewer and seamless switch(with same resolution)
- Support multi output resolution
- Support uncompressed yuy2 acquisition (USB3.0)

Connection Diagram

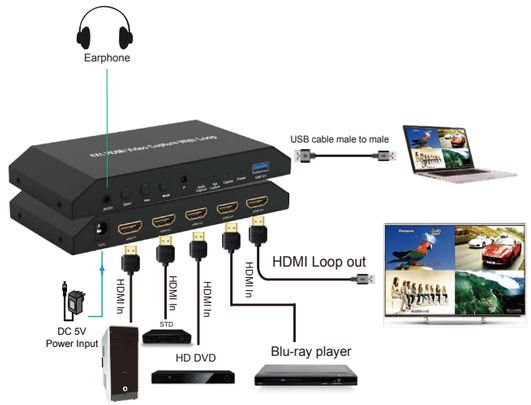

U2-02

USB DATA & SIGNAL FILTER

NEW



GEN-U2VC

VIDEO CAPTURE

NEW



GEN-U2VCL

HDMI TO HDMI+AUDIO HDMI CONVERTER

NEW



GEN-U3VCL

HDMI VIDEO CAPTURE WITH AUDIO

NEW



GEN-344

DOCKING STATION FOR 2 SSD M2 NGFF NVME PCIE CONNECTOR USB 3.2 GEN2 10GB WITH CLONA FUNCTION

NEW



GEN-241E

2.5”/3.5” DUAL SATA HDD/SDD STANDALONE DOCKING STATION DUPLICATOR AND ERASER



U3-HVD

USB 3.0 TO HDMI/VGA/DVI DUAL 2K DISPLAY ADAPTER



HM-CV052

HDMI AUDIO EXTRACTOR SUPPORT 5.1CH & 4K & 3D



GEN-236U3

USB 3.0 LAPTOP DOCKING STATION WITH VIDEO



SDI-HM

SDI TO HDMI CONVERTER



Features

- Supports multiple video resolutions :
  SD 525i and 625i HD 720P 24, 25, 30, 50 and 60
  HD 1080i 50, 60 HD 1080P 24, 25, 30, 50 and 60
- Supports multiple color space :
  RGB or YCbCr 4:4:4 sampled YCbCr 4:2:2 sampled
- Supports data rates : 270m~2.97Gbps.
- Supports 8 bit, 10 bit, 12 bit of deep color.
- Supports eight channels of 48k sampling rate of digital audio
- SDI input. Support long coaxial cable, SD model 300m, HD mode 130m(RG59 cable or its quite product).
- One way SDI output, with the Re-clock function, can support multiple cascaded

HM-SDI

HDMI TO SDI CONVERTER



Features

- Supports multiple video resolution :
  HD 720P 50Hz, 60Hz HD 1080i 50Hz, 60Hz
  HD 1080P 24Hz FHD 50Hz, 60Hz
- Supports multiple color space :
  RGB sampled YCbCr 4:4:4 or YCbCr 4:2:2 sampled
- Supports data rate : 270m~2.97Gbps.
- Supports deepcolor of 8bit, 10bit and 12bit.
- Supports 8 channels of 48K sampling rate digital audio.
- The SDI input supports long coaxial cable, SD mode 400m, HD mode 200m, 3G mode 100m (cable is RG6 or equivalentproducts).
- 2 ways SDI output.
- Supports HDCP specification.
- Supports HDMI V1.3 specification.

SSP102

SDI 1X2 SPLITTER



Features

This product is specially designed with equalizer IC in its input and IC in its outputs. All of the input and outputs support long coaxial cable.

- Supports multiple video resolution :
  SD 525i and 625i
  HD 720p 24, 25, 30, 50 and 60
  HD 1080i 50, 60
  HD 1080p 24, 25, 30, 50 and 60
- Supports multiple color space :
  RGB or YCbCr 4:4:4 sampled
  YCbCr 4:2:2 or 4:2:0 sampled
- Supports wide range of data rates : 270Mbps~2.97Gbps.
- Supports multiple deep color : 8bit, 10bit, 12bit.

SSP104

SDI 1X4 SPLITTER



Features

This product is specially designed with equalizer IC in its input and drive IC in its outputs. All of the input and outputs support long coaxial cable.

- Supports multiple video resolution :
  SD 525i and 625i
  HD 720p 24, 25, 30, 50 and 60
  HD 1080i 50, 60
  HD 1080p 24, 25, 30, 50 and 60
- Supports multiple color space
  RGB or YCbCr 4:4:4 sampled
  YCbCr 4:2:2 or 4:2:0 sampled
- Supports wide range of data rates：270Mbps~2.97Gbps.
- Supports multiple deep color：8bit, 10bit, 12bit.

GAN-15

GAN USB-A/C CHARGER



Features

- USB-C1&C2; PD3.0, 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A (Max 100W)
- PPS: 3.3V-11V/4A
- UUSB-C3: PD3.0, 5V/3A, 9V/2A, 12V/1.67A (Max 20W)
- USB-AI: QC3.0, 5V/3A, 9V/2A, 12V/1.5A (Max 18W)
- C1: 100W C2; 100W
- C3: 20W A1; 18W
- C1+C2= 65W+30W(Max 95W)
- C1/C2+C3= 65W+20W (Max 85W)
- C1/C2+A1= 65W+18W(Max 83W)
- C3+A1= 7.5W+7.5W(Max 15W)
- C1+C2+C3=45W+30W+20W(Max 95W)
- C1+C2+A1=45W+30W+18W (Max 93W)
- C1/C2+C3+A1= 65W+7.5W+7.5W (Max 80W)
- C1+C2+C3+A1=45W+30W+7.5W+7.5W(Max 90W)

GAN-16

GAN USB-A/C CHARGER



Features

- Output Power: 140W Max
- Input: 100-240V-50/60Hz 2.5A
- USB-C1/C2/C3:5/9/12/15V-3A,20V-5A
- USB-A1/A2:5/9/12/20V-3A
- USB-A1+A2:12W(5V-2.4A)+12W(5V-2.4A)
- USB-C1/C2+C2/C3:95W+45W
- USB-C1/C2/C3+A1/A2:100W+36W
- USB-C1/C2/C3+A1+A2:100W+12W+12W
- USB-C1+C2+C3:65W+45W+30W
- USB-C1/C2+C2/C3+A1/A2:65W+45W+25W
- USB-C1/C2+C2/C3+A1+A2:65W+45W+12W+12W