



NEW PRODUCTS CATALOG

www.winkeen.com



Shenzhen Winkeen Electronics Co., Ltd.

Address: 1208-1211, Bldg B, Weidonglong Commercial Building, Mellong Road,
Qinghu, Longhua, Shenzhen, China
Tel: +86-755-2314 9652 Fax: +86-755-2945 9344
Email: sales@winkeen.com
www.winkeen.com
Website on alibaba.com: szwinkeen.en.alibaba.com



ABOUT US

公司简介

Established in Mainland China since 2003, we have been in this field for many years to provide OEM/ODM for well-known brands from all over the world. We produce products locally for customers' brands ready-to-sale globally, offering great quality and service at fair prices, serving customers whenever and wherever they want for their local market demand. Differentiate our offer in crowded market place, giving customers a compelling reason to visit our factory drive customers perceptions of quality, value for money and innovation Enhance our reputation, live our values and help deliver the Vision "To be the most trusted Supplier".Contact us with your specified request, you will be satisfied with our wild variety of style products and customized services.

我们自2003年起在中国大陆成立，现已在该领域工作多年，为来自世界各地的知名品牌提供OEM/ODM。我们为全球客户的品牌生产产品，以公平的价格提供优质的服务，随时满足当地客户的市场需求。在拥挤的市场上区分我们的报价，给客户一个令人信服的理由来参观我们的工厂，推动客户对质量、物有所值和创新的看法，提高我们的声誉，实现我们的价值，帮助实现愿景；成为最值得信赖的供应商。根据您的要求联系我们，您会对我们的风格产品和定制服务感到满意。



Shenzhen Winkeen Electronics Co., Ltd.
深圳市文琴电子有限公司

Neville Gan Charger




#4U11T
PD PPS 100W + PD PPS 100W + QC30W + QC30W
Total: 100W

SPECIFICATION

Input: 100-240V, (50-60HZ)
Total Power: 100W(max)
USB-C1 PD PPS 100W : 3.3-20V=5A, 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=5A
USB-C2 PD PPS 100W: 3.3-20V=5A, 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=5A
USB-A1 QC3.0 18W: 5V=3A, 9V=2A, 12V=1.5A
USB-A2 QC3.0 18W: 5V=3A, 9V=2A, 12V=1.5A
[USB-C1]+[USB-C2] 65W PD+30W PD+18W QC
[USB-A1]+[USB-A2] 5V=3A
[USB-C1]+[USB-C2]+[USB-A1] 65W PD+30W PD+18W QC(113W)
[USB-C1]+[USB-C2]+[USB-A2] 65W PD+30W PD+18W QC(113W)
Plug: US, KR
USB Port: 2 USB C+1 USB A
Size: L101*W40*H40mm
N.W: 230g
Colour: White, Black



Neville GaN Charger

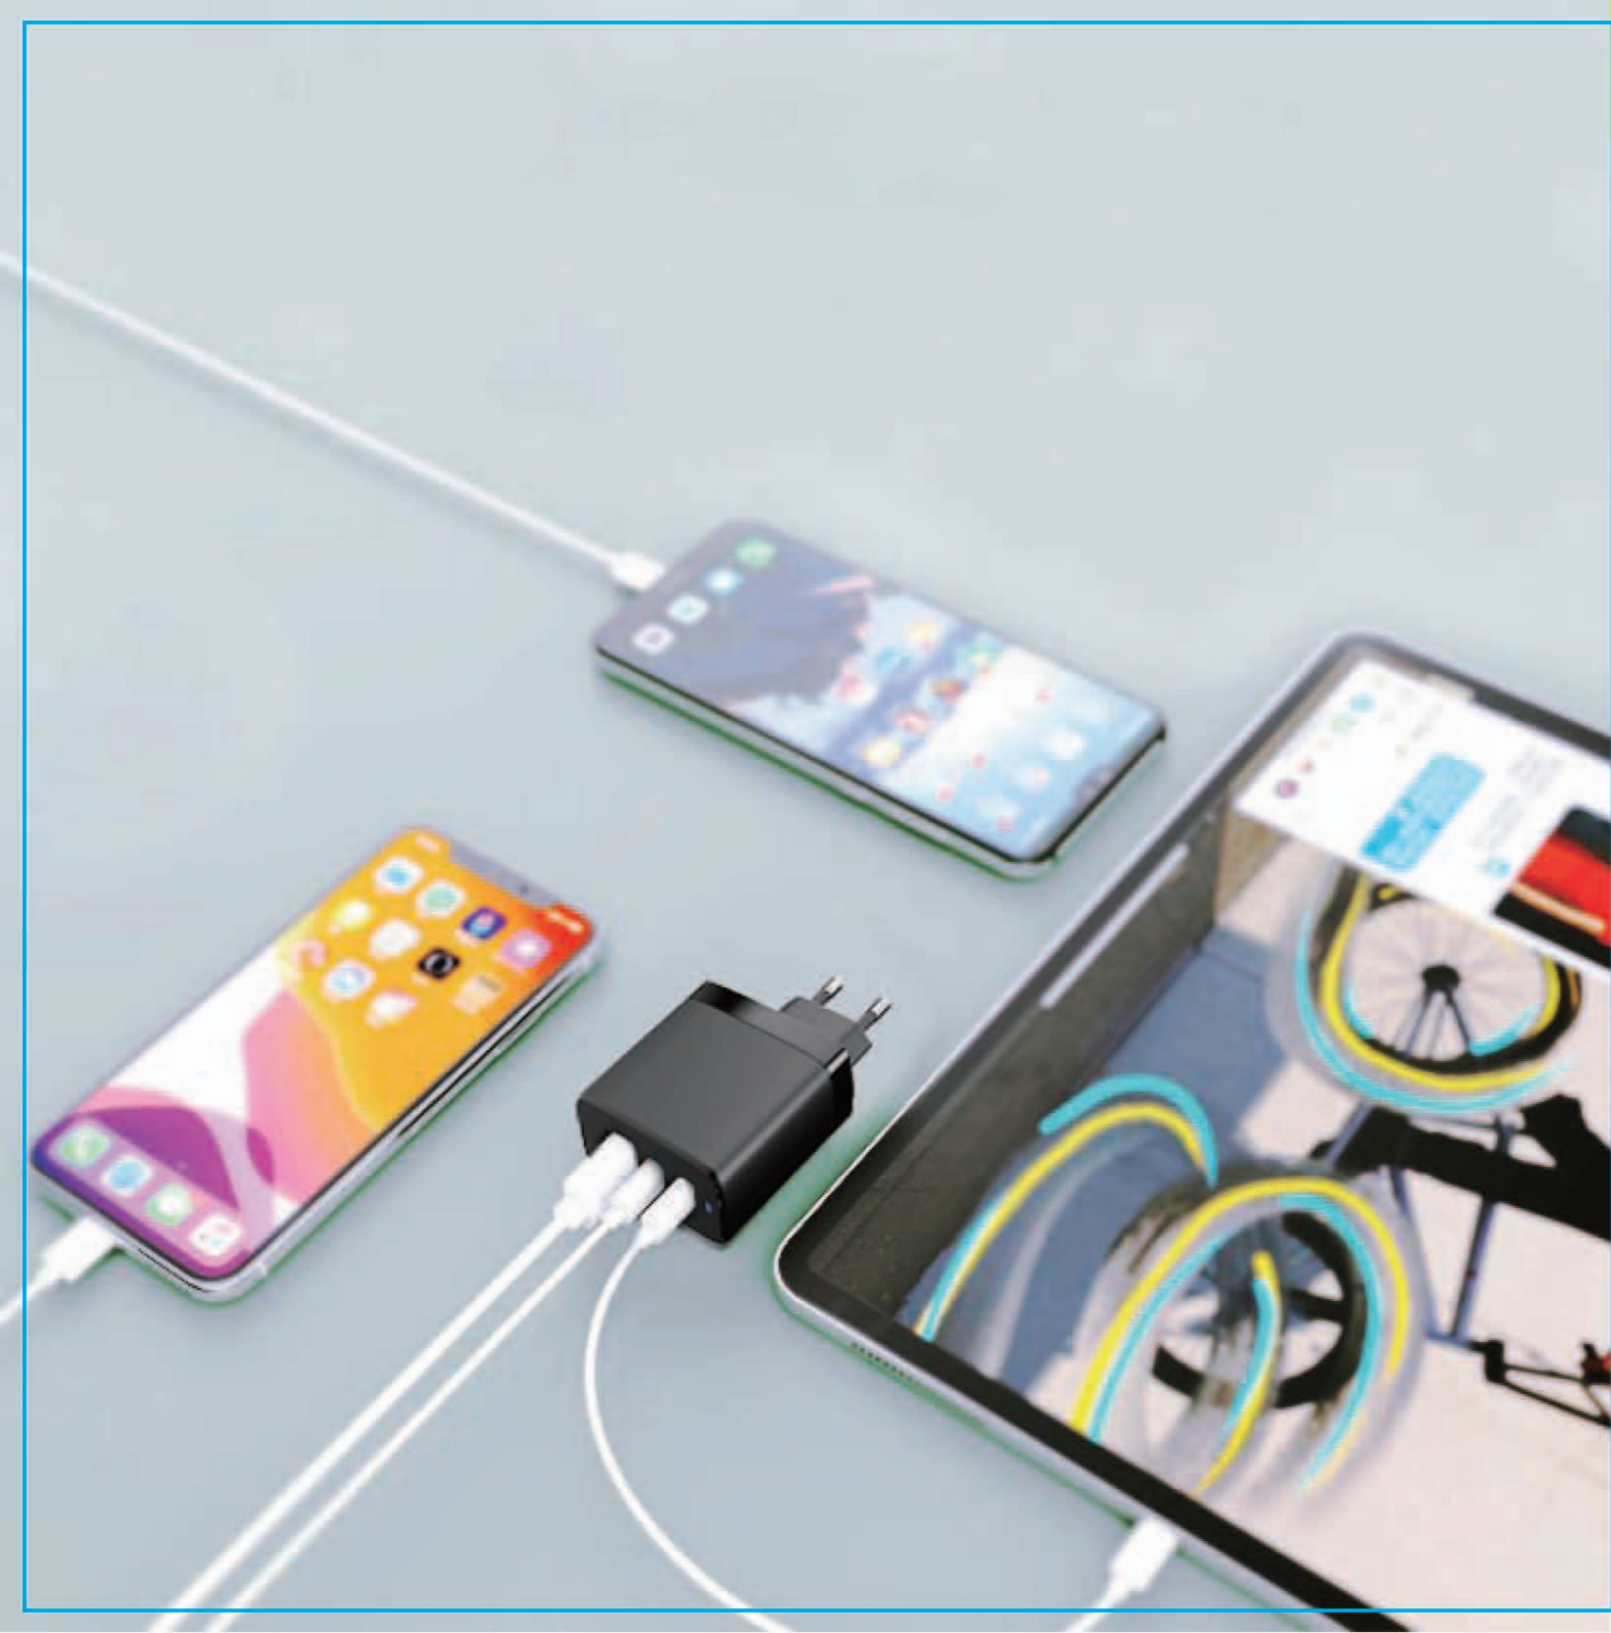


#3U11T
PD PPS 100W + PD PPS 100W + QC30W
Total: 100W

SPECIFICATION
Input: 100-240V, [50-60HZ]
Total Power: 100W (mAx)
USB-C1 PD PPS 100W : 3.3-16V=5A, 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=5A
USB-C2 PD PPS 100W: 3.3-16V=5A, 5V=3A, 9V=3A, 12V=3A, 15V=3A, A USB-A
QC4.0 20V=5 30W: 5V=4.5 A, 4.5V=5 A, 9VA, 4.5V=3 A, 12VA, 4.5V=2.5
A, 15VA, 4.5V=2 20V=1.5 A (USB-C1)[(USB-C2)]65WPD30WPD
[95W][USB-C1][USB-A]65WPD30WQC [95W][USB-C2][USB-A]65WPD30WQC
[95W] [(USB-C1)][(USB-C2)][(USB-A)]60WPD18WPD18WQC
Plug: US, KR
USB Port: 2 USB C 1 USB A
Size: L63*W63*H31mm
N.W: 210g
Colour: White, Black





Neville GaN Charger

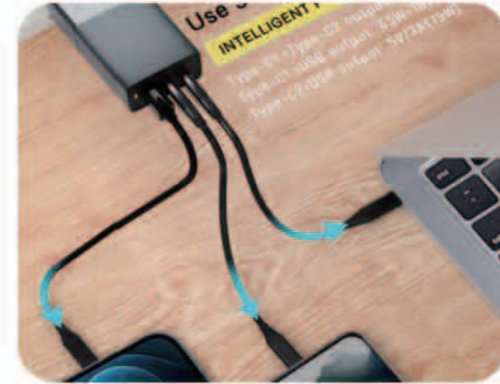

3U10T
D65W+PD30W+QC30W
Total:65W

SPECIFICATION
 Input: 100-240V, 50-60HZ
 Total Power: 65W (max)
 USB-C1 PD PPS 65W : 3.3-11V=3 A, 5V=3 A, 9V=3 A, 12V=3 A, 15V=3 A, 20V=2.5 A
 USB-C2 PD PPS 30W : 3.3-11V=3 A, 5V=3 A, 9V=3 A, 12V=2.5 A, 15V=2 A
 USB-A QC4.0 20V=1.5 30W : 5V=4.5 A, 4.5 V=5 A, 9V=3 A, 12V=2.5 A
 (USB-C1)(USB-A)45WPD18WQC (63W)(USB-C2)(USB-A)5 V /3A/15W
 (USB-C1)(USB-C2)(USB-A)45W PD 15W
 Plug: EU, US, BS, KR
 USB Port: 2 USB C 1 USB A
 Size: L66*W39*H32mm
 Weight: 149g
 Color: White, Black





Green Gan Charger



#1U28T PD65W



SPECIFICATION
 Input: 110-240V,[50-60HZ]
 Total Power: 65W (mAx)
 Output PD : 5V=3 A,9V
 Output PD : 5V=3 A,12V
 Output PD : 5V=3 A,20V
 Output PD : 5V=3
 Plug: EU,US,KR
 USB Port: 1 TYPE-C
 Size: L53*W53*H28mm
 N.W: 107g
 Colour: White,Black

#1U27T PD45W

SPECIFICATION
 Input: 110-240V,[50-60HZ]
 Total Power: 45W (mAx)
 Output PD : 5V=3 A,9V
 Output PD : 5V=3 A,12V
 Output PD : 5V=3 A,20V
 Output PD : 5V=3
 Plug: EU,US,KR
 USB Port: 1 TYPE-C
 Size: L43*W43*H28mm
 N.W: 87g
 Colour: White,Black




Quick Charger 3.0

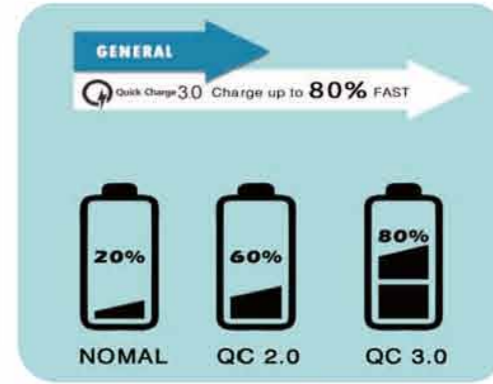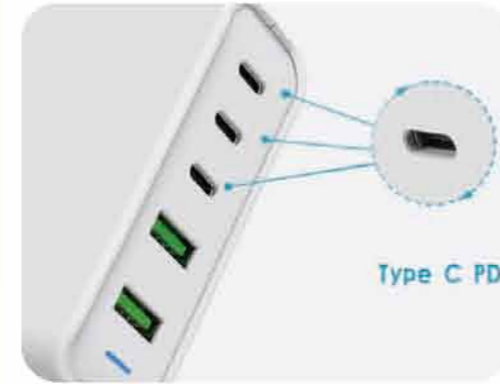

More Powerful

support 5 voltage and could automatically match current

5V 3A 9V 3A 12V 3A 15V 3A 20V 3A


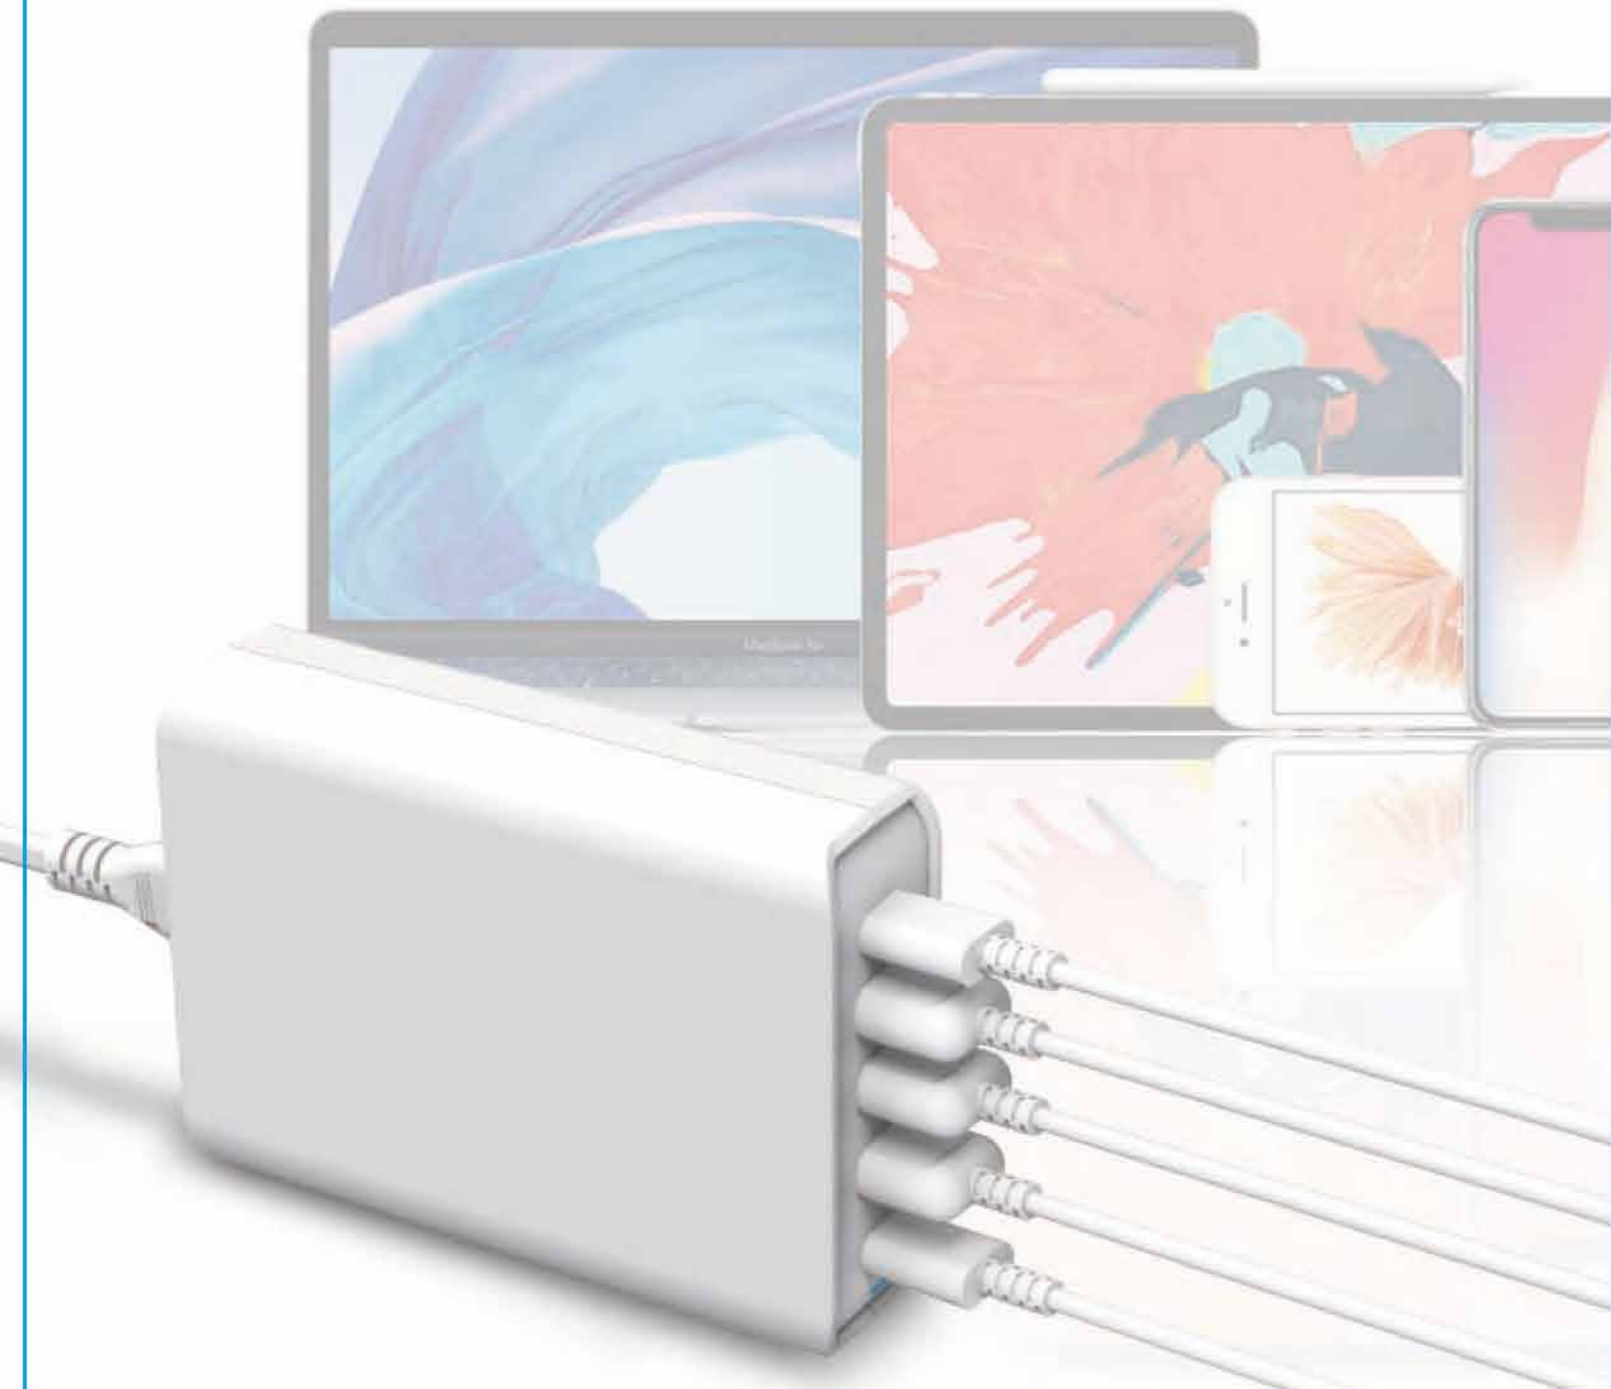


#5U06T
PD 60W+PD PPS25W+PD18W+ QC 18W+QC18W
Total:110W

SPECIFICATION
 Input: 110-240V, (50-60HZ)
 Total Power:110W(mAx)
 Output 1 PD :5V=3A,9V=3A,12V=3A,15V=3A,20V=3A
 Output 2 PD PPS :3.3V-5.9V=3A,3.3V-11V=2.25A
 Output 3 PD :5V=3A,9V=3A,12V=1.5A
 Output 4 QC :5V=3A,9V=3A,12V=1.5A
 Output 5 QC :5V=3A,9V=3A,12V=1.5A
 Output [1+2+3+4+5] PD60W+PPS25W+PD18W+QC18W+QC18W(139W)
 Plug: EU, US, BS, KR, JP, IN,CN, BR,AU,AR
 USB Port:3 TYPE C+2 USB A
 Size: L100*W74*H28mm
 N.W:282g
 Colour:White,Black



Quick Charger 3.0

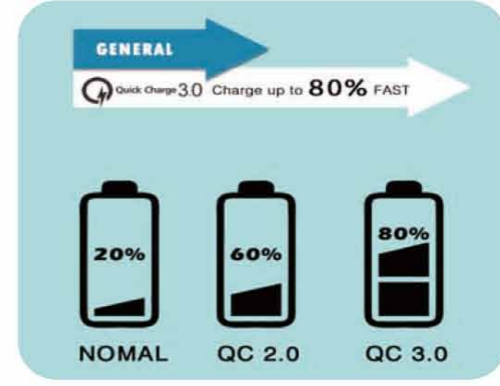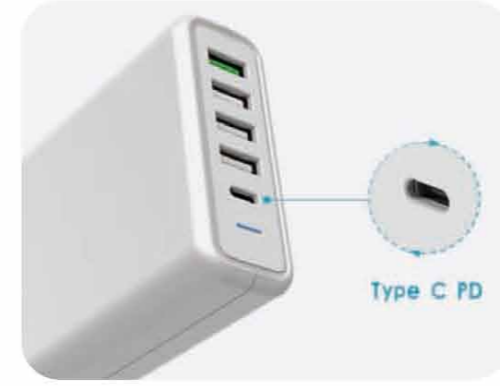

More Powerful

support 5 voltage and could automatically match current

5V	9V	12V	15V	20V
3A	3A	3A	3A	3A





#5U05T
PD 60W+QC 18W+Smart 15W
Total:93W

SPECIFICATION
Input: 110-240V, (50-60HZ)
Total Power:93W(mAx)
Output 1 PD60W :5V=3A,9V=3A,12V=3A,15V=3A,20V=3A
Output 5 QC18W :5V=3A,9V=3A,12V=1.5A
Output 2-4 :5V=3A
plug: EU, US, BS, KR, JP, IN,CN, BR,AU,AR
USB Port:1 TYPE C+1 USB A+1 USB A
Size: L100*W74*H28mm
N.W:234g
Colour:White,Black





Quick Charger 3.0

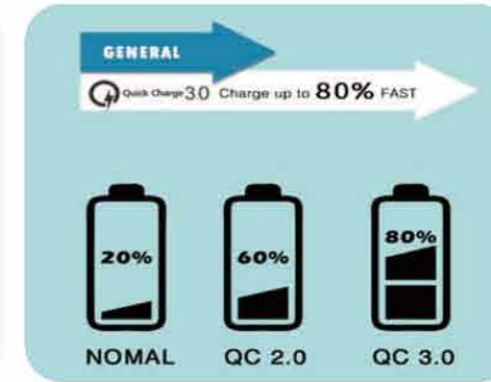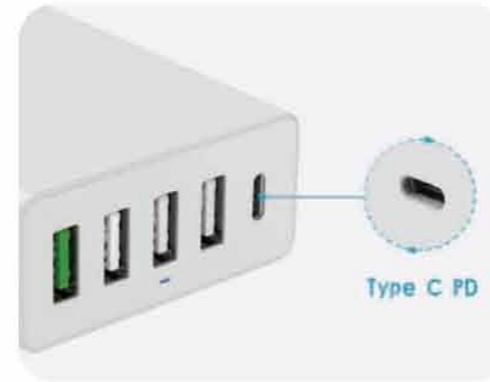

#5U01T
PD 30W+QC 18W+ Smart 5V/2.4A
Total:60W



SPECIFICATION

Input: 110-240V, (50-60HZ)
Total Power:60W(mAx)
Output 1 PD30W :5V=3A,9V=3A,12V=2.5A,15V=2A,20V=1.5A
Output 5 QC18W :5V=3A,5V=3A,12V=1.5A
Output 2-4 :5V=2.4A
plug: EU, US, BS, KR, JP, IN,CN, BR,AU,AR
USB Port:1 TYPE C+1 USB A+1 USB A
Size: L91*W58*H26mm
N.W:174g
Colour:White,Black





Quick Charger 3.0

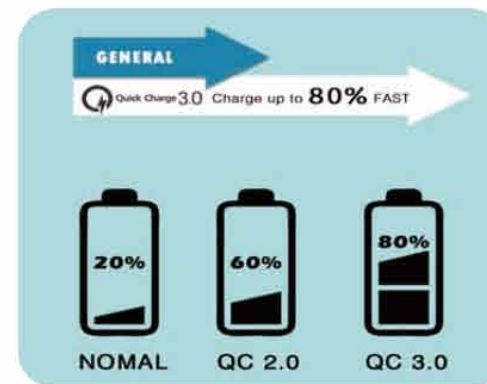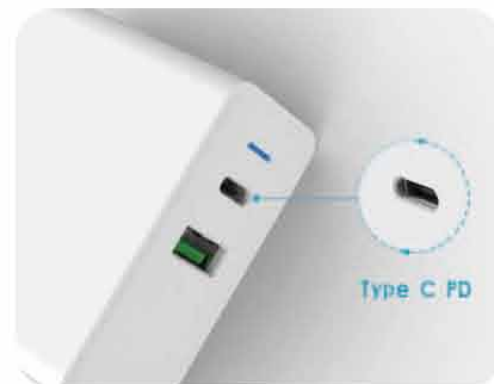

#2U21T PD 45W+QC18W Total:63W

SPECIFICATION

Input: 110-240V, (50-60HZ)
 Total Power:63W(mAx)
 Output 1 PD45W :5V=3A,9V=2A,12V=3A,15V=3A,20V=2.25A
 Output 2 QC18W :5V=3A,9V=2A,12V=1.5A
 Output1+Output2:PD45W +QC18W
 Plug: EU, US, KR
 USB Port:1 TYPE C+1 USB A
 Size: L67*W67*H28mm
 N.W:176g
 Colour:White,Black


#2U23T PD 30W+QC18W Total:48W

SPECIFICATION

Input: 110-240V, (50-60HZ)
 Total Power:48W(mAx)
 Output 1 PD30W :5V=3A,9V=3A,12V=2.5A,15V=2A,20V=1.5A
 Output 2 QC18W :5V=3A,9V=2A,12V=1.5A
 Output1+Output 2:PD30W+QC18W
 Plug: EU, US, KR
 USB Port:1 TYPE C+1 USB A
 Size: L62*W61*H28mm
 N.W:121g
 Colour:White,Black



Quick Charger 3.0

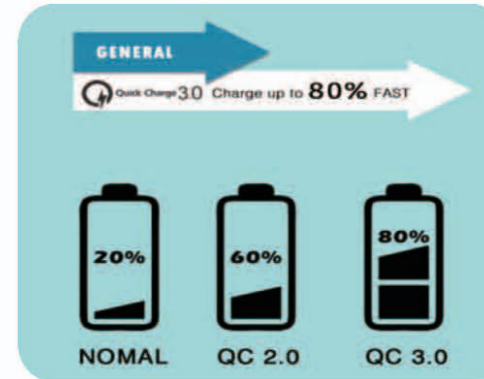

#2U41T PD 25W+QC 18W Total:25W

SPECIFICATION
Input: 110-240V, (50-60HZ)
Total Power:25W(mAx)
Output1 PD25W :5V=3A,9V=2.7A,12V=2.1A
Output1 PPS25W :3.3V-5.9V=3A,3.3V-11V=2.25A
Output 2 QC18W :5V=3A,9V=2A,12V=1.5A
Output1+Output2: 5V3A
Plug: EU, US, KR
USB Port:1 TYPE C+1 TYPE C
Size: L43*W49*H26mm
N.W:78g
Colour:White,Blac

#2U40T PD 20W+QC 18W Total:38W

SPECIFICATION
Input: 110-240V, (50-60HZ)
Total Power:38W(mAx)
Output 1 PD20W :5V=3A,9V=2.22A,12V=1.67A
Output 2 QC18W :5V=3A,9V=2A,12V=1.5A
Output 1+Output 2:PD20W+QC18W
plug: EU, US, KR
USB Port:1 TYPE C+1 TYPE C
Size: L50*W53*H26mm
N.W:78g
Colour:White,Black

#2U40T PD 20W+QC 18W Total:20W

SPECIFICATION
Input: 110-240V, (50-60HZ)
Total Power:20W(mAx)
Output 1 PD20W :5V=3A,9V=2A,12V=1.5A
Output 2 QC18W :5V=3A,9V=2A,12V=1.5A
Output1+Output2 :5V=3A
plug: EU, US, BS, KR, JP, IN,CN
USB Port:1 TYPE C+1 USB A
Size: L46*W41*H26mm
N.W:51g
Colour:White,Black

#2U45T PD 25W+QC 18W Total:43W

SPECIFICATION
Input: 110-240V, (50-60HZ)
Total Power:43W(mAx)
USB-C:PD25W :5V=3A,9V=2.7A,12V=2.1A
USB-C:PPS25W :3.3V-5.9V=3A,3.3V-11V=2.25A
USB-A: QC18W :5V=3A,9V=2A,12V=1.5A
[USB-C]+[USB-A]:PD PPS25W+QC18W
plug: EU, US, KR
USB Port:1 TYPE C+1 TYPE C
Size: L42*W55*H27mm
N.W:98g
Colour:White,Black

C+A Wall Charger

PPS /PD 25W + QC 18W = 15W
Charge Two Devices at the same time

Quick Charger 3.0



#1U32T PD 25W

SPECIFICATION

Input: 110-240V, (50-60HZ)
Total Power:25W(mAx)
Output PD25W :5V=3A,9V=2.7A,12V=2.1A
Output PPS25W :3.3V-5.9V=3A,3.3V-11V=2.25A
plug: EU, US, BS, KR, JP, IN,CN
USB Port:1 TYPE-C
Size: L51*W49*H26mm
N.W:63g
Colour:White,Black

Mini PD20W Wall Charger For iphone 12



#1U31T

SPECIFICATION

Input: 110-240V, (50-60HZ)
Total Power:20W(mAx)
Output PD20W:5V=3A,9V=2.22A,12V=1.67A
plug: EU, US, BS, KR, JP, IN,CN
USB Port:1 TYPE-C
Size: L42*W42*H27mm
N.W:51g
Colour:White,Black



#DK94T

SPECIFICATION

Input : 100-240V
Total Output:20W
Output PD:5V3A/ 9V2.22A/ 12V1.67A(20W)
plug: EU, US
Colour:White,Black



#T011

SPECIFICATION

Input : 100-240V
Total Output:20W
Output PD:5V3A/ 9V2.22A/ 12V1.67A(20W)
plug: EU, US,UK,AU
Colour:White,Black



Type-C PD



Car Charger

All metal, Won't Heat

USB PPS 95W fast charging

Cooling Hole

Cooling hole, fast charging and long service life

Charges compatible devices **UP TO 4X FASTER** than usual chargers

USB PPS

PPS 5.3-11V/3A 8.3-11V/3.25A 5V/7A, 9V/3A, 12V/3A, 15V/3A, 20V/1.25A (65W)

5V/3A, 9V/3A, 12V/2.5A (30W)

3V/3A, 9V/3A, 12V/2.5A (30W)



#BD350-1U2C 95W
USB-A+C1+C2=30W+65W=95W

SPECIFICATION
 Input: 12-24V
 Total Power: 95W (max)
 USB1 30W: DC 5V/3A 9V/3A, 12V/2.5A 15V/2A 20V/1.5A
 TYPE C1 30W: 5V/3A 9V/3A, 15V/2A, 20V/1.5A
 USB1+TYPE C1: 30W Max
 TYPE C2 65W: 5V/3A 9V/3A, 12V 3A 15V/3A, 20V/3.25A
 USB1 30W +TYPE C2 65W=95W
 [TYPE C1+USB1=30W]+TYPE C2 65W=95W



Car Charger



COMPATIBLE WITH MULTIPLE DEVICES

USB-C Anschluss
USB-A Anschluss
Design for different vehicles



#CC53-1C1A
PD65+QC18W

SPECIFICATION
Input : 12-24V
Total Output:83W
Type C Output:5V/3A,9V/3A,12V/3A,
15V/3A,20V/3.25A Maximum(65W)
Output QC3.0:5V3A/ 9V2A/ 12V1.5A(18W)



#CC53-1C2A
PD38+QC18W

SPECIFICATION
Input : 12-24V
Total Output:38W
Type C Output 1:5V/3A,9V2.22A(20W)
Output QC3.0 1:5V3A/ 9V2A/
12V1.5A(18W)
Output QC3.02:5V3A/ 9V2A/
12V1.5A(18W)



#CC53-2C1A
PD40+QC18W

SPECIFICATION
Input : 12-24V
Total Output:40W
Type C Output 1:5V/3A,9V2.22A
Maximum 20W
Type C Output 2:5V/3A,9V2.22A
Maximum 20W
Output QC3.0:5V3A/ 9V2A/ 12V1.5A(18W)



#CC53-2C2A
PD40+QC18W

SPECIFICATION
Input : 12-24V
Total Output:40W
Type C Output 1:5V/3A,9V2.22A(20W)
Output QC3.0 2:5V3A/ 9V2A/
12V1.5A(18W)
Type C Output 3:5V/3A,9V2.22A(20W)
Output QC3.04:5V3A/ 9V2A/
12V1.5A(18W)



Car Charger



COMPATIBLE WITH MULTIPLE DEVICES

USB-C Anschluss
USB-A Anschluss
Design for different vehicles



#CC50-1C
PD20W

SPECIFICATION
Input : 12-24V
Total Output:20W
Output PD:5V3A/ 9V2.22A/
12V1.67A(20W)



#CC50-1A
PD20W+QC18W=38W

SPECIFICATION
Input : 12-24V
Total Output:38W
Output PD:5V3A/ 9V2.22A/
12V1.67A(20W)
Output QC3.0:5V3A/ 9V2A/ 12V1.5A(18W)



#CC50-1A1C
PD20W+QC18W=38W

SPECIFICATION
Input : 12-24V
Total Output:38W
Output PD:5V3A/ 9V2.22A/
12V1.67A(20W)
Output QC3.0:5V3A/ 9V2A/ 12V1.5A(18W)



#CC50-2A
Dual QC 3.0 18W=36W

SPECIFICATION
Input:12-24V
Total Power:36W(mAx)
Output 1 QC3.0: DC3.6-6.5V/3A DC
6.5V-9V/2A
DC 9-12V/1.5A
Output 2 QC3.0: DC3.6-6.5V/3A DC
6.5V-9V/2A
DC 9-12V/1.5A



Car Charger



COMPATIBLE WITH MULTIPLE DEVICES

USB-C Anschluss
 USB-A Anschluss
 Design for different vehicles



**#CC281-1C
PD20W**

SPECIFICATION
 Input : 12-24V
 Total Output:20W
 Output PD:5V3A/ 9V2.22A/
 12V1.67A(20W)

CE FC ETL Intertek RoHS



**#CC281-1A1C
PD20W+QC18W**

SPECIFICATION
 Input : 12-24V
 Total Output:38W
 Output PD:5V3A/ 9V2.22A/
 12V1.67A(20W)
 Output QC3.0:5V3A/ 9V2A/ 12V1.5A(18W)

CE FC ETL Intertek RoHS



**#CC53-3A
36W**

SPECIFICATION
 Input : 12-24V
 Total Output:20W
 Output PD:5V3A/ 9V2.22A/
 12V1.67A(20W)

CE FC ETL Intertek RoHS



**#CC53-2A1C
37W**

SPECIFICATION
 Input : 12-24V
 Total Output:38W
 Output PD:5V3A/ 9V2.22A/
 12V1.67A(20W)
 Output QC3.0:5V3A/ 9V2A/ 12V1.5A(18W)

CE FC ETL Intertek RoHS



**#CC53-2A
36W**

SPECIFICATION
 Input : 12-24V
 Total Output:38W
 Output PD:5V3A/ 9V2.22A/
 12V1.67A(20W)
 Output QC3.0:5V3A/ 9V2A/ 12V1.5A(18W)

CE FC ETL Intertek RoHS



**#CC271-1C1A
38W/36W/48W**

SPECIFICATION
 Input : 12-24V
 Total Output:38W
 Output PD:5V3A/ 9V2.22A/
 12V1.67A(20W)
 Output QC3.0:5V3A/ 9V2A/ 12V1.5A(18W)

CE FC ETL Intertek RoHS

Car Charger



COMPATIBLE WITH MULTIPLE DEVICES

USB-C Anschluss
USB-A Anschluss
Design for different vehicles



#DK08C1 2.4A+QC3.0

SPECIFICATION

Input:12-24V
USB port 5V 2.4A+QC3.0 total: 30W
Output:3.6V-6.5V/3A,6.5V-9V/2A,9V-12V/1.5A
Size:62*28*28mm
Certificates:QC3.0,CE,ROHS,FCC,UL



#DK08C2 QC3.0+QC3.0

SPECIFICATION

Input:12-24V
Total Power:36W(mAx)
Output 1 QC3.0: DC3.6-6.5V/3A DC 6.5V-9V/2A
DC 9-12V/1.5A
Output 2 QC3.0: DC3.6-6.5V/3A DC 6.5V-9V/2A
DC 9-12V/1.5A
Certificates:QC3.0,CE,ROHS,FCC,UL



#DK08C3 PD+QC

SPECIFICATION

Input:12-24V
PD 18W+QC3.0 18W total:36W
Output[QC3.0]:3.6V-6.5V/3A,6.5V-9V/2A,9V-12V/1.5A
Output:PD 18W
Certificates:CE,ROHS,FCC,UL




Car Charger

phone
15W

iWatch
5W

Airpods
5W

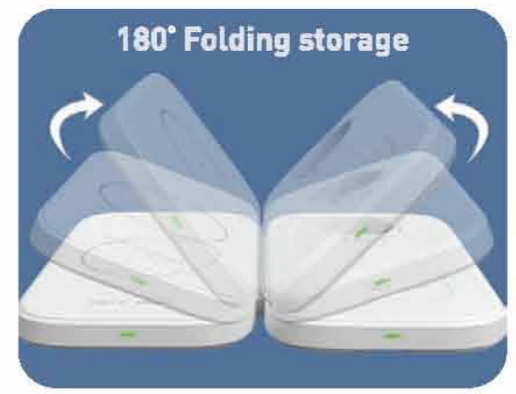

#WK-66 15W Magnetic Foldable 3 in 1 Wireless Charger Station

SPECIFICATION
 Working frequency 110-205kHz
 Input Power: 5V3A;9V3A;12V3A
 Output: 5W/7.5W/10W/15W for Smart phone
 3W [AirPods] 2W [Apple Watch]
 Output 1: 15W(Max)
 Output 2: 3W (AirPods)
 Output 3: 2W (Watch)
 Charging Efficiency: >70%
 Material: ABS
 PCB Scheme: blande





Car Charger




#WK-WF153 15W Magnetic Foldable 3 in 1 Wireless Charger Station


SPECIFICATION

Standard: WPC-Qi V1.2
 Material: ABS+PC
 Size: 185*70*10.5mm
 Weight: 108G
 Working frequency 110-205kHz
 Input Power: 5V3A; 9V3A; 12V3A
 Output 1: 15W(Max)
 Output 2: 3W (AirPods)
 Output 3: 2W (Watch)
 Charging Efficiency: >70%
 Material: ABS+PC
 Scheme: blande



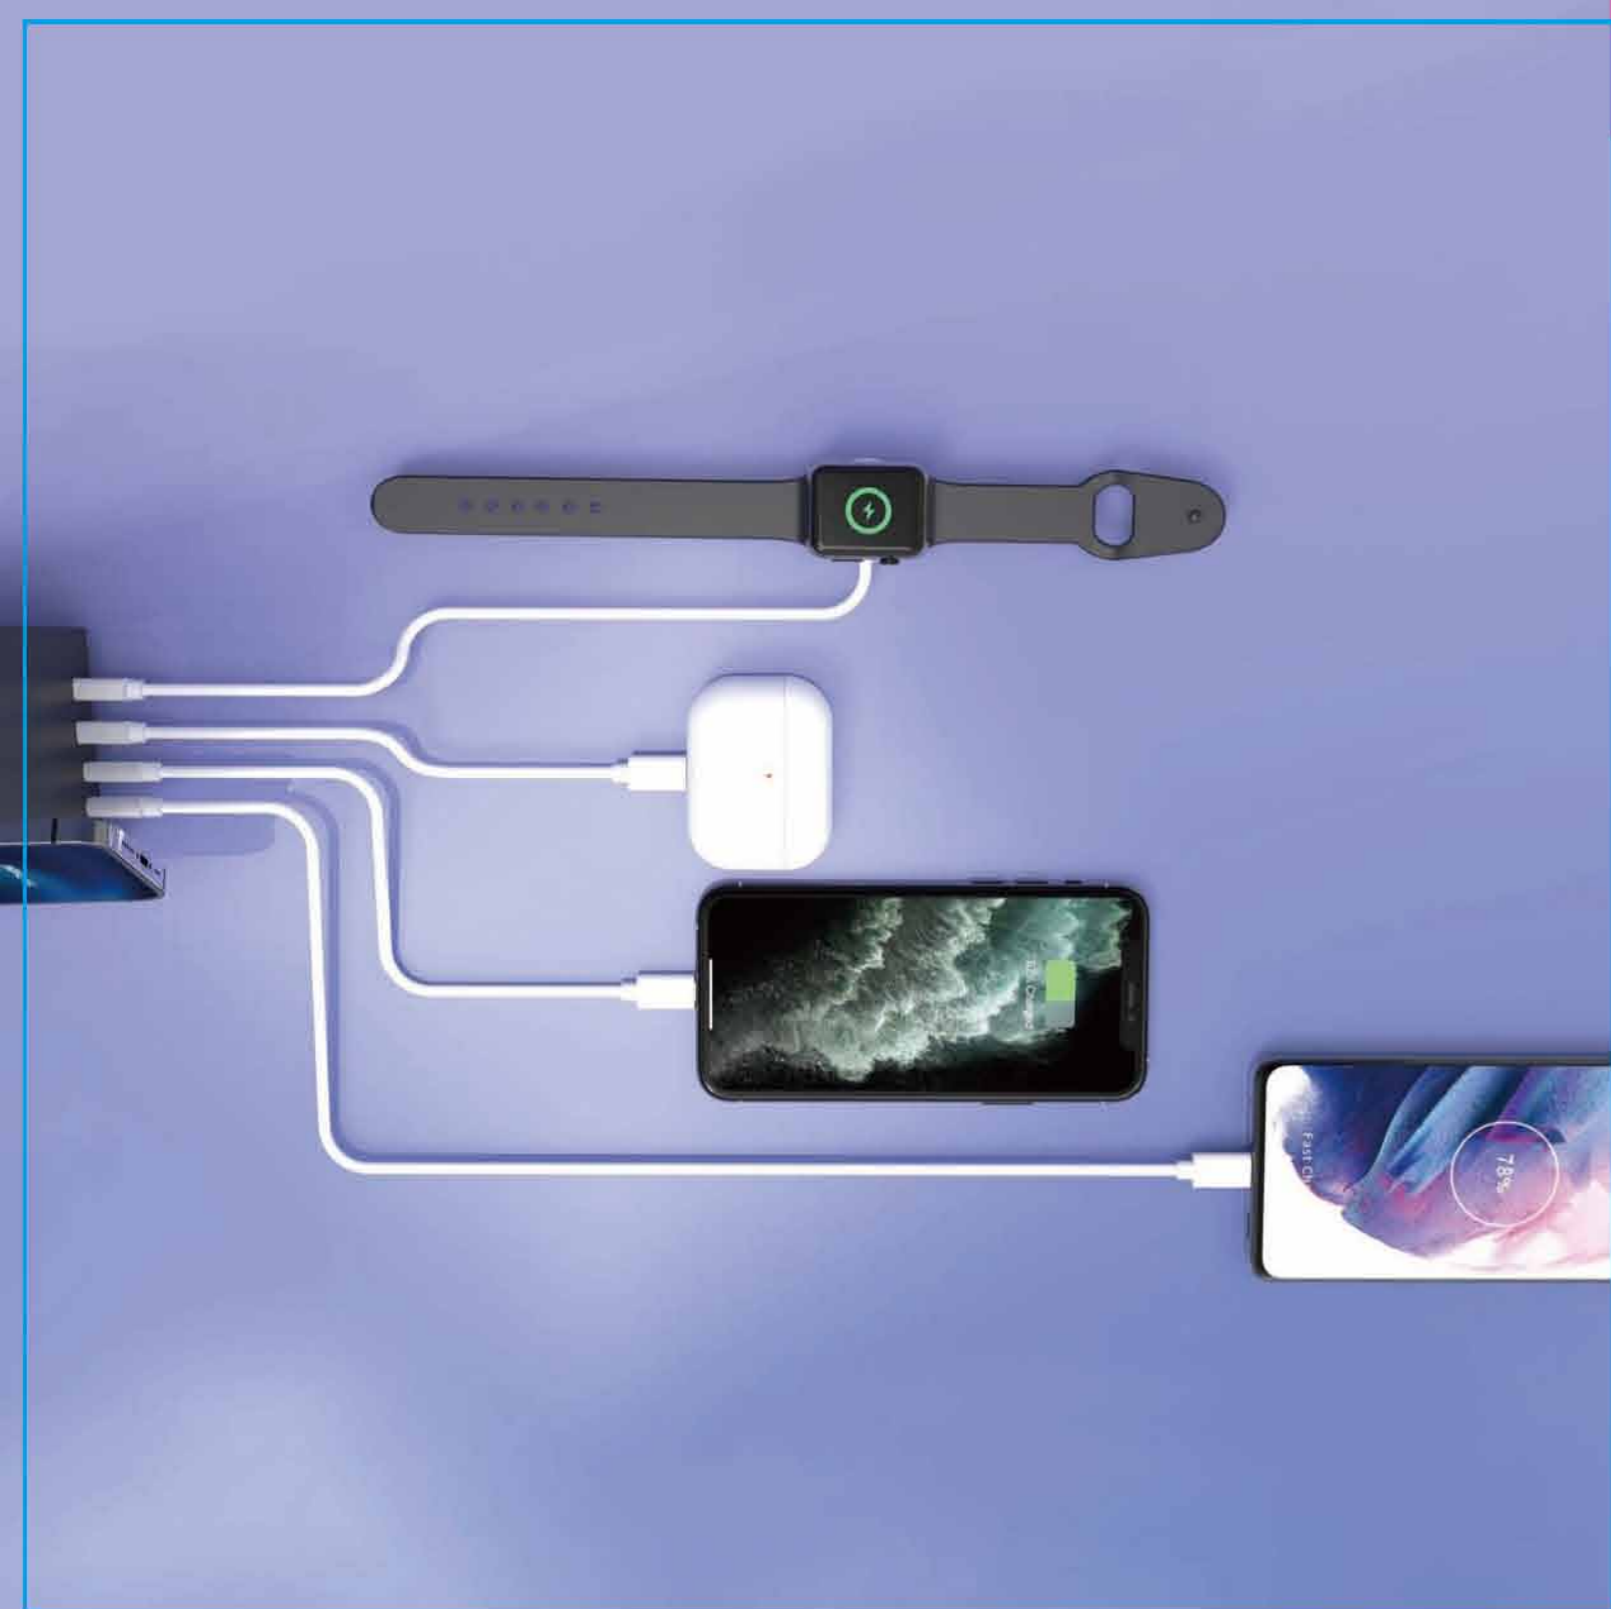

Car Charger

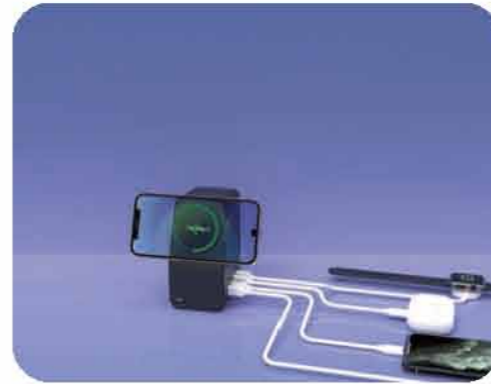


#WK-T11 PD multipurpose plus magsafe wireless charger

SPECIFICATION

1. Output magsafe area: 15W(MAX)
- USB-1:10w
- USB-2:10W
- TYPE-C PD-1:18W
- TYPE-C PD-2:18W
2. input:100-240V AC(AC cable with plug)
3. Product Standard: Qi
4. Conversion: up to 80%
5. Working Frequency: 110-205KHz
6. Color: Black Can be customized
7. Coil Numbe: 1
8. Fast Charging Supported 15W PD charging



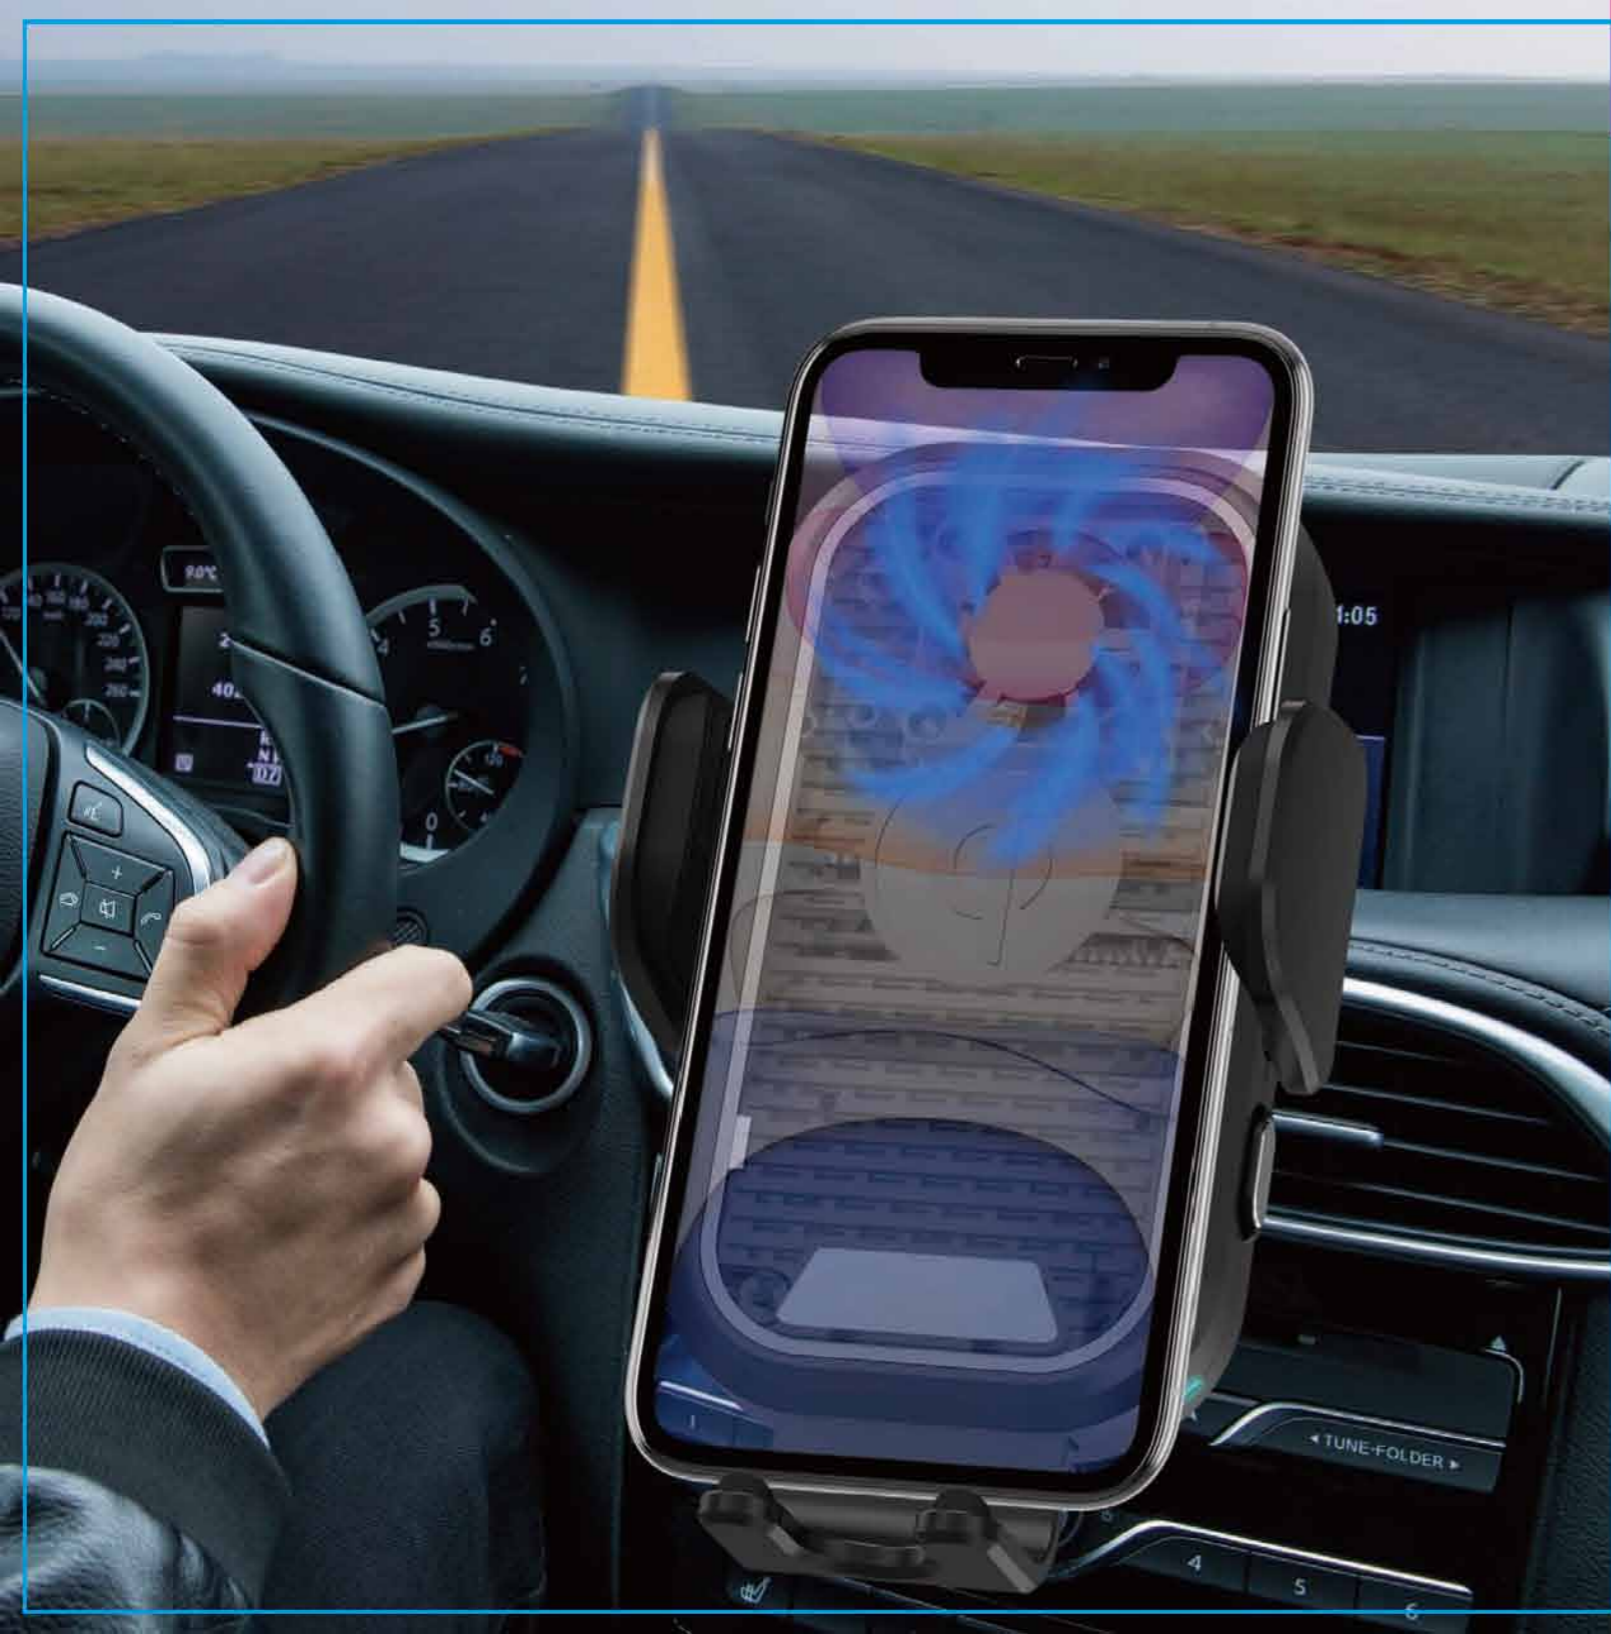

Car Charger



#WK-CF10 Induction Wireless Car Charger Quick Charging

SPECIFICATION

Working Frequency 110-205kHz
Input : 5V/2A, 9V/1.67A, 12V/1.5A-3A
Output: 5W/7.5W/10W/15W
Charging Efficiency: >85%
Material: ABS
PCB Scheme: blande



Charging Simplified

Just set your phone down to start charging



Car Charger

PROFESSIONAL CERTIFICATION

Guarantees a Safe and Reliable Wireless Charging Experience



Fitted: Thin Phone Cases (less than 5 mm)
Unfitted: Rugged/Tough Armor Cases, Metal Cases, Otterbox



#WK-600F Qi Wireless charger pad

SPECIFICATION

Qi Wireless charger pad
Input: DC 9V 1.8A | 5V 2.0A
Output: 10W | 7.5W | 5W
Charging frequency 110-205 KHZ
Energy efficiency > 75%
Charging distance: 4-10mm



Quick Charger 3.0



GENERAL

Quick Charge 3.0 Charge up to **80% FAST**

NOMAL QC 2.0 QC 3.0

Wide compatibility

Support PD QC3.0 FCP AFC protocol
Work with all smart phones & tablet PC.



#T022 Dual USB PD20W and QC18W Wall Charger

SPECIFICATION
Input: 110-240V, (50-60HZ)
Total Power:20W(max)
Output PD20W:5V=3A,9V=2.22A,12V=1.67A
plug: EU, US, BS, KR, JP, IN,CN
USB Port:1 TYPE-C
Size: L42*W42*H27mm
N.W:51g
Colour:White,Black






Cable



USB TO C FAST CHARGING DATA CABLE

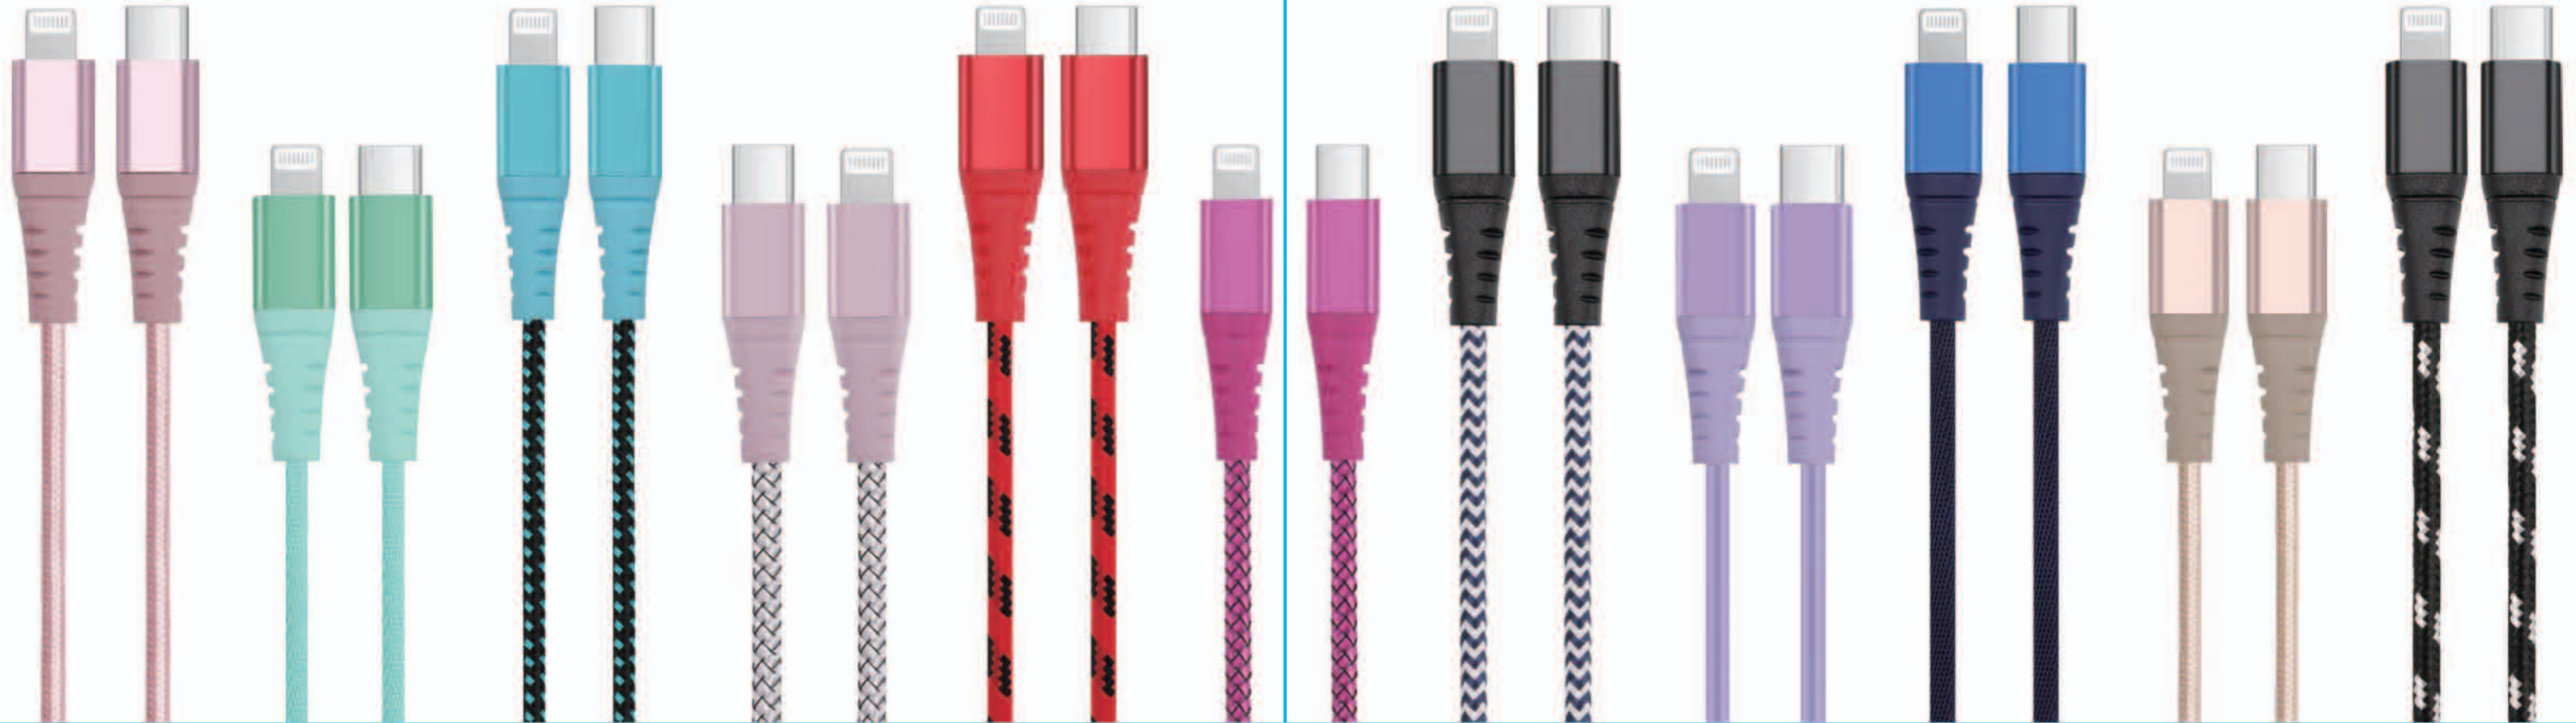

MFI CERTIFIED TYPE C TO LIGHTNING CABLE





USB A TO LIGHTNING CABLE WITH ORIGINAL APPLE CHIP

Made for
iPhone | iPad