


MINSHUANG CO.,LTD

GARDEN LIGHT

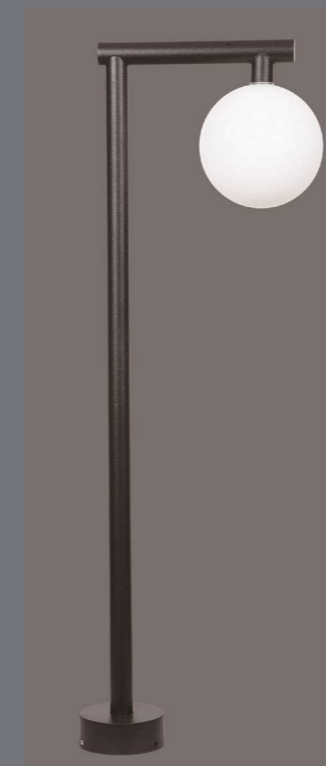

TEL:
86-13689528097 / 13642343902

E-mail:
sunny@lightspack.com
sales@lightspack.com

NEW
Outdoor Light



GARDEN LITE

MINSHUANG Lighting is a reliable light manufacturer with design expertise. It boasts many private and even patent products, thanks to its creative designers, experienced engineers, and professional sales. Having been working in this field for over 22 years, they can turn your ideas into products, customize your products, and offer OEM and ODM service.

Business type: lighting manufacturer and designer

Products: outdoor architectural lights and indoor commercial lights

Advantage: design expertise + quality products + reasonable price + 24/7 service

Certification: ISO 9001:2005, CE, ROHS etc.

History: Founded in 2014
Location: Zhongshan City, Guangdong, China (about 2 hours away from Hong Kong International Airport)

Mission: To light up your world together.

Certificate



Photoelectricity intergrating system



Salt spray test machine




IP tester



Yellowing resistance tester




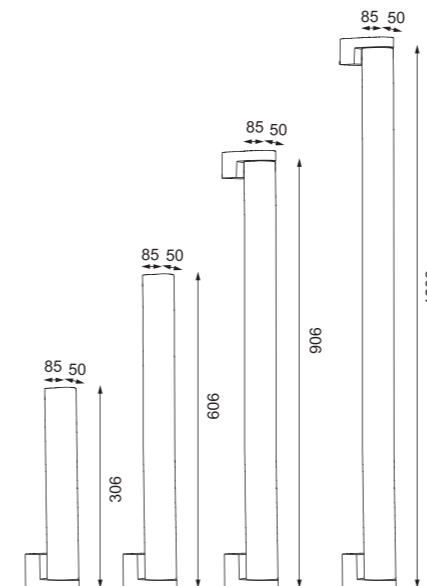
Laser marking machine

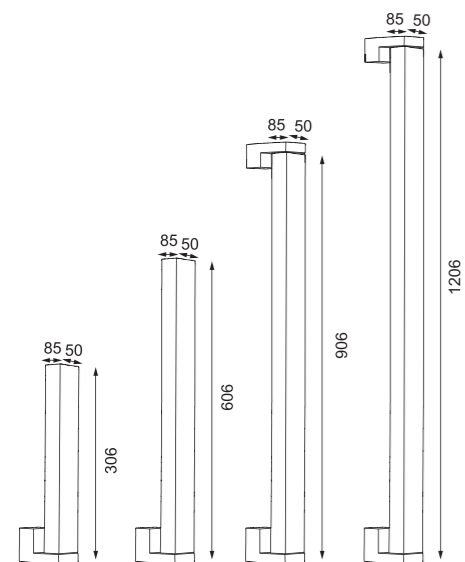

Product Specifications


Material	Aluminum +PC		
Voltage	96-260V, 50/60Hz		
CCT	2700K~6500K		
Body Color	Shiny Black / Dark Grey /Matt Black / Matt White / Rust		
CRI	≥80		


Model	LED Watt	Luminous Flux	Safety type
W8001-30	12W	800 Lm	IP65 
W8001-60	18W	1200 Lm	
W8001-90	24W	1800 Lm	
W8001-120	36W	2400 Lm	



Product Specifications



Material	Aluminum +PC		
Voltage	90-260V, 50/60Hz		
CCT	2700K~6500K		
Body Color	Shiny Black / Dark Grey /Matt Black / Matt White / Rust		
CRI	≥80		

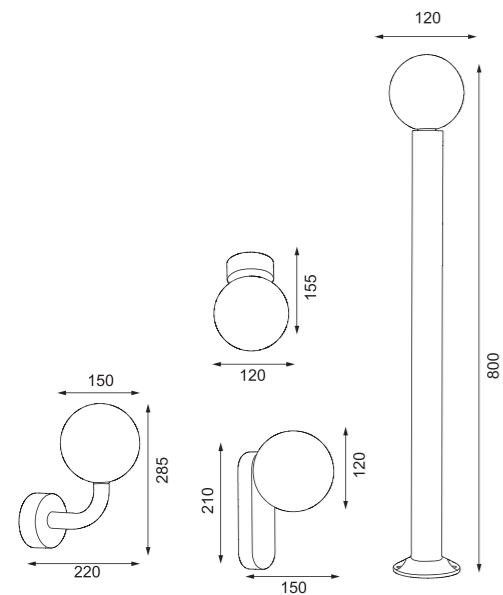
Model	LED Watt	Luminous Flux	Safety type
W8002-30	12W	800 Lm	IP65 
W8002-60	18W	1200 Lm	
W8002-90	24W	1800 Lm	
W8002-120	36W	2400 Lm	



Product Specifications



Material	Aluminum +PC
Voltage	220-240V, 50/60Hz
CCT	2700K~6500K
Body Color	Shiny Black / Dark Grey /Matt Black / Matt White / Rust

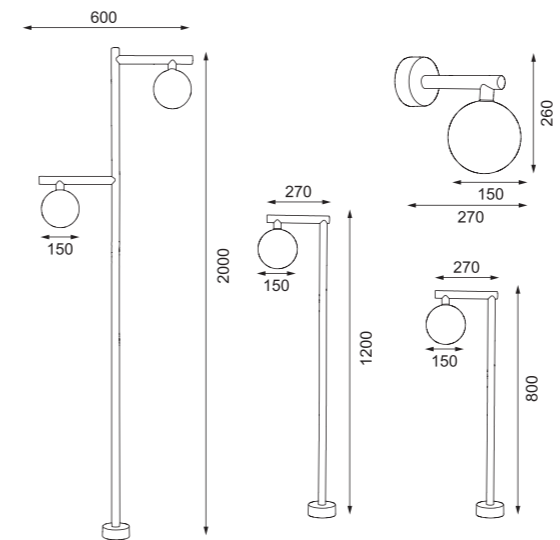Model	Lampholder	LED Watt	Safety type
W2091	G9	MAX.10W	IP54  
W2092	G9	MAX.10W	
W2093	G9	MAX.10W	
B2091	G9	MAX.10W	



Product Specifications

Material	Aluminum +PC
Voltage	220-240V, 50/60Hz
CCT	2700K~6500K
Body Color	Shiny Black / Dark Grey /Matt Black / Matt White / Rust

Model	Lampholder	LED Watt	Safety type
W2094	G9	MAX.10W	IP54  
B2094-80	G9	MAX.10W	
B2094-120	G9	MAX.10W	
B2093-200	2*G9	MAX.2x10W	



W2017



W2019



W2018






W2020



Product Specifications


Material	Aluminum + Lens PC		
Voltage	90-260V50 / 60Hz		
CCT	2700K~6500K		
Body Color	Shiny Black / Dark Grey / Matt Black / Matt White / Rust		
CRI	≥80		

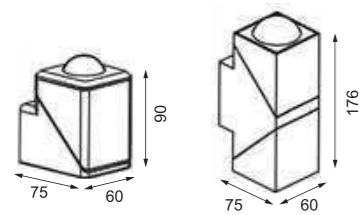



Model	LED Watt	Luminous Flux	Safety type
W2017	5W	400 lm	IP65  
W2018	2*5W	800 lm	

Product Specifications

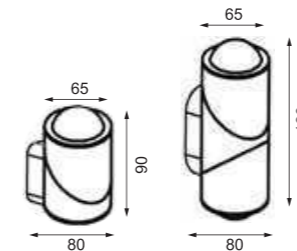Material	Aluminum +PC		
Voltage	90-260V50 / 60Hz		
CCT	2700K~6500K		
Body Color	Shiny Black / Dark Grey / Matt Black / Matt White / Rust		
CRI	≥80		



Model	LED Watt	Luminous Flux	Safety type
W2019	5W	400 lm	IP65  
W2020	2*5W	800 lm	



W2025




W2027



W2026



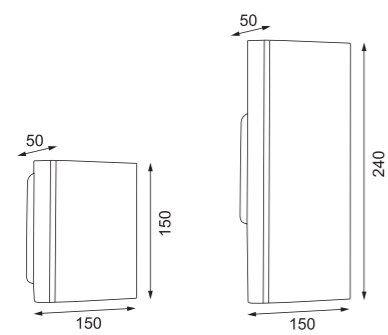


W2028



Product Specifications



Material	Die-casting aluminum+Clear tempered glass		
Voltage	90-260V50 / 60Hz		
CCT	2700K~6500K		
Body Color	Shiny Black / Dark Grey /Matt Black / Matt White / Rust		
CRI	≥80		

Model	LED Watt	Luminous Flux	Safety type
W2025	10W	800 lm	IP65  
W2026	2*10W	1600 lm	

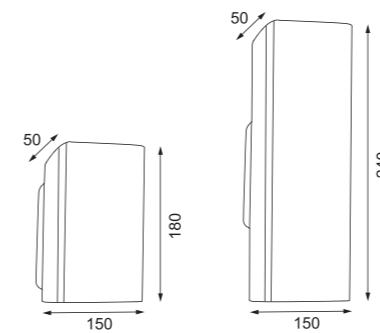

Product Specifications

Material	Die-casting aluminum+Clear tempered glass		
Voltage	90-260V50 / 60Hz		
CCT	2700K~6500K		
Body Color	Shiny Black / Dark Grey /Matt Black / Matt White / Rust		
CRI	≥80		

Model	LED Watt	Luminous Flux	Safety type
W2027	10W	800 lm	IP65  
W2028	2*10W	1600 lm	



W3114A



W3115A



B3115A-80



B3113A-100



B3114




W3113B



W3112B



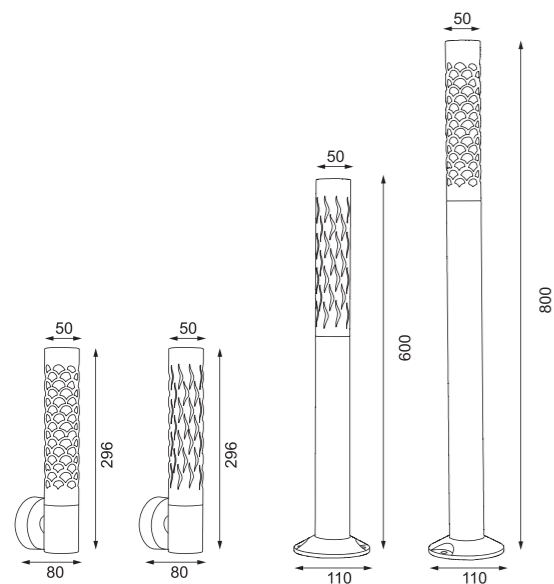


W3116B



Product Specifications



Material	Die-casting aluminum+Explosion-proof glass		
Voltage	220-240V, 50/60Hz		
CCT	2700K-6500K		
Body Color	Shiny Black / Dark Grey /Matt Black / Matt White / Rust		

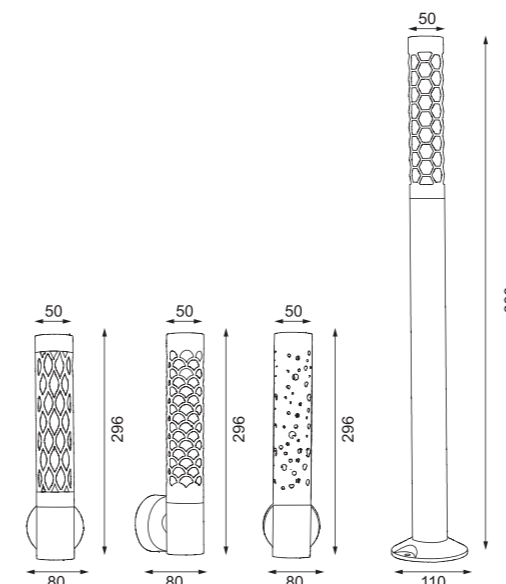Model	Lampholder	LED Watt	Safety type
W3114A	E27	MAX.20W	IP65  
B3113A-100	E27	MAX.20W	
W3115A	E27	MAX.20W	
B3115A-80	E27	MAX.20W	



Product Specifications

Material	Die-casting aluminum+Explosion-proof glass		
Voltage	220-240V, 50/60Hz		
CCT	2700K-6500K		
Body Color	Shiny Black / Dark Grey /Matt Black / Matt White / Rust		

Model	Lampholder	LED Watt	Safety type
W3112B	E27	MAX.20W	IP65  
W3113B	E27	MAX.20W	
W3116B	E27	MAX.20W	
B3115-80	E27	MAX.20W	



W3101



B7118-80



W3110B




W3104



W3102



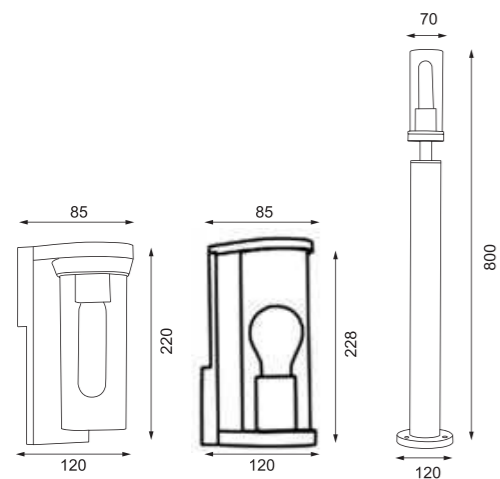


W3103



Product Specifications



Material	Die-casting aluminum+Explosion-proof glass		
Voltage	220-240V, 50/60Hz		
CCT	2700K~6500K		
Body Color	Shiny Black / Dark Grey /Matt Black / Matt White / Rust		

Model	Lampholder	LED Watt	Safety type
W3101	E27	MAX.20W	
W3100B	E27	MAX.20W	IP65  
B7118-65	E27	MAX.20W	

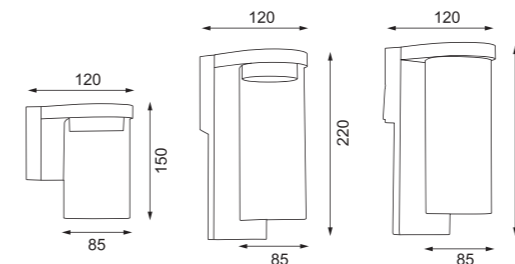

Product Specifications

Material	Die-casting aluminum+Explosion-proof glass		
Voltage	90-260V, 50/60Hz		
CCT	2700K~6500K		
Body Color	Shiny Black / Dark Grey /Matt Black / Matt White / Rust		
CRI	≥80		

Model	LED Watt	Luminous Flux	Safety type
W3102	7W	450 Lm	
W3103	7W	450 Lm	IP65  
W3104	7W	450 Lm	



W3108



W3110



W3109



W1002



W7086






W7085



Product Specifications

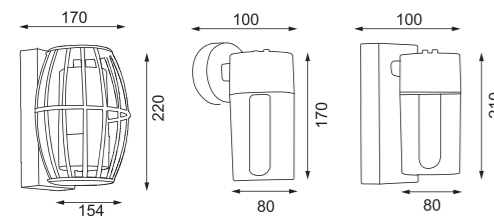
Material	Die-casting aluminum+PC		
Voltage	220-240V, 50/60Hz		
CCT	2700K~6500K		
Body Color	Shiny Black / Dark Grey /Matt Black / Matt White / Rust		





Model	Lampholder	LED Watt	Safety type
W3108	E27	MAX.20W	IP54  
W3109	E27	MAX.20W	
W3110	E27	MAX.20W	

Product Specifications

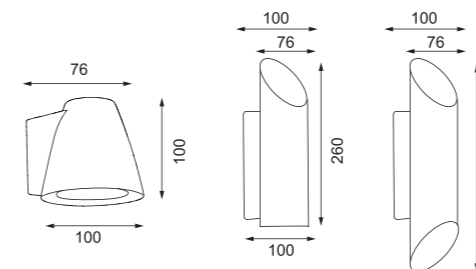Material	Die-casting aluminum+Explosion-proof glass		
Voltage	90-260V / 220-240V, 50/60Hz		
CCT	2700K~6500K		
Body Color	Shiny Black / Dark Grey /Matt Black / Matt White / Rust		
CRI	≥80		




Model	Lampholder	LED Watt	Safety type
W1002	GU10	MAX.9W	IP65  
W7085	GU10	MAX.7W	
W7086	2*GU10	MAX.2x7W	



W1560



W1561

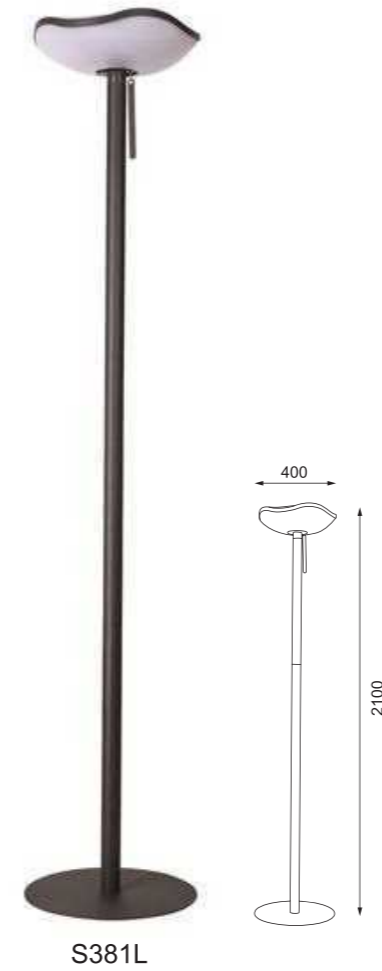






S381L




Product Specifications

Material	Die-casting aluminum+ PC
Voltage	90-260V,50/60Hz
CCT	2700K~6500K
Body Color	Shiny Black / Dark Grey /Matt Black / Matt White / Rust
CRI	≥80



Model	LED Watt	Luminous Flux	Safety type
W1560	15W	1000Lm	IP65  
W1561	15W	1000Lm	IP65  

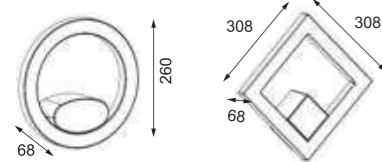

First Use 

First use requires 8 hours of charging in the sun!

Function

	
1. Max. 500lm 4hrs	Green signal flashing (battery>20%)
2. 200lm 8hrs	Red signal flashing (battery<20%)
3. 100lm 12hrs	Light off
4. OFF	

Press and hold to turn on / Switch
Press and hold to turn off / Switch

Product Specifications

Material	Die-casting aluminum+ PC
Voltage	6V
Battery	18650 4000 mAh
Voltage	3.7V
CCT	3000K~6000K
Body Color	Shiny Black / Dark Grey /Matt Black / Matt White / Rust
CRI	≥80

Model	Solar Panel	Safety type
S381L	8W	IP65 