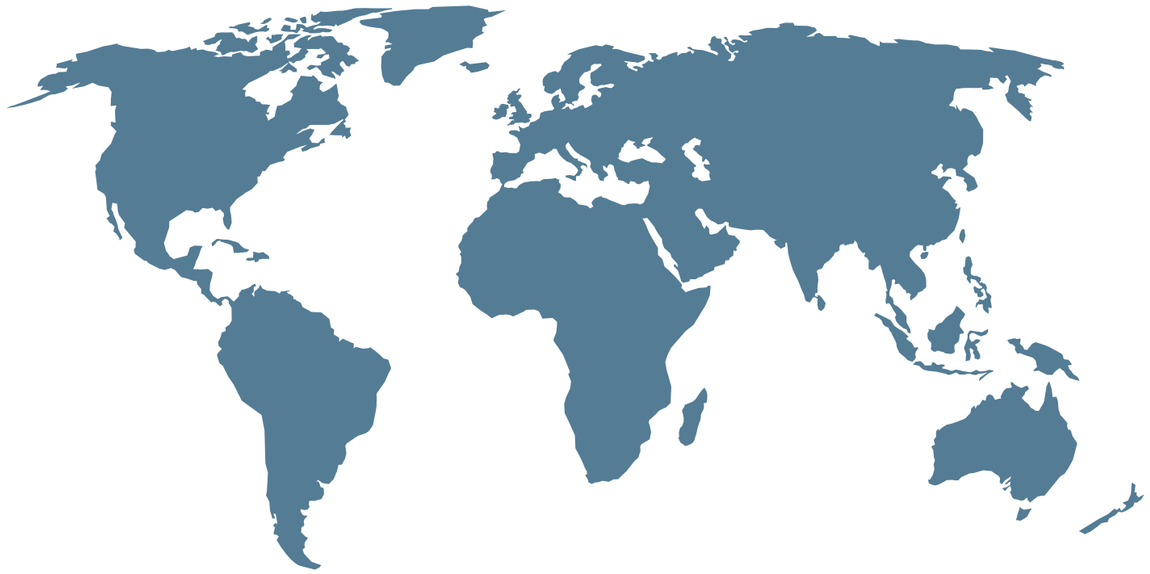


DIFENG

CIXI CHANGFENG ELECTRICAL APPLIANCE CO.,LTD.

CONTACT

Phone: +86 15381893802

Email: summer@cxcf-elec.com mia@cxcf-elec.com

Website: www.cxcf-elec.com

Address: Guanhaiwei Industrial Park(East) Cixi City, Zhejiang, China

WECHAT WHATSAPP

POWER SOCKET & ADAPTER
PDU & RECESSED OUTLET

PROFESSIONAL POWER CONNECTOR MANUFACTURER



DIFENG

Cixi Changfeng Electrical Appliance Co.,Ltd.

Precision in Every Connection,
Commitment in Every Partnership.

Founded in 1996, Cixi Changfeng Electrical Appliance Co., Ltd. is a leading manufacturer specializing in high-quality "Difeng" brand sockets, adapters, and other electrical connection solutions.

Strategically located in the Guanghaiwei Industrial Zone near National Highway, our facility benefits from excellent logistics links, providing easy access to the major ports and commercial hubs of Ningbo,Hangzhou and Shanghai.

Operating from a modern 10,000m² facility with hundreds of skilled employees, we utilize advanced manufacturing and rigorous testing processes to ensure superior product quality and safety. Our diverse portfolio boasts over 100 different socket models, all certified with required standards.


Our commitment to excellence is reflected in our full compliance with national safety and export certification requirements, including the ETL/GS/CE/SASO etc. This dedication to quality has earned the trust of a global clientele, with our products exported worldwide to markets including the USA, Europe, the Middle East, Southeast Asia, and South Africa.

Our Core Philosophy: Professionalism, Innovation, Quality, and Integrity. We believe in building lasting partnerships through pragmatism and a forward-looking vision, working hand-in-hand with global allies to deliver exceptional value.





DF-2304

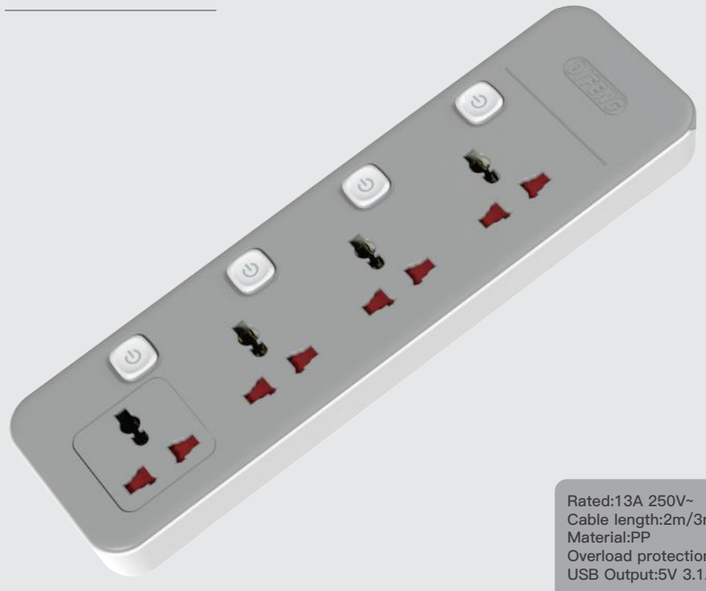







Rated:13A 250V~
Cable length:2m/3m/5m
Material:PP
Overload protection
USB Output:5V 3.1A

Specification



DF-8123-UK(USB output)
UK Travel Charger
MAX 13A 250V~
USB output:DC5V



DF-8123(USB output)
CHN Travel Charger
MAX 10A 250V~
USB output:DC5V



DF-8123S-UK(USB output)
UK Travel Charger
MAX 13A 250V~
USB output:DC5V

DF-634



• PVC bag packing • Blister packing

Rated:13A 250V~
Cable length:2m/3m/5m
Material:PC/ABS
Overload protection
Spray painting process

Specification











DF-324



Rated:13A 250V~
Cable length:2m/3m/5m
Material:PC/ABS
USB Output:5V 2.4A

Specification









DF-534



Rated:13A 250V~
Cable length:2m/3m/5m
Material:PC/ABS
Overload protection

Specification










DF-6434U

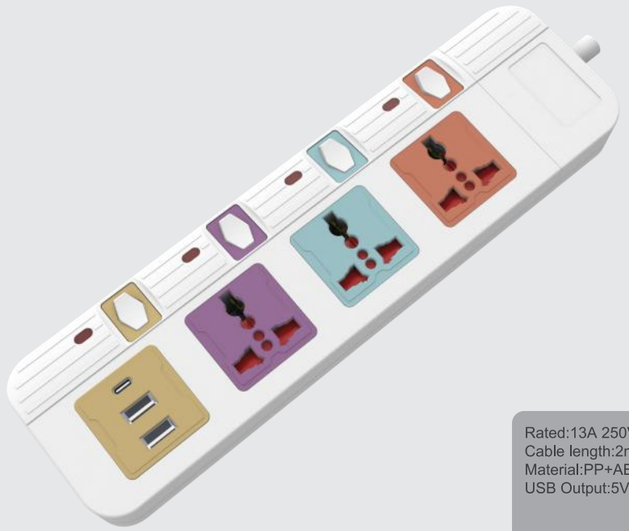

Rated:13A 250V~
Cable length:2m/3m/5m
Material:PP+ABS
USB Output:5V 2.4A

Specification










DF-N214U

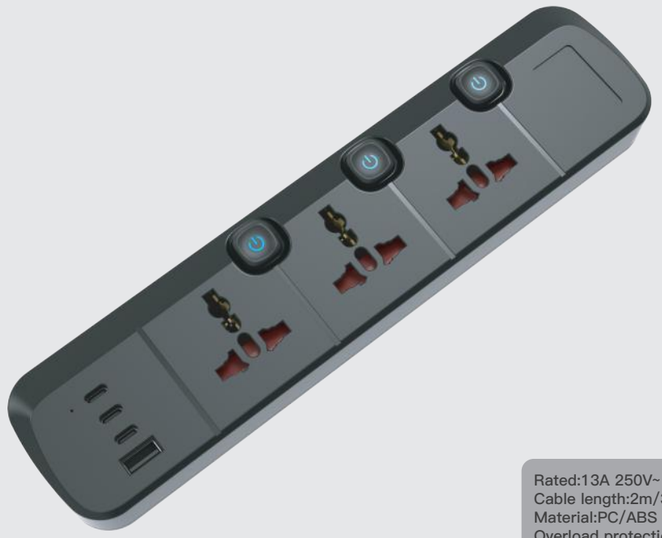


Rated:13A 250V~
Cable length:2m/3m/5m
Material:PC/ABS
Overload protection
USB Output:5V 3.1A
Specification







DF-104U

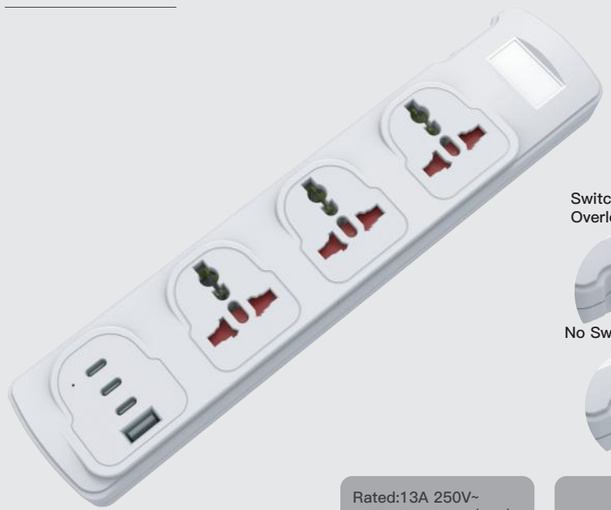

Switch with
Overload protection




No Switch



Rated:13A 250V~
Cable length:2m/3m/5m
Material:PP
Overload protection
USB Output:5V 3.1A
Specification













DF-414U

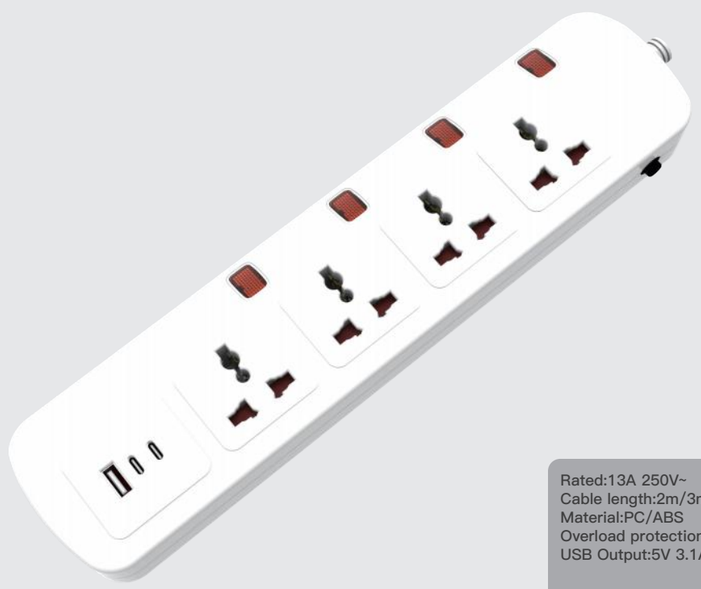

Rated:13A 250V~
Cable length:2m/3m/5m
Material:PC/ABS
Overload protection
USB Output:5V 3.1A
Specification







DF-934U



Rated:13A 250V~
Cable length:2m/3m/5m
Material:PC/ABS
Overload protection
USB Output:5V 3.1A
Specification













DF–654U

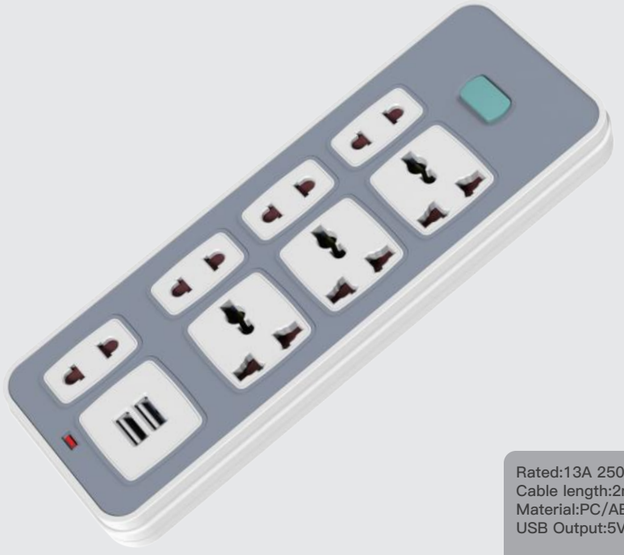








Rated:13A 250V~
Cable length:2m/3m/5m
Material:PC/ABS
USB Output:5V 2.4A

Specification


DF–674U

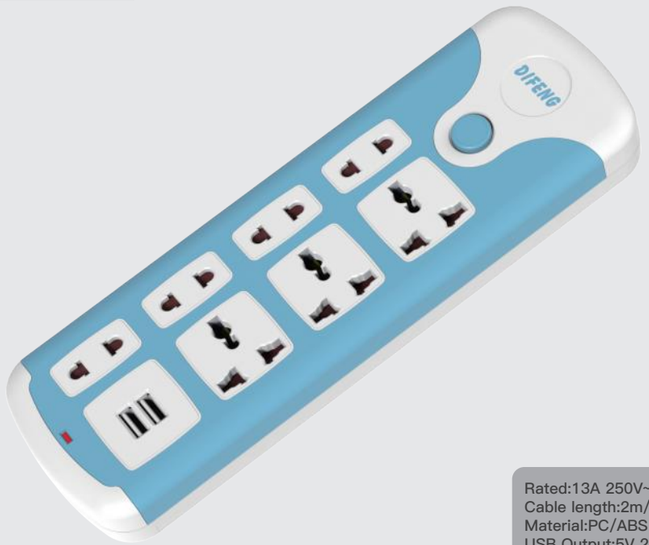









Rated:13A 250V~
Cable length:2m/3m/5m
Material:PC/ABS
USB Output:5V 2.4A

Specification


DF-814











Rated:13A 250V~
Cable length:2m/3m/5m
Material:PC/ABS
Overload protection

Specification

DF–214SA











Rated:13A 250V~
Cable length:2m/3m/5m
Material:PC/ABS
Overload protection

Specification

DF-204U









Rated:13A 250V~
Cable length:2m/3m/5m
Material:PP
Overload protection
USB Output:5V 3.1A
Specification



DF-687



Rated:13A 250V~
Cable length:2m/3m/5m
Material:PC/ABS
USB Output:5V 2.1A
Specification

DF-NFA11









Rated:16A 250V~
Material:PP
Optional Feature:
- Surge Protector
- Overload protection

Specification

DF-NFA111









Rated:16A 250V~
Material:PP
Optional Feature:
- Surge Protector
- Overload protection

Specification



180+ Destinations Compatible

For iPhone Android



T01U20	T01U17	T01
		
Rating:100-250V~ MAX10A Max Power:1100W(100V)/2500W(250~)		
USB Input: 100-250V~ 50/60Hz 0.6A MAX USB-A1 Output: 5V 3A/9V 2A/12V 1.5A(18W Max) USB-C1 Output: 5V 3A/9V 2.22A/12V 1.67A(PD 20W MAX) USB-C2 Output: 5V 3A/9V 2.22A/12V 1.67A(PD 20W MAX) USB A1+C1+C2 Output: 5V 3A(15W Max)	USB Input: 100-250V~ 50/60Hz 0.6A MAX USB-A1 Output: 5V 3.4A(17W Max) USB-C1 Output: 5V 3.4A(17W Max) USB-C2 Output: 5V 3.4A(17W Max) USB A1+C1+C2 Output: 5V 3.4A(17W Max)	


EU


UK



AUS


US

Recessed power strip

DF-TP02A



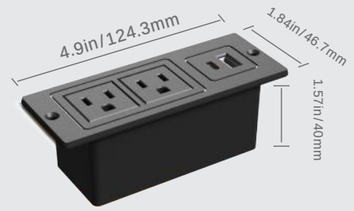



Rating:
14AWG 15A 125V~ 60Hz 1875W
16AWG 12A 125V~ 60Hz 1500W

Material:
Fire-resistant PC

USB Output:
USB-A: 5V 3A(15W MAX)
USB-C: 5V 3A/9V 2.22A/12V 1.67A(PD 20W MAX)
USB-A+C: 5V 3A(15W MAX)

Specification

DF-TE234












Rated:13A 250V~
Cable length:2m/3m/5m
Material:PC/ABS


Specification





DF-734U

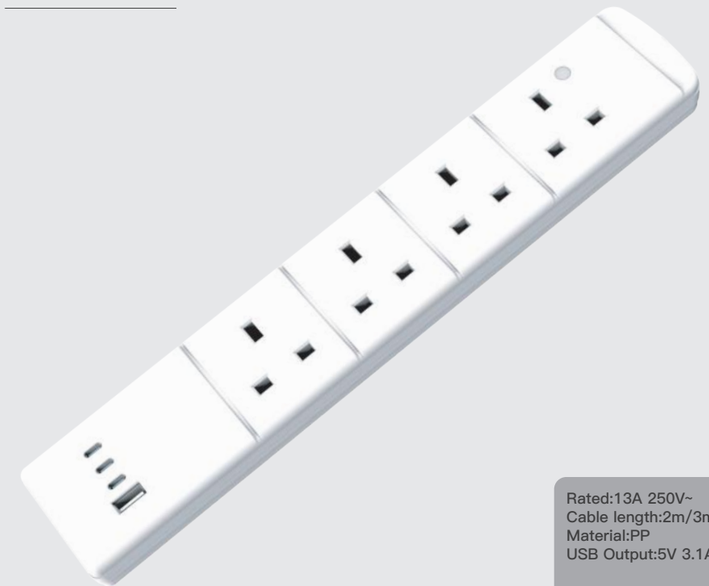










Rated:13A 250V~
Cable length:2m/3m/5m
Material:PP
USB Output:5V 3.1A

Specification


DF–834U


Double break switch

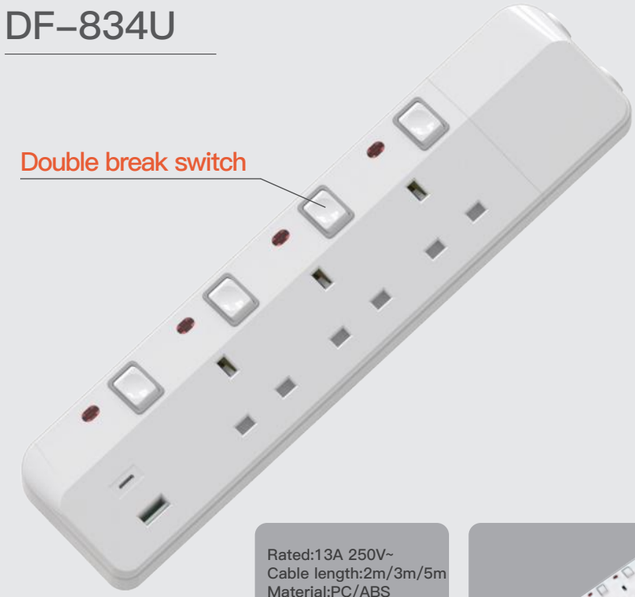









Rated:13A 250V~
Cable length:2m/3m/5m
Material:PC/ABS
USB Output:5V 3.1A

Specification



DF-731



Ration:13A 250V~
Total length:2m/3m/5m
Material:PP

Specification


DF-724U





Rated:13A 250V~
Cable length:2m/3m/5m
Material:PP
USB Output:5V 3.1A
Customizable colors

Specification









DF-584U



Rated:13A 250V~
Material:PP
USB Output:5V 3.1A
Customizable colors


Specification









DF-714

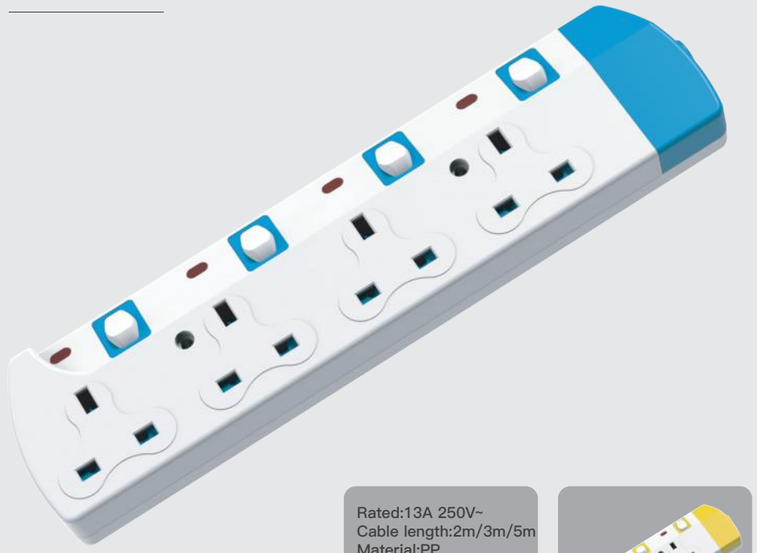



Rated:13A 250V~
Cable length:2m/3m/5m
Material:PP
Customizable colors

Specification










DF-6624

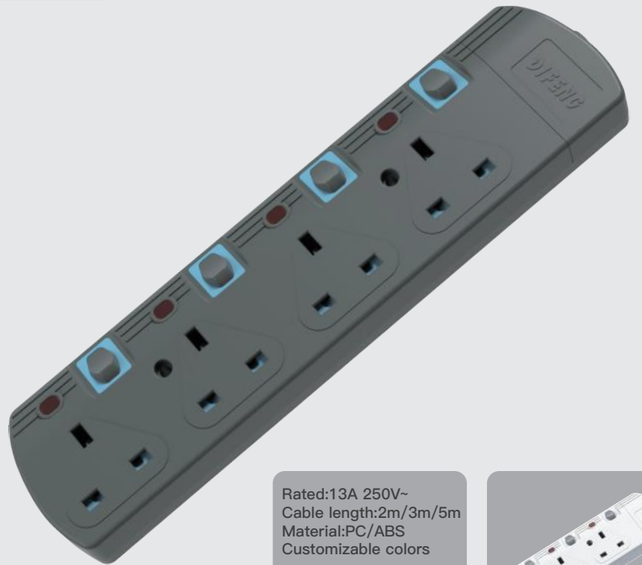


Rated:13A 250V~
Cable length:2m/3m/5m
Material:PC/ABS
Customizable colors

Specification










DF-DB04K

Intertek GS

Double break switch

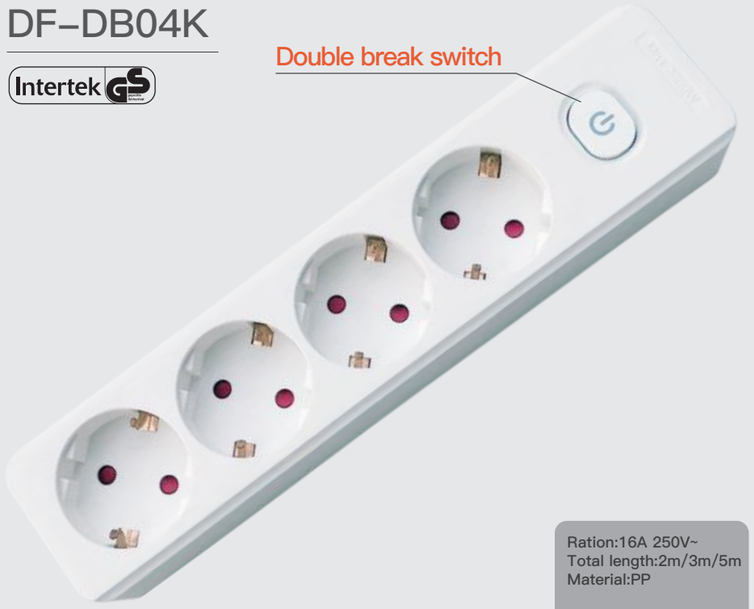

Ration:16A 250V~
Total length:2m/3m/5m
Material:PP

Specification







DF-574U



Ration:13A 250V~
Material:PC/ABS
USB Output:5V 2.4A

Specification









DF-510





EU



UK

Ration:13A 250V~
Material:ABS

Optional Feature:
- EU Plug
- UK Plug

Specification







DF-8019



DF-940 FUSED



DF-D5



DF-16W FUSED



DF-18W FUSED





DIFENG

DF-51 Series FURNITURE POWER DISTRIBUTION UNIT



Rating:
12A 125V~ 60Hz 1500W with 16 AWG
15A 125V~ 60Hz 1850W with 14 AWG


Material:
Fire-resistant PC
Aluminum alloy

Optional Feature:
- 3-12 Outlets
- Surge Protector
- USB PD Charger


HIGHLY CUSTOMIZED

Specifcation

DFUW-71 Series

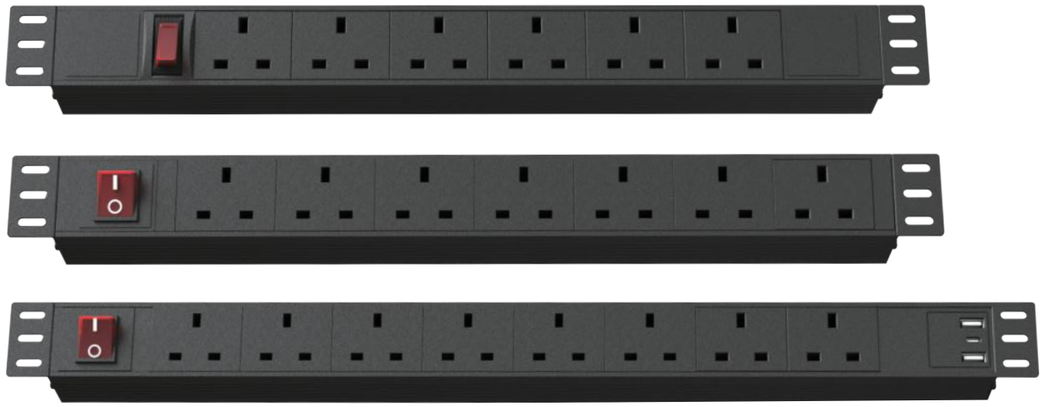

DFWW-32 Series

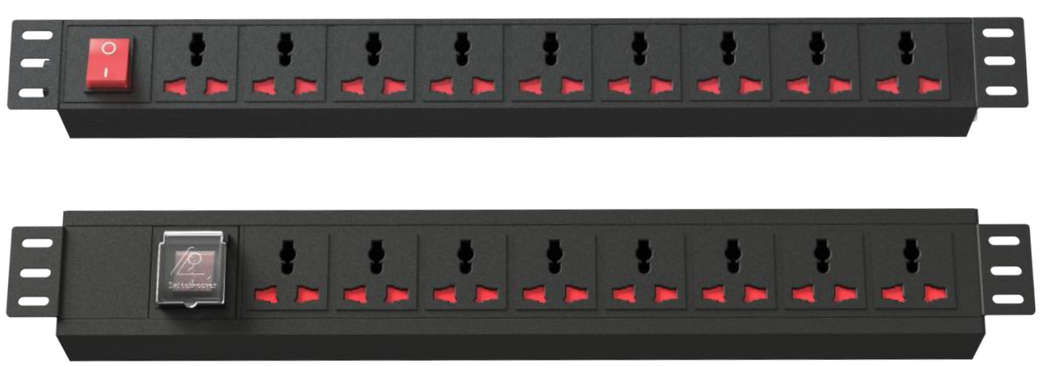

DFWW-41 Series



DFES-61 Series



DFFW-81 Series



DFWW-21 Series



DF-XPS-GE









DF-XPS-UN2

Rated13A/16A 250V~
Cable length:25m/50m
Shell Material:
- Plastic/25m
- Metal/50m

Overload protection

Specification

DF-XP10A





DF-XP10B



Rated:13A/16A 250V~
Cable length:10m
Material:Plastic
Overload protection

Specification






DF-A1


DF-A2


DF-A3


DF.A-9


DF-A4


DF-A5


DF.A-7


DF.A-10


DF.A-11


SH-5


SH-6


SH-7


SH-8


SH-9


SH-5A


SH-6A


SH-7A


SH-8A


SH-9A


7387


7387A


7198


7198A


7196


7196A