Factory Profile



Our factory was founded in 2013, locates in Baoan Dist, Shenzhen City. We are a professional factory with strong technical force which has passed ISO9001 quality management system, with a wide range, good quality, reasonable prices and stylish designs. Our products are extensively used for education, hotel, office and home, high-end models are also popular in market. To ensure that all materials comply with requirements of practical performance, we can provide the related material testing reports such as CE, ROHS, CCC, FCC and so on.

Our business principles are Quality first, Credit first, Technology Innovation first, Customer first. we persist in providing good service, positive cooperation, stable and good quality products for our customer so as to gain win-win altogether.


Workshop view-1



Workshop view-2



10.1 “ Tablet PC

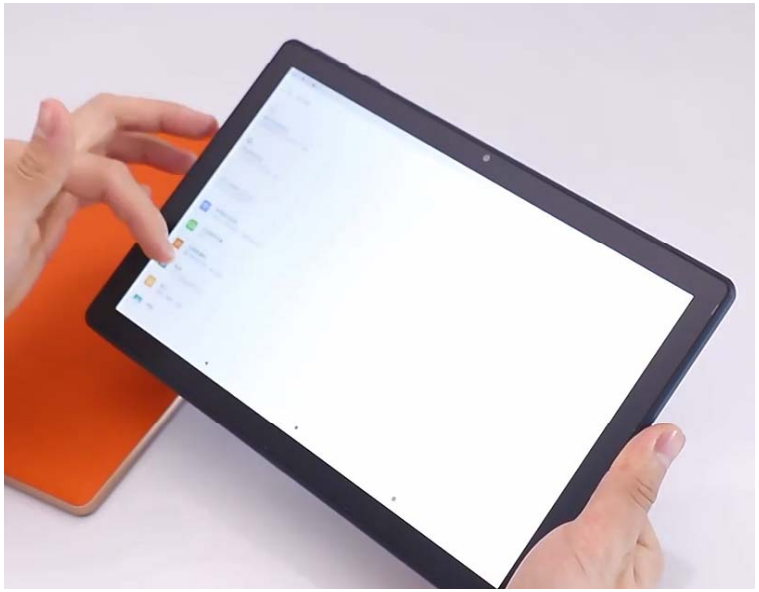

size: 10.1 “
System version: Android 11
CPU Processor: MTK6833
Network: 5G full Netcom
Charging port: Type-C
RAM memory: 6GB
Storage: 128GB
Camera: front 500W pixel
rear 1300W pixel
Battery capacity: 7000mAh
resolution: 1920*1200 IPS LCD screen





taille : 10.1″
Version du système : Android 11
Processeur d'UC : MTK6833
Réseau : 5G complet Netcom
Port de charge : Type-C
Mémoire vive : 6 GB
Stockage : 128 GB
Caméra : pixel avant de 500 W
pixel arrière 1300W
Capacité de la batterie : 7000 mAh
résolution: écran LCD 1920*1200 IPS

10.1 “ Tablet PC



size: 10.1 “
System version: Android 8
CPU Processor: MTK6797
Network: 4G full Netcom,duall Sim
Charging port: Type-C
RAM memory: 4GB
Storage: 64GB
Camera: front 200W pixel
rear 500W pixel
Battery capacity: 5000mAh
resolution: 1280*800 HD screen

taille : 10.1″
Version du système : Android 8
Processeur d'unité centrale : MTK6797
Réseau : 4G complet Netcom, dual Sim
Port de charge : Type-C
Mémoire vive : 4 Gb
Stockage : 64 Gb
Caméra : pixel avant de 200 W
pixel arrière 500W
Capacité de la batterie : 5000 mAh
résolution : écran HD 1280*800

10.1 “ Tablet PC



size: 10.1 “
System version: Android 8-11.0
CPU Processor: MTK6771
Network: 4G full Netcom,duall Sim
Charging port: Type-C
RAM memory: 4GB
Storage: 64GB
Camera: front 500W pixel
rear 1300W pixel
Battery capacity: 5000mAh
resolution: 1920x1200 HD screen

taille : 10.1″
Version du système : Android 8-11.0
Processeur d'unité centrale : MTK6771
Réseau : 4G complet Netcom, dual Sim
Port de charge : Type-C
Mémoire vive : 4 Gb
Stockage : 64 Gb
Caméra : pixel avant de 500 W
pixel arrière 1300W
Capacité de la batterie : 5000 mAh
résolution : écran HD 1920*1200



catalogue

CONTENTS

P3-P4	QD20/QD40
P5-P6	L40/ L70
P7-P8	X40/GX70
P9-P10	GX300
P11-P12	GT40
P13-P14	K40/K70
P15-P16	G20/G40/G70/G20PRO/G40PRO/G70PRO
P17-P18	B20/B20PRO/B40/B40PRO
P19-P20	G15
P21-P22	X5/X6
P23-P24	G700
P25-P26	A700/S700
P27	MD40/GD40/MD70/GD70 Monitor
P28	QD20/QD40 Monitor
P29	SD20/ SD40 Monitor
P30	SD70 Monitor
P31	T1 Mini PC
P32	T2 Mini PC
P33	T7 Mini PC
P34	T10 Mini PC

All in one PC

21.5”

23.8”

27”

30”





Mini PC



QD20/QD40

Entry level ALL IN ONE PC















Model:	QD20	QD40
Size	21.5"	23.8"
Touch	N/A	N/A
Motherboard	N5095(Pre-install)	N5095(Pre-install)
Chipset	5095	5095
CPU	Celeron N5095	Celeron N5095
Memory	DDR4 2666MHz/2933MHz	DDR4 2666MHz/2933MHz
Storage	1×M. 2 2242/2280 (Support SATA/NVME)	1×M. 2 2242/2280 (Support SATA/NVME)
Optical Drive	N/A	N/A
LCD	21.5" LED Back Light 1920x1080 Full HD 250nits typical brightness 5ms response time 178/178 viewing angle 1000:1 contrast ratio	23.8" LED Back Light 1920x1080 Full HD 250nits typical brightness 5ms response time 178/178 viewing angle 1000:1 contrast ratio
Graphic	Integrated Intel HD	Integrated Intel HD
I/O	1×DC, 1×HDMI, 1×VGA, 4×USB3. 0, 1×RJ45, 1×OUT, 1×MIC	
Front Panel	2xUSB2.0	2xUSB2.0
WiFi	802.11 b/g/n(AC), Bluetooth 4.2	802.11 b/g/n(AC), Bluetooth 4.2
Camera	N/A	N/A
Speaker	Built-in 2Channel stereo	Built-in 2Channel stereo
Power Supply	110V~220V 48W/60W AC-DC Adapter	110V~220V 48W/60W AC-DC Adapter
Color	Black/White	Black/White
Unit Dimension	492. 6x286. 1x27. 7mm	540.8x322.6x27. 7mm
VESA	N/A	N/A

GL40/GL70

AIO & Monitor















Model:	GL40	GL70
Size	23.8"	
Touch	N/A	
Motherboard	H510/H610(LGA1200/1700)(Pre-install)	
Chipset	H510/H610	
CPU	Support Intel 10th/11th/12th/13th Gen Celeron/Pentium/Core i3/i5/i7(TDP<65W)	
Memory	2xSO-DIMM, 1.2V(DDR4), MAX 32GB	
Storage	1xSATA(2.5"),1xM.2(SATA/PCIE)	
Optical Drive	N/A	
LCD	23.8" LED Back Light 1920x1080@60Hz 250nits typical brightness 14ms response time(GTG) 178/178 viewing angle 1000:1 contrast ratio	27" LED Back Light 1920x1080@60Hz 250nits typical brightness 14ms response time(GTG) 178/178 viewing angle 1000:1 contrast ratio
Graphic	Integrated Intel HD	
I/O	1xHDMI OUT, 2xUSB2.0,2xUSB3.2, 1xRJ45 Gigabit LAN, AUDIO IN/OUT	
Front Panel	2xUSB2.0/2xUSB3.0, 1xType C	
WiFi	802.11 b/g/n(AC), Bluetooth 4.2	
Camera	2.0M+MIC/1080P+Dual MIC	
Speaker	Built-in 2Channel stereo	
Power Supply	110V~220V 90W/120W AC-DC Adapter	
Color	Silver White/Gray Black	
Unit Dimension	540*320*56.7 mm	614*362*61.9 mm
VESA	Support 100*100mm	

GX40/GX70

Adjustable Stand Base&Powerful Cooling













Model:	GX40	GX70
Size	23.8"	27"
Touch	N/A	
Motherboard	H510/H610(LGA1200/1700)(Pre-install)	
Chipset	H510/H610	
CPU	Support Intel 10th/11th/12th/13th Gen Celeron/Pentium/Core i3/i5/i7(TDP<65W)	
Memory	2xSO-DIMM, 1.2V(DDR4), MAX 32GB	
Storage	1xSATA(2.5"),1xM.2(SATA/PCIE)	
Optical Drive	N/A	
LCD	23.8" LED Back Light 1920x1080@60Hz 250nits typical brightness 5ms response time(GTG) 178/178 viewing angle 1000:1 contrast ratio	27" LED Back Light 1920x1080@60Hz/144Hz/2560x1440@60Hz 250nits typical brightness 14ms response time(GTG) 178/178 viewing angle 1000:1 contrast ratio
Graphic	Integrated Intel HD	
I/O	1xHDMI OUT,2xUSB2.0,2xUSB3.2, 1xRJ45 Gigabit LAN, AUDIO IN/OUT	
Front Panel	2xUSB2.0/2xUSB3.0	
WiFi	802.11 b/g/n(AC), Bluetooth 4.2	
Camera	2.0M+MIC/1080P+Dual MIC	
Speaker	Built-in 2Channel stereo	
Power Supply	110V~220V 90W/120W AC-DC Adapter	
Color	White/Black	
Unit Dimension	540*320.3*54.2mm	614.9*361.8*56.2mm
VESA	Support 100*100mm	

GX300

Adjustable Stand Base&Powerful Cooling











Model:	GX300
Size	30"
Touch	N/A
Motherboard	H510/H610(LGA1200/1700)(Pre-install)
Chipset	H510/H610
CPU	Support Intel 10th/11th/12th/13th Gen Celeron/Pentium/Core i3/i5/i7(TDP<65W)
Memory	2xSO-DIMM, 1.2V(DDR4), MAX 32GB
Storage	1xSATA(2.5"),1xM.2(SATA/PCIE)
Optical Drive	N/A
LCD	30" LED Back Light 1920x1080@60Hz 250nits typical brightness 14ms response time(GTG) 178/178 viewing angle 1000:1 contrast ratio
Graphic	Integrated Intel HD
I/O	1xHDMI OUT, 2xUSB2.0,2xUSB3.2, 1xRJ45 Gigabit LAN, AUDIO IN/OUT
Front Panel	2xUSB2.0/2xUSB3.0
WiFi	802.11 b/g/n(AC), Bluetooth 4.2
Camera	2.0M+MIC/1080P+Dual MIC
Speaker	Built-in 2Channel stereo
Power Supply	110V~220V 90W/120W AC-DC Adapter
Color	Black
Unit Dimension	708*317*55mm
VESA	Support 100*100mm

GT40

Adjustable Stand Base&Powerful Cooling















Model:	GT40
Size	23.8"
Touch	Optional
Motherboard	H510/H610
Chipset	H510/H610
CPU	Support Intel 10th/11th/12th/13th Gen Celeron/Pentium/Core i3/i5/i7(TDP<65W)
Memory	2xSO-DIMM, 1.2V(DDR4), MAX 32GB
Storage	1xSATA(2.5"),1xM.2(SATA/PCIE)
Optical Drive	N/A
LCD	23.8" LED Back Light 1920x1080@60Hz 250nits typical brightness 14ms response time(GTG) 178/178 viewing angle 1000:1 contrast ratio
Graphic	Integrated Intel HD
I/O	HDMI OUT*1、USB2.0*1、USB3.2*2、RJ45*1、AUDIO IN/OUT*1
Front Panel	USB2.0*2/USB3.0*2
WiFi	802.11 b/g/n(AC), Bluetooth 4.2
Camera	2.0M+MIC/1080P+Dual MIC
Speaker	Built-in 2Channel stereo
Power Supply	110V~220V 90W/120W AC-DC Adapter
Color	Black/White
Unit Dimension	580.9*350*60.5 mm
VESA	Support 100*100mm

K40/K70

Camera, Adjustable Stand Base, Powerful Cooling















Model:	K40	K70
Size	23.8"	27"
Touch	N/A	
Motherboard	H510/H610(LGA1200/1700)(Pre-install)	
Chipset	H510/H610	
CPU	Support Intel 10th/11th/12th/13th Gen Celeron/Pentium/Core i3/i5/i7(TDP<65W)	
Memory	2xSO-DIMM, 1.2V DDR4 Max 32GB	
Storage	1xSATA(2.5"),1xM.2(SATA/PCIE)	
Optical Drive	N/A	
LCD	23.8" IPS LED Back Light Frameless 1920x1080 Full HD 250nits typical brightness 14ms response time(GTG) 178/178 viewing angle 1000:1 contrast ratio	27" LED Back Light 1920x1080@60Hz/144Hz/2560x1440@60Hz 250nits typical brightness 14ms response time(GTG) 178/178 viewing angle 1000:1 contrast ratio
Graphic	Integrated Intel HD	
I/O	1xHDMI OUT，2xUSB2.0,2xUSB3.2，1xRJ45 Gigabit LAN, AUDIO IN/OUT	
Front Panel	2xUSB2.0	
WiFi	802.11 b/g/n AC, Bluetooth Optional	
Camera	2.0M+MIC/1080P+Dual MIC	
Speaker	Built-in 2Channel stereo	
Power Supply	110V~220V 90W/120W AC-DC Adapter	
Color	Black	
Unit Dimension	541x324x50mm	614x362x50mm
VESA	100*100mm	

G20/G40 G20 Pro/G40 Pro/G70 Pro

Adjustable Stand Base&Powerful Cooling















Model:	G20/G20Pro	G40/G40Pro	G70Pro
Size	21.5"	23.8"	27"
Touch	N/A	N/A	N/A
Motherboard	H510/H610(LGA1200/1700)(Pre-install)		
Chipset	H510/H610		
CPU	Support Intel 10th/11th/12th/13th Gen Celeron/Pentium/Core i3/i5/i7(TDP<65W)		
Memory	2xSO-DIMM, 1.2V DDR4 Max 32GB		
Storage	1xSATA(2.5"),1xM.2(SATA/PCIE)		
Optical Drive	N/A		
LCD	21.5" LED Frameless 1920x1080 Full HD 250nits typical brightness 5ms response time 178/178 viewing angle 1000:1 contrast ratio	23.8" IPS LED Frameless 1920x1080 Full HD 250nits typical brightness 5ms response time 178/178 viewing angle 1000:1 contrast ratio	27" LED Frameless 1920x1080/2560x1440 250nits typical brightness 14ms response time 178/178 viewing angle 1000:1 contrast ratio
Graphic	Integrated Intel HD		
I/O	1xHDMI OUT ,2xUSB2.0,2xUSB3.2,1xRJ45 Gigabit LAN, AUDIO IN/OUT		
Front Panel	2xUSB2.0, SD Card Reader		
WiFi	802.11 b/g/n(AC), Bluetooth 4.2		
Camera	N/A		
Speaker	Built-in 2Channel stereo		
Power Supply	110V~220V 90W/120W AC-DC Adapter		
Color	Black/White		
Unit Dimension	489x294x50mm	541x324x50mm	615x362x50mm
VESA	100*100mm		

B20/B20PRO/B40/B40PRO

Full function for tenders















Model:	B20/B20PRO	B40/B40PRO
Size	21.5"	23.8"
Touch	N/A	
Motherboard	H510/H610(LGA1200/1700)(Pre-install)	
Chipset	H510/H610	
CPU	Support Intel 10th/11th/12th/13th Gen Celeron/Pentium/Core i3/i5/i7(TDP<65W)	
Memory	2xSO-DIMM, 1.2V DDR4 Max 32GB	
Storage	1xSATA(2.5"),1xM.2(SATA/PCIE)	
Optical Drive	Laptop ODD supported	
LCD	21.5" LED Panel 1920x1080 Full HD 250nits typical brightness 5ms response time 178/178 viewing angle 1000:1 contrast ratio	23.8" Panda IPS LED Panel 1920x1080 Full HD 250nits typical brightness 14ms response time 178/178 viewing angle 1000:1 contrast ratio
Graphic	Integrated Intel HD	
I/O	1xHDMI OUT, 2xUSB2.0,2xUSB3.2, 1xRJ45 Gigabit LAN, AUDIO IN/OUT	
Front Panel	2xUSB2.0	
WiFi	802.11 b/g/n(AC), Bluetooth 4.2	
Camera	2.0M+MIC/1080P+Dual MIC	
Speaker	Built-in 2Channel stereo	
Power Supply	110V~220V 90W/120W AC-DC Adapter	
Color	Black	
Unit Dimension	491x314x48mm	540x343x49mm
VESA	100*100mm	100*100mm

G15

DVD, Camera, Touch















Model:	G15
Size	21.5"
Touch	Capacitive Optional
Motherboard	H510/H610(LGA1200/1700)(Pre-install)
Chipset	H510/H610
CPU	Support Intel 10th/11th/12th/13th Gen Celeron/Pentium/Core i3/i5/i7(TDP<65W)
Memory	2xSO-DIMM, 1.2V(DDR4), MAX 32GB
Storage	1xSATA(2.5"),1xM.2(SATA/PCIE)
Optical Drive	Laptop ODD supported
LCD	21.5" LED Back Light, BOE/AUO Panel 1920x1080 Full HD 250nits typical brightness 5ms response time 178/178 viewing angle 1000:1 contrast ratio
Graphic	Integrated Intel HD
I/O	1xHDMI OUT,2xUSB2.0,2xUSB3.2,1xRJ45 Gigabit LAN, AUDIO IN/OUT
Front Panel	2xUSB2.0
WiFi	802.11 b/g/n(AC), Bluetooth 4.2
Camera	2.0M+MIC/1080P+Dual MIC
Speaker	Built-in 2Channel stereo
Power Supply	110V~220V 90W/120W AC-DC Adapter
Color	Black
Unit Dimension	505x301x53mm
VESA	100x100mm

X5/X6

Economic 23.8" Frameless





X6





X5





Model:	X5	X6
Size	23.8"	23.8"
Touch	N/A	
Motherboard	H510/H610(LGA1200/1700)(Pre-install)	
Chipset	H510/H610	
CPU	Support Intel 10th/11th/12th/13th Gen Celeron/Pentium/Core i3/i5/i7(TDP<65W)	
Memory	2xSO-DIMM, DDR4, 1.2V, MAX 32GB	
Storage	1x m-SATA,1xSATA(2.5")/1xM.2(SATA/PCIE),1xSATA(2.5")	
Optical Drive	N/A	
LCD	23.8" IPS LED Back Light Frameless 1920x1080 Full HD 250nits typical brightness 14ms response time 178/178 viewing angle 1000:1 contrast ratio	
Graphic	Integrated Intel HD	
I/O	1xHDMI OUT,2xUSB2.0,2xUSB3.2, 1xRJ45 Gigabit LAN, AUDIO IN/OUT	
Front Ports	1xUSB2.0	2xUSB2.0
WiFi	802.11 b/g/n(AC), Bluetooth Optional	
Camera	2.0M+MIC/1080P+Dual MIC	N/A
Speaker	Built-in 2Channel stereo	
Power Supply	110V~220V 48W/90W/120W AC-DC Adapter	
Color	Black/White	Silver White
Unit Dimension	540x324x54mm	540x324x54mm
VESA	N/A	N/A

G700

High performance gaming















Model:	G700
Size	27"
Touch	N/A
Motherboard	B660 I-P(LGA1700)(Pre-install)
Chipset	B660 I-P
CPU	Support Intel 12th/13th Gen Celeron/Pentium/Core i3/i5/i7(TDP<65W)
Memory	2xSO-DIMM, 1.2V(DDR4), MAX 32GB
Storage	1xSATA(2.5"),1xM.2(SATA/PCIE)
Optical Drive	N/A
LCD	27" LED Back Light 1920x1080@60Hz/2560*1440@60Hz/1920*1080@144Hz 250nits typical brightness 14ms response time(GTG) 178/178 viewing angle 1000:1 contrast ratio
Graphic	Support Graphic Card
I/O	1×DC(19V),1×HDMI IN,1×HDMI OUT,USB Port 4×USB3.0,Internet port 1×RJ45、Audio 1×OUT1×MIC
Front Panel	2xUSB2.0,SD Card Reader
WiFi	802.11 b/g/n(AC), Bluetooth 4.2
Camera	2.0M+MIC/1080P+Dual MIC
Speaker	Built-in 2Channel stereo
Power Supply	110V~220V 180W/300W AC-DC Adapter
Color	White/Black
Unit Dimension	615*362*67 mm
VESA	N/A















Model:	A700	S700(Curve)
Size	27"	27"
Touch	N/A	
Motherboard	B660 I-P(LGA-1700)(Pre-install)	
Chipset	B660 I-P	
CPU	Support Intel 12th/13th Gen Celeron/Pentium/Core i3/i5/i7(TDP<65W)	
Memory	2xSO-DIMM, 1.2V(DDR4), MAX 32GB	
Storage	1xSATA(2.5"),1xM.2(SATA/PCIE)	
Optical Drive	N/A	
LCD	27" LED Back Light 1920x1080@60Hz/2560*1440@60Hz/1920*1080@144Hz 250nits typical brightness 14ms response time(GTG) 178/178 viewing angle 1000:1 contrast ratio	
Graphic	Support Graphic Card	
I/O	1×DC(19V),1×HDMI IN,1×HDMI OUT,USB Port 4×USB3.0,Internet port 1×RJ45、Audio 1×OUT1×MIC	
Front Panel	2xUSB2.0	
WiFi	802.11 b/g/n(AC), Bluetooth 4.2	
Camera	N/A	
Speaker	Built-in 2Channel stereo	
Power Supply	110V~220V 300W AC-DC Adapter	
Color	Black	
Unit Dimension	615*362*80 mm	615*362*80 mm
VESA	N/A	

MD40/GD40/MD70/GD70

Business Monitor/All in one PC



Model:	MD40/GD40	MD70/GD70
Size	23.8"	27"
Panel type	VA/IPS	VA/IPS
Resolution	1920*1080@75Hz 2560*1440@60Hz	1920*1080@75Hz 2560*1440@60Hz 3840*2160@60Hz
Aspect Ratio	16:9	16:9
Contrast Ratio	3000:1	3000:1
Brightness	250cd/m²	250cd/m²
Viewing angle	178°/178°	178°/178°
Response time	5ms	5ms
Interface	HDMI+DP+USB	HDMI+DP+USB+Type-C
Camera	5.0M	5.0M
Speaker	Optional	Optional
Power Supply	12V/4A	12V/5A 24V/5A
Color	Black/White	Black/White
Unit Dimension	540x324x48mm	614x362x48mm
VESA	100*100	100*100

SD20/SD40

Entry Level Monitor



Model:	SD20	SD40
Size	21.45"	23.8"
Panel type	VA	VA/IPS
Resolution	1920*1080@75Hz	1920*1080@75Hz
Aspect Ratio	16:9	16:9
Contrast Ratio	3000:1	3000:1
Brightness	250cd/m²	250cd/m²
Viewing angle	178°/178°	178°/178°
Response time	5ms	5ms
Interface	HDMI+VGA	HDMI+VGA
Camera	N/A	N/A
Speaker	Optional	Optional
Power Supply	12V/3A	12V/3A
Color	Black	Black
Unit Dimension	496x285x40mm	542x321x44mm
VESA	100*100mm	100*100mm

SD70

Entry Level Monitor



Model:	SD70
Size	27"
Panel type	VA/IPS
Resolution	1920*1080@75Hz/2650*1440@75HZ
Aspect Ratio	16:9
Contrast Ratio	3000:1
Brightness	250cd/m²
Viewing angle	178°/178°
Response time	5ms
Interface	HDMI+VGA
Camera	N/A
Speaker	Optional
Power Supply	12V/3A
Color	Black
Unit Dimension	614x362x48mm
VESA	N/A

T1

MiniPC	Model:	T1-N5095/T1-H610/T1-11320H
	Motherboard size	N50952.0GHz /Intel H610 , support Intel 12th 1700/Intel Core 11th,3.2Ghz
	RAM	Support DDR4*1/DDR42666MHz/2933MHz*2 / DDR43200(OC)/2933/2800/2666/2400/2133*2
	SSD	M.2*12242/2280Slot(Support SATA/NVME)+2.5 SSD
	Display Port	HDMI*1、VGA*1/HDMI*1/HDMI*
	Front I/O port	USB3.0*2/headsetiack/MIC*1
	Back I/O Port	USB3.0*4RJ45*1.OUT*1、MIC*1COM*1、RJ45*1、 USB3.0*4、OUT*1、MIC*1VGA*1、RJ45*1、USB3.2*4、
	Power	DC(12-19V)*1 Hunrket/FSP 48W/60W/90W/120W
	WIFI	wifi2.4G+5G with bluetooth
	Motherboard size	ThinMinilTX170mm(W)x170mm(L)
	PC size	183*186.5*37mm
	VESA	100*100mm
	net weight	430 g

T2

MiniPC	Model:	T2-N5095/T2-H610/T2-11320H
	Motherboard size	N5095 2.0GHz/Intel H610 support Intel 12th 1700/Intel H510 support intel 10th/11th 1200
	RAM	Support DDR4*1/DDR42666MHz/2933MHz*2/DDR4 3200(OC)2933/2800/2666/2400/2133MHz*2
	SSD	M2*1224212280Slot(Support SATA/NVME)+2.5 SSD
	Display Port	HDMI*1、VGA*1/HDMI*1/HDMI*
	Front I/O port	USB3.0*2/headsetjack/MIC*1
	Back I/O Port	USB3.0*4RJ45*1OUT*1、MIC*1COM*1、RJ45*1、USB3.0*4、OUT*1、MIC*1VGA*1、RJ45*1、USB3.2*2、USB2.0*2、OUT*1、MIC*1VGA*1、RJ45*1、USB3.2*4、USB2.0*2、OUT*1、MIC*1
	Power	DC(12-19V)*1Hunrket/FSP48W/60W/90W/120W
	WIFI	wifi2.4G+5Gwithbluetooth, RJ45*1
	Motherboard size	ITX170mm(W)x170mm(L)
	PC size	212*200*55mm
	VESA	Support
	net weight	430 g

T7

MiniPC	Model:	T7-B660
	Motherboard size	Intel B660,Support Intel 12th 1700
	RAM	Support DDR4 3200MHz*2
	SSD	M.22280SSDExtend*2、SATA*4
	GPU	Intel UHD Graphics/PCIE
	Display Port	HDMI*1、DP*1
	FrontI/O port	USB3.0*2、Headsetjack*1、MIC*2
	BackI/O Port	USB2.0*4、Type-A*1、USB3.0*3、Type-A(Type-A*2+Type-C)、HDMI*1、DP*1、Audioout*1、MIC*1、RJ45*1、WiFi*1、CLR_CMS*1
	Power	TFXWith 200W PC PSU
	WIFI	WIF16 Wifi2.4G+5G with bluetooth、RJ45*1
	Motherboard size	ITX170mm(W)x170mm(L)
	PC size	295*290*93mm
	net weight	430 g

T10

MiniPC	Model:	T10-1215UT10-1235U
 	Matherboardj Chipset	Intel core i3 12th ,1.20Ghz/lntel Core i5 12th ,1.30Ghz
	RAM	Support2xDDR4 3200MHz
	SSD	1xM.2 2280 Slot
	GPU	Intergrated
	Front 10 port	US日8.2*2、Typo-C*1、3.5mm Audlo*1DC”1、CMOS”1、MIC“2
	Back I/O Port	USB2.0*2、HDMI1、RJ45*1、Typ-C*1、DC*1
	Power	(12-19V)12V/5A60W
	WIFI	Wifi2.4G+5G with bluelooth
	PC size	120mm120mm
	VESA	Support
	Motherboard size	ITX170mm(W)x170mm(L)
	net weight	430 g

Certificates

CE

Certificate · 認證證書 · 인증증서 · diplomes · certificado

iTC

CERTIFICATE OF EMC COMPLIANCE

According to Directive: 2014/53/EU

Ref. No.: 20ITC0708074

Applicant: DEJIN-INC Co., Ltd

Address: 4th Floor, 2rd Plant, Anda Industrial Park, Heping Community, Fuyong St, Baoan Dist, Shenzhen, China

Product : ALL IN ONE PC

Model No.: G15,G15PRO, G15PLUS, G15T, G15PRO-T, G15PLUS-T, G15B, G15W,G15A,G15C,G15D,G15E,G15F,G15G,G15H,G15I,G15J,G15K

The test sample of product has been passed, the test according to requirements of the following standards:

Essential requirement		Applied Specifications/Standards	Documentary Evidence
Art.3.1(a)	Safety	EN 62368-1:2014+A11:2017	20ITC0708075S
Art.3.1(a)	Health	EN 62311:2008	20ITC0708074F
Art.3.1(b)	EMC	Draft ETSI EN 301 489-1 V2.2.0 (2017-03) Draft ETSI EN 301 489-17 V3.2.0 (2017-03)	20ITC0708074E
Art.3.2	Radio	ETSI EN300 328 V2.2.2 (2019-07)	20ITC0708074W01 20ITC0708074W02
		ETSI EN 301 893 V2.1.1 (2017-05)	20ITC0708074W03

The EUT described above has been tested by us with the listed standards and found in compliance with the council Radio Equipment Directive(RED) 2014/53/EU. It is possible to use CE marking to demonstrate the compliance with this Directive. The scope of evaluation relates to the submitted documents only.

CE

Approved by/Date: Jul. 15, 2020

Department Manager

Shenzhen iTC Product Testing Co., Ltd.
Room 502, Floor 5,Fuhong buliding,No. 3, Dayang road, Qiaotou community,Fuhai street,Baoan district. Shenzhen. China
Tel: (86)-0755-33138690 Fax: (86)-0755-23071003 Http: www.itclab.cn

Certificate · 認證證書 · 인증증서 · diplomes · certificado

ROHS

Certificate · 認證證書 · 인증증서 · diplomes · certificado

iTC

CERTIFICATE OF COMPLIANCE

2015/863/EU Restriction of Hazardous Substance

Ref. No.: 20ITC0708076

Applicant: DEJIN-INC Co., Ltd

Address: 4th Floor, 2rd Plant, Anda Industrial Park, Heping Community, Fuyong St, Baoan Dist, Shenzhen

Manufacturer: DEJIN-INC Co., Ltd

Address: 4th Floor, 2rd Plant, Anda Industrial Park, Heping Community, Fuyong St, Baoan Dist, Shenzhen

Product : ALL IN ONE PC

Model No.: G15,G15PRO,G15PLUS,G15T,G15PRO-T,G15PLUS-T, G15B,G15W, G15A,G15C,G15D,G15E,G15F,G15G,G15H,G15I,G15J,G15K

The test sample of product has been passed, the test according to requirements of the following standards:

Standard(s):
IEC62321-3-1:2013;
IEC62321-4:2013+A1:2017;
IEC 62321-5:2013; IEC 62321-6:2015;
IEC 62321-7-1:2015;IEC 62321-7-2:2017;
IEC 62321-8:2017

Test eport(s) No.:
20ITC0708076R

The Certificate of compliance is based on a test procedure or an evaluation of the above-mentioned product. This is to certify that the above-mentioned product is in compliance with the EU RoHS Directive 2011/65/EU and its amendment directives 2015/863/EU (RoHS 2.0) of the European parliament.

ROHS

Approved by/Date: Jul. 15, 2020

Department Manager

Shenzhen iTC Product Testing Co., Ltd.
2nd Floor, Building A7 , Xinhe XinxingThird Industrial Area, Fuhai Road, Fuyong Street Bao'an District, Shenzhen, China
Tel: (86)-0755-33138690 Fax: (86)-0755-23071003 http://www.itclab.cn/

Certificate · 認證證書 · 인증증서 · diplomes · certificado

Certificates



中国节能产品认证证书

附　录
APPENDIX
证书编号：CQC19701234681

第 1 页 共 1 页
Page 1 of 1
纸号：161376

F40S;G40-H;G40-I;G40-J;G40-K;G40-L;G40-M;E40S;X5;X6;X9;F1;F2;F3;M9;M9215;M9200;A20;B20;C20;D20;E20;F20;G20;G20-A;G20-B;G20-C;G20-D;G20-E;G20-F;G20-G;H20;I20;J20;K20;A40;B40;C40;D40;E40;F40;G40;G40-A;G40-B;G40-C;G40-D;G40-E;G40-G;H40;I40;J40;K40;G40PRO;B20Pro;B40Pro;G20Pro;G41pro;K40pro;X400;G700;S700;F700;A20S;B20S;C20S;D20S;E20S;F20S;G20-H;G40-F;G20-J;G20-K;G20-L;G20-M;G20-N;G20S;H20S;I20S;J20S;K20S;B20E9HLW;B20E9HLY;B20E9HL5;J20E9HLW;J20E9HLY;J20E9HL5;A40S;B40S;C40S;D40S;G20-I;G40-N;G40S;H40S;I40S;J40S;K40S;B40E9HLW;B40E9HLY;B40E9HL5;A20E9HLW;A20E9HLY;A20E9HL5;J40E9HLW;J40E9HLY;J40E9HL5;
（所有型号尺寸为：21.5 英寸，产品类型：D 类 能效等级：1 级；产品类型：B 类 能效等级：1 级）
电源输入：19V 6.32A
（电源适配器：HDZ1201-3C，输出：19V 6.32A）

注：此附录与证书同时使用时有效。
NOTE: This appendix is valid when used with the certificate.

CQC

主任：

CHINA QUALITY CERTIFICATION CENTRE 中国质量认证中心

中国质量认证中心

http://www.cqc.com.cn　中国・北京・南四环西路188号9区 100070　电话：+86 10 83889666