



We highly emphasize on Innovation and Designs.
We keep pursuing Growth and investing extensively on Research and Development.

RK-PA10

- >> Power Supply Front Positioned
- >> Support 360mm AIO
- >> High Air Flow Performance



SPECIFICATIONS

Motherboard Support	ITX, M-ATX(support BTF), ATX(support BTF)	Fan Support	Top: 120mm x 3
Case Dimension	473.5(L)x245(W)x463(H) mm		MB Tray: 120mm x 1
I/O Panel	USB3.0 x 1+USB1.1 x 2, HD Audio, Reset, Power		Bottom: 120mm x 3
Steel Thickness	0.50~0.70mm		Rear: 120mm x 2
Front Panel	Tool-Free Tempered Glass	Liquid Cooler Support	Top: 120mm, 240mm or 360mm
Left Side Panel	Tool-Free Tempered Glass		MB Tray: N/A
Drive Bay	3.5"x1 + 2.5"x1		Rear: 120mm
PCI Slot	Standard x 7	Max. VGA Length	465mm
PSU Support	Top Front Positioned, ATX Max. 160mm	Max. CPU Height	170mm
Cable Management	44mm		

RK-PA10 PRO

- >> Support Back-Connected Motherboard
- >> Two 120mm Fan at Rear for Better Airflow
- >> Detachable Glass Panels



RK-PM10

- >> Power Supply Front Positioned
- >> Support 360mm AIO
- >> Quick Detached Design



SPECIFICATIONS

Motherboard Support	ITX, M-ATX(support BTF)	Fan Support	Top: 120mm x 3
Case Dimension	473.5(L)x245(W)x381(H) mm		MB Tray: 120mm x 1
I/O Panel	USB3.0 x 1+USB1.1 x 2, HD Audio, Reset, Power		Bottom: 120mm x 3
Steel Thickness	0.50~0.70mm		Rear: 120mm x 1
Front Panel	Tempered Glass	Liquid Cooler Support	Top: 120mm, 240mm or 360mm
Left Side Panel	Tool-Free Tempered Glass		MB Tray: N/A
Drive Bay	3.5"x1 + 2.5" x1		Rear: 120mm
PCI Slot	Standard x 5	Max. VGA Length	465mm
PSU Support	Top Front Positioned, ATX Max. 160mm	Max. CPU Height	170mm
Cable Management	44mm		



CASE
ITX, M-ATX

RK-PM10 PRO

- >> Support Back-Connected Motherboard
- >> Detachable Glass Panels
- >> Customized Colors are Available



RK-A1851

- >> Big Full View Sight
- >> Support Back Connected Motherboard
- >> High Quality ARGB Stripe Decoration



SPECIFICATIONS

Motherboard Support	ITX, M-ATX(support BTF), ATX(support BTF)	Fan Support	Front: N/A
Case Dimension	428(L)x280(W)x435(H)mm		Top: 120mm x 3 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x1,HD Audio		MB Tray: 120mm x 3
Steel Thickness	0.50~0.60mm		Bottom: 120mm x 3
Front Panel	Tempered Glass		Rear: 120mm x 1
Left Side Panel	Slide Tempered Glass	Liquid Cooler Support	Top: 240mm or 280mm or 360mm
Drive Bay	3.5" x2 + 2.5"x1		MB Tray: 240mm or 280mm or 360mm
PCI Slot	Standard x 8	Max. VGA Length	407mm
PSU Support	Top mounted, ATX Max. 160mm	Max. CPU Height	162mm

RK-M1851

- >> Big Full View Sight
- >> Support 360mm AIO
- >> High Quality ARGB Stripe Decoration



SPECIFICATIONS

Motherboard Support	M-ATX(support BTF), ITX	Fan Support	Front: N/A
Case Dimension	420(L)x280(W)x355(H)mm		Top: 120mm x 3 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x1,HD Audio		MB Tray: 120mm x 2
Steel Thickness	0.50~0.60mm		PSU: 120mm x 2
Front Panel	Tempered Glass		Rear: 120mm x 1
Left Side Panel	Slide Tempered Glass	Liquid Cooler Support	Top: 240mm or 280mm or 360mm
Drive Bay	3.5"x2 + 2.5"x1		MB Tray: 120mm or 240mm
PCI Slot	Standard x 5	Max. VGA Length	400mm
PSU Support	Top mounted, ATX Max. 160mm	Max. CPU Height	162mm

RK-A3609

- >> Support 360mm AIO
- >> Curved Tempered Glass
- >> ARGB Board Decoration



SPECIFICATIONS

Motherboard Support	ITX, M-ATX, ATX	Fan Support	Front: N/A
Case Dimension	460(L)x220(W)x459(H)mm		Top: 120mm x 3 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x1,HD Audio,Reset,Power		MB Tray: 120mm x 2
Steel Thickness	0.50~0.60mm		PSU: 120mm x 3
Front Panel	Curved Tempered Glass		Rear: 120mm x 1
Left Side Panel	Tool-free Tempered Glass	Liquid Cooler Support	Top: 240mm or 280mm or 360mm
Drive Bay	3.5"x2 + 2.5"x2		Rear: 120mm
PCI Slot	Standard x 7	Max. VGA Length	420mm
PSU Support	Bottom mounted, ATX Max. 220mm	Max. CPU Height	175mm

RK-A2409

- >> Full Seaview Curved Glass Design
- >> Support CPU Cooler Max.175mm
- >> ARGB Decoration on PSU



SPECIFICATIONS

Motherboard Support	ITX, M-ATX, ATX	Fan Support	Front: N/A
Case Dimension	370(L)x220(W)x486(H)mm		Top: 120mm x 2 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x1,HD Audio,Reset,Power		PSU: 120mm x 2
Steel Thickness	0.50~0.6mm		Rear: 120mm x 1
Front Panel	Curved Tempered Glass		
Left Side Panel	Tool-free Tempered Glass	Liquid Cooler Support	Top: 240mm or 280mm
Drive Bay	3.5"x2 + 2.5"x1		Rear: 120mm
PCI Slot	Standard x 7	Max. VGA Length	329mm
PSU Support	Bottom mounted, ATX Max. 170mm	Max. CPU Height	175mm

RK-M3609

- >> Curved Tempered Glass
- >> Support 360mm AIO
- >> ARGB Decoration on PSU



SPECIFICATIONS

Motherboard Support	ITX, M-ATX	Fan Support	Front: N/A
Case Dimension	460(L)x220(W)x410(H)mm		Top: 120mm x 3 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x1, HD Audio, Reset, Power		MB Tray: 120mm x 3
Steel Thickness	0.50~0.6mm		PSU: 120mm x 2
Front Panel	Curved Tempered Glass		Rear: 120mm x 1
Left Side Panel	Tool-free Tempered Glass	Liquid Cooler Support	Top: 240mm or 280mm or 360mm
Drive Bay	3.5"x2 + 2.5"x1		Rear: 120mm
PCI Slot	Standard x 4	Max. VGA Length	420mm
PSU Support	ATX Bottom mounted Max. 220mm	Max. CPU Height	175mm

RK-M2409

- >> Curved Tempered Glass
- >> Support 280mm AIO
- >> ARGB Decoration on PSU



SPECIFICATIONS

Motherboard Support	ITX, M-ATX	Fan Support	Front: N/A
Case Dimension	393(L)x220(W)x410(H)mm		Top: 120mm x 2 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x1, HD Audio, Reset, Power		PSU: 120mm x 2
Steel Thickness	0.50~0.6mm		Rear: 120mm x 1
Front Panel	Curved Tempered Glass		
Left Side Panel	Tempered Glass	Liquid Cooler Support	Top: 240mm or 280mm
Drive Bay	3.5"x2 + 2.5"x1		Rear: 120mm
PCI Slot	Standard x 4	Max. VGA Length	340mm
PSU Support	ATX Bottom mounted Max. 170mm	Max. CPU Height	175mm

RK-A3607

- >> ARGB Board Design
- >> Support 360mm AIO
- >> Tool-Free Tempered Glass



SPECIFICATIONS

Motherboard Support	ITX, M-ATX, ATX	Fan Support	Front: N/A
Case Dimension	460(L)x220(W)x459(H)mm		Top: 120mm x 3 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x1,HD Audio,Reset,Power		MB Tray: 120mm x 2
Steel Thickness	0.50~0.60mm		PSU: 120mm x 3
Front Panel	Tool-Free Tempered Glass		Rear: 120mm x 1
Left Side Panel	Tool-Free Tempered Glass	Liquid Cooler Support	Top: 240mm or 280mm or 360mm
Drive Bay	3.5"x2 + 2.5"x2		Rear: 120mm
PCI Slot	Standard x 7	Max. VGA Length	420mm
PSU Support	Bottom mounted, ATX Max. 220mm	Max. CPU Height	175mm

RK-M3607

- >> Curved Tempered Glass
- >> Support 360mm AIO
- >> ARGB Decoration on PSU



SPECIFICATIONS

Motherboard Support	ITX, M-ATX	Fan Support	Front: N/A
Case Dimension	460(L)x220(W)x410(H)mm		Top: 120mm x 3 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x1, HD Audio, Reset, Power		MB Tray: 120mm x 2
Steel Thickness	0.50mm		PSU: 120mm x 2
Front Panel	Tool-Free Tempered Glass		Rear: 120mm x 1
Left Side Panel	Tool-Free Tempered Glass	Liquid Cooler Support	Top: 240mm or 280mm or 360mm
Drive Bay	3.5"x2 + 2.5"x1		Rear: 120mm
PCI Slot	Standard x 4	Max. VGA Length	420mm
PSU Support	ATX Bottom mounted Max. 220mm	Max. CPU Height	175mm

RK-M3621

- >> Support Long VGA
- >> Support 360mm AIO
- >> Tool-Free Tempered Glass Panels



SPECIFICATIONS

Motherboard Support	ITX, M-ATX	Fan Support	Front: N/A
Case Dimension	460(L)x220(W)x410(H)mm		Top: 120mm x 3 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x1, HD Audio,Reset,Power		MB Tray: 120mm x 2
Steel Thickness	0.50~0.60mm		PSU: 120mm x 3
Front Panel	Tool-Free Tempered Glass		Rear: 120mm x 1
Left Side Panel	Tool-Free Tempered Glass	Liquid Cooler Support	Top: 240mm or 280mm or 360mm
Drive Bay	3.5"x2 + 2.5"x1		Rear: 120mm
PCI Slot	Standard x 4	Max. VGA Length	420mm
PSU Support	ATX Bottom mounted (220mm)	Max. CPU Height	175mm

RK-M2407

- >> Support CPU Cooler Max.175mm
- >> Support 280mm AIO
- >> ARGB Decoration on PSU



SPECIFICATIONS

Motherboard Support	ITX, M-ATX	Fan Support	Front: N/A
Case Dimension	393(L)x220(W)x410(H)mm		Top: 120mm x 2 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x1, HD Audio, Reset, Power		PSU: 120mm x 2
Steel Thickness	0.50~0.6mm		Rear: 120mm x 1
Front Panel	Tool-Free Tempered Glass		
Left Side Panel	Tempered Glass	Liquid Cooler Support	Top: 240mm or 280mm
Drive Bay	3.5"x2 + 2.5"x1		Rear: 120mm
PCI Slot	Standard x 4	Max. VGA Length	340mm
PSU Support	ATX Bottom mounted Max. 170mm	Max. CPU Height	175mm

RK-KU09

- >> Big Full View Sight
- >> Support 360mm AIO
- >> L-Shaped Tempered Glass



SPECIFICATIONS

Motherboard Support	ITX, M-ATX(support BTF), ATX(support BTF), E-ATX	Fan Support	Front: N/A
Case Dimension	430(L)x238(W)x493(H)mm		Top: 120mm x 3 or 140mm x 2
I/O Panel	USB3.0 x1+USB1.1 x2,HD Audio,Reset,Power		MB Tray: 120mm x 3
Steel Thickness	0.70-0.80mm		Bottom: 120mm x 3
Front Panel	L-Shaped Tempered Glass		Rear: 120mm x 1
Left Side Panel	Tempered Glass	Liquid Cooler Support	Top: 240mm or 280mm or 360mm
Drive Bay	3.5"x2 + 2.5"x2		MB Tray: 240mm or 360mm
PCI Slot	Standard x 7 (support vertical installation)		Rear: 120mm
PSU Support	ATX Bottom mounted	Max. VGA Length	415mm
Cable Management	36mm	Max. CPU Height	180mm

RK-KU03

- >> Curved Tempered Glass
- >> Support 360mm AIO
- >> Support VGA Vertical Installation



SPECIFICATIONS

Motherboard Support	ITX, M-ATX(support BTF), ATX(support BTF), E-ATX	Fan Support	Front: N/A
Case Dimension	430(L)x238(W)x493(H)mm		Top: 120mm x 3 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x2,HD Audio,Reset,Power		MB Tray: 120mm x 3
Steel Thickness	0.70-0.80mm		Bottom: 120mm x 3
Front Panel	L-Shaped Tempered Glass(Curved Glass in Front is optional)		Rear: 120mm x 1
Left Side Panel	L-Shaped Tempered Glass	Liquid Cooler Support	Top: 240mm or 280mm or 360mm
Drive Bay	3.5"x2 + 2.5"x2		MB Tray: 240mm or 360mm
PCI Slot	Standard x 7 (support vertical installation)		Rear: 120mm
PSU Support	ATX Bottom mounted (280mm)	Max. VGA Length	415mm
Cable Management	36mm	Max. CPU Height	180mm

RK-KU01

- >> Big Full View Sight
- >> Support 360mm AIO
- >> Support VGA Vertical Installation



SPECIFICATIONS

Motherboard Support	ITX, M-ATX(support BTF), ATX(support BTF), E-ATX	Fan Support	Front: N/A
Case Dimension	430(L)x238(W)x493(H)mm		Top: 120mm x 3 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x2,HD Audio,Reset,Power		MB Tray: 120mm x 3
Steel Thickness	0.70-0.80mm		Bottom: 120mm x 3
Front Panel	Tempered Glass (RGB strip is optional)		Rear: 120mm x 1
Left Side Panel	Tool-Free Tempered Glass	Liquid Cooler Support	Top: 240mm or 280mm or 360mm
Drive Bay	3.5"x2 + 2.5"x2		MB Tray: 240mm or 360mm
PCI Slot	Standard x 7 (support vertical installation)		Rear: 120mm
PSU Support	ATX Bottom mounted (280mm)	Max. VGA Length	415mm
Cable Management	36mm	Max. CPU Height	180mm

RK-E221

- >> Support 360mm AIO
- >> Simple and Elegant Design
- >> High Airflow Performance



SPECIFICATIONS

Motherboard Support	ITX, M-ATX, ATX, E-ATX	Fan Support	Front: 120mm x 3 or 140mm x 3
Case Dimension	480(L)x222(W)x465(H)mm		Top: 120mm x 3 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x1, HD Audio, Reset, Power		MB Tray: 120mm x 2
Steel Thickness	0.50~0.60mm		Bottom: 120mm x 3
Front Panel	ABS+Removable Mesh(Wood is optional)		Rear: 120mm x 1
Left Side Panel	Tool-Free Tempered glass	Liquid Cooler Support	Top: 240mm or 280mm or 360mm
Drive Bay	3.5"x2 + 2.5"x1		MB Tray: 240mm
PCI Slot	Standard x 7		Rear: 120mm
PSU Support	ATX Bottom	Max. VGA Length	380mm
Cable Management	21mm	Max. CPU Height	180mm

RK-E222

- >> Support 360mm AIO
- >> Support CPU Cooler 180mm High
- >> High Airflow Performance



SPECIFICATIONS

Motherboard Support	ITX, M-ATX, ATX, E-ATX	Fan Support	Front: 120mm x 3 or 140mm x 3
Case Dimension	480(L)x222(W)x465(H)mm		Top: 120mm x 3 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x1, HD Audio, Reset, Power		MB Tray: 120mm x 2
Steel Thickness	0.50~0.6mm		Bottom: 120mm x 3
Front Panel	ABS+ Plastic Mesh		Rear: 120mm x 1
Left Side Panel	Tool-Free Tempered glass	Liquid Cooler Support	Top: 240mm or 280mm or 360mm
Drive Bay	3.5"x2 + 2.5"x1		MB Tray: 240mm
PCI Slot	Standard x 7		Rear: 120mm
PSU Support	ATX Bottom	Max. VGA Length	380mm
Cable Management	21mm	Max. CPU Height	180mm

RK-E223

- >> Support 360mm AIO
- >> Support CPU Cooler 180mm High
- >> High Airflow Performance



SPECIFICATIONS

Motherboard Support	ITX, M-ATX, ATX, E-ATX	Fan Support	Front:120mm x 3 or 140mm x 3
Case Dimension	480(L)x222(W)x465(H)mm		Top: 120mm x 3 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x1,HD Audio,Reset,Power		MB Tray: 120mm x 2
Steel Thickness	0.50~0.6mm		Bottom: 120mm x 3
Front Panel	ABS+ Iron Mesh		Rear: 120mm x 1
Left Side Panel	Tool-Free Tempered glass	Liquid Cooler Support	Top: 240mm or 280mm or 360mm
Drive Bay	3.5"x2 + 2.5"x1		MB Tray: 240mm
PCI Slot	Standard x 7		Rear: 120mm
PSU Support	ATX Bottom	Max. VGA Length	380mm
Cable Management	21mm	Max. CPU Height	180mm

RK-A430ZF

- >> Dual Top Cover Design
- >> Support 360mm AIO
- >> Support GPU Vertical Installation



SPECIFICATIONS

Motherboard Support	ITX, M-ATX(support BTF), ATX(support BTF), E-ATX	Fan Support	Front: N/A
Case Dimension	443(L) x 277(W) x 426(H)mm		Top: 120mm x 3 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x2,HD Audio,Reset,Power		MB Tray: 120mm x 3
Steel Thickness	0.60~1.30mm		Bottom: 120mm x 3
Front Panel	Tempered Glass (RGB stripe is optional)		Rear: 120mm x 1
Left Side Panel	Slide Tempered Glass	Liquid Cooler Support	Top: 240mm or 280mm or 360mm
Drive Bay	3.5"x2 + 2.5"x3		MB Tray: 240mm or 360mm
PCI Slot	Standard x 7 (support vertical installation)		Rear: 120mm
PSU Support	ATX Top mounted Max. 165mm	Max. VGA Length	420mm
Cable Management	93mm	Max. CPU Height	155mm



CASE
ITX, M-ATX

RK-M430ZF

- >> Dual Top Cover Design
- >> Support 360mm AIO
- Support Long VGA



SPECIFICATIONS

Motherboard Support	ITX, M-ATX	Fan Support	Front: N/A
Case Dimension	443(L)x277(W)x377(H)mm		Top: 120mm x 3 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x2,HD Audio,Reset,Power		MB Tray: 120mm x 2
Steel Thickness	0.60~1.30mm		Bottom: 120mm x 3
Front Panel	Tempered Glass (Wood is optional)		Rear: 120mm x 1
Left Side Panel	Slide Tempered Glass	Liquid Cooler Support	Top: 240mm or 280mm or 360mm
Drive Bay	3.5"x2 + 2.5"x3		MB Tray: 240mm
PCI Slot	Standard x 5		Rear: 120mm
PSU Support	ATX Top mounted Max. 165mm	Max. VGA Length	420mm
Cable Management	93mm	Max. CPU Height	155mm

**CASE****ITX, M-ATX**

- >> Perfect Airflow Performance
- >> Longer Size is Available
- >> Perfect Size Desktop Case

360mm water cooling**280mm water cooling**

SPECIFICATIONS

Motherboard Support	ITX, M-ATX	Fan Support	Front: 120mm x 3
Case Dimension	380(L)x220(W)x410(H)mm		Top: 120mm x 2 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x1, HD Audio, Reset, Power		PSU: 120mm x 2
Steel Thickness	0.50~0.60mm		Rear: 120mm x 1
Front Panel	Mesh/Glass/Wood is Optional		
Left Side Panel	Tempered Glass	Liquid Cooler Support	Top: 240mm or 280mm
Drive Bay	3.5"x2 + 2.5"x1		Rear: 120mm
PCI Slot	Standard x 4	Max. VGA Length	329mm
PSU Support	ATX Bottom mounted Max. 170mm	Max. CPU Height	175mm



CASE
ITX, M-ATX

- >> Perfect Airflow Performance
- >> Support 280mm AIO
- >> Perfect Size Desktop Case



RK-M2406MS



RK-M2406TG



CASE

ITX, M-ATX

- >> Perfect Airflow Performance
- >> Support 280mm AIO
- >> Perfect Size Desktop Case



RK-M2413



RK-2408



CASE

ITX, M-ATX

- >> Perfect Airflow Performance
- >> Support 280mm AIO
- >> Perfect Size Desktop Case



RK-M2420



RK-M2430



CASE
ITX, M-ATX

RK-C102

- >> Real Wood Panel
- >> Support 240mm AIO
- >> Perfect Size Desktop Case



SPECIFICATIONS

Motherboard Support	ITX, M-ATX	Fan Support	Front: 120mm x 2 or 140mm x 2
Case Dimension	359(L)x218(W)x403(H)mm		Top: 120mm x 2 or 140mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x2,HD Audio,Reset,Power		PSU: 120mm x 2
Steel Thickness	0.50~0.60mm		Rear: 120mm x 1
Front Panel	Real wood		
Left Side Panel	Slide Tempered Glass	Liquid Cooler Support	Top: 240mm
Drive Bay	3.5"x1 + 2.5"x1		Rear: 120mm
PCI Slot	Standard x 4	Max. VGA Length	305mm
PSU Support	ATX Bottom mounted Max. 160mm	Max. CPU Height	180mm

RK-H500

- >> Slim Size Desktop Use
- >> Support 240mm AIO
- >> 270° Seaview Design



SPECIFICATIONS

Motherboard Support	ITX, M-ATX	Fan Support	Front: N/A
Case Dimension	360(L)x195(W)x423(H)mm		Top: 120mm x 2
I/O Panel	USB3.0 x 1+USB1.1 x1, HD Audio, Reset, Power		MB Tray: 120mm x 2
Steel Thickness	0.40~0.50mm		PSU: 120mm x 2
Front Panel	Tool-Free Tempered Glass		Rear: 120mm x 1
Left Side Panel	Tempered Glass	Liquid Cooler Support	Top: 240mm or 280mm
Drive Bay	3.5"x1 + 2.5"x1		Rear: 120mm
PCI Slot	Standard x 4	Max. VGA Length	338mm
PSU Support	ATX Bottom mounted Max. 180mm	Max. CPU Height	158mm

CPU LIQUID COOLER 120mm, 240mm, 360mm

RK-SKY92

- >> High Performance
- >> 9.2Inch LCD Screen
- >> Friendly Software



SPECIFICATIONS

TDP	240mm: 260W 360mm: 300W	Radiator Size	240mm: 277*120*27 ± 3(mm) 360mm: 394x120x27 ± 3(mm)
Pump Materials	Aluminum	Radiator Material	Aluminum
Pump Dimension	67*67*46.5(mm)	LCD Size	9.16inch
Pump Speed	2850RPM ± 10%	Fan Size	120x120x25mm
Pump Voltage	DC 12	Fan Airflow	78CFM ± 10%
Pump Rated Power	3W ± 10%	Fan Air Pressure	2.8(Min: 2.1) mmH2O
Bearing Type	Ceramic	Fan Speed	800-2500RPM ± 10%
Capatibility	LGA 115X/17XX/18XX AM4/AM5		

CPU LIQUID COOLER 120mm, 240mm, 360mm

RK-SKY68

- >> High Performance
- >> 6.86Inch LCD Screen
- >> Friendly Software



SPECIFICATIONS

TDP	240mm: 260W	Radiator Size	240mm: 277*120*27 ± 3(mm)
	360mm: 300W		360mm: 394x120x27 ± 3(mm)
Pump Materials	Plastic+ Copper	Radiator Material	Aluminum
Pump Dimension	67*67*46.5(mm)	LCD Size	6.86inch
Pump Speed	2850RPM ± 10%	Fan Size	120x120x25mm
Pump Voltage	DC 12	Fan Airflow	78CFM ± 10%
Pump Rated Power	3W ± 10%	Fan Air Pressure	3.1(Min:2.6)mmH2O
Bearing Type	Ceramic	Fan Speed	800-2500RPM ± 10%
Capatibility	LGA 115X/17XX/18XX	Fan Noise Level	36dB(A)(Max.)
	AM4/AM5		



CPU LIQUID COOLER

120mm, 240mm, 360mm

RK-SKY55

- >> High Performance
- >> 5.5 inch LCD Screen
- >> Friendly Software



SPECIFICATIONS

TDP	240mm: 260W	Radiator Size	240mm: 277*120*27 ± 3(mm)
	360mm: 300W		360mm: 394x120x27 ± 3(mm)
Pump Materials	Plastic+Magnetic	Radiator Material	Aluminum
Pump Dimension	67*67*46.5(mm)	LCD Size	5.5inch
Pump Speed	2850RPM ± 10%	Fan Type	ARGB+PWM
Pump Voltage	DC 12	Fan Size	120x120x25mm
Pump Rated Power	3W ± 10%	Fan Airflow	78CFM ± 10%
Bearing Type	Ceramic	Fan Air Pressure	2.8(Min:2.1)mmH2O
Capatibility	LGA 115X/17XX/18XX	Fan Speed	800-2500RPM ± 10%
	AM4/AM5	Fan Noise Level	36dB(A)(Max.)

CPU LIQUID COOLER 120mm, 240mm, 360mm

RK-SKY40

- >> High Performance
- >> 4.0 inch LCD Screen
- >> Friendly Software



SPECIFICATIONS

TDP	240mm: 260W	Radiator Size	240mm: 277*120*27 ± 3(mm)
	360mm: 300W		360mm: 394x120x27 ± 3(mm)
Pump Materials	Plastic+ARGB Stripe	Radiator Material	Aluminum
Pump Dimension	67*67*46.5(mm)	LCD Size	4.0inch
Pump Speed	2850RPM ± 10%	Fan Type	ARGB+PWM
Pump Voltage	DC 12	Fan Size	120x120x25mm
Pump Rated Power	3W ± 10%	Fan Airflow	78CFM ± 10%
Bearing Type	Ceramic	Fan Air Pressure	2.8(Min:2.1)mmH2O
Capatibility	LGA 115X/17XX/18XX	Fan Speed	800-2500RPM ± 10%
	AM4/AM5	Fan Noise Level	36dB(A)(Max.)

CPU LIQUID COOLER 120mm, 240mm, 360mm

RK-28PH01

- >> High Performance
- >> Simple Cable Management
- >> Friendly Software



SPECIFICATIONS

TDP	240mm: 260W	Radiator Size	240mm: 277*120*27 ± 3(mm)
	360mm: 300W		360mm: 394x120x27 ± 3(mm)
Pump Materials	Full aluminum	Radiator Material	Aluminum
Pump Dimension	67*67*46.5(mm)	LCD Size	2.8inch
Pump Speed	2850RPM ± 10%	Fan Size	120x120x25mm
Pump Voltage	DC 12	Fan Airflow	78CFM ± 10%
Pump Rated Power	3W ± 10%	Fan Air Pressure	2.8(Min:2.1)mmH2O
Bearing Type	Ceramic	Fan Speed	800-2500RPM ± 10%
Capatibility	LGA 115X/17XX/18XX	Fan Noise Level	36dB(A)(Max.)
	AM4/AM5		



CPU LIQUID COOLER

120mm, 240mm, 360mm

RK-28PH02

- >> High Performance
- >> Simple Cable Management
- >> Friendly Software



SPECIFICATIONS

TDP	240mm: 260W	Radiator Size	240mm: 277*120*27 ± 3(mm)
	360mm: 300W		360mm: 394x120x27 ± 3(mm)
Pump Materials	Plastic+ARGB Stripe	Radiator Material	Aluminum
Pump Dimension	67*67*46.5(mm)	LCD Size	2.8inch
Pump Speed	2850RPM ± 10%	Fan Type	ARGB+PWM
Pump Voltage	DC 12	Fan Size	120x120x25mm
Pump Rated Power	3W ± 10%	Fan Airflow	78CFM ± 10%
Bearing Type	Ceramic	Fan Air Pressure	2.8(Min:2.1)mmH2O
Capatibility	LGA 115X/17XX/18XX	Fan Speed	800-2500RPM ± 10%
	AM4/AM5	Fan Noise Level	36dB(A)(Max.)



CPU LIQUID COOLER

120mm, 240mm, 360mm

RK-21PH03

- >> Adjustable to Change Display Modes
- >> Simple Cable Management
- >> Friendly Software



SPECIFICATIONS

TDP	240mm: 260W	Radiator Size	240mm: 277*120*27 ± 3(mm)
	360mm: 300W		360mm: 394x120x27 ± 3(mm)
Pump Materials	Full aluminum	Radiator Material	Aluminum
Pump Dimension	67*67*46.5(mm)	LCD Size	2.8inch
Pump Speed	2850RPM ± 10%	Fan Type	ARGB+PWM
Pump Voltage	DC 12	Fan Size	120x120x25mm
Pump Rated Power	3W ± 10%	Fan Airflow	78CFM ± 10%
Bearing Type	Ceramic	Fan Air Pressure	3.1(Min:2.6)mmH2O
Capatibility	LGA 115X/17XX/18XX	Fan Speed	1200-2500RPM ± 10%
	AM4/AM5	Fan Noise Level	36dB(A)(Max.)



CPU LIQUID COOLER

120mm, 240mm, 360mm

RK-BD360

- >> Simple Cable Management
- >> Temperature Display
- >> Friendly Software



SPECIFICATIONS

TDP	240mm: 250W 360mm: 300W	Radiator Size	240mm: 277*120*27 ± 3(mm) 360mm: 394x120x27 ± 3(mm)
Pump Materials	Plastic+ Copper	Radiator Material	Aluminum
Pump Dimension	75*65*50(mm)	Fan Type	ARGB+PWM
Pump Speed	2800RPM ± 10%	Fan Size	120x120x25mm
Pump Voltage	DC 12	Fan Airflow	73CFM ± 10%
Pump Rated Power	3W ± 10%	Fan Air Pressure	2.5(Min:2:1)mmH2O
Bearing Type	Ceramic	Fan Speed	800-2000RPM ± 10%
Capatibility	LGA 115X/17XX/18XX AM4/AM5	Fan Noise Level	36dB(A)(Max.)



CPU LIQUID COOLER

120mm, 240mm, 360mm

RK-Magic03

- >> High Value Design
- >> Infinity Mirror Lighting
- >> Simple Cable Management



SPECIFICATIONS

TDP	240mm: 250W 360mm: 290W	Radiator Size	240mm: 277*120*27 ± 3(mm) 360mm: 397x120x27 ± 3(mm)
Pump Materials	Plastic+ Copper	Radiator Material	Aluminum
Pump Dimension	67*67*46.5(mm)	Fan Type	ARGB+PWM
Pump Speed	2650RPM ± 10%	Fan Size	120x120x25mm
Pump Voltage	DC 12	Fan Airflow	73CFM ± 10%
Pump Rated Power	3W ± 10%	Fan Air Pressure	2.5(Min:2.1)mmH2O
Bearing Type	Ceramic	Fan Speed	800-2000RPM ± 10%
Capatibility	LGA 115X/17XX/18XX AM4/AM5	Fan Noise Level	36dB(A)(Max.)



CPU AIR COOLER

120mm, 240mm, 360mm

- >> High Performance
- >> Customized Design
- >> Easy Installation



RK-FH500



RK-HJ15



RK-HJ16



RK-HJ21



RK-PH400



RK-PHR03



RK-PHR05

FOR MORE MODELS, PLEASE CONTACT US FOR INFORMATION, THANK YOU.



CASE COOLING FAN

120mm, 140mm



PH028A



PH028B



PH028C



YF025



9PRO



YF023C



YF023A



DA12



YF012



EXCEED

SPECIFICATIONS


Connector&Control	Light: 5V 3Pin ARGB	Speed	800-1800RPM $\pm 10\%$
	Fan: PWM-4Pin	Bearing	Hydraulic Bearing
Airflow	65CFM $\pm 10\%$	Operating Voltage	7~13.2VDC
Air Pressure	2.15mmH ₂ O $\pm 10\%$	Rated Current	0.21(MAX:0.26)
Rated Voltage	12VDC	Noise Level	32dB(A)(Max.)

FOR MORE MODELS, PLEASE CONTACT US FOR INFORMATION, THANK YOU.



CASE COOLING FAN


120mm, 140mm



RB120




RB240

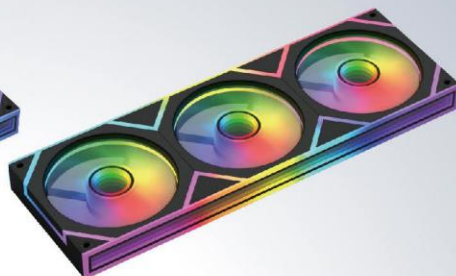

RB360



PLUS BLOCK

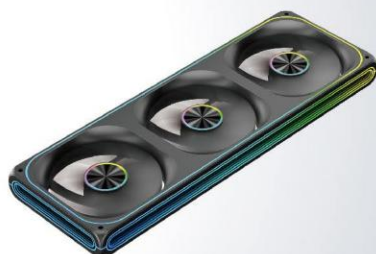

EXCEED360



V2 BLOCK

SPECIFICATIONS

Connector&Control	Light: 5V 3Pin ARGB	Speed	800-1800RPM $\pm 10\%$
	Fan: PWM-4Pin	Bearing	Hydraulic Bearing
Airflow	65CFM $\pm 10\%$	Operating Voltage	7~13.2VDC
Air Pressure	2.15mmH ₂ O $\pm 10\%$	Rated Current	0.21(MAX:0.26)
Rated Voltage	12VDC	Noise Level	32dB(A)(Max.)

FOR MORE MODELS, PLEASE CONTACT US FOR INFORMATION, THANK YOU.



Line



Wechat



Whatsapp

E-mail: lynn@reknowtech.com

Mobile: 0086-13929584783

Address: Room 1931-1932, No.197, Shuixi Road,
Huangpu District, Guangzhou City, China.

Zip Code: 510700

Website: www.reknowtech.com