

BTL GROUP INTERNATIONAL LTD.

WE KNOW WHAT YOU NEED

COMPANY CATALOGUE



Catalogue
Download

2023~2024 | PRODUCTS & SERVICES

CONTACT

WWW.INBTL.COM


English Service : +886-955609297 (TW)

INFO@INBTL.COM

English Service : +86-13925509346 (CN)

ADDRESS

No. 307, Building#2, No. 26 Xiping 3rd Rd., Nancheng District, Dongguan City, Guangdong, China



“Success doesn’t
just find you. You
have to go out and
get it.”

- David Keneath

Welcome to BTL Group International Limited, a leading manufacturer and trading company with over 15 years of experience in the industry. Our Taiwan management team and skilled engineers are dedicated to providing superior quality products and services that meet the evolving needs of our clients. With two state-of-the-art manufacturing factories located in China, we are able to provide fast and efficient delivery of high-quality products. At BTL Group International Limited, we are committed to providing comprehensive solutions that combine innovation, efficiency, and exceptional customer service. We take pride in our ability to work closely with our clients to understand their needs and deliver customized solutions that exceed their expectations. We look forward to working with you to achieve your business goals and help drive your success.

The Contents

Company profile	01
Wireless Charging Solutions	10
Power Banks Solutions	12
Video Converters Solutions	14
Power Bricks Solutions	20
USB2.0 / 3.2 / 4.0 Cable Solutions	24
Audio Video Cable Solutions	36
Serial Cable Solutions	56
Serial RS232 Adapters Solutions	04
USB 2.0 /3.4 Active Cable Solutions	66
PC Power Solutions	70
Adapters Solutions	74
Networking Solutions	86

Who we are

BTL stands out as the top manufacturer and global distributor of accessories in the realm of consumer electronics. Our extensive range of products includes well-established private labels, niche products with high potential, and globally renowned top brands, making us a compelling partner for our customers.

Our clientele encompasses both long-standing and newly established businesses from the wholesale, brick-and-mortar specialty retail, and online retail sectors.


Moreover, we offer comprehensive services to top-tier industrial companies, starting from product development all the way to delivery at their desired location. With multiple locations across Europe and Asia, we deliver to any corner of the world.

Our expertise is unmatched in the industry, and a worldwide

network make us a competent full-service partner and innovation driver for trade and industry.

Many companies appreciate our partnership-based approach and back this up with many years of trusting cooperation.

This has made us one of the industry leaders in Europe and a reliable partner for many first-class distributors on all continents of the world.

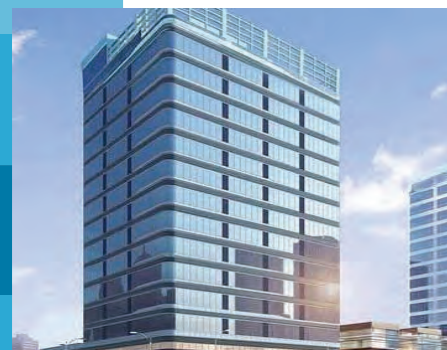

China Office
Dong Guan City

Welcome to our main office location in China, where we provide comprehensive services that meet the needs of businesses of all sizes. Our location is equipped with cutting-edge technology and staffed by highly skilled professionals who are dedicated to providing exceptional service.



Factory Location#1
Houjie Area -Dong Guan

Welcome to our manufacturing factory located in Dongguan, China. Our state-of-the-art facility is equipped with the latest technology and staffed by highly skilled professionals who are committed to delivering the highest quality products and services.



Factory Location#2
Jiangsu Nantong

We are pleased to introduce our manufacturing factory in the dynamic Nantong area of China. Our state-of-the-art facility is staffed with highly skilled professionals who are committed to delivering superior quality products and services, and equipped with the latest technology to ensure efficiency and innovation.

Why Choose us?



15 years of experience

With over 15 years of experience, we have established ourselves as a dependable and capable partner in the industry.



Excellent price-performance

Our team are committed to achieving the best possible performance for you, while ensuring a competitive price point.



Outstanding selection

Our collection features over 12,000 items, offering a captivating blend of new, innovative products and best-selling essentials.



Ordered shipped on time

Our delivery service is global, reliable, and punctual, ensuring timely arrival for customers worldwide.



Comprehensive sales

Effective marketing drives successful sales. Our comprehensive support includes high-resolution photos, clear product descriptions, catalogs, and more, to help you achieve your goals. We are



Trouble-free

We strive to ensure your complete satisfaction at all times. If at any point you are not completely satisfied, we are committed to finding a mutually agreeable solution to address your concerns.

OUR CERTIFICATIONS

OEM SOLUTIONS

We manufacture your custom designed and OEM cables upon request.

Our technical engineers and our logistics team understand the OEM industry's requirements to continuously improve efficiency while also reducing complexity and risk. As a trusted OEM cable supplier,



BUSINESS LICENSE



ROHS



REACH



CE



FCC



PSE



UL



ETL



BSMI



PRODUCTION LINE EQUIPMENTS

We offer an extensive selection of industrial semi-automation and process control cables that facilitate data and signal transmission without interference. Our range of cables caters to various industries, reflecting the diversity of applications for which our cables are used.



LASSER WELDING MACHINE

The automatic HDMI/DP/FCC connector Soldering machine uses pulse heating technology to work, so the temperature control is very accurate. No more hand welding always a perfect soldering no



CABLE WINDING MACHINE

Semi automatic Winding and bunding machine you can winding and tying in one time Four time more faster then old hand method , speed the time and save labor cost.



OPTICAL FIBER LASER MARKINGMACHINE

Laser Engraving Glass, Metal, Plastic surface use for engraving logos , QR codes, customer OEM designs on the product surface



AUTOMATIC CABLE WIRE CUTTING

the wire will be cut and stripped automatically. you always get the same cable size in every order



CONTINUOUS SEALING MACHINE

The product uses an electronic constant temperature mechanism and stepless speed adjusting transmission mechanism and it can seal plastic film or bags of various materials in various shapes. special for OPP bags sealing



LASSER WELDING MACHINE

The automatic USB connector soldering machine adopts a vibration plate to feed loose USB connectors automatically. The worker only needs to simply place the cable into certain working area. No more hand welding



INJECTION MOLDING MACHINE

applicable rubber compound: ABS/PVC/ PA/PP/PC/POM/PBT fluorocarbon and other heavy engineering plastic injection molding for : VGA/SVGA/DVI/HDMI/DP/USB and more



HAND-HELD SCREWDRIVER

The electric or pneumatic screwdriver will lock the screws into the right place of the products. Compared with traditional screwdriver, automatic screwdriver machine just needs one hand to take the screwdriver and align the screw hole, saving the other hand.

TEST LAB INSTRUMENTS

Our team of skilled engineers, with over 15 years of experience in utilizing software for technical drawing, allows us to manufacture products that adhere strictly to the customer's specifications.


To facilitate our research and development, we have equipped ourselves with a range of machinery and equipment, including CAD/CAM, Pro/e, Adobe Illustrator, Corel Draw, REACH, RoHs testing equipment, and temperature equipment.

Our Products have been tested and approved by CE, FCC and Rohs.



INSERTING AND PULLING FORCE

This machine is specially designed to test the bending strength of the lead wire and cable of the plug; the speed is transmitted by the photoelectric sensor to the digital display meter, and the value can be read by directly adjusting the non-polar governor.



TENSILE TEST MACHINE

The machine is equipped with different fixtures to achieve tensile, force, bending, peeling, shearing, tearing, puncture and other mechanical tests. Machines are widely used in factories, universities, scientific research institutions, technical supervision, quality inspection stations and other departments.



PLUG WIRE BENDING TESTING MACHINE

The machine is suitable for a variety of connector plug experiment, adopted the embedded micro-computer measurement and control technology. Insertion force , pullout force , instant force .It also has the function of Auto Zero and Unit Conversion,etc



UNIVERSAL CABLE HARNESS CABLE

Cable tester is used for test and measure wire cable harness,wire harness, like as : auto cable, audio cable, power cable, network cable, telephone cable, USD cable, HDMI cable, video cable, etc. .



PLASTIC DROP BALL IMPACT TEST MACHINE

The machine will test the product on the test bench, the weight of steel balls from the specified drop height free fall on the product, the product impact, and then check the appearance of the product and all aspects of performance.



FLUKE ETHERNET CABLE TESTER

The Ethernet Cable Tester is designed specifically for testing residential copper cables where ensuring certification for specific standards isn't necessary.



VECTOR NETWORK ANALYZER

Real time measurements simultaneously in time domain (TDR/TDT) and frequency domain (S-parameters)
Eye diagram tests without external bit pattern generator
Stressed eye diagram analysis
Impedance analysis
ESD Robustness



QUANTUMDATA 980B


980 48G Protocol Analyzer / Generator module for Testing provides the deep analysis test features necessary to test the development of your
HDMI 1.3/1.4/2.0/2.1
DP 1.2/1.4
MHL 1.2, 1.3, 1.4, 2.0, 2.1 and 2.2
DP 1.4 over USB-C
12G-SDI
HDMI Phy & Protocol Aux



2 in 1 Magnetic fold Wireless Charger

- Material: PC Fireproof Material, ABS, Aluminum, fabric
- Protection: Short Circuit Protection, ovp, OTP, OLP, ocp, Over-charging, Overcurrent, Overvoltage
- Function: Qi, QC2.0, QC3.0, PD 3.0, PD 2.0
- Port:1 x USB Type C
- Input voltage and current: 9V/2A, 9V/1.67A, 12V/2.5A, 12V/5A, 5V/2A
- output voltage and current:
- 12V/1.25A, 9V/2A, 5V/2.4A, 9V/1.2A, 9V/1.67A, 5V/2A, 5V/1A, 5V/3A, 5V/2.1A, 5.1V/2.4A, 5V/1.2A
- Output Power:30W 20W 15W 10W 7.5W 5W (30W will be faster than others)
- For Apple Watch Output Power:3W
- For Airpods Output Power:5W Color: Black
- Compatible: Qi Standard Wireless Receiver

SKU #	Other
ELC0001	black
ELC0002	white

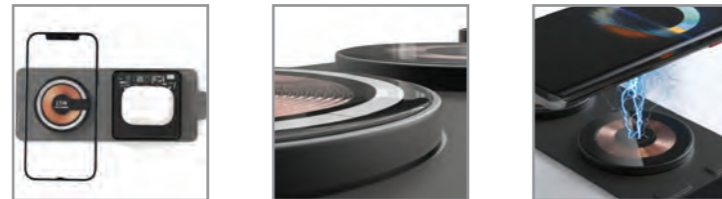

3 in 1 Magnetic Wireless Charging Station

- Material: PC Fireproof Material, ABS, Aluminum, fabric
- Protection: Short Circuit Protection, ovp, OTP, OLP, ocp, Over-charging, Overcurrent, Overvoltage
- Function: Qi, QC2.0, QC3.0, PD 3.0, PD 2.0
- Port:1 x USB Type C
- Input voltage and current: 9V/2A, 9V/1.67A, 12V/2.5A, 12V/5A, 5V/2A
- output voltage and current:
- 12V/1.25A, 9V/2A, 5V/2.4A, 9V/1.2A, 9V/1.67A, 5V/2A, 5V/1A, 5V/3A, 5V/2.1A, 5.1V/2.4A, 5V/1.2A
- Output Power:30W 20W 15W 10W 7.5W 5W (30W will be faster than others)
- For Apple Watch Output Power:3W
- For Airpods Output Power:5W
- Color: Black,White
- Compatible: Qi Standard Wireless Receiver

SKU #	Other
ELC0007	black
ELC0008	white



3 in 1 Magnetic fold Wireless Charger

- Material: PC Fireproof Material, ABS, Aluminum, fabric
- Protection: Short Circuit Protection, ovp, OTP, OLP, ocp, Over-charging, Overcurrent, Overvoltage
- Function: Qi, QC2.0, QC3.0, PD 3.0, PD 2.0
- Port:1 x USB Type C
- Input voltage and current: 9V/2A, 9V/1.67A, 12V/2.5A, 12V/5A, 5V/2A
- output voltage and current:
- 12V/1.25A, 9V/2A, 5V/2.4A, 9V/1.2A, 9V/1.67A, 5V/2A, 5V/1A, 5V/3A, 5V/2.1A, 5.1V/2.4A, 5V/1.2A
- Output Power:30W 20W 15W 10W 7.5W 5W (30W will be faster than others)
- For Apple Watch Output Power:3W
- For Airpods Output Power:5W Color: Black
- Compatible: Qi Standard Wireless Receiver



SKU #	Other
ELC0003	black
ELC0004	white



3 in 1 Magnetic Wireless Charging Station

- Material: PC Fireproof Material, ABS, Aluminum, fabric
- Protection: Short Circuit Protection, ovp, OTP, OLP, ocp, Over-charging, Overcurrent, Overvoltage
- Function: Qi, QC2.0, QC3.0, PD 3.0, PD 2.0
- Port:1 x USB Type C
- Input voltage and current: 9V/2A, 9V/1.67A, 12V/2.5A, 12V/5A, 5V/2A
- output voltage and current:
- 12V/1.25A, 9V/2A, 5V/2.4A, 9V/1.2A, 9V/1.67A, 5V/2A, 5V/1A, 5V/3A, 5V/2.1A, 5.1V/2.4A, 5V/1.2A
- Output Power:30W 20W 15W 10W 7.5W 5W (30W will be faster than others)
- For Apple Watch Output Power:3W
- For Airpods Output Power:5W
- Color: Black,White
- Compatible: Qi Standard Wireless Receiver



SKU #	Other
ELC0009	black
ELC0010	white



2 in 1 Magnetic fold Wireless Charger

- Material: PC Fireproof Material, ABS, Aluminum, fabric
- Protection: Short Circuit Protection, ovp, OTP, OLP, ocp, Over-charging, Overcurrent, Overvoltage
- Function: Qi, QC2.0, QC3.0, PD 3.0, PD 2.0
- Port:1 x USB Type C
- Input voltage and current: 9V/2A, 9V/1.67A, 12V/2.5A, 12V/5A, 5V/2A
- output voltage and current:
- 12V/1.25A, 9V/2A, 5V/2.4A, 9V/1.2A, 9V/1.67A, 5V/2A, 5V/1A, 5V/3A, 5V/2.1A, 5.1V/2.4A, 5V/1.2A
- Output Power:30W 20W 15W 10W 7.5W 5W (30W will be faster than others)
- For Apple Watch Output Power:3W
- For Airpods Output Power:5W Color: Black
- Compatible: Qi Standard Wireless Receiver



SKU #	Other
ELC0005	black
ELC0006	white



Mini Magnetic Portable charger for iWatch

- Type: USB-C Apple Watch Charger
- Color: Black / White (Optional)
- Size(L*W*H): 58.5*29.9*8.7MM
- Compatible Devices: Apple Watch 7 6 5 4 3 2 1 SE
- Connectivity Technology: USB
- Connector Gender: Type-C
- Connector Type: USB-C
- Charging power: standard version: 2.5W (full time about 3.5H-4.0H)
- Input interface: TYPE-C 5V 1A and above (can be connected to laptop, charging head, mobilepower supply, mobile phone charging port)
- Material: flame retardant ABS material; environmentally friendly PU or silicone tail




SKU #	Other
ELC0011	black
ELC0012	white



MagSafe Powerbank

- Input parameters: 5V/3A
- Battery type: polymer lithium ion battery
- Mobile power with cable charging power: 15W
- Mobile power wireless charging output power: 15W
- size 5000mah : 9.6cm*6.4cm*1.4cm
- size 10000mAh: 11.1cm*6.8cm*1.9cm
- Product material: ABS+PC
- color: White,blue,orange


Specification	SKU #	Other
5000mah	ELC0013	pink
5000mah	ELC0014	purple
5000mah	ELC0015	sky blue
10000mA	ELC0016	pink
10000mA	ELC0017	purple
10000mA	ELC0018	sky blue

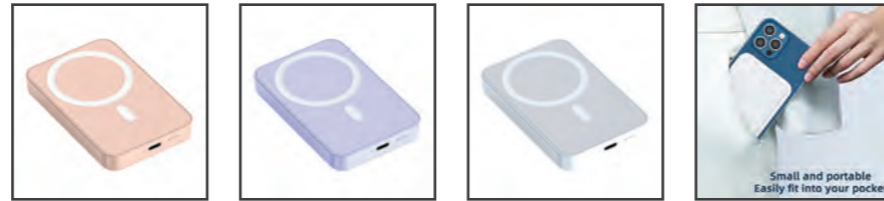

MagSafe Powerbank Transparent Design

- Input parameters: 5V/3A
- Battery type: polymer lithium ion battery
- Wireless Output: 7.5W/10W/15W
- Input interface: Type C (20W)
- Type-C output: 5V 2A 9V 2.2A (20W)
- size 5000mah : 9.6cm*6.4cm*1.4cm
- size 10000mAh: 11.1cm*6.8cm*1.9cm
- Product material: Aluminum alloy + tempered glass

Specification	SKU #
5000mah	ELC0019
10000mA	ELC0020

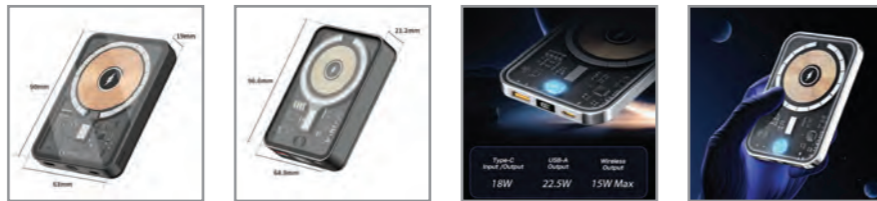

Portable Emergency Key Chain Power Bank

- Mini cute design, no need data cable.
- With key chain more convenient for carrying.
- Flexible plug and charge, easy to use.
- Battery Capacity 1500mAh
- Apple or Type C Android plug for choices, wide compatibility with various smart phones.
- Black or pink color for options.
- Perfect gift for Women, Girl, Wife, Mother, Girlfriend, Sister.
- Output interface : USB Type C , Lightning Connector
- Input interface: Type C

Specifica-	SKU #	Other
Type C	ELC0021	black
Lightning	ELC0022	pink
Type C	ELC0023	black
Lightning	ELC0024	pink



Cute Portable Emergency Power Bank



- Mini cute design, no need data cable.
- Flexible plug and charge, easy to use.
- Battery Capacity 1500mAh
- Apple or Type C Android plug for choices, wide compatibility with various smart phones.
- Perfect gift for Women, Girl, Wife, Mother, Girlfriend, Sister.
- Output interface : USB MicroB, USB Type C , Lightning Connector
- Input interface: Type C

Specification	SKU #	Other
USB MicroB	ELC0025	orange
USB MicroB	ELC0026	green
USB MicroB	ELC0027	blue
USB Type C	ELC0028	orange
USB Type C	ELC0029	green
USB Type C	ELC0030	blue
Lightning	ELC0031	orange
Lightning	ELC0032	green
Lightning	ELC0033	blue




100W 2000mAh Laptop Power Bank

- 2000mAh Large Capacity
- Intelligence IPS Screen on-display power management system visualizes the battery life
- PD 100W USB C port, which enables it fast charges MacBook Pro 16" from 0% to 50% in 41 minutes
- Universal Compatibility: Equipped with 1*USB C port, 1*USB port
- The power bank is compatible with laptops, phones, switch, drones, cameras, and more devices with a DC port, meeting all your charging needs.
- LED for outdoor use.
- Material : PC/ABS
- Dimension: 162*52*38MM
- USB Type A Output: 22.5W
- USB Type C Output: PD 100W , 40W
- 1.5 Hour Recharge Time



Specification	SKU #	Other
2000mAh	ELC0034	black
2000mAh	ELC0035	red
2000mAh	ELC0036	green

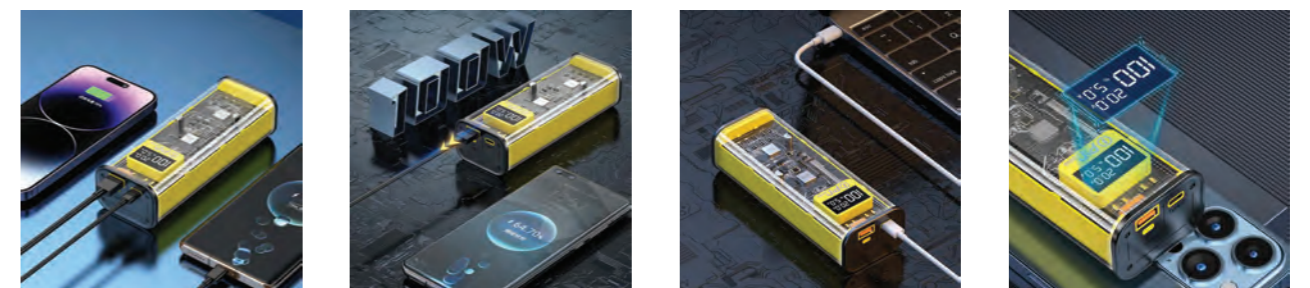



8K
ULTRA HD

USB Type-C HUB Adapter

- HDMI Output resolution: 7680X4320@30Hz
- 1 USB3.2 Ports: Gen1 - 5Gbps
- Chipset IC: VMM6100
- Material: Aluminum Housing
- Color: Space Grey

Specification	SKU #	Packaging
15CM	8K-CHDMI-ADP06	poly bag



8K
ULTRA HD

USB Type-C 10Gbps Multi-Port With Power Delivery

- 1 HDMI2.1 Port : 7680X4320@30Hz
- 2 USB AF 3.2 Ports: Gen2/ 10Gbps
- 1 RJ45 Port :10/100/1000M
- 1 USBC Port : PD3.0 60~100W
- Chipset IC: RTS5459+VMM6100+RTL8153VC
- Material: Aluminum Housing
- Color: Space Grey

Specification	SKU #	Packaging
15CM	8K-CHDMI-ADP09	poly bag



8K
ULTRA HD

USB Type-C 10Gbps Multi-Port With Power Delivery

- 3 USB3.2 AF Ports: Gen2/ 10Gbps
- 1 RJ45 Port :10/100/1000M
- 1 USBC Port : PD3.0 60~100W
- Chipset IC: RTS5459+VMM6100+RTL8153VC
- Material: Aluminum Housing
- Color: Space Grey

Specification	SKU #	Packaging
15CM	8K-CHDMI-ADP10	poly bag



8K
ULTRA HD

HDMI Splitter Cable (4K@60Hz)

- 2 HDMI Port : 3840*2160@60Hz
- 1 USB-C Port for Power
- Chipset IC: GSV2001
- Does not support MST function
- Material: Aluminum Housing
- Color: Space Grey

Specification	SKU #	Packaging
15CM	8K-HDMISPL-01	poly bag



8K
ULTRA HD

USB Type-C to 2 x HDMI

- Dual Video Output : Support 4K@60Hz
- Single Video Output Supports 8K@60Hz
- HDMI2.1 Port 1 Support : 7680X4320@60Hz
- HDMI2.1 Port 2 Support : 3840X2160@60Hz
- Chipset IC: CCG2+VMM6210+RTD2172A
- Material: ABS Plastic
- Color: Black

Specification	SKU #	Packaging	Other
15CM	8K-CHDMI-ADP08	poly bag	black



USB Type-C to Display Port Cable

- Display Port Output resolution: 3840X2160@60Hz
- Chipset IC: RTD2172AU
- Material: Aluminum Housing
- Color: Space Grey

Specification	SKU #	Packaging
1M	4K-HDMIDP1-1M	poly bag
2M	4K-HDMIDP1-2M	poly bag
3M	4K-HDMIDP1-3M	poly bag



USB Type-C to HDMI Cable

- DVI Output resolution: 3840X2160@60Hz
- Chipset IC: VMM7100
- Material: Aluminum Housing
- Color: Space Grey

Specification	SKU #	Packaging
1M	4K-HDMIDP2-1M	poly bag
2M	4K-HDMIDP2-2M	poly bag
3M	4K-HDMIDP2-3M	poly bag



USB Type-C to VGA Cable

- VGA Output resolution: 3840X2160@60Hz
- Chipset IC: RTD2169
- Material: Aluminum Housing
- Color: Space Grey

Specification	SKU #	Packaging
1M	4K-HDMIDP3-1M	poly bag
2M	4K-HDMIDP3-2M	poly bag
3M	4K-HDMIDP3-3M	poly bag



HDMI to VGA Cable

- HDMI Output resolution: 1920x1200@60Hz and 1080P@60Hz
- Chipset IC: CS5210
- Material: PVC Molded
- Color: Black

Specification	SKU #	Packaging
1M	HVC010	poly bag
1.8M	HVC018	poly bag
3M	HVC030	poly bag



HDMI to DVI Cable

- HDMI Output resolution: 1920x1200@60Hz and 1080P@60Hz
- Chipset IC: CS5210
- Material: PVC Molded
- Color: Black

Specification	SKU #	Packaging
1M	DHC010	poly bag
1.8M	DHC018	poly bag
3M	DHC030	poly bag



8K
ULTRA HD

USB Type-C To HDMI CABLE

- HDMI Max Resolution :7680X2160@60Hz
- Chipset IC: VMM7100
- Material: Aluminum Housing
- Color: Space Grey

Specification	SKU #	Packaging
1M	8K-CHDMI-1MA	poly bag
2M	8K-CHDMI-2MA	poly bag
3M	8K-CHDMI-3MA	poly bag



8K
ULTRA HD

HDMI to DP Adapter With USB for Power

- Input: HDMI Plug
- Output : DisplayPort Port:3840X2160@120Hz/7680X4320@30Hz
- Chipset IC: LT6711GX+IX1533
- Material: Aluminum Housing
- Color: Space Grey

Specification	SKU #	Packaging
15CM	8K-HDMIDP-ADP	poly bag



8K
ULTRA HD

HDMI to DP With USB for Power

- HDMI to DP Cable with USB for Power Supply
- Input: HDMI Plug
- Output : DisplayPort Port:3840X2160@120Hz/7680X4320@30Hz
- Chipset IC: LT6711GX+IX1533
- Material: Aluminum Housing
- Color: Space Grey

Specification	SKU #	Packaging
1M	8K-HDMIDP-1M	poly bag
2M	8K-HDMIDP-2M	poly bag
3M	8K-HDMIDP-3M	poly bag



8K
ULTRA HD

USB Type-C To HDMI Adapter

- 1 HDMI Port : 7680X2160@60Hz
- 1 USB C Port : PD3.0 60~100W
- Chipset IC: RTD2173+RTS5459
- Material: Aluminum Housing
- Color: Space Grey

Specification	SKU #	Packaging
15CM	8K-CHDMI-ADP01	poly bag



8K
ULTRA HD

USB TYPE-C HUB Adapter

- 1 HDMI Port : 7680X2160@30Hz
- 1 USB3.2 Ports: Gen1 - 5Gbps
- 1 PD3.0 Port: 100W
- Chipset IC: RTD2173-RTS5459
- Material: Aluminum Housing
- Color: Space Grey

Specification	SKU #	Packaging
15CM	8K-CHDMI-ADP02	poly bag



8K
ULTRA HD

USB Type-C 10Gbps Multi-Port Hub W/ Power Delivery

- 1 HDMI2.1 Port : 7680X4320@30Hz
- 1 USB3.2 AF Ports: Gen2/ 10Gbps
- 2 USB C 3.2 Ports: Gen2 / 10Gbps
- 1 USB C Port : PD3.0 60~100W
- Chipset IC: RTS5459+VMM7100+GL3590S
- Material: Aluminum Housing
- Color: Space Grey

Specification	SKU #	Packaging
15CM	ELC0046	poly bag



8K
ULTRA HD

3 in 1 USB Type-C 8K Video Adapter

- Dual Video Output : Support 4K@60Hz
- Single Video Output Supports 8K@60Hz
- 1 HDMI2.1 Port : 7680X4320@60Hz
- 1 DisplayPort1.4 Port: 7680X4320@60Hz
- 1 USB C Port : PD3.0 60~100W
- Chipset IC: RTS5459+VMM6210
- Material: Aluminum Housing
- Color: Space Grey

Specification	SKU #	Packaging
15CM	8K-CHDMI-ADP03	poly bag



8K
ULTRA HD

USB Type-C 12 to 1 Docking Station

- 1*HDMI/F-1 4K@60Hz Win MST;IOS SST
- 1*HDMI/F-2 4K@60Hz Win MST;IOS SST (separate output supports 8K@30Hz, dual HDMI output together supports 4K@60Hz)
- 1 RJ45 Port : 2.5G
- 1 USB3.2 C/F GEN2-10Gbps
- 2 USB-C/F3.0 5Gbps
- 2 USB3.2 C/F GEN2-10Gbps
- 1 USB3.2 A/F GEN2-10Gbps
- 2 SD/TF 4.0 Card reader Slot Speed 218M/s
- 1 PD Port: 100W* Chipset IC:RTS5459+GL3590S+GL3510+GL3231S+FE1.1S+VMM6210+RTD2172AU+RTL8156B
- Material: Aluminum Housing
- Color: Space Grey

Specification	SKU #	Packaging
15CM	8K-CHDMI-ADP12	poly bag



8K
ULTRA HD

USB Type-C 8 to 1 Docking Station

- Dual Video Output : Support 4K@60Hz
- Single Video Output Supports 8K@60Hz
- 1 HDMI2.1 Port : 7680X4320@60Hz
- 1 DisplayPort1.4 Port: 7680X4320@60Hz
- 2 USB3.2 Ports: Gen2/ 10Gbp
- 1 RJ45 Port :10/100/1000M
- 1 USB C USB3.2 Gen1/ 5Gbps
- 1 3.5mm Port : Audio
- 1 USB C Port : PD3.0 60~100W
- Chipset IC: VL102+VL160+UPD720210+VMM6210+FE8.1S+AX88179A+KT0200
- Material: Aluminum Housing
- Color: Space Grey



8K
ULTRA HD

Display Port 1.4 to HDMI Cable

- HDMI Output resolution: 7680X4320@60Hz
- Chipset IC: VMM7100
- Material: Aluminum Housing
- Color: Space Grey

Specification	SKU #	Packaging
1M	8K-CDP-1MA	poly bag
2M	8K-CDP-2MA	poly bag
3M	8K-CDP-3MA	poly bag

3 in 1 USB Hub Type-C to Mini DisplayPort

- MiniDP Output: 8K@60Hz, 4K@60Hz
- HDR: Support
- USB2.0 Type C Male
- USB2.0 Type A Female (Option 1)
- USB2.0 Type C Female (Option 2)
- USB Type C Female : PD Charging Power: Up to 100W
- Material: Aluminum Alloy
- Product Dimension: 53*24*10mm(L*W*H)
- Color: Grey
- Plug and play
- Support System: Windows, Android, Mac OS



Specification	SKU #	Packaging
Type A Female	AD2001	poly bag
Type C Female	AD2002	poly bag



3 in 1 USB Hub Type-C to DisplayPort

- DP Output: 8K@60Hz, 4K@60Hz
- HDR: Support
- USB2.0 Type C Male
- USB2.0 Type A Female (Option 1)
- USB2.0 Type C Female (Option 2)
- USB Type C Female : PD Charging Power: Up to 100W
- Material: Aluminum Alloy
- Product Dimension: 53*24*10mm(L*W*H)
- Color: Grey
- Plug and play
- Support System: Windows, Android, Mac OS



Specification	SKU #	Packaging	Other
Type A Female	AD2003	poly bag	white
Type C Female	AD2004	poly bag	white



3 in 1 USB Hub Type-C to HDMI

- HDMI Output: 4K@60Hz
- HDR: Support
- USB2.0 Type C Male
- USB2.0 Type A Female (Option 1)
- USB2.0 Type C Female (Option 2)
- USB Type C Female : PD Charging Power: Up to 100W
- Material: Aluminum Alloy
- Product Dimension: 53*24*10mm(L*W*H)
- Color: Grey
- Plug and play
- Support System: Windows, Android, Mac OS



Specification	SKU #	Packaging	Other
Type A Female	AD2005	poly bag	white
Type C Female	AD2006	poly bag	white



USB Type-C to HDMI

- HDMI Output: 4K@60Hz
- HDR: Support
- Material: Aluminum Alloy
- Product Dimension: 33*24*10mm(L*W*H)
- Color: Grey
- Plug and play
- Support System: Windows, Android, Mac OS



SKU #
AD2007

USB Type-C to VGA

- VGA Output: 1080P@60Hz
- Material: Aluminum Alloy
- Product Dimension: 33*25*14mm(L*W*H)
- Color: Grey
- Plug and play
- Support System: Windows, Android, Mac OS



SKU #
AD2009

USB Type-C to RJ45

- Supports 10/ 100/ 1000 Mbps
- Material: Aluminum Alloy
- Product Dimension: 44*25*14mm(L*W*H)
- Color: Grey
- Plug and play
- Support System: Windows, Android, Mac OS



SKU #
AD2011

USB Type-C to Type AF

- USB3.2 USB A Female 10Gbps Speed
- Material: Aluminum Alloy
- Product Dimension: 44*25*14mm(L*W*H)
- Color: Grey
- Plug and play
- Support System: Windows, Android, Mac OS



SKU #
AD2013

USB Type-C to DisplayPort

- DP Output: 8K@60Hz, 4K@60Hz
- HDR: Support
- Material: Aluminum Alloy
- Product Dimension: 33*24*10mm(L*W*H)
- Color: Grey
- Plug and play
- Support System: Windows, Android, Mac OS



SKU #
AD2008

USB Type-C to Mini DP

- MiniDP Output: 8K@60Hz, 4K@60Hz
- HDR: Support
- Material: Aluminum Alloy
- Product Dimension: 33*24*10mm(L*W*H)
- Color: Grey
- Plug and play
- Support System: Windows, Android, Mac OS



SKU #
AD2010

MiniDP to USB Type C

- MiniDP Output: 8K@60Hz, 4K@60Hz
- Material: Aluminum Alloy
- Product Dimension: 40*24*11mm(L*W*H)
- Color: Grey
- Plug and play
- Support System: Windows, Android, Mac OS



SKU #
AD2012



EU-Power Strip Tower with USB Ports



- Cable Length: 1.5m/3.0m
- 11 European Outlets + Switch On/Off
- 2 USB-A /2 USB Type-C ports
- Total USB Output : 5V/3.5A, 17.5W Max
- Single USB-C Output: 5V/3A
- Single USB-A Output: 5V/2.4A
- Material: ABS & PC Fire Resistant Plastic
- Electrical Rating: 100-230V 50-60Hz, 16A 3680W
- Product Dimension: 221*109*82mm(L*W*H)
- Using Temperature: -10C~40C
- Power cord specification: 3x0.75mm²



SKU #	Other
EU-7301CR	1.5m
EU-7301CR2	3.0m

UK-Power Strip Tower with USB Ports



- Cable Length: 1.5m/3.0m
- 11 UK Outlets + Switch On/Off
- 2 USB-A /2 USB Type-C ports
- Total USB Output : 5V/3.4A
- Single USB-C Output: 5V/3A
- Single USB-A Output: 5V/2.4A
- Material: ABS & PC Fire Resistant Plastic
- Electrical Rating: 100-250V 50-60Hz 10A 3680WW
- Product Dimension: 221*109*82mm(L*W*H)
- Using Temperature: -10C~40C
- Power cord specification: 3x0.75mm²



SKU #	Other
UK-7301CR	1.5m
UK-7301CR2	3.0m

US-Power Strip Tower with USB Ports



- Cable Length: 1.5m/3.0m
- 11 US Outlets + Switch On/Off
- 2 USB-A /2 USB Type-C ports
- Total USB Output : 5V/3.4A
- Single USB-C Output: 5V/3A
- Single USB-A Output: 5V/2.4A
- Material: ABS & PC Fire Resistant Plastic
- Electrical Rating: 100-250V 50-60Hz 13A
- Product Dimension: 221*109*82mm(L*W*H)
- Using Temperature: -10C~40C
- Power cord specification: 3x0.75mm²



SKU #	Other
US-7301CR	1.5m
US-7301CR2	3.0m

EU Power Cube Socket



- Number of jacks: 4 power jacks for models
- High temperature resistant PC/ABS material, reject any safety hazards
- Protection: overvoltage protection/overcurrent protection/anti-static protection/anti-short circuit protection/anti-surge protection
- Input:100-250v. 50/60HZ
- Rated Power: 3680W
- USB Total output: 5V 3.1A 15W Max
- Output port : 4 Socket + 2* USB port + Type C + Switch On/Off
- Rated Power: 3680W
- Dimensions: 76x76x76 mm

Specification	SKU #	Packaging
EU	A01C	poly bag

EU Power Cube Socket Strip



- Number of jacks: 4 power jacks for models
- High temperature resistant PC/ABS material, reject any safety hazards
- Protection: overvoltage protection/overcurrent protection/anti-static protection/anti-short circuit protection/anti-surge protection
- Input:100-250v. 50/60HZ
- Rated Power: 3680W
- USB Total output: 5V 3.1A 15W Max
- Output port : 4 Socket + 2* USB port + Type C +Switch On/Off
- Rated Power: 3680W
- Power cord length: 1.5 meters
- Dimensions: 76x76x76 mm

Specification	SKU #	Packaging
EU	A03C	poly bag


US Power Cube Socket



- Number of jacks: 4 power jacks for models
- High temperature resistant PC/ABS material, reject any safety hazards
- Protection: overvoltage protection/overcurrent protection/anti-static protection/anti-short circuit protection/anti-surge protection
- Input:100-250v. 50/60HZ
- Rated Power: 3680W
- USB Total output: 5V 3.1A 15W Max
- Output port : 4 Socket + 2* USB port + Type C +Switch On/Off
- Rated Power: 3680W
- Dimensions: 76x76x76 mm

Specification	SKU #	Packaging
US	A02C	poly bag

US Power Cube Socket Strip

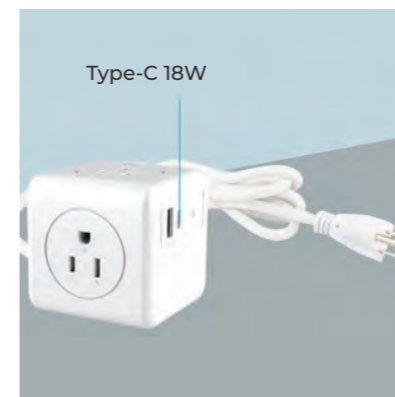

- Number of jacks: 4 power jacks for models
- High temperature resistant PC/ABS material, reject any safety hazards
- Protection: overvoltage protection/overcurrent protection/anti-static protection/anti-short circuit protection/anti-surge protection
- Input:100-250v. 50/60HZ
- Rated Power: 3680W
- USB Total output: 5V 3.1A 15W Max
- Output port : 4 Socket + 2* USB port + Type C +Switch On/Off
- Rated Power: 3680W
- Power cord length: 1.5 meters
- Dimensions: 76x76x76 mm

Specification	SKU #	Packaging
US	A04C	poly bag

20W PD Wall Charger



- Smart IC Solution
- Color: white + gray, pure PC material shell
- Input: 00-240V 50/60Hz 0.5A
- Single C port output: 5V/3A 9V/2.78A 12V/2.1A
- Certification ETL,FCC,CE
- Plugs Available : US / EU / UK / AU

Specification	SKU #	Packaging	Other
20W US	ELC0037	poly bag	white
20W EU	ELC0038	poly bag	white
20W UK	ELC0039	poly bag	white
20W AU	ELC0040	poly bag	white



35W Dual Wall Charger



- Smart IC Solution
- Color: white + gray, pure PC material shell
- Input: 100-240V 50-60Hz 0.3A
- Single C port output: 5V/3A 9V/2.78A 12V/2.1A
- Dual C port simultaneous output: 5V/3A
- Certification ETL,FCC,CE
- Plugs Available : US / EU / UK

Specification	SKU #	Packaging	Other
35W US	ELC0041	poly bag	white
35W EU	ELC0042	poly bag	white
35W UK	ELC0043	poly bag	white



GaN 20W Wall Charger

- GaN Solution (Gallium Nitride)
- Color: white + gray, pure PC material shell
- Input: 90V-264V-50-60Hz 1.2A
- Output USB:5V/3A, 9V/2.22A, 12V/1.67A
- Certification CCC,ETL,FCC,CE,PSE
- Plugs Available : US / EU / CN / JP / TW
- Compatibility Protocol :PD3.0,PD2.0,QC2.0,QC3.0,,AFC,FCP

SKU #	Packaging	Other
ELC0044	poly bag	white



GaN 35W Dual Wall Charger

- GaN Solution (Gallium Nitride)
- Color: white + gray, pure PC material shell
- Input: 100-240Vac 50/60Hz. 0.8A Max
- Output USB-C1 + C2: 5V/3A , 9V/3A , 12V/2.9A , 15V/2.33A , 20V /1.75A 35W Max
- Total Output USB-C1+USB-C2: : 17.5W + 17.5W , 27.5W+7.5W
- Certification ETL,FCC,CE,CCC,PSE (in process)
- Plugs Available : US / EU / UK / AU / CN / JP / TW / KR
- Compatibility Protocol : PD3.0,PD2.0,QC2.0,QC3.0,,AFC,FCP,PPS

SKU #	Packaging	Other
ELC0045	poly bag	white

GaN 35W Single Wall Charger



- GaN Solution (Gallium Nitride)
- Color: white + gray, pure PC material shell
- Input: 90V-264V-50-60Hz 1.2A
- Single C port output: 5V/3.0A, 9V/3A, 15V/3A, 20V/2..25A, PPS:3.3-20V/2.25A
- Certification ETL,FCC,CE
- Plugs Available : US / EU / UK / AU / CN / JP / TW / KR
- Compatibility Protocol : PD3.0,PD2.0,QC2.0,QC3.0,QC4.0+,AFC,FCP,PPS

SKU #	Packaging	Other
ELC004	poly bag	black/white

GaN 35W Dual Wall Charger



- GaN Solution (Gallium Nitride)
- Color: white + gray, pure PC material shell
- Input: 90V-264V-50-60Hz 1.2A
- Output USB-C1 + C2: 5V=3.0A, 9V/3A, 12V/3A, 15V/3A, 20.3V/2.25A
- Total Output USB-C1+USB-C2: 25W+20W
- Certification ETL,FCC,CE,CCC,PSE
- Plugs Available : US / EU / UK / AU / CN / JP / TW / KR
- Compatibility Protocol : PD3.0,PD2.0,QC2.0,QC3.0,QC4.0+,AFC,FCP,PPS

SKU #	Packaging	Other
ELC0046	poly bag	black/white

GaN 47W Dual Wall Charger



- GaN Solution (Gallium Nitride)
- Color: white + gray, pure PC material shell
- Input: 90V-264V-50-60Hz 1.2A
- Output USB-C1: 5V/3.0A, 9V/3A, 12V/3A, 15V/3A, 20.3V/2.31A
- Output USB-C2: 5V=3.0A, 9V/3A, 12V/3A, 15V/3A, 20.3V/2.31A
- Total Output USB-C1+USB-C2: PD27W+PD20W
- Certification ETL,FCC,CE,CCC,PSE,CB
- Plugs Available : US / EU / UK / AU / CN / JP / TW / KR
- Compatibility Protocol : PD3.0,PD2.0,QC2.0,QC3.0,QC4.0+,AFC,FCP,PPS

SKU #	Packaging	Other
ELC0047	poly bag	black/white



GaN 67W Dual Wall Charger

- GaN Solution (Gallium Nitride)
- Color: white + gray, pure PC material shell
- Input: 90V-264V-50-60Hz 1.2A
- Output USB-C1: 5V/3.0A, 9V/3A, 12V/3A, 15V/3A, 20.3V/3.3A
- Output USB-C2: 5V=3.0A, 9V/3A, 12V/3A, 15V/3A, 20.3V/3.3A
- Total Output USB-C1+USB-C2: PD47W+PD20W
- Certification ETL,FCC,CE,CCC,PSE,CB
- Plugs Available : US / EU / UK / AU / CN / JP / TW / KR
- Compatibility Protocol : PD3.0,PD2.0,QC2.0,QC3.0,QC4.0+,AFC,FCP,PPS

SKU #	Packaging	Other
ELC0048	poly bag	black/white



GaN 100W Single Wall Charger

- GaN Solution (Gallium Nitride)
- Color: white + gray, pure PC material shell
- Input: 100-240V 50/60Hz. 2A Max
- Single C port output: 5V/3A , 9V/3A , 12V/3A , 15V/3A , 20V/5A
- Dual C port simultaneous output: 5V/3A
- Certification ETL,FCC,CE,CCC,PSE
- Plugs Available : US / EU / UK / AU / CN / JP / TW / KR
- Compatibility Protocol : PD3.0,PD2.0,QC2.0,QC3.0,QC4.0+,AFC,FCP,PPS

SKU #	Packaging	Other
ELC0049	poly bag	black/white

480Mbps **USB2.0 AM to AM Cable**

USB 2.0 male (type A) > USB 2.0 male (type A)

- Supports USB Protocol 480Mbps data transfer rate
- Contains shielded cable to minimize interference
- Strong moulded stress relief to protect the connector



Length	SKU #	Packaging
0.50 meter	U20001	poly bag
1.00 meter	U20002	poly bag
2.00 meter	U20003	poly bag
3.00 meter	U20004	poly bag

480Mbps **USB2.0 AM to AF Cable**

USB 2.0 male (type A) > USB 2.0 female (type A)

- Supports USB Protocol 480Mbps data transfer rate
- Contains shielded cable to minimize interference
- Strong moulded stress relief to protect the connector



Length	SKU #	Packaging
0.50 meter	U20005	poly bag
1.00 meter	U200	poly bag
2.00 meter	U200	poly bag
3.00 meter	U200	poly bag

480Mbps **USB2.0 AM to BM Cable**

USB 2.0 male (type A) > USB 2.0 male (type B)

- Supports USB Protocol 480Mbps data transfer rate
- Contains shielded cable to minimize interference
- Strong moulded stress relief to protect the connector



Length	SKU #	Packaging
0.50 meter	U20006	poly bag
1.00 meter	U20007	poly bag
2.00 meter	U20008	poly bag
3.00 meter	U20009	poly bag

480Mbps **USB2.0 AM to Mini 5pin Cable**

USB 2.0 male (type A) > USB 2.0 mini 5Pin (type B)

- Supports USB Protocol 480Mbps data transfer rate
- Contains shielded cable to minimize interference
- Strong moulded stress relief to protect the connector



Specification	SKU #	Packaging
0.50 meter	U20010	poly bag
1.00 meter	U20011	poly bag
2.00 meter	U20012	poly bag
3.00 meter	U20013	poly bag

480Mbps **USB2.0 AM to Micro B Cable**

USB 2.0 male (type A) > USB 2.0 micro (type B)

- Supports USB Protocol 480Mbps data transfer rate
- Contains shielded cable to minimize interference
- Strong moulded stress relief to protect the connector



Length	SKU #	Packaging
0.50 meter	U20014	poly bag
1.00 meter	U20015	poly bag
2.00 meter	U20016	poly bag
3.00 meter	U20017	poly bag

480Mbps **USB2.0 AM to CM Cable**

USB 2.0 male (type A) > USB 2.0 USB-C™ male

- Supports USB Protocol 480Mbps data transfer rate
- Contains shielded cable to minimize interference
- Strong moulded stress relief to protect the connector
- USB-C™ connector can be used on both sides



Length	SKU #	Packaging
0.50 meter	U20018	poly bag
1.00 meter	U20019	poly bag
2.00 meter	U20020	poly bag
3.00 meter	U20021	poly bag

480Mbps **USB2.0 CM to CM Cable**

USB 2.0 USB-C™ male > USB 2.0 USB 2.0 USB-C™ male

- Supports USB Protocol 480Mbps data transfer rate
- Contains shielded cable to minimize interference
- Strong moulded stress relief to protect the connector
- USB-C™ connector can be used on both sides



Length	SKU #	Packaging
0.50 meter	U20022	poly bag
1.00 meter	U20023	poly bag
2.00 meter	U20024	poly bag
3.00 meter	U20025	poly bag

480Mbps **USB2.0 CM to CF Cable**

USB 2.0 USB-C™ male > USB 2.0 USB-C™ female

- Supports USB Protocol 480Mbps data transfer rate
- Contains shielded cable to minimize interference
- Strong moulded stress relief to protect the connector
- USB-C™ connector can be used on both sides



Length	SKU #	Packaging
0.50 meter	U20026	poly bag
1.00 meter	U20027	poly bag
2.00 meter	U20028	poly bag
3.00 meter	U20029	poly bag

480Mbps

USB2.0 CM to AF Cable

USB 2.0 USB-C™ male > USB 2.0 female (type A)

- Supports USB Protocol 480Mbps data transfer rate
- Contains shielded cable to minimize interference
- Strong moulded stress relief to protect the connector
- USB-C™ connector can be used on both sides



Length	SKU #	Packaging
0.50 meter	U20030	poly bag
1.00 meter	U20031	poly bag
2.00 meter	U20032	poly bag
3.00 meter	U20033	poly bag

480Mbps

USB2.0 CM to MiniB Cable

USB 2.0 USB-C™ male > USB 2.0 micro (type B)

- Supports USB Protocol 480Mbps data transfer rate
- Contains shielded cable to minimize interference
- Strong moulded stress relief to protect the connector
- USB-C™ connector can be used on both sides



Length	SKU #	Packaging
0.50 meter	U20034	poly bag
1.00 meter	U20035	poly bag
2.00 meter	U20036	poly bag
3.00 meter	U20037	poly bag

480Mbps

USB2.0 CM to MicroB Cable

USB 2.0 USB-C™ male > USB 2.0 mini (type B)

- Supports USB Protocol 480Mbps data transfer rate
- Contains shielded cable to minimize interference
- Strong moulded stress relief to protect the connector
- USB-C™ connector can be used on both sides



Length	SKU #	Packaging
0.50 meter	U20038	poly bag
1.00 meter	U20039	poly bag
2.00 meter	U20040	poly bag
3.00 meter	U20041	poly bag

480Mbps

USB2.0 CM to BM Cable

USB 2.0 USB-C™ male > USB 2.0 male (type B)

- Supports USB Protocol 480Mbps data transfer rate
- Contains shielded cable to minimize interference
- Strong moulded stress relief to protect the connector
- USB-C™ connector can be used on both sides



Length	SKU #	Packaging
0.50 meter	U20042	poly bag
1.00 meter	U20043	poly bag
2.00 meter	U20044	poly bag
3.00 meter	U20045	poly bag


LED flowing Light Up USB Cable For Type-C

USB 2.0 (type A) male > USB 2.0 USB-C™ male

- Supports USB Protocol 480Mbps data transfer rate
- Light flows when charging, LED light-up glow, electroluminescent USB Cable.
- Electroluminescent technology, high brightness, not dazzling.
- 5V/2.4A
- Colors: Green,Blue,Red,Rainbow
- Length: 1 meter



Length	SKU #	Color	Packaging
1.00 meter	U20060	Green	poly bag
1.00 meter	U20061	Blue	poly bag
1.00 meter	U20062	Red	poly bag
1.00 meter	U20063	Rainbow	poly bag

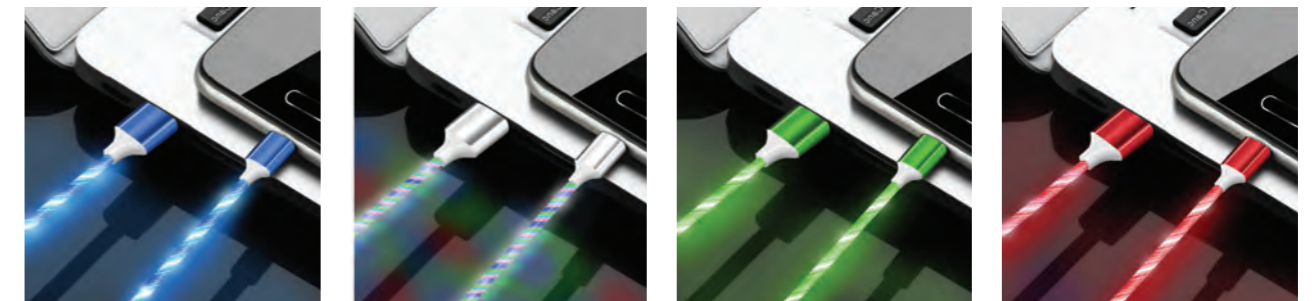

PD Fast Charging Data Cable

USB 2.0 USB-C™ male > USB 2.0 USB-C™ male

- Supports USB Protocol 480Mbps data transfer rate
- Support :5V/100W
- downward compatible to USB 2.0 and 1.1
- Cable Length:1.2M



Length	SKU #	Packaging
1.20 meter	U20070	poly bag



5Gbps

USB 3.2 AM to AM Cable

USB 3.2 male (type A) > USB 3.2 male (type A)

- USB3.2 Gen1 (USB3.0)
- SuperSpeed data transmissions up to 5 Gbps – ten times faster than USB 2.0
- Downward compatible to USB 2.0 and 1.1



Length	SKU #	Packaging
0.50 meter	U30001	poly bag
1.00 meter	U30002	poly bag
2.00 meter	U30003	poly bag
3.00 meter	U30004	poly bag

5Gbps

USB 3.2 AM to AF Cable

USB 3.2 male (type A) > USB 3.2 female (type A)

- USB3.2 Gen1 (USB3.0)
- SuperSpeed data transmissions up to 5 Gbps – ten times faster than USB 2.0
- Downward compatible to USB 2.0 and 1.1



Length	SKU #	Packaging
0.50 meter	U30005	poly bag
1.00 meter	U30006	poly bag
2.00 meter	U30007	poly bag
3.00 meter	U30008	poly bag

5Gbps

USB 3.2 AM to BM Cable

USB 3.2 male (type A) > USB 3.2 male (type B)

- USB3.2 Gen1 (USB3.0)
- SuperSpeed data transmissions up to 5 Gbps – ten times faster than USB 2.0
- Downward compatible to USB 2.0 and 1.1



Length	SKU #	Packaging
0.50 meter	U30009	poly bag
1.00 meter	U30010	poly bag
2.00 meter	U30011	poly bag
3.00 meter	U30012	poly bag

5Gbps

USB 3.2 AM to Micro B Cable

USB 3.2 male (type A) > USB 3.2 micro (type B)

- USB3.2 Gen1 (USB3.0)
- SuperSpeed data transmissions up to 5 Gbps – ten times faster than USB 2.0
- Downward compatible to USB 2.0 and 1.1



Length	SKU #	Packaging
0.50 meter	U30013	poly bag
1.00 meter	U30014	poly bag
2.00 meter	U30015	poly bag
3.00 meter	U30016	poly bag

5Gbps

USB 3.2 CM to CM Cable

USB 3.2 USB-C™ male >USB-C™ male

- USB3.2 Gen1 (USB3.0)
- SuperSpeed data transmissions up to 5 Gbps – ten times faster than USB 2.0
- Downward compatible to USB 2.0 and 1.1
- USB-C™ connector can be used on both sides



Length	SKU #	Packaging
0.50 meter	U30017	poly bag
1.00 meter	U30018	poly bag
2.00 meter	U30019	poly bag
3.00 meter	U30020	poly bag

5Gbps

USB 3.2 AM to AM Cable

USB 3.2 USB 3.2 male (type A) >USB-C™ male

- USB3.2 Gen1 (USB3.0)
- SuperSpeed data transmissions up to 5 Gbps – ten times faster than USB 2.0
- Downward compatible to USB 2.0 and 1.1
- USB-C™ connector can be used on both sides



Length	SKU #	Packaging
0.50 meter	U30021	poly bag
1.00 meter	U30022	poly bag
2.00 meter	U30023	poly bag
3.00 meter	U30024	poly bag

5Gbps

USB 3.2 AM to AM Cable

USB 3.2 USB-C™ male >USB 3.2 female (type A)

- USB3.2 Gen1 (USB3.0)
- SuperSpeed data transmissions up to 5 Gbps – ten times faster than USB 2.0
- Downward compatible to USB 2.0 and 1.1
- USB-C™ connector can be used on both sides



Length	SKU #	Packaging
0.50 meter	U30025	poly bag
1.00 meter	U30026	poly bag
2.00 meter	U30027	poly bag
3.00 meter	U30028	poly bag

5Gbps

USB 3.2 AM to AM Cable

USB 3.2 USB-C™ male >USB 3.2 male (type B)

- USB3.2 Gen1 (USB3.0)
- SuperSpeed data transmissions up to 5 Gbps – ten times faster than USB 2.0
- Downward compatible to USB 2.0 and 1.1
- USB-C™ connector can be used on both sides



Length	SKU #	Packaging
0.50 meter	U30029	poly bag
1.00 meter	U30030	poly bag
2.00 meter	U30031	poly bag
3.00 meter	U30032	poly bag

5Gbps

USB 3.2 CM to Micro B Cable

USB 3.2 USB-C™ male >> USB 3.2 micro (type B)

- USB3.2 Gen1 (USB3.0)
- SuperSpeed data transmissions up to 5 Gbps – ten times faster than USB 2.0
- Downward compatible to USB 2.0 and 1.1
- USB-C™ connector can be used on both sides



Length	SKU #	Packaging
0.50 meter	U30033	poly bag
1.00 meter	U30034	poly bag
2.00 meter	U30035	poly bag
3.00 meter	U300	poly bag

10Gbps

USB 3.2 CM to CM Cable

USB 3.2 USB 3.2 male (type A) > USB 3.2 USB-C™

- USB3.2 Gen2
- SuperSpeed + data transmissions up to 10 Gbps
- Downward compatible to USB 2.0 and 1.1
- USB-C™ connector can be used on both sides



Length	SKU #	Packaging
0.50 meter	U30036	poly bag
1.00 meter	U30037	poly bag
2.00 meter	U30038	poly bag
3.00 meter	U30039	poly bag

OEM- Solutions



USB connector chart

USB Version	Data Rate (Bits / Sec)	Packing Logo	USB Trident Logo	Connector
USB 1.0	Basic-Speed (USB1.0) 1.5Mbps			
USB 1.1	Full-Speed (USB1.1) 12Mbps			
USB2.0	Hi-Speed (USB2.0) 480Mbps			
USB 3.2	USB3.2 Gen1 (USB3.0) 5Gbps			
	USB3.2 Gen1 (USB3.1) 10Gbps			
	USB3.2 Gen2x2 (USB3.2) 20Gbps			
USB 4	Gen 2x2 20Gbps			
	Gen 3x2 40Gbps			

10Gbps

USB 3.2 CM to CM Cable

USB 3.2 USB-C™ male> USB 3.2 USB-C™ male

- USB3.2 Gen2
- SuperSpeed + data transmissions up to 10 Gbps
- Support 100W (20V/5A)
- e-marker Chipset - Support 4K@60hz video display
- Fully Bidirectional Support
- USB-C™ connector can be used on both sides
- Downward compatible to USB 2.0



Length	SKU #	Packaging
0.50 meter	U30040	poly bag
1.00 meter	U30041	poly bag
1.50 meter	U30042	poly bag
2.00 meter	U30043	poly bag

10Gbps

USB 3.2 CM to CF Cable

USB 3.2 USB-C™ male> USB 3.2 USB-C™ female

- USB3.2 Gen2
- SuperSpeed + data transmissions up to 10 Gbps
- Support 100W (20V/5A)
- e-marker Chipset - Support 4K@60hz video display
- Fully Bidirectional Support
- USB-C™ connector can be used on both sides
- Downward compatible to USB 2.0



Length	SKU #	Packaging
0.50 meter	U30044	poly bag
1.00 meter	U30045	poly bag
1.50 meter	U30046	poly bag
2.00 meter	U30047	poly bag

10Gbps

USB 3.2 CM 90° to CM Cable

USB 3.2 USB-C™ male> USB 3.2 USB-C™ male

- USB3.2 Gen2
- SuperSpeed + data transmissions up to 10 Gbps
- Support 100W (20V/5A)
- e-marker Chipset - Support 4K@60hz video display
- Fully Bidirectional Support
- USB-C™ connector can be used on both sides
- Downward compatible to USB 2.0



Length	SKU #	Packaging
0.50 meter	U30048	poly bag
1.00 meter	U30049	poly bag
1.50 meter	U30050	poly bag
2.00 meter	U30051	poly bag

10Gbps

USB 3.2 CM 90° to CF Cable

USB 3.2 USB-C™ male> USB 3.2 USB-C™ female

- USB3.2 Gen2
- SuperSpeed + data transmissions up to 10 Gbps
- Support 100W (20V/5A)
- e-marker Chipset - Support 4K@60hz video display
- Fully Bidirectional Support
- USB-C™ connector can be used on both sides
- Downward compatible to USB 2.0



Length	SKU #	Packaging
0.50 meter	U30052	poly bag
1.00 meter	U30053	poly bag
1.50 meter	U30054	poly bag
2.00 meter	U30055	poly bag

20Gbps



USB 3.2 CM to CM Cable

USB 3.2 USB 3.2 male (type A) > USB 3.2 USB-C™

- USB3.2 Gen 2x2
- SuperSpeed + data transmissions up to 20 Gbps
- Support 100W (20V/5A)
- e-marker Chipset - Support 8K@30hz video display
- Fully Bidirectional Support
- USB-C™ connector can be used on both sides
- Downward compatible to USB 2.0

Length	SKU #	Packaging	Other
0.50 meter	U30056	poly bag	Aluminum /Braid
0.80 meter	U30057	poly bag	Aluminum /Braid
1.00 meter	U30058	poly bag	Aluminum /Braid
1.20 meter	U30059	poly bag	Aluminum /Braid

20Gbps



USB 3.2 CM to CM Cable

USB 3.2 USB 3.2 male (type A) > USB 3.2 USB-C™

- USB3.2 Gen 2x2
- SuperSpeed + data transmissions up to 20 Gbps
- Support 100W (20V/5A)
- e-marker Chipset - Support 8K@30hz video display
- Fully Bidirectional Support
- USB-C™ connector can be used on both sides
- Downward compatible to USB 2.0

Length	SKU #	Packaging	Other
0.50 meter	U30060	poly bag	Aluminum /Braid
0.80 meter	U30061	poly bag	Aluminum /Braid
1.00 meter	U30062	poly bag	Aluminum /Braid
1.20 meter	U30063	poly bag	Aluminum /Braid

40Gbps



USB 3.2 CM to CM Cable

USB 3.2 USB 3.2 male (type A) > USB 3.2 USB-C™

- USB3.2 Gen 2x2
- SuperSpeed + data transmissions up to 40 Gbps
- Support 100W (20V/5A)
- e-marker Chipset - Support 8K@60hz video display or dual 4K displays at 60Hz
- Fully Bidirectional Support
- USB-C™ connector can be used on both sides
- Downward compatible to USB 2.0

Length	SKU #	Packaging	Other
0.50 meter	U30064	poly bag	Aluminum /Braid
0.80 meter	U30065	poly bag	Aluminum /Braid
1.00 meter	U30066	poly bag	Aluminum /Braid
1.20 meter	U30067	poly bag	Aluminum /Braid

40Gbps



USB 3.2 CM to CM Cable

USB 3.2 USB-C™ male > USB 3.2 USB-C™ male

- USB3.2 Gen 2x2
- SuperSpeed + data transmissions up to 40 Gbps
- Support 100W (20V/5A)
- e-marker Chipset - Support 8K@60hz video display or dual 4K displays at 60Hz
- Fully Bidirectional Support
- USB-C™ connector can be used on both sides

Length	SKU #	Packaging	Other
0.50 meter	U30068	poly bag	Aluminum /Braid
0.80 meter	U30069	poly bag	Aluminum /Braid
1.00 meter	U30070	poly bag	Aluminum /Braid
1.20 meter	U30071	poly bag	Aluminum /Braid

40Gbps



USB 3.2 CM to CM Cable

USB 3.2 USB-C™ male > USB 3.2 USB-C™ male

- USB3.2 Gen 2x2
- SuperSpeed + data transmissions up to 40 Gbps
- Support 100W (20V/5A)
- e-marker Chipset - Support 8K@60hz video display or dual 4K displays at 60Hz
- Fully Bidirectional Support
- USB-C™ connector can be used on both sides
- Downward compatible to USB 2.0

Length	SKU #	Packaging	Other
0.50 meter	U30072	poly bag	Aluminum /Braid
1.00 meter	U30073	poly bag	Aluminum /Braid
1.50 meter	U30074	poly bag	Aluminum /Braid
2.00 meter	U30075	poly bag	Aluminum /Braid

40Gbps



Thunderbolt 4 Cable

USB-C™ male > USB-C™ male

- Thunderbolt 4 Series
- Data transmissions up to 40 Gbps
- Support 100W (20V/5A)
- Support 8K@60hz video display or dual 5K displays at 60Hz
- Compatible to USB 2.0 and thunderbolt 3 devices
- USB-C™ connector can be used on both sides

Length	SKU #	Packaging	Other
0.50 meter	T4001	poly bag	Aluminum /Braid
1.00 meter	T4002	poly bag	Aluminum /Braid
1.50 meter	T4003	poly bag	Aluminum /Braid
2.00 meter	T4004	poly bag	Aluminum /Braid

40Gbps



USB4 Cable with 240W Charging

USB-C™ male > USB-C™ male

- Data transmissions up to 40 Gbps
- Support 240W (48V/5A)
- Support 8K@60hz video display or dual 5K displays at 60Hz
- Extended Power Range (EPR) cable is capable of carrying a massive 240W (48V/5A),
- Thunderbolt-compatible
- USB-C™ connector can be used on both sides

Length	SKU #	Packaging	Other
0.20 meter	U4001	poly bag	Aluminum /Braid
0.50 meter	U4002	poly bag	Aluminum /Braid
1.00 meter	U4003	poly bag	Aluminum /Braid
1.50 meter	U4004	poly bag	Aluminum /Braid

USB-IF Certified



USB4 Cable with 240W Charging USB-IF Certified

USB-C™ male > USB-C™ male

- USB-IF TID # : 6992
- USB-IF Certified to ensure maximum functionality
- Data transmissions up to 40 Gbps
- Support 240W (48V/5A)
- Support 8K@60hz video display or dual 5K displays at 60Hz
- Extended Power Range (EPR) cable is capable of carrying a massive 240W (48V/5A),
- Thunderbolt-compatible
- USB-C™ connector can be used on both sides

Length	SKU #	Packaging	Other
1.20 meter	U4005	poly bag	PVC

Lightning to USB-A Cable

- Lightning to USB-A cable
- PVC Molded
- Apple MFi certified
- Supports high-speed charging
- 480Mbps super-fast data transfer speed
- Compatible with iPhone 14 13 Series, iPhone 12 Series, iPhone 11 Series, iPhone XS, iPhone X, iPad (not Pro), AirPods® Pro, AirPods



Length	SKU #	Packaging
0.50 meter	APL0001	poly bag
1.00 meter	APL0002	poly bag
1.50 meter	APL0003	poly bag
2.00 meter	APL0004	poly bag

Lightning to USB-A Cable

- Lightning to USB-A cable
- Aluminium Housing
- Apple MFi certified
- Supports high-speed charging
- 480Mbps super-fast data transfer speed
- Compatible with iPhone 14 13 Series, iPhone 12 Series, iPhone 11 Series, iPhone XS, iPhone X, iPad (not Pro), AirPods® Pro, AirPods



Length	SKU #	Packaging
0.50 meter	APL0005	poly bag
1.00 meter	APL0006	poly bag
1.50 meter	APL0007	poly bag
2.00 meter	APL0008	poly bag

Lightning to USB-C Cable

- Lightning to USB-C cable
- PVC Molded
- Apple MFi certified
- Supports high-speed charging
- 480Mbps super-fast data transfer speed
- Compatible with iPhone 14 13 Series, iPhone 12 Series, iPhone 11 Series, iPhone XS, iPhone X, iPad (not Pro), AirPods® Pro, AirPods



Length	SKU #	Packaging
0.50 meter	APL0009	poly bag
1.00 meter	APL0010	poly bag
1.50 meter	APL0011	poly bag
2.00 meter	APL0012	poly bag

Lightning to USB-C Cable

- Lightning to USB-C cable
- Aluminium Housing
- Apple MFi certified
- Supports high-speed charging
- 480Mbps super-fast data transfer speed
- Compatible with iPhone 14 13 Series, iPhone 12 Series, iPhone 11 Series, iPhone XS, iPhone X, iPad (not Pro), AirPods® Pro, AirPods



Length	SKU #	Packaging
0.50 meter	APL0013	poly bag
1.00 meter	APL0014	poly bag
1.50 meter	APL0015	poly bag
2.00 meter	APL0016	poly bag

DIY -Zinc Alloy Silicone Data Charging Cable



- Support Fast Charge
- 120W Super Fast Charging
- Input:5V
- Output:5V3A,9V/2A,



- Special Strain Relief Support design, can bear 20000+ bending test



- Cooper Cable Wire
- Support 05M ~3M Max Length



- Zinc Alloy Housing large Variety of color



- Product Color: Blue,White,Orange,Yellow,Black,Green, Pink




- Wire
- Zinc Housing
- Plugs




- Option#1
- Support 12W
- Lightning C89 Plug
- USB AM Plug



- Option#2
- Support 27W
- Lightning C94 Plug
- USB Type C Plug



- Option#3
- Support 66W
- USB Type C Plug
- USB AM Plug



- Option#4
- Support 120W
- USB Type C Plug
- USB AM Plug



- Option#5
- Support 100W
- USB Type C Plug
- USB Type C Plug

Premium HDMI® Cable

HDMI® (type A) > HDMI® (type A)

- Supports all HDMI resolutions up to 4K (3840x2160p @60Hz), including 3D and Multi View video
- Supports up to 32 audio channels and a 1536 kHz audio sampling rate
- Supports the 21:9 cinema aspect ratio
- 18Gbps bandwidth with a high level of EMI resistance.
- Certified by HDMI Authorized Test Centers.

Specification	SKU #	Packaging
1.00meter	HD0001	poly bag
1.50 meter	HD0002	poly bag
2.00 meter	HD0003	poly bag
3.00 meter	HD0004	poly bag



PREMIUM HDMI CABLE CERTIFICATION PROGRAM

Premium High Speed HDMI® cables are tested to ensure quality for feature-rich 4K/Ultra-HD content

The Premium HDMI® Cable Certification Program™ encompasses additional and enhanced cable testing as well as an authentication and verification program for High Speed HDMI Cables. Cables are tested to ensure they support the full 18Gbps bandwidth with an EMI test to ensure cables minimize interference with wireless signals.

The program is designed to give end users confidence when purchasing new HDMI® cables for their 4K/UltraHD products that may include features such as 4K@60Hz, BT.2020 and HDR. Participating HDMI Adopters can promote their HDMI ATC-tested High Speed HDMI Cables as Premium High Speed HDMI Cables or Premium High Speed HDMI Cables with Ethernet using a unique anti-counterfeiting authentication label on their products.

These special cables are available with both HDMI Type-A and Type-D Connectors.



Trust the Cable with the Label
Only Premium HDMI cables are permitted to display and promote the official Premium HDMI Cable Authentication Label.



*The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

NOTE: All images and brand Trademark logos used on this page belong to their respective copyright holders, and used for non-profit, informational purposes only.

Ultra High Speed HDMI® Cable

HDMI® (type A) > HDMI® (type A)

- Supports all 8K@60Hz, 4K@120Hz, 2K@144Hz.
- Support the latest High-Bitrate Audio Formats including DTS Master, DTS:X, Atmos, and Enhanced Audio Return Channel(eARC).
- 48Gbps ultra high speed bandwidth with a high level of EMI resistance.
- Certified by HDMI Authorized Test Centers.

Specification	SKU #	Packaging
1.00meter	HD0005	poly bag
1.50 meter	HD0006	poly bag
2.00 meter	HD0007	poly bag
3.00 meter	HD0008	poly bag



Ultra High Speed HDMI® Cable Certification Program

The HDMI 2.1a Specification includes a new cable - the Ultra High Speed HDMI® Cable. It's the only cable that complies with stringent specifications designed to ensure support for all HDMI 2.1a features including uncompressed 8K@60 and 4K@120. The cable's increased bandwidth capability supports up to 48Gbps.

The Ultra High Speed HDMI Certification Program is a mandatory certification program for all Ultra High Speed HDMI Cables; and ensures quality Ultra High Speed HDMI Cables reach the market and support 4K and 8K video, HDR, VRR, eARC, and all other HDMI 2.1a features. Cables are also required to be tested and certified to ensure low EMI to reduce the possibility of interference with wireless networks, streaming media players, Bluetooth devices and mobile phones.

All certified cables of any length must pass certification testing at an HDMI Forum Authorized Testing Center (Forum ATC). Once certified, cables will be required to affix an Ultra High Speed HDMI Certification Label to each package or unit of sale enabling consumers to verify the certification status of the product.

Trust the Cable with the Label

Only Premium HDMI cables are permitted to display and promote the official Premium HDMI Cable Authentication Label.



Trust the Cable with the Label
Only Premium HDMI cables are permitted to display and promote the official Premium HDMI Cable Authentication Label.



HDMI® Cable

HDMI® (type A) > HDMI® (type A)

- Resolutions up to 7680*4320
- supports up to 48Gbps.
- suitable for MacBook with USB-C™ port
- Downward compatible 2.0b/2.0a/1.4/1.3/1.2/1.1



Specification	SKU #	Packaging
0.5 Meter	HD0014	poly bag
1.5 Meter	HD0015	poly bag
2 Meter	HD0016	poly bag
3 Meter	HD0017	poly bag

Tooling showcase



HDMI® 1.4b Version - Active Cable


HDMI® (type A) > HDMI® (type A)

- Wire 24 AWG
- High Speed HDMI with Ethernet Spec.
- Data transfer rate up to 18 Gb/s
- Maximum screen resolution 3840 x 2160 @ 60 Hz1
- Chipset Redmere 8181



Specification	SKU #	Packaging	Other
10 Meter	HD0010	poly bag	8181
15 Meter	HD0011	poly bag	8181
20 Meter	HD0012	poly bag	8181
30 Meter	HD0013	poly bag	8181

HDMI® Specification Technology Overview

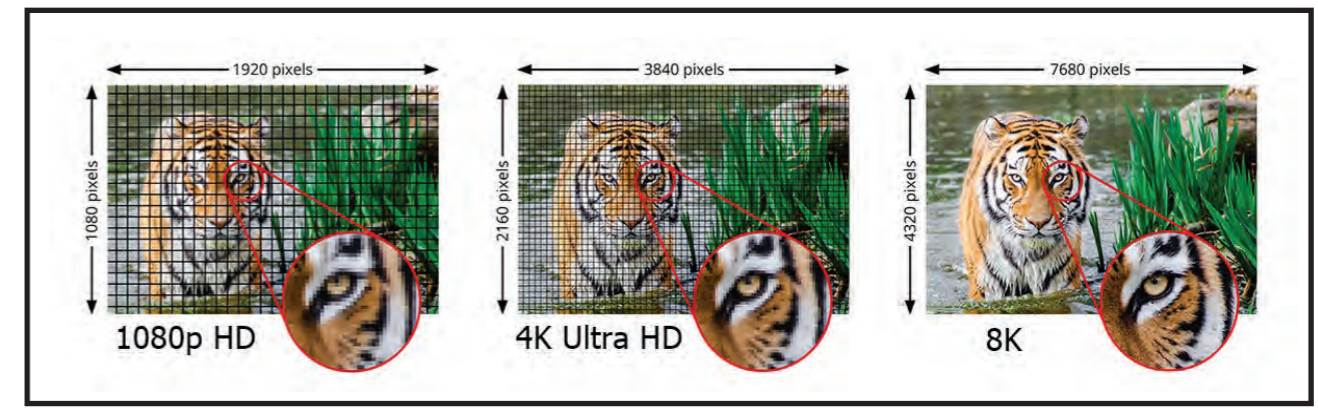

HDMI® Chart versions

	HDMI version						
	1	1.1	1.2-1.2a	1.3-1.3a	1.4-1.4b	2.0-2.0b	2.1
Full HD Blu-ray Disc and HD DVD video	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Consumer Electronic Control (CEC)	Yes	Yes	Yes	Yes	Yes	Yes	Yes
DVD-Audio	No	Yes	Yes	Yes	Yes	Yes	Yes
Super Audio CD (DSD)	No	No	Yes	Yes	Yes	Yes	Yes
Auto lip-sync	No	No	No	Yes	Yes	Yes	Yes
Dolby TrueHD / DTS-HD Master Audio bitstream capable	No	No	No	Yes	Yes	Yes	Yes
Updated list of CEC commands	No	No	No	Yes	Yes	Yes	Yes
3D video	No	No	No	No	Yes	Yes	Yes
Ethernet channel (100 Mbit/s)	No	No	No	No	Yes	Yes	Yes
Audio return channel (ARC)	No	No	No	No	Yes	Yes	Yes
4 audio streams	No	No	No	No	No	Yes	Yes
2 video streams (Dual View)	No	No	No	No	No	Yes	Yes
Hybrid Log-Gamma (HLG) HDR OETF	No	No	No	No	No	Yes	Yes
Static HDR (HDR static metadata)	No	No	No	No	No	Yes	Yes
Dynamic HDR (HDR dynamic metadata)	No	No	No	No	No	No	Yes
Enhanced audio return channel (eARC)	No	No	No	No	No	No	Yes
Variable Refresh Rate (VRR)	No	No	No	No	No	No	Yes
Quick Media Switching (QMS)	No	No	No	No	No	No	Yes
Quick Frame Transport (QFT)	No	No	No	No	No	No	Yes
Auto Low Latency Mode (ALLM)	No	No	No	No	No	No	Yes
Display Stream Compression (DSC)	No	No	No	No	No	No	Yes

*The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. NOTE: All images and brand Trademark logos used on this page belong to their respective copyright holders, and used for non-profit, informational purposes only.



HDMI 2.0 AOC,Hybrid 18Gbps 4K@60hz

HDMI® (type A) > HDMI® (type A)

- Thin and Flexible. No signal delay and provides higher speed than copper HDMI cable
- 4K 2K 60Hz Chroma Subsampling 4:4:4:2/4:2:0.(8 bit for 4:4:4 and 10 bit for 4:2:0 color depth).
- Provide the best A/V quality for HDMI 2.0b specification with 18 Gbps bandwidth
- Supports HDR/ARC/HDCP2.2/3D/CEC/EDID/. EMI-FREE and No signal loss in high noise environments

Specification	SKU #	Packaging
10.00meter	AOC0001	poly bag
30.00 meter	AOC0002	poly bag
50.00 meter	AOC0003	poly bag
100.00 meter	AOC0004	poly bag



HDMI 2.1 Hybrid 48Gbps 8K@60hz

HDMI® (type A) > HDMI® (type A)

- Thin and Flexible. No signal delay and provides higher speed than copper HDMI cable
- SUPPORT: This active optical cable support 48Gbps Super High Speed Data Transfer
- Support HDCP 2.2, backward compatible with HDMI 2.0 and HDMI 1.4
- 48 Gbps bandwidth
- EDID,CEC,HDCP (2.2), HDR (High Dynamic Range),HEC,eARC, Supports up to eight PCM channels, DTS-HD Master and Dolby Digital True HD surround sound audio

Specification	SKU #	Packaging
10.00meter	AOC0005	poly bag
30.00 meter	AOC0006	poly bag
50.00 meter	AOC0007	poly bag
100.00 meter	AOC0008	poly bag



DisplayPort 1.4 Hybrid 32.4Gbps 8K@60hz

Displayport male > Displayport male

- Support 8K@60Hz , Supports HBR3, HDCP 1.4 / 2.2; very good compatibility
- Support DP1.4 standard, bandwidth can reach 8.1 Gbps per chanel, 32Gbps total
- Up to 32 audio channels with 1536 Hz sampling rate
- Support DPCP/EDID/CEC/DDC
- Latching connectors prevent accidental disconnection
- Plug and play
- Low RFI / EMI profile for sensitive applications

Specification	SKU #	Packaging
10.00meter	AOC0009	poly bag
30.00 meter	AOC0010	poly bag
50.00 meter	AOC0011	poly bag
100.00 meter	AOC0012	poly bag



Armored DisplayPort 1.4 Hybrid 32.4Gbps 8K@60hz

Displayport male > Displayport male

- Support 8K@60Hz , Supports HBR3, HDCP 1.4 / 2.2; very good compatibility
- Support DP1.4 standard, bandwidth can reach 8.1 Gbps per chanel, 32Gbps total
- Up to 32 audio channels with 1536 Hz sampling rate
- Support DPCP/EDID/CEC/DDC
- Latching connectors prevent accidental disconnection
- Plug and play
- Low RFI / EMI profile for sensitive applications

Specification	SKU #	Packaging
10.00meter	AOC0013	poly bag
30.00 meter	AOC0014	poly bag
50.00 meter	AOC0015	poly bag
100.00 meter	AOC0016	poly bag



USB 3.2 GEN 2 Hybrid 10Gbps

USB-C™ male > USB-C™ male

- Meet USB 3.1 Gen2 Standard , bandwidth can reach up to 10Gbps super speed
- Support length up to 30m
- Hybrid optical cable with fiber and copper wire
- Support USB 2.0 & 3.0
- Support two sides plug and play
- Can provide 5V 800mA power maximum to the remote device
- Does not support charging or powering of devices
- No RF interference , working stable in complex environments

Specification	SKU #	Packaging
10.00meter	AOC0017	poly bag
20.00 meter	AOC0018	poly bag
25.00 meter	AOC0019	poly bag
30.00 meter	AOC0020	poly bag



DVI AOC, Hybrid 10.2Gbps 4K30 DVI

DVI male > DVI male

- Extends WUXGA (1920x1200) at 60Hz or 1080p at 60Hz (36bit, 3.4 Gbps/ch)
- Single channel DVI interface, support up to 10.2Gbps bandwidth
- Operated by DVI source without external power
- Transmits DVI data up to 100m (328feet) over Optical hybrid cable
- Supports 3D contents transmissionComplies with EDID, HDCP
- Certifications: FCC/CE standards for EMI/RFI emission

Specification	SKU #	Packaging
10.00meter	AOC0021	poly bag
30.00 meter	AOC0022	poly bag
50.00 meter	AOC0023	poly bag
100.00 meter	AOC0024	poly bag



Detachable HDMI Hybrid 18Gbps 4K60

HDMI® (type D) > HDMI® (type D)

- Extend full 4096 X 2160 (4K) @ 60 HZ 4:4:4
- Data transfer rates up to 18Gbps
- High dynamic range (HDR) video for expansive contrast ratio and color accuracy
- Compliant with all HDMI 2.0 and HDCP 2.2 specifications
- Plug and play, no software to be installed
- Fiber technology greatly reduces EMI/RFI emissions

Specification	SKU #	Packaging
10.00meter	AOC0025	poly bag
30.00 meter	AOC0026	poly bag
50.00 meter	AOC0027	poly bag
100.00 meter	AOC0028	poly bag



Armored HDMI 2.1 AOC 48Gbps 8K60

HDMI® (type A) > HDMI® (type A)

- Thin and Flexible. No signal delay and provides higher speed than copper HDMI cable
- SUPPORT: This active optical cable support 48Gbps Super High Speed Data Transfer
- Support HDCP 2.2, backward compatible with HDMI 2.0 and HDMI 1.4
- 48 Gbps bandwidth
- EDID,CEC,HDCP (2.2), HDR (High Dynamic Range),HEC,eARC, Supports up to eight PCM channels, DTS-HD Master and Dolby Digital True HD surround sound audio

Specification	SKU #	Packaging
10.00meter	AOC0029	poly bag
30.00 meter	AOC0030	poly bag
50.00 meter	AOC0031	poly bag
100.00 meter	AOC0032	poly bag

DisplayPort 1.4 Cable

DisplayPort male > DisplayPort male

- Higher bandwidth for higher resolution and refresh rates (up to 8K at 60Hz).
- HDR support for wider color range and contrast.
- Multi-Stream Transport (MST) for multi-display setups.
- Display Stream Compression (DSC) for high-quality visuals.
- Backward compatible with previous versions of DisplayPort.



Specification	SKU #	Packaging
0.50 meter	DP10001	poly bag
1.00 meter	DP10002	poly bag
2.00 meter	DP10003	poly bag
3.00 meter	DP10004	poly bag

DisplayPort to HDMI Cable

DisplayPort male > HDMI male

- DisplayPort Male plug with latch, very Durable & Reliable. Ideal for video streaming, gaming, or extending a workstation.
- Supports 3840*2160@30Hz, including 1080p Full HD 720p, 1600x1200, 1280x1024
- Plug and Play, does not require any software or drivers, or extra power supply.



Specification	SKU #	Packaging
1.00 meter	DP10005	poly bag
2.00 meter	DP10006	poly bag
3.00 meter	DP10007	poly bag

DisplayPort to DVI Cable

DisplayPort male > DVI male

- DisplayPort Male plug with latch, very Durable & Reliable. Ideal for video streaming, gaming, or extending a workstation.
- Supports 1920x1080@60Hz (1080p Full HD) including 720p, 1600x1200, 1280x1024
- Plug and Play, does not require any software or drivers, or extra power supply.



Specification	SKU #	Packaging
1.00 meter	DP10008	poly bag
2.00 meter	DP10009	poly bag
3.00 meter	DP10010	poly bag

DisplayPort to VGA Cable

DisplayPort male > DVI male

- DisplayPort Male plug with latch, very Durable & Reliable. Ideal for video streaming, gaming, or extending a workstation.
- Supports 1920x1080@60Hz (1080p Full HD) including 720p, 1600x1200, 1280x1024
- Plug and Play, does not require any software or drivers, or extra power supply.



Specification	SKU #	Packaging
1.00 meter	DP10011	poly bag
2.00 meter	DP10012	poly bag
3.00 meter	DP10013	poly bag

DisplayPort2.0 Cable

DisplayPort male > DisplayPort male

- Supports up to 16K resolution
- Supports up to 120Hz refresh rate
- Supports HDR10 with 30bpp deep color and YCbCr 4:4:4 color space
- Supports NVIDIA G-Sync AMD FreeSync
- Up to 80.0Gbps bandwidth, nearly triple that of DP 1.4a
- Backward compatible with DisplayPort 1.2 and 1.4 devices
- Supports Display Stream Compression (DSC)
- Supports Multi-Stream Transport (MST)



Specification	SKU #	Packaging
1.00 meter	DP10014	poly bag
2.00 meter	DP10015	poly bag
3.00 meter	DP10016	poly bag

DisplayPort 2.0 Aluminum Slim Cable

DisplayPort male > DisplayPort male

- Supports up to 16K resolution
- Supports up to 120Hz refresh rate
- Supports HDR10 with 30bpp deep color and YCbCr 4:4:4 color space
- Supports NVIDIA G-Sync AMD FreeSync
- Up to 80.0Gbps bandwidth, nearly triple that of DP 1.4a
- Backward compatible with DisplayPort 1.2 and 1.4 devices
- Supports Display Stream Compression (DSC)
- Supports Multi-Stream Transport (MST)



Specification	SKU #	Packaging
1.00 meter	DP10018	poly bag
2.00 meter	DP10019	poly bag
3.00 meter	DP10020	poly bag

DisplayPort 1.2 Aluminum Slim Cable

DisplayPort male > DisplayPort male

- displayport 1.2 tested and certified by vesa
- high bit rate 2 (hbr2) connection provides a bandwidth of 21.6 gbps
- supports 4k uhd (3840 x 2160) @60hz and 1080p @240hz
- 3d resolutions up to 2560x1600@60hz



Specification	SKU #	Packaging
1.00 meter	DP10022	poly bag
2.00 meter	DP10023	poly bag
3.00 meter	DP10024	poly bag

DisplayPort 1.4 Aluminum Slim Cable

DisplayPort male > DisplayPort male

- Higher bandwidth for higher resolution and refresh rates (up to 8K at 60Hz).
- HDR support for wider color range and contrast.
- Multi-Stream Transport (MST) for multi-display setups.
- Display Stream Compression (DSC) for high-quality visuals.
- Backward compatible with previous versions of DisplayPort.



Specification	SKU #	Packaging
1.00 meter	DP10022	poly bag
2.00 meter	DP10023	poly bag
3.00 meter	DP10024	poly bag

Mini DP plug to VGA/DVI/HDMI



- PVC enclosure with labelled sockets
- Maximum resolution: 3840x21600 @30 Hz
- Adapter with Mini DP plug and VGA, DVI and HDMI sockets
- Cable approximately 10 centimetres long
- DP v1.2 compliant
- Plug and Play, does not require any software or drivers, or extra power supply.

Specification	SKU #	Packaging	Other
0.15 meter	DP10044	poly bag	ABS

Mini DP plug to DP/DVI/HDMI



- Supports DVI & HDMI signals such as 576i, 576p, 720p, 1080i & 1080p
- Supports DisplayPort resolutions up to 1920 x 1200
- Powered from mini DisplayPort source
- Full Support for HDCP ver. 1.2 and DPCP (Display Port Content Protection) over compatible connections
- Only One Output may be used at any time
- Plug and Play, does not require any software or drivers, or extra power supply.

Specification	SKU #	Packaging	Other
0.15 meter	DP10045	poly bag	ABS

Mini DP plug to VGA/DVI/HDMI



- Supports DVI & HDMI signals such as 576i, 576p, 720p, 1080i & 1080p/60Hz
- Supports VGA resolutions up to 1600 x 1200
- Powered from mini DisplayPort source
- Full Support for HDCP ver. 1.2 and DPCP (Display Port Content Protection) over compatible connections
- Only One Output may be used at any time
- Plug and Play, does not require any software or drivers, or extra power supply.

Specification	SKU #	Packaging	Other
0.15 meter	DP10046	poly bag	ABS

HDMI to DisplayPort Adapter with USB Power



- Input(from video source): HDMI Male
- Output(to monitor): DisplayPort Female (Note: A separate DisplayPort cable is required, not included in the package)
- Audio Support: Yes
- Resolution: 4K(3840*2160)@30Hz, 2K@60Hz, 1080P@120Hz,(1440P 144Hz May not be supported)
- Power: Type-A USB Male (Connect with External Power Supply)
- PS5 2K is not supported
- Xbox may not support 60HZ

Specification	SKU #	Packaging	Other
0.15 meter	DP10047	poly bag	ABS

DisplayPort (DP) to HDMI 4k Adapter

DisplayPort male > HDMI female



- This is a 4K@60Hz DisplayPort to HDMI-compatible adapter that supports both audio and video transmission.
- The adapter supports mirror and extend dual mode and only transfers signal from DisplayPort source to HDMI-compatible display.
- Plug and Play, does not require any software or drivers, or extra power supply.

SKU #	Packaging	Other
DP10048	poly bag	ABS-black

Displayport1.2 to HDMI Adapter

DisplayPort male > HDMI female



- DisplayPort Male plug with latch, very Durable & Reliable. Ideal for video streaming, gaming, or extending a workstation.
- Supports 3840*2160@30Hz, including 1080p Full HD 720p, 1600x1200, 1280x1024
- Plug and Play, does not require any software or drivers, or extra power supply.

Specification	SKU #	Packaging	Other
0.15 meter	DP10049	poly bag	ABS-black

Displayport1.2 to VGA Adapter

DisplayPort male > VGA female



- DisplayPort Male plug with latch, very Durable & Reliable. Ideal for video streaming, gaming, or extending a workstation.
- Supports 3840*2160@30Hz, including 1080p Full HD 720p, 1600x1200, 1280x1024
- Plug and Play, does not require any software or drivers, or extra power supply.

Specification	SKU #	Packaging	Other
0.15 meter	DP10050	poly bag	ABS-black

Displayport1.2 to DVI Adapter

DisplayPort male > DVI female



- DisplayPort Male plug with latch, very Durable & Reliable. Ideal for video streaming, gaming, or extending a workstation.
- Supports 3840*2160@30Hz, including 1080p Full HD 720p, 1600x1200, 1280x1024
- Plug and Play, does not require any software or drivers, or extra power supply.

Specification	SKU #	Packaging	Other
0.15 meter	DP10051	poly bag	ABS-black

DVI-I Cable - Computer Monitor Cable

DVI-I (18+5) male > DVI-I (18+5) male



- Supports a maximum resolution 1920x1200
- High-speed digital transmission rate of up to 4.95 Gbits/sec
- Ferrite core eliminates EMI interference
- Aluminum-Mylar Foil with Braided Shielding
- Supports hot-plugging of DVI display devices
- Compliant with DVI DDWG Standards

Specification	SKU #	Packaging	Other
1.00 meter	VG0001	poly bag	PVC/Ferrite
2.00 meter	VG0002	poly bag	PVC/Ferrite
3.00 meter	VG0003	poly bag	PVC/Ferrite
5.00 meter	VG0004	poly bag	PVC/Ferrite

DVI-I Cable - Computer Monitor Cable

DVI-I (24+5) male > DVI-I (24+5) male



- Supports a maximum resolution of 2560x1600
- High-speed digital transmission rate of up to 9.9 Gbits/sec
- Ferrite core eliminates EMI interference
- Aluminum-Mylar Foil with Braided Shielding
- Supports hot-plugging of DVI display devices
- Compliant with DVI DDWG Standards

Specification	SKU #	Packaging	Other
1.00 meter	VG0005	poly bag	PVC/Ferrite
2.00 meter	VG0006	poly bag	PVC/Ferrite
3.00 meter	VG0007	poly bag	PVC/Ferrite
5.00 meter	VG0008	poly bag	PVC/Ferrite

DVI-D Cable - Computer Monitor Cable

DVI-D (18+1) male > DVI-D (18+1) male



- Supports a maximum resolution 1920x1200
- High-speed digital transmission rate of up to 4.95 Gbits/sec
- Ferrite core eliminates EMI interference
- Aluminum-Mylar Foil with Braided Shielding
- Supports hot-plugging of DVI display devices
- Compliant with DVI DDWG Standards

Specification	SKU #	Packaging	Other
1.00 meter	VG0009	poly bag	PVC/Ferrite
2.00 meter	VG0010	poly bag	PVC/Ferrite
3.00 meter	VG0011	poly bag	PVC/Ferrite
5.00 meter	VG0012	poly bag	PVC/Ferrite

DVI-D Cable - Computer Monitor Cable

DVI-D (24+1) male > DVI-D (24+1) male



- Supports a maximum resolution of 2560x1600
- High-speed digital transmission rate of up to 9.9 Gbits/sec
- Ferrite core eliminates EMI interference
- Aluminum-Mylar Foil with Braided Shielding
- Supports hot-plugging of DVI display devices
- Compliant with DVI DDWG Standards

Specification	SKU #	Packaging	Other
1.00 meter	VG0013	poly bag	PVC/Ferrite
2.00 meter	VG0014	poly bag	PVC/Ferrite
3.00 meter	VG0015	poly bag	PVC/Ferrite
5.00 meter	VG0016	poly bag	PVC/Ferrite

VGA to VGA Monitor Cable

VGA female > VGA male



- Screw-in VGA cable with 15-pin male input and female output
- Supports resolutions at 800x600 (SVGA), 1024x768 (XGA), 1600x1200 (UXGA), 1920x1080P and up for high resolution LCD and LED monitors
- Links VGA-equipped computer to any display with 15-pin VGA port
- Jacket Material : PVC

Specification	SKU #	Packaging	Other
2.00 meter	VG0017	poly bag	PVC/Ferrite
3.00 meter	VG0018	poly bag	PVC/Ferrite
5.00 meter	VG0019	poly bag	PVC/Ferrite
10.00 meter	VG0020	poly bag	PVC/Ferrite

VGA to VGA Monitor Cable

VGA male > VGA male



- Screw-in VGA cable with 15-pin male input and output
- Supports resolutions at 800x600 (SVGA), 1024x768 (XGA), 1600x1200 (UXGA), 1920x1080P and up for high resolution LCD and LED monitors
- Links VGA-equipped computer to any display with 15-pin VGA port
- Jacket Material : PVC

Specification	SKU #	Packaging	Other
2.00 meter	VG0021	poly bag	PVC/Ferrite
3.00 meter	VG0022	poly bag	PVC/Ferrite
5.00 meter	VG0023	poly bag	PVC/Ferrite
10.00 meter	VG0024	poly bag	PVC/Ferrite

SVGA to SVGA Monitor Cable

SVGA male > SVGA male



- Fully shielded VGA / SVGA extension or replacement cable
- Supports resolutions at 800x600 (SVGA), 1024x768 (XGA), 1600x1200 (UXGA), 1080p (Full HD), 1920x1200 (WUXGA), and up for high resolution LCD and LED monitors
- Gold-plated connectors; 100% bare copper conductors
- Each SVGA Cable have two high density HD15 connectors with thumbscrews

Specification	SKU #	Packaging	Other
2.00 meter	VG0025	poly bag	PVC/Ferrite
3.00 meter	VG0026	poly bag	PVC/Ferrite
5.00 meter	VG0027	poly bag	PVC/Ferrite
10.00 meter	VG0028	poly bag	PVC/Ferrite

SVGA to SVGA Monitor Cable

SVGA female > SVGA male



- Fully shielded VGA / SVGA extension or replacement cable
- Supports resolutions at 800x600 (SVGA), 1024x768 (XGA), 1600x1200 (UXGA), 1080p (Full HD), 1920x1200 (WUXGA), and up for high resolution LCD and LED monitors
- Gold-plated connectors; 100% bare copper conductors
- Each SVGA Cable have two high density HD15 connectors with thumbscrews

Specification	SKU #	Packaging	Other
2.00 meter	VG0029	poly bag	PVC/Ferrite
3.00 meter	VG0030	poly bag	PVC/Ferrite
5.00 meter	VG0031	poly bag	PVC/Ferrite
10.00 meter	VG0032	poly bag	PVC/Ferrite



SVGA to SVGA Monitor Cable with Audio

SVGA female+3.5MM > SVGA male+3.5MM

- The VGA to VGA cable supports both video and audio with a single cable
- support resolutions at 800x600 (SVGA), 1024x768 (XGA), 1600x1200 (UXGA), 1080p (Full HD), 1920x1200 (WUXGA)
- Supports 3.5mm stereo audio pass-through for audio signal

Specification	SKU #	Packaging
0.50 meter	VG0033	poly bag
1.00 meter	VG0034	poly bag
2.00 meter	VG0035	poly bag
3.00 meter	VG0036	poly bag



DVI-Digital splitter Y Cable

DVI-D male > 2 x DVI-D female

- DVI-Digital splitter lets you view two identical 24-pin DVI-D images from a single source, but does not support DVI-Analog signals.
- It's best for desktop computers with a DVI output and may not work with HDMI/DP/USB-C adapters or docking stations.
- The splitter delivers the same image on both monitors and cannot be used to span or display different images.
- Passive adapter resolutions over 1920x1200 is not recommended

Specification	SKU #	Packaging
0.15 meter	VG0042	poly bag



DVI to VGA Display Monitor Cable

DVI male > VGA male

- Supports HDTV resolution up to 1080p @60Hz and PC graphics resolutions up to 1920 x 1200 @60Hz
- Support Windows XP/7/8/10/11,MAC OS 8.6/9 and operating systems above,DO NOT support audio transmission.
- EASY PLUG & PLAY installation - with no external power or software drivers required; DVI-D single link connects the newest video graphics cards to existing displays with VGA

Specification	SKU #	Packaging
1.00 meter	VG0037	poly bag
2.00 meter	VG0038	poly bag
3.00 meter	VG0039	poly bag



VGA Splitter Y Cable

VGA male > 2 x VGA female

- Passive cables duplicate the PC screen to a monitor only, does not support screen extension or showing separate displays
- IMPORTANT NOTE: Two monitors can not be recognized at the same time,Only one monitor can be conected,and then the another monitor is conected.
- Duplicator VGA splitter dual monitor has a male connector that plugs directly into a computer; Two female VGA sockets on the VGA splitter cord connect to the VGA cables of two separate displays
- Supports 800x600 (SVGA), 1024x768 (XGA), 1600x1200 (UXGA) and 1080p Video resolutions; Audio must be transmitted separately.

Specification	SKU #	Packaging
0.15 meter	VG0043	poly bag



DMS 59 to Dual DVI Splitter Cable

DMS 59 male > 2 x DVI female

- This splitter supports 2560x1600, 60Hz / 1920x1080, 120Hz resolution, widely used in equipment and industry with high resolution, professionally suitable for the 3D effect of LCD (3D effect requires LCD with 120Hz). This cable also supports 1920x1200 resolution devices.
- Unidirectional Transmission,This LFH Graphics Card dongle is only suitable for DMS 59-pin to dual DVI transmission.
- Wide Compatibility, When you connect DVI cable from our cable to your DVI monitors, DVI 24+1 or 24+5 Cable will be both Compatible.
- Compatible with computers which are equipped with DMS / LHF graphics cards .

Specification	SKU #	Packaging
0.15 meter	VG0040	poly bag



VGA Splitter Y Cable

VGA male > 2 x VGA female

- Passive cables duplicate the PC screen to a monitor only, does not support screen extension or showing separate displays
- IMPORTANT NOTE: Two monitors can not be recognized at the same time,Only one monitor can be conected,and then the another monitor is conected.
- Duplicator VGA splitter dual monitor has a male connector that plugs directly into a computer; Two female VGA sockets on the VGA splitter cord connect to the VGA cables of two separate displays
- Supports 800x600 (SVGA), 1024x768 (XGA), 1600x1200 (UXGA) and 1080p Video resolutions; Audio must be transmitted separately.

Specification	SKU #	Packaging
0.15 meter	VG0044	poly bag



DMS 59 to DVI 24+5 & VGA Splitter Cable

DMS 59 male > 1 x DVI female ,1 x VGA female

- Dual 1xVGA Monitor and 1xDVI Monitor,It allows you to dual your video from your DMS 59 Pin Graphics Card to one of your DVI Monitor and one of your VGA Monitor,A Separately VGA Cable and A Separately DVI Cable are needed,but not included
- 1080P Video Output:This DMS 59Pin Dual VGA DVI Cable supports resolution of 1920x1080,note:your DMS 59Pin Graphics Card must support 1080p resolution firstly

Specification	SKU #	Packaging
0.15 meter	VG0041	poly bag



VGA Splitter Y Cable

VGA male > 2 x VGA female

- Passive cables duplicate the PC screen to a monitor only, does not support screen extension or showing separate displays
- IMPORTANT NOTE: Two monitors can not be recognized at the same time,Only one monitor can be conected,and then the another monitor is conected.
- Duplicator VGA splitter dual monitor has a male connector that plugs directly into a computer; Two female VGA sockets on the VGA splitter cord connect to the VGA cables of two separate displays
- Supports 800x600 (SVGA), 1024x768 (XGA), 1600x1200 (UXGA) and 1080p Video resolutions; Audio must be transmitted separately.

Specification	SKU #	Packaging
0.15 meter	VG0045	poly bag



RGB Scart Cable for N64

- High Quality cable of RGB Scart to Nintendo-N64 connector
- Compatible with original Nintendo-N64
- Third party product.

Specification	SKU #	Packaging
1.00M	SCT001	poly bag
1.80M	SCT002	poly bag
3.00M	SCT003	poly bag



RGB Scart Cable for MD1-CPIN

- High Quality cable of RGB Scart to MEGA DRIVE connector
- Compatible with original MEGA DRIVE
- Third party product.

Specification	SKU #	Packaging
1.00M	SCT004	poly bag
1.80M	SCT005	poly bag
3.00M	SCT006	poly bag



RGB Scart Cable for Wii

- High Quality cable of RGB Scart to Nintendo-Wii connector
- Compatible with original Nintendo-Wii
- Third party product.

Specification	SKU #	Packaging
1.00M	SCT007	poly bag
1.80M	SCT008	poly bag
3.00M	SCT009	poly bag



RGB Scart Cable for XBOX

- High Quality cable of RGB Scart to Xbox Gen connector
- Compatible with original Xbox (NOT Xbox 360 or later versions)
- Third party product.

Specification	SKU #	Packaging
1.00M	SCT010	poly bag
1.80M	SCT011	poly bag
3.00M	SCT012	poly bag



RGB Scart Cable for MD1-VPIN

- High Quality cable of RGB Scart to SEGA MEGA DRIVE connector
- Compatible with original SEGA MEGA DRIVE
- Third party product.

Specification	SKU #	Packaging
1.00M	SCT013	poly bag
1.80M	SCT014	poly bag
3.00M	SCT015	poly bag



RGB Scart Cable for MD2

- High Quality cable of RGB Scart to SEGA MEGA DRIVE 2 connector
- Compatible with original SEGA MEGA DRIVE 2
- Third party product.

Specification	SKU #	Packaging
1.00M	SCT016	poly bag
1.80M	SCT017	poly bag
3.00M	SCT018	poly bag



RGB Scart Cable for DREAMCAST

- High Quality cable of RGB Scart to SEGA DREAMCAST connector
- Compatible with original SEGA DREAMCAST
- Third party product.

Specification	SKU #	Packaging
1.00M	SCT019	poly bag
1.80M	SCT020	poly bag
3.00M	SCT021	poly bag



RGB Scart Cable for SATURN

- High Quality cable of RGB Scart to SEGA SATURN connector
- Compatible with original SEGA SATURN
- Third party product.

Specification	SKU #	Packaging
1.00M	SCT022	poly bag
1.80M	SCT023	poly bag
3.00M	SCT024	poly bag



RGB Scart Cable for PS2/PS3

- High Quality cable of RGB Scart to PS2 & PS3 connector
- Compatible with original PS2 & PS3.
- Third party product.

Specification	SKU #	Packaging
1.00M	SCT025	poly bag
1.80M	SCT026	poly bag
3.00M	SCT027	poly bag



RGB Scart Cable for NES AV-RCA

- High Quality cable of RGB Scart to 3 RCA connector
- Compatible with original NES
- Third party product.

Specification	SKU #	Packaging
1.00M	SCT028	poly bag
1.80M	SCT029	poly bag
3.00M	SCT030	poly bag



3.5mm Male to Female Stereo Audio Adapter Cable

- 3.5mm male-to-female cable that transmits audio in stereo format
- UNIVERSALLY COMPATIBLE: Works with any device equipped with standard 3.5mm audio jack or AUX-in port
- 24K Gold-plated Corrosion-resistant

Specification	SKU #	Packaging
1.00M	AU0001	poly bag
2.00M	AU0002	poly bag
3.00M	AU0003	poly bag



3.5mm Male to Male Stereo Audio Cable

- 3.5mm male-to-male cable that transmits audio in stereo format
- UNIVERSALLY COMPATIBLE: Works with any device equipped with standard 3.5mm audio port
- 24K Gold-plated Corrosion-resistant

Specification	SKU #	Packaging
1.00M	AU0004	poly bag
2.00M	AU0005	poly bag
3.00M	AU0006	poly bag



3.5mm Female Jack to 2 RCA Plugs Audio Stereo

- Gold-Plated 3.5mm 1/8 Female Mini Jack to 2 RCA Plugs Audio Cable
- This cable will send your music from MP3 player to stereo system.
- One end of the cable has a female 3.5mm stereo mini jack and the other end has two color coded male RCA plugs. (left and right audio channels).

Specification	SKU #	Packaging
0.30M	AU0007	poly bag



3.5mm Mini Plug Stereo Headphone

- It has a male 3.5mm (1/8") stereo mini plug on one end and two color coded Stereo female 3.5mm jacks on the both ends.
- You can plug two sets of stereo headphones into each jack.
- Both red and white jacks does NOT split the stereo signal into separate left and right mono channels, both jacks output has the same stereo signal.

Specification	SKU #	Packaging
0.30M	AU0008	poly bag



3.5mm to 3 RCA Camcorder Video Audio

- Connect to Mini-Plug-compatible camcorders. Designed to connect 3.5mm male plug to 3RCA Audio Video female.
- Plug and Play, Ultra-high performance.
- Reduces RF and EMI noise for efficient signal transfer
- High Quality Gold Plated Color-Coded RCA Plugs resist corrosion, provide durability, and improve the signal transmission. Flexible high-quality PVC material

Specification	SKU #	Packaging
1.00M	AU0009	poly bag
2.00M	AU0010	poly bag
3.00M	AU0011	poly bag



1 RCA Male to 1 RCA Male Composite Cable

- RCA video connector cable.
- You can connect video equipment with composite video and audio output jacks to televisions and Prejean ultra flexible PVC jacket and color coded connectors help to simplify installation.

Specification	SKU #	Packaging
1.00M	AU00012	poly bag
2.00M	AU00013	poly bag
3.00M	AU00014	poly bag



3 RCA Male to 3 RCA Male Cable

- 3-RCA Component Video Cable: 1080i-capable
- 1 video and 2 audio (left and right stereo),
- Connects game consoles, digital camcorders, satellite receivers, DVD players, cable boxes, DVR's, VCRs to a TV or projectors with RCA Composite AV Cable input jacks.

Specification	SKU #	Packaging
1.00M	AU00015	poly bag
2.00M	AU00016	poly bag
3.00M	AU00017	poly bag



S-Video & 2-RCA Audio Cables Combo

- Combines S-Video and RCA cables in a single design
- 24K gold-plated connectors for smooth connections and to prevent corrosion. Fully molded color-coded connectors (White - Left Audio, Red - Right Audio) and 4-Pin S-Video Plug
- Plug and Play, Links DVD Player, Camcorder, Set-Top-Box, VCR or any s-video based component to a TV or receiver

Specification	SKU #	Packaging
1.00M	AU00018	poly bag
2.00M	AU00019	poly bag
3.00M	AU00020	poly bag



3 RCA Male to 3 RCA Male Cable

- 3-RCA Component Video Cable: 1080i-capable
- 1 video (Blue signals) and 2 audio (left and right stereo),
- Connects game consoles, digital camcorders, satellite receivers, DVD players, cable boxes, DVR's, VCRs to a TV or projectors with RCA Composite AV Cable input jacks.

Specification	SKU #	Packaging
1.00M	AU00021	poly bag
2.00M	AU00022	poly bag
3.00M	AU00023	poly bag



5 RCA Male to 5 RCA Male Cable

- 5-RCA Component Video Cable: 1080i-capable
- 3 video (Red, Green and Blue signals) and 2 audio (left and right stereo),
- Connects game consoles, digital camcorders, satellite receivers, DVD players, cable boxes, DVR's, VCRs to a TV or projectors with RCA Composite AV Cable input jacks.

Specification	SKU #	Packaging
1.00M	AU00024	poly bag
2.00M	AU00025	poly bag
3.00M	AU00026	poly bag

DB9 M/M RS-232 Serial Cable

DB9 male > DB9 male

- Connects your computer to device with COM port RS-232 compatible interface
- Null-Modem cord that 2-3, 4-6, 7-8 line are cross linked (TX,RX,RTS, CTS, DTR,DSR)
- DB9 connector on each end equipped with screws to ensure an easy and solid connection for stable data communication



Specification	SKU #	Packaging
1.00meter	DB0001	poly bag
1.50 meter	DB0002	poly bag
2.00 meter	DB0003	poly bag
3.00 meter	DB0004	poly bag

DB9 F/F RS-232 Serial Cable

DB9 female > DB9 female

- Connects your computer to device with COM port RS-232 compatible interface
- Null-Modem cord that 2-3, 4-6, 7-8 line are cross linked (TX,RX,RTS, CTS, DTR,DSR)
- DB9 connector on each end equipped with screws to ensure an easy and solid connection for stable data communication



Specification	SKU #	Packaging
1.00meter	DB0005	poly bag
1.50 meter	DB0006	poly bag
2.00 meter	DB0007	poly bag
3.00 meter	DB0008	poly bag

DB9 M/F RS-232 Serial Cable

DB9 male > DB9 female

- Connects your computer to device with COM port RS-232 compatible interface
- Null-Modem cord that 2-3, 4-6, 7-8 line are cross linked (TX,RX,RTS, CTS, DTR,DSR)
- DB9 connector on each end equipped with screws to ensure an easy and solid connection for stable data communication



Specification	SKU #	Packaging
1.00meter	DB0009	poly bag
1.50 meter	DB0010	poly bag
2.00 meter	DB0011	poly bag
3.00 meter	DB0012	poly bag

DB15 M/M RS-232 Serial Cable

DB15 male > DB15 male

- Connects your computer to device with COM port RS-232 compatible interface
- DB15 connector on each end equipped with screws to ensure an easy and solid connection for stable data communication



Specification	SKU #	Packaging
1.00meter	DB0013	poly bag
1.50 meter	DB0014	poly bag
2.00 meter	DB0015	poly bag
3.00 meter	DB0016	poly bag

DB15 F/F RS-232 Serial Cable

DB15 female > DB15 female

- Connects your computer to device with COM port RS-232 compatible interface
- DB15 connector on each end equipped with screws to ensure an easy and solid connection for stable data communication



Specification	SKU #	Packaging
1.00meter	DB0017	poly bag
1.50 meter	DB0018	poly bag
2.00 meter	DB0019	poly bag
3.00 meter	DB0020	poly bag

DB15 M/F RS-232 Serial Cable

DB15 male > DB15 female

- Connects your computer to device with COM port RS-232 compatible interface
- DB15 connector on each end equipped with screws to ensure an easy and solid connection for stable data communication



Specification	SKU #	Packaging
1.00meter	DB0021	poly bag
1.50 meter	DB0022	poly bag
2.00 meter	DB0023	poly bag
3.00 meter	DB0024	poly bag

DB25 M/M RS-232 Serial Cable

DB25 male > DB25 male

- DB25 25Pin each cable is shielded and designed with fully molded thumbscrew connectors for quick and easy connections every time, it features a sturdy design and strict quality standards.
- All 25 wires are directly connected through pin pins for easy compatibility and expand your existing cables, it uses pure copper gold plated pins for maximum connectivity and signal transmission.



Specification	SKU #	Packaging
1.00meter	DB0025	poly bag
1.50 meter	DB0026	poly bag
2.00 meter	DB0027	poly bag
3.00 meter	DB0028	poly bag

DB25 F/F RS-232 Serial Cable

DB25 female > DB25 female

- DB25 25Pin each cable is shielded and designed with fully molded thumbscrew connectors for quick and easy connections every time, it features a sturdy design and strict quality standards.
- All 25 wires are directly connected through pin pins for easy compatibility and expand your existing cables, it uses pure copper gold plated pins for maximum connectivity and signal transmission.



Specification	SKU #	Packaging
1.00meter	DB0029	poly bag
1.50 meter	DB0030	poly bag
2.00 meter	DB0031	poly bag
3.00 meter	DB0032	poly bag

DB25 M/F RS-232 Serial Cable

DB25 male > DB25 female



- DB25 25Pin each cable is shielded and designed with fully molded thumbscrew connectors for quick and easy connections every time, it features a sturdy design and strict quality standards.
- All 25 wires are directly connected through pin pins for easy compatibility and expand your existing cables, it uses pure copper gold plated pins for maximum connectivity and signal transmission.

Specification	SKU #	Packaging
1.00meter	DB0033	poly bag
1.50 meter	DB0034	poly bag
2.00 meter	DB0035	poly bag
3.00 meter	DB0036	poly bag

DB37 M/M RS-449 Serial Cable

DB37 male > DB37 male



- DB37 37Pin each cable is shielded and designed with fully molded thumbscrew connectors for quick and easy connections every time, it features a sturdy design and strict quality standards.
- All 37 wires are directly connected through pin pins for easy compatibility and expand your existing cables, it uses pure copper gold plated pins for maximum connectivity and signal transmission.

Specification	SKU #	Packaging
1.00meter	DB0037	poly bag
1.50 meter	DB0038	poly bag
2.00 meter	DB0039	poly bag
3.00 meter	DB0040	poly bag

DB37 F/F RS-449 Serial Cable

DB37 female > DB37 female



- DB37 37Pin each cable is shielded and designed with fully molded thumbscrew connectors for quick and easy connections every time, it features a sturdy design and strict quality standards.
- All 37 wires are directly connected through pin pins for easy compatibility and expand your existing cables, it uses pure copper gold plated pins for maximum connectivity and signal transmission.

Specification	SKU #	Packaging
1.00meter	DB0041	poly bag
1.50 meter	DB0042	poly bag
2.00 meter	DB0043	poly bag
3.00 meter	DB0044	poly bag

DB37 M/F RS-449 Serial Cable

DB37 male > DB37 female



- DB37 37Pin each cable is shielded and designed with fully molded thumbscrew connectors for quick and easy connections every time, it features a sturdy design and strict quality standards.
- All 37 wires are directly connected through pin pins for easy compatibility and expand your existing cables, it uses pure copper gold plated pins for maximum connectivity and signal transmission.

Specification	SKU #	Packaging
1.00meter	DB0045	poly bag
1.50 meter	DB0046	poly bag
2.00 meter	DB0047	poly bag
3.00 meter	DB0048	poly bag

SCSI DB50 M/M Cable

DB50 male > DB50 male



- DB50 50Pin each cable is shielded and designed with fully molded thumbscrew connectors for quick and easy connections every time, it features a sturdy design and strict quality standards.
- All 50 wires are directly connected through pin pins for easy compatibility and expand your existing cables, it uses pure copper gold plated pins for maximum connectivity and signal transmission.

Specification	SKU #	Packaging
1.00meter	DB0049	poly bag
1.50 meter	DB0050	poly bag
2.00 meter	DB0051	poly bag
3.00 meter	DB0052	poly bag

SCSI DB50 F/F Cable

DB50 female > DB50 female



- DB50 50Pin each cable is shielded and designed with fully molded thumbscrew connectors for quick and easy connections every time, it features a sturdy design and strict quality standards.
- All 50 wires are directly connected through pin pins for easy compatibility and expand your existing cables, it uses pure copper gold plated pins for maximum connectivity and signal transmission.

Specification	SKU #	Packaging
1.00meter	DB0053	poly bag
1.50 meter	DB0054	poly bag
2.00 meter	DB0055	poly bag
3.00 meter	DB0056	poly bag

SCSI DB50 M/F Cable

DB50 male > DB50 female



- DB50 50Pin each cable is shielded and designed with fully molded thumbscrew connectors for quick and easy connections every time, it features a sturdy design and strict quality standards.
- All 50 wires are directly connected through pin pins for easy compatibility and expand your existing cables, it uses pure copper gold plated pins for maximum connectivity and signal transmission.

Specification	SKU #	Packaging
1.00meter	DB0057	poly bag
1.50 meter	DB0058	poly bag
2.00 meter	DB0059	poly bag
3.00 meter	DB0060	poly bag

DB9 Male to Two DB9 Female RS-232 Serial Y Cable

DB9 male > 2 x DB9 female



- Connects your computer to device with COM port RS-232 compatible interface
- Null-Modem cord that 2-3, 4-6, 7-8 line are cross linked (TX,RX,RTS, CTS, DTR,DSR wires are connected); standard shielded DE9 rs232 cable male to female with AL foil
- DB9 connector on each end equipped with screws to ensure an easy and solid connection for stable data communication

Specification	SKU #	Packaging
1.00meter	DB0061	poly bag



DIN5 M/M AT Keyboard Cable

- AT keyboard cables are perfect for connecting your AT style keyboard to a PC.
- This cable is constructed from top quality foil-shielded wire to prevent EMI/RFI interference, and is fully molded to ensure excellent strain relief and a clean, professional appearance.

Specification	SKU #	Packaging
1.00M	MD0001	poly bag
2.00M	MD0002	poly bag
3.00M	MD0003	poly bag



DIN5 M/F AT Keyboard Extension Cable

- AT keyboard cables are perfect for connecting your AT style keyboard to a PC.
- This cable is constructed from top quality foil-shielded wire to prevent EMI/RFI interference, and is fully molded to ensure excellent strain relief and a clean, professional appearance.

Specification	SKU #	Packaging
1.00M	MD0004	poly bag
2.00M	MD0005	poly bag
3.00M	MD0006	poly bag



Mini-DIN6 M/M PS/2 Keyboard/Mouse Cable

- PS/2 Keyboard / Mouse cables are perfect for connecting your PS/2 style keyboard or mouse to your PC.
- Each PS/2 cable is constructed from top quality foil-shielded wire to prevent EMI/RFI interference, and is fully molded to ensure excellent strain relief and a clean, professional appearance.

Specification	SKU #	Packaging
1.00M	MD0007	poly bag
2.00M	MD0008	poly bag
3.00M	MD0009	poly bag



Mini-DIN6 M/F PS/2 Keyboard/Mouse

- Extend the length of the cable on any PS/2 device, such as a mouse or keyboard, for more flexibility.
- Each PS/2 cable is constructed from top quality foil-shielded wire to prevent EMI/RFI interference, and is fully molded to ensure excellent strain relief and a clean, professional appearance.

Specification	SKU #	Packaging
1.00M	MD0010	poly bag
2.00M	MD0011	poly bag
3.00M	MD0012	poly bag



IEEE-1284 DB25M to CN36M Parallel Printer

- Connect your PC to a parallel dot-matrix printer, older laser printer or other uni-directional Centronics peripheral.
- This cable provides foil shielding to protect valuable data from EMI/RFI interference.
- All 25 conductors are wired for ease of compatibility.

Specification	SKU #	Packaging
1.00M	MD0016	poly bag
2.00M	MD0017	poly bag
3.00M	MD0018	poly bag



IEEE-1284 DB25M/M Parallel Cable

- To enjoy the increased data rate and two-way communication of your IEEE-1284 compliant printer or scanner, you need a cable with high quality connectors and a specialized wire type.
- This cable connects IEEE-1284 compliant printers, scanners, and other compliant peripherals to your PC.

Specification	SKU #	Packaging
1.00M	MD0019	poly bag
2.00M	MD0020	poly bag
3.00M	MD0021	poly bag



IEEE-1284 DB25M to HPCN36M Parallel

- This IEEE 1284 bi-directional parallel printer cable connects computers with a DB25 female parallel port to IEEE-1284 compliant parallel printers with a High Density Centronics 36 female parallel port.
- The cable supports high-speed IEEE 1284 bi-directional communication.
- It is double shielded for maximum EMI/RFI protection.

Specification	SKU #	Packaging
1.00M	MD0022	poly bag
2.00M	MD0023	poly bag
3.00M	MD0024	poly bag



3 in 1 KVM Cable

- Super VGA M/F + PS/2 Keyboard & Mouse, with Ferrite, Black
- This 3 in 1 KVM cable connects your PC to a VGA PS/2 KVM switch, which allows a user to control multiple computers from a single keyboard, video monitor and mouse.

Specification	SKU #	Packaging
2.00M	MD0025	poly bag
3.00M	MD0026	poly bag
5.00M	MD0027	poly bag



3 in 1 KVM Cable

- Super VGA M/M + PS/2 Keyboard & Mouse, with Ferrite, Black
- This 3 in 1 KVM cable connects your PC to a VGA PS/2 KVM switch, which allows a user to control multiple computers from a single keyboard, video monitor and mouse.

Specification	SKU #	Packaging
2.00M	MD0028	poly bag
3.00M	MD0029	poly bag
5.00M	MD0030	poly bag



USB Type A (2.0) to RS232 (DB9-Male Hex nut)

- Chipset: PROLIFIC PL2303
- USB specification 1.1 or 2.0 compliant
- Support RS232 serial interface DB9
- Support over 1Mbps data transfer rate
- Support remote wake-up and power management
- Support four individual RS232 Serial ports
- Suitable for PDA and Modem or more
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- Driver CD included
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging	Other
1.00M	MD0001	poly bag	beige



USB Type A (2.0) to RS232 (Thumbscrew)

- Chipset: PROLIFIC PL2303
- USB specification 1.1 or 2.0 compliant
- Support RS232 serial interface DB9
- Support over 1Mbps data transfer rate
- Support remote wake-up and power management
- Support four individual RS232 Serial ports
- Suitable for PDA and Modem or more
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- Driver CD included
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
1.00M	MD0001	poly bag



USB Type A (2.0) to RS232 (Female Thumbscrew)

- Chipset: FTDI / FT232
- USB specification 1.1 or 2.0 compliant
- Support RS232 serial interface DB9
- Support over 1Mbps data transfer rate
- Support remote wake-up and power management
- Support four individual RS232 Serial ports
- Suitable for PDA and Modem or more
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- Driver CD included
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
1.00M	MD0001	poly bag



USB Type A (2.0) to RS232 (Thumbscrew)

- Chipset: FTDI / FT232
- USB specification 1.1 or 2.0 compliant
- Support RS232 serial interface DB9
- Support over 1Mbps data transfer rate
- Support remote wake-up and power management
- Support four individual RS232 Serial ports
- Suitable for PDA and Modem or more
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- Driver CD included
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
1.00M	MD0001	poly bag



USB Type A (2.0) to RS232 (Thumbscrew)

- Chipset: FTDI / FT232
- USB specification 1.1 or 2.0 compliant
- Support RS232 serial interface DB9 / Supports the RS-485 interface
- Support over 1Mbps data transfer rate
- Support remote wake-up and power management
- Support four individual RS232 Serial ports
- Suitable for PDA and Modem or more
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- Driver CD included
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
1.00M	MD0001	poly bag



Serial RS232 to 485/422

- Industrial grade - High temperature range
- Plug-and-Play (hot-pluggable)
- Includes terminal block with selectable
- Operates from 300 to 115.2K baud
- Port powered - no external power needed
- Built-in 600W surge protection
- Built-in 15KV static protection
- CE, FCC and RoHS Compliance Certified
- RoHS compliant

Specification	SKU #	Packaging
1.00M	MD0001	poly bag



Serial RS232 to 485

- Industrial grade - High temperature range
- Plug-and-Play (hot-pluggable)
- Includes terminal block with selectable
- Operates from 300 to 115.2K baud
- Port powered - no external power needed
- Built-in 600W surge protection
- Built-in 15KV static protection
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
1.00M	MD0001	poly bag



Serial RS232 to TTL

- Industrial grade - High temperature range
- High speed - operates from 300 to 912.6K baud
- 5000V (5000Vrms min AC) optical isolation protects RS232 devices from electrical surges and lightning strikes
- 5000V (5000Vrms min AC) optical isolation also eliminates ground loop and noise problems
- Port Powered: no external power is necessary
- Plug-and-Play (Device is hot-pluggable)
- CE, FCC and RoHS Compliance Certified
- RoHS compliant

Specification	SKU #	Packaging
1.00M	MD0001	poly bag



Serial RS232 Isolator Optocoupler

- Industrial grade - High temperature range
- High speed - operates from 300 to 912.6K baud
- 5000V (5000Vrms min AC) optical isolation protects RS232 devices from electrical surges and lightning strikes
- 5000V (5000Vrms min AC) optical isolation also eliminates ground loop and noise problems
- Port Powered: no external power is necessary
- Plug-and-Play (Device is hot-pluggable)
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
1.00M	MD0001	poly bag



USB to RS232 Serial Adapter (Thumbscrew)

- Chipset: FTDI / FT232
- USB specification 1.1 or 2.0 compliant
- Support RS232 serial interface DB9
- Support over 1Mbps data transfer rate
- Support remote wake-up and power management
- Support four individual RS232 Serial ports
- Suitable for PDA and Modem or more
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- Driver CD included
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
1.00M	MD0001	poly bag



USB to RS232 Serial Adapter (DB9-Male Hex nut)

- Chipset: FTDI / FT232
- USB specification 1.1 or 2.0 compliant
- Support RS232 serial interface DB9
- Support over 1Mbps data transfer rate
- Support remote wake-up and power management
- Support four individual RS232 Serial ports
- Suitable for PDA and Modem or more
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- Driver CD included
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
1.80M	MD0001	poly bag



USB to RS232 Serial Adapter (Thumbscrew)

- Chipset: PROLIFIC PL2303
- USB specification 1.1 or 2.0 compliant
- Support RS232 serial interface DB9
- Support over 1Mbps data transfer rate
- Support remote wake-up and power management
- Support four individual RS232 Serial ports
- Suitable for PDA and Modem or more
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- Driver CD included
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
1.80M	MD0001	poly bag



USB to RS232 Serial Adapter (DB9-Male Hex nut)

- Chipset: PROLIFIC PL2303
- USB specification 1.1 or 2.0 compliant
- Support RS232 serial interface DB9
- Support over 1Mbps data transfer rate
- Support remote wake-up and power management
- Support four individual RS232 Serial ports
- Suitable for PDA and Modem or more
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- Driver CD included
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
1.80M	MD0001	poly bag



USB to RS232 Serial Adapter

- Chipset: PROLIFIC PL2303
- USB specification 1.1 or 2.0 compliant
- Support RS232 serial interface DB9/DB25
- Support over 1Mbps data transfer rate
- Support remote wake-up and power management
- Support four individual RS232 Serial ports
- Suitable for PDA and Modem or more
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- Driver CD included
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
1.80M	MD0001	poly bag



USB to RS232 Serial Adapter

- Chipset: PROLIFIC PL2303
- USB specification 1.1 or 2.0 compliant
- Support RS232 serial interface DB9
- Support over 1Mbps data transfer rate
- Support remote wake-up and power management
- Support four individual RS232 Serial ports
- Suitable for PDA and Modem or more
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- Driver CD included
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
2.00M	MD0028	poly bag



USB to RS232 Serial Adapter w/ferrite

- Chipset: PROLIFIC PL2303
- USB specification 1.1 or 2.0 compliant
- Support RS232 serial interface DB9
- Support over 1Mbps data transfer rate
- Support remote wake-up and power management
- Support four individual RS232 Serial ports
- Suitable for PDA and Modem or more
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- Driver CD included
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
0.35M	MD0028	poly bag



USB-C to RS232 Serial Adapter

- Chipset: FTDI / FT232
- USB specification 1.1 or 2.0 compliant
- Support RS232 serial interface DB9
- Support over 1Mbps data transfer rate
- Support remote wake-up and power management
- Support four individual RS232 Serial ports
- Suitable for PDA and Modem or more
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- Driver CD included
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
1.80M	MD0028	poly bag



USB 2.0 to 2 Ports Serial RS-232 Cable

- Chipset: FTDI / FT232
- USB specification 1.1 or 2.0 compliant
- Support RS232 serial interface DB9
- Support over 1Mbps data transfer rate
- Support remote wake-up and power management
- Support four individual RS232 Serial ports
- Suitable for PDA and Modem or more
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- Driver CD included
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
1.80M	MD0028	poly bag



USB 2.0 to 4 Ports Serial RS-232 Cable

- Chipset: FTDI / FT232
- USB specification 1.1 or 2.0 compliant
- Support RS232 serial interface DB9
- Support over 1Mbps data transfer rate
- Support remote wake-up and power management
- Support four individual RS232 Serial ports
- Suitable for PDA and Modem or more
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- Driver CD included
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
2.00M	MD0028	poly bag

USB 3.2 Gen 1 Active Signal Booster Type AM to Type AF



- Chipset: GL3523
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- USB 3.2 compatible
- Data transferrate up to 5Gbps
- include power supply 5V/1A
- Note: not cascable, can not be extended by more active extensions.
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
10.0 Meter	U3ACT10	white box
15.00Meter	U3ACT15	white box
20.0 Meter	U3ACT20	white box
25.0 Meter	U3ACT25	white box



USB 3.2 Gen 1 Active Signal Booster Type CM to Type AF



- Chipset: GL3523
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- USB 3.2 compatible
- Data transferrate up to 5Gbps
- include power supply 5V/1A
- Note: not cascable, can not be extended by more active extensions.
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
10.0 Meter	U3ACT10CA	white box
15.00Meter	U3ACT15CA	white box
20.0 Meter	U3ACT20CA	white box
25.0 Meter	U3ACT25CA	white box



USB 3.2 Gen 1 Active Signal Booster Type AM to Type CF



- Chipset: GL3523
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- USB 3.2 compatible
- Data transferrate up to 5Gbps
- include power supply 5V/1A
- Note: not cascable, can not be extended by more active extensions.
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
10.0 Meter	U3ACT10AC	white box
15.00Meter	U3ACT15AC	white box
20.0 Meter	U3ACT20AC	white box
25.0 Meter	U3ACT25AC	white box



USB 3.2 Gen 1 Active Signal Booster Type CM to Type CF



- Chipset: GL3523
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10, Linux, Mac 8.x/9.x/10.x/11.x
- USB 3.2 compatible
- Data transferrate up to 5Gbps
- include power supply 5V/1A
- Note: not cascable, can not be extended by more active extensions.
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
10.0 Meter	U3ACT10CC	white box
15.00Meter	U3ACT15CC	white box
20.0 Meter	U3ACT20CC	white box
25.0 Meter	U3ACT25CC	white box





USB 2.0 Active Signal Booster / Repeater Cable

- Chipset: FE21
- USB specification 1.1 or 2.0 compliant
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10,Linux, Mac 8.x/9.x/10.x/11.x
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
5.0 Meter	U2ACT05	white box
7.5 Meter	U2ACT7.5	white box



USB 2.0 Active Signal Booster / Repeater Cable

- Chipset: FE21
- USB specification 1.1 or 2.0 compliant
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10,Linux, Mac 8.x/9.x/10.x/11.x
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
10.0 Meter	U2ACT10	white box
15.00Meter	U2ACT15	white box
20.0 Meter	U2ACT20	white box
25.0 Meter	U2ACT25	white box



USB 2.0 Active Signal Booster / Repeater Cable

- Chipset: FE21
- USB specification 1.1 or 2.0 compliant
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10,Linux, Mac 8.x/9.x/10.x/11.x
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
5.0 Meter	U2ACT05B	white box
7.50Meter	U2ACT7.5B	white box
10.0 Meter	U2ACT10B	white box
15.0 Meter	U2ACT15B	white box



USB 3.2 Extension Dock

- Splits an USB 3.2 Port into 1 Data and 1 Power Port
- Super Speed USB 3.2/ 5Gbps Data Rate
- Backward Compatible with USB 2.0 and 1.1
- Gold-plated Copper Contacts Minimize Data Loss
- Foiled and Braided Shield Complies with Fully Rated Cable Specifications
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10,Linux, Mac 8.x/9.x/10.x/11.x
- RoHS Compliance Certified

Specification	SKU #	Packaging
1.80 Meter	U3A018	poly bag
3.00 Meter	U3A030	poly bag



USB 3.2 Gen 1 Active Signal Booster (5M)

- Chipset: SN65LVPES02
- Supports Windows 2000/XP/ Server 2008/ Vista/7/8/10,Linux, Mac 8.x/9.x/10.x/11.x
- USB 3.2 compatible
- Data transferrate up to 5Gbps
- CE, FCC and RoHS Compliance Certified
- RoHS Compliance Certified

Specification	SKU #	Packaging
5.00 Meter	U3ACT05	poly bag



USB Extender up to 60m over RJ45

- USB 1.1 compatible
- Can extend up to 60 meters
- Supports all common USB devices such as scanners, printers, digital cameras, etc.
- Connection with standard UTP / FTP / S-FTP patch cable
- Optional power supply with 5V / 2A DC
- No need to drive, plug and play
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
1.00M	UIACT60	white box



USB Extender up to 50m over RJ45

- USB 1.1 compatible
- Can extend up to 50 meters
- Supports all common USB devices such as scanners, printers, digital cameras, etc.
- Connection with standard UTP / FTP / S-FTP patch cable
- Optional power supply with 5V / 2A DC
- No need to drive, plug and play
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
1.00M	UIACT50	white box

USB2.0 Extender over 50m over RJ45

- This USB 2.0 Extender Can extend up to 50 meters
- Connection with standard UTP / FTP / S-FTP patch cable
- Support USB 2.0 protocol USB devices can be hot swapped
- Connection with standard UTP / FTP / S-FTP patch cable
- Optional power supply with 5V / 2A DC
- No need to drive, plug and play
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
1.00M	U2ACT50	white box



USB2.0 Extender with 4 ports , 50m over RJ45

- This USB 2.0 Extender Can extend up to 50 meters(165FT)
- 4 USB HUB Port
- Connection with standard UTP / FTP / S-FTP patch cable
- Support USB 2.0 protocol USB devices can be hot swapped
- Connection with standard UTP / FTP / S-FTP patch cable
- Optional power supply with 5V / 2A DC
- No need to drive, plug and play
- CE, FCC and RoHS Compliance Certified

Specification	SKU #	Packaging
1.00M	U2ACT504	poly bag





CEE 7/7 to IEC320 C5

- Cables are fully rated for 250 Volt / 2.5 Amp applications
- VDE & RoHS approved
- All materials are complied with RoHS directive.

Specification	SKU #	Packaging
1.00M	PW0001	poly bag
2.00M	PW0002	poly bag
3.00M	PW0003	poly bag



CEE 7/7 to IEC320 C13

- This heavy-duty 18 AWG cord features a fully molded design for maximum durability and long life
- Cables are fully rated for 250 Volt/10 Amp applications
- All materials are complied with RoHS directive.

Specification	SKU #	Packaging
1.00M	PW0004	poly bag
2.00M	PW0005	poly bag
3.00M	PW0006	poly bag



IEC-320-C7 to CEE 7/16

- European Power Cord is rated for AC250V and 2.5A. Connection is from a Europlug male end to a C-7 female end.
- Cables are fully rated for 250 Volt / 2.50 Amp applications
- All materials are complied with RoHS directive.

Specification	SKU #	Packaging
1.00M	PW0007	poly bag
2.00M	PW0008	poly bag
3.00M	PW0009	poly bag



IEC320 C5 to NEMA 5-15P

- This heavy-duty 18 AWG cord features a fully molded design for maximum durability and long life
- Cables are fully rated for 125 Volt/10 Amp applications
- UL listed and CSA approved
- All materials are complied with RoHS directive.

Specification	SKU #	Packaging
1.00M	PW0010	poly bag
2.00M	PW0011	poly bag
3.00M	PW0012	poly bag



IEC320 C13 to NEMA 5-15P

- This heavy-duty 18 AWG cord features a fully molded design for maximum durability and long life
- Cables are fully rated for 125 Volt/10 Amp applications
- UL listed and CSA approved
- All materials are complied with RoHS directive.

Specification	SKU #	Packaging
1.00M	PW0013	poly bag
2.00M	PW0014	poly bag
3.00M	PW0015	poly bag



IEC320 C7 to NEMA 1-15P

- This heavy-duty 18 AWG cord features a fully molded design for maximum durability and long life
- UL listed and CSA approved
- All materials are complied with RoHS directive.

Specification	SKU #	Packaging
1.00M	PW0016	poly bag
2.00M	PW0017	poly bag
3.00M	PW0018	poly bag



IEC-320-C5 to UK Plug BS1363-1/A

- England Notebook Power Cord for laptop computers or C5 cord device
- Ideal replacement for damaged, overused or missing UK power cords.
- Approved by BSI.
- All materials are complied with RoHS directive.

Specification	SKU #	Packaging
1.00M	PW0019	poly bag
2.00M	PW0020	poly bag
3.00M	PW0021	poly bag



IEC-320-C13 to UK Plug BS1363-1/A

- This UK power cord is a perfect solution to connect your computer, monitor, or other devices that have the IEC-60320-C14 inlet while traveling to England.
- This BS 1363 UK plug is rated at 13A 250V.
- Approved by BSI.
- All materials are complied with RoHS directive.

Specification	SKU #	Packaging
1.00M	PW0022	poly bag
2.00M	PW0023	poly bag
3.00M	PW0024	poly bag



IEC-320-C7 to UK Plug BS1363-1/A

- Ideal replacement for damaged, overused or missing UK power cords.
- This BS 1363 UK plug is rated at 5A 250V.
- Approved by BSI.
- All materials are complied with RoHS directive.

Specification	SKU #	Packaging
1.00M	PW0025	poly bag
2.00M	PW0026	poly bag
3.00M	PW0027	poly bag

OEM Solution Availables







Brazil AC cords





Israel AC cords





Italy AC cords





China AC cords



Argentina AC cords





<p>IDE SATA</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PCI Bracket</td> <td>ADP20001</td> </tr> </table>	Specification	SKU #	PCI Bracket	ADP20001	<p>SATA x 2 / 4 Pin</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PCI Bracket</td> <td>ADP20002</td> </tr> </table>	Specification	SKU #	PCI Bracket	ADP20002	<p>SATA x 2</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PCI Bracket</td> <td>ADP20003</td> </tr> </table>	Specification	SKU #	PCI Bracket	ADP20003	<p>SATA</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PCI Bracket</td> <td>ADP20004</td> </tr> </table>	Specification	SKU #	PCI Bracket	ADP20004
Specification	SKU #																		
PCI Bracket	ADP20001																		
Specification	SKU #																		
PCI Bracket	ADP20002																		
Specification	SKU #																		
PCI Bracket	ADP20003																		
Specification	SKU #																		
PCI Bracket	ADP20004																		





<p>SATA /4 Pin / 3pin fan</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PCI Bracket</td> <td>ADP20005</td> </tr> </table>	Specification	SKU #	PCI Bracket	ADP20005	<p>DB25 Female</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PCI Bracket</td> <td>ADP20006</td> </tr> </table>	Specification	SKU #	PCI Bracket	ADP20006	<p>DB25F / DB9 M</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PCI Bracket</td> <td>ADP20007</td> </tr> </table>	Specification	SKU #	PCI Bracket	ADP20007	<p>DB9 Male</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PCI Bracket</td> <td>ADP20008</td> </tr> </table>	Specification	SKU #	PCI Bracket	ADP20008
Specification	SKU #																		
PCI Bracket	ADP20005																		
Specification	SKU #																		
PCI Bracket	ADP20006																		
Specification	SKU #																		
PCI Bracket	ADP20007																		
Specification	SKU #																		
PCI Bracket	ADP20008																		





<p>2 x DB9 Male</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PCI Bracket</td> <td>ADP20009</td> </tr> </table>	Specification	SKU #	PCI Bracket	ADP20009	<p>2 x USB2.0</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PCI Bracket</td> <td>ADP20010</td> </tr> </table>	Specification	SKU #	PCI Bracket	ADP20010	<p>4 x USB2.0</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PCI Bracket</td> <td>ADP20011</td> </tr> </table>	Specification	SKU #	PCI Bracket	ADP20011	<p>2 x USB3.2</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PCI Bracket</td> <td>ADP20012</td> </tr> </table>	Specification	SKU #	PCI Bracket	ADP20012
Specification	SKU #																		
PCI Bracket	ADP20009																		
Specification	SKU #																		
PCI Bracket	ADP20010																		
Specification	SKU #																		
PCI Bracket	ADP20011																		
Specification	SKU #																		
PCI Bracket	ADP20012																		

<p>USB Type-C</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PCI Bracket</td> <td>ADP20013</td> </tr> </table>	Specification	SKU #	PCI Bracket	ADP20013	<p>2 x USB Type-C</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PCI Bracket</td> <td>ADP20014</td> </tr> </table>	Specification	SKU #	PCI Bracket	ADP20014	<p>USB Type-C</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PCI Bracket</td> <td>ADP20015</td> </tr> </table>	Specification	SKU #	PCI Bracket	ADP20015	<p>2 x USB Type-C</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PCI Bracket</td> <td>ADP20016</td> </tr> </table>	Specification	SKU #	PCI Bracket	ADP20016
Specification	SKU #																		
PCI Bracket	ADP20013																		
Specification	SKU #																		
PCI Bracket	ADP20014																		
Specification	SKU #																		
PCI Bracket	ADP20015																		
Specification	SKU #																		
PCI Bracket	ADP20016																		

<p>4 Pin to Floppy</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PC Power Cable</td> <td>ADP20017</td> </tr> </table>	Specification	SKU #	PC Power Cable	ADP20017	<p>4 Pin to SATA Angle</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PC Power Cable</td> <td>ADP20018</td> </tr> </table>	Specification	SKU #	PC Power Cable	ADP20018	<p>4 Pin ATX to 2 x 4Pin</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PC Power Cable</td> <td>ADP20019</td> </tr> </table>	Specification	SKU #	PC Power Cable	ADP20019	<p>4 Pin M to 4 Pin F</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PC Power Cable</td> <td>ADP20020</td> </tr> </table>	Specification	SKU #	PC Power Cable	ADP20020
Specification	SKU #																		
PC Power Cable	ADP20017																		
Specification	SKU #																		
PC Power Cable	ADP20018																		
Specification	SKU #																		
PC Power Cable	ADP20019																		
Specification	SKU #																		
PC Power Cable	ADP20020																		

<p>4 Pin M to 2 x 4 Pin F</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PC Power Cable</td> <td>ADP20021</td> </tr> </table>	Specification	SKU #	PC Power Cable	ADP20021	<p>4 Pin M to 2 x SATA</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PC Power Cable</td> <td>ADP20022</td> </tr> </table>	Specification	SKU #	PC Power Cable	ADP20022	<p>4 Pin to SATA</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PC Power Cable</td> <td>ADP20023</td> </tr> </table>	Specification	SKU #	PC Power Cable	ADP20023	<p>4 Pin to 2 x Floppy</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PC Power Cable</td> <td>ADP20024</td> </tr> </table>	Specification	SKU #	PC Power Cable	ADP20024
Specification	SKU #																		
PC Power Cable	ADP20021																		
Specification	SKU #																		
PC Power Cable	ADP20022																		
Specification	SKU #																		
PC Power Cable	ADP20023																		
Specification	SKU #																		
PC Power Cable	ADP20024																		

<p>4 Pin ATX to 4Pin</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PC Power Cable</td> <td>ADP20025</td> </tr> </table>	Specification	SKU #	PC Power Cable	ADP20025	<p>ATX to ATX</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PC Power Cable</td> <td>ADP20026</td> </tr> </table>	Specification	SKU #	PC Power Cable	ADP20026	<p>4 Pin to Floppy / 4 Pin</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PC Power Cable</td> <td>ADP20027</td> </tr> </table>	Specification	SKU #	PC Power Cable	ADP20027	<p>4 Pin M to 2 x SATA Angle</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PC Power Cable</td> <td>ADP20028</td> </tr> </table>	Specification	SKU #	PC Power Cable	ADP20028
Specification	SKU #																		
PC Power Cable	ADP20025																		
Specification	SKU #																		
PC Power Cable	ADP20026																		
Specification	SKU #																		
PC Power Cable	ADP20027																		
Specification	SKU #																		
PC Power Cable	ADP20028																		

<p>4 Pin to SATA / 4 Pin</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PC Power Cable</td> <td>ADP20029</td> </tr> </table>	Specification	SKU #	PC Power Cable	ADP20029	<p>4 Pin M to 2 x SATA Angle</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PC Power Cable</td> <td>ADP20030</td> </tr> </table>	Specification	SKU #	PC Power Cable	ADP20030	<p>IDE SATA to SATA / 4 Pin</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PC Power Cable</td> <td>ADP20031</td> </tr> </table>	Specification	SKU #	PC Power Cable	ADP20031	<p>IDE SATA to SATA / 2 Pin</p>  <table border="1"> <tr> <th>Specification</th> <th>SKU #</th> </tr> <tr> <td>PC Power Cable</td> <td>ADP20032</td> </tr> </table>	Specification	SKU #	PC Power Cable	ADP20032
Specification	SKU #																		
PC Power Cable	ADP20029																		
Specification	SKU #																		
PC Power Cable	ADP20030																		
Specification	SKU #																		
PC Power Cable	ADP20031																		
Specification	SKU #																		
PC Power Cable	ADP20032																		

<p>USB4 90° magnetic plug</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0001</td></tr> </table>	Specification	SKU #	40Gbps	ADP0001	<p>USB4 90° magnetic plug</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0002</td></tr> </table>	Specification	SKU #	40Gbps	ADP0002	<p>USB4 right angle magnetic</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0003</td></tr> </table>	Specification	SKU #	40Gbps	ADP0003	<p>USB4 straight magnetic</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0004</td></tr> </table>	Specification	SKU #	40Gbps	ADP0004
Specification	SKU #																		
40Gbps	ADP0001																		
Specification	SKU #																		
40Gbps	ADP0002																		
Specification	SKU #																		
40Gbps	ADP0003																		
Specification	SKU #																		
40Gbps	ADP0004																		
<p>USB4 CM to CM</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0008</td></tr> </table>	Specification	SKU #	40Gbps	ADP0008	<p>USB4 90° angle</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0007</td></tr> </table>	Specification	SKU #	40Gbps	ADP0007	<p>USB4 CF to CF</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0006</td></tr> </table>	Specification	SKU #	40Gbps	ADP0006	<p>USB4 CM to CF holder</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0005</td></tr> </table>	Specification	SKU #	40Gbps	ADP0005
Specification	SKU #																		
40Gbps	ADP0008																		
Specification	SKU #																		
40Gbps	ADP0007																		
Specification	SKU #																		
40Gbps	ADP0006																		
Specification	SKU #																		
40Gbps	ADP0005																		
<p>USB4 left angle CM to CF</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0009</td></tr> </table>	Specification	SKU #	40Gbps	ADP0009	<p>USB4 left angle CM to CF</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0010</td></tr> </table>	Specification	SKU #	40Gbps	ADP0010	<p>USB4 CM to CM</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0011</td></tr> </table>	Specification	SKU #	40Gbps	ADP0011	<p>USB4 CF TO CF holder</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0012</td></tr> </table>	Specification	SKU #	40Gbps	ADP0012
Specification	SKU #																		
40Gbps	ADP0009																		
Specification	SKU #																		
40Gbps	ADP0010																		
Specification	SKU #																		
40Gbps	ADP0011																		
Specification	SKU #																		
40Gbps	ADP0012																		
<p>USB3.2 AM to AM</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0013</td></tr> </table>	Specification	SKU #	40Gbps	ADP0013	<p>USB3.2 AF to AF</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0014</td></tr> </table>	Specification	SKU #	40Gbps	ADP0014	<p>USB3.2 AM to AF</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0015</td></tr> </table>	Specification	SKU #	40Gbps	ADP0015	<p>USB3.2 AM to CF</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0016</td></tr> </table>	Specification	SKU #	40Gbps	ADP0016
Specification	SKU #																		
40Gbps	ADP0013																		
Specification	SKU #																		
40Gbps	ADP0014																		
Specification	SKU #																		
40Gbps	ADP0015																		
Specification	SKU #																		
40Gbps	ADP0016																		

<p>USB Type-C to Type-E</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0017</td></tr> </table>	Specification	SKU #	40Gbps	ADP0017	<p>USB Type-A to Type-E</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0018</td></tr> </table>	Specification	SKU #	40Gbps	ADP0018	<p>USB Type-E to Type-E</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0019</td></tr> </table>	Specification	SKU #	40Gbps	ADP0019	<p>USB Type-E to Type-A</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0020</td></tr> </table>	Specification	SKU #	40Gbps	ADP0020
Specification	SKU #																		
40Gbps	ADP0017																		
Specification	SKU #																		
40Gbps	ADP0018																		
Specification	SKU #																		
40Gbps	ADP0019																		
Specification	SKU #																		
40Gbps	ADP0020																		
<p>USB Type-E to Type-C</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0021</td></tr> </table>	Specification	SKU #	40Gbps	ADP0021	<p>19P/20P to USB3.2 * 2</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0022</td></tr> </table>	Specification	SKU #	40Gbps	ADP0022	<p>19P/20P to USB3.2 * 2</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0023</td></tr> </table>	Specification	SKU #	40Gbps	ADP0023	<p>119P/20P to USB3.2 * 2</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>40Gbps</td><td>ADP0024</td></tr> </table>	Specification	SKU #	40Gbps	ADP0024
Specification	SKU #																		
40Gbps	ADP0021																		
Specification	SKU #																		
40Gbps	ADP0022																		
Specification	SKU #																		
40Gbps	ADP0023																		
Specification	SKU #																		
40Gbps	ADP0024																		
<p>USB2.0 90° BM to CF</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>480Mbps</td><td>ADP0025</td></tr> </table>	Specification	SKU #	480Mbps	ADP0025	<p>USB2.0 90° BM to CF</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>480Mbps</td><td>ADP0026</td></tr> </table>	Specification	SKU #	480Mbps	ADP0026	<p>USB2.0 BM to CF</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>480Mbps</td><td>ADP0027</td></tr> </table>	Specification	SKU #	480Mbps	ADP0027	<p>USB2.0 BM to CF</p>  <table border="1"> <tr><th>Specification</th><th>SKU #</th></tr> <tr><td>480Mbps</td><td>ADP0028</td></tr> </table>	Specification	SKU #	480Mbps	ADP0028
Specification	SKU #																		
480Mbps	ADP0025																		
Specification	SKU #																		
480Mbps	ADP0026																		
Specification	SKU #																		
480Mbps	ADP0027																		
Specification	SKU #																		
480Mbps	ADP0028																		

100W PD Adapter, Aluminum Alloy Type-C Female-Male Charging Adapter

• Specification:
 Type: DC Converter Plug, PD E-Mark Chips, stable and fast charging
 Connector A: USB Type C Female
 Connector (s) B: 5.5*2.5mm/7.4*5.0mm/3.0*1.1mm/4.5*3.0mm/2.5*0.7mm/7.9*5.5mm.....Square Plug Male
 Laptop Input Supported:18V-20V

- 3.0mm*1.0mm For Acer Samsung Ultrabook
- 7.4mm*5.0mm For Hp 18.5V 3.5A,19V 4.74A,etc.
- 7.4mm*5.0mm For Dell 19.5V 3.34A,19.5V 4.62A,etc.
- 5.5mm*2.5mm For Lenovo Asus Toshiba.....Laptop Adapter
- 4.5mm*3.0mm For Dell 19.5V 2.31A,19.5V 3.34A,etc.
- 4.5mm*3.0mm For Hp 19.5V3.33A 19.5V4.62A (Blue Tip)
- 2.5mm*0.7mm For Asus 19V 1.58A,etc.
- 4.0mm*1.35mm For Asus 19V 2.37A,19V3.42A
- 4.8mm*1.7mm For Hp 18.5V 3.5A
- 4.0mm*1.7mm For Lenovo Ideapad 20V 2.25A,20V3.25A
- 7.9mm*5.5mm For Lenovo 20V 3.25A,4.5A
- 5.0mm*3.0mm For Samsung 19V 3.16A
- 6.5mm*4.4mm For Sony 19.5V 3.3A,3.9A,4.7A
- 5.5mm*1.7mm For Acer 19V3.42A
- Square Plug For Lenovo Thinkpad Yoga 20V3.25A 20V4.5A




•To better understand our products, let me introduce you to our USB Type-C to Universal Laptop Adapter converter. This converter allows you to charge your laptop using a USB Type-C adapter, eliminating the need for a traditional laptop adapter. Please note that our converter is not a power source on its own and requires a USB Type-C adapter to function.


• Whether or not you can charge your laptop using a power bank depends on the output power of your power bank. Make sure that the output power of your power bank is not lower than the power needs of your laptop.

•Unfortunately, you cannot charge your laptop using a USB-C phone adapter as the power output is too low. Phone adapters usually have an output of only 5W-10W, while laptop adapters typically have a much higher output, such as 65W, 90W, or more, such as 19V 3.42A 20V 3.25A 65W; 19V 4.74A 20V 4.5A 90W.

•To check the charging power of your laptop, please follow these steps:

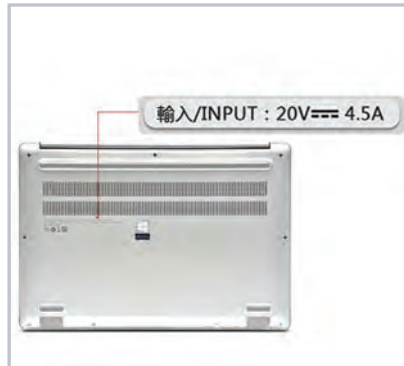


Check the Bottom info of your laptop

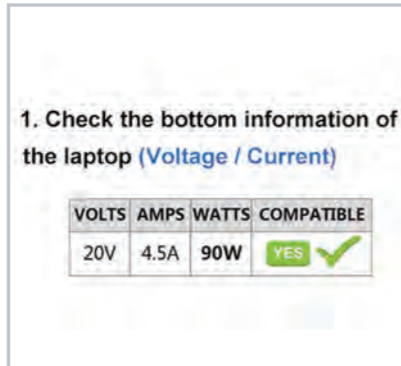

1. Check the bottom information of the laptop (Voltage / Current)


VOLTS	AMPS	WATTS	COMPATIBLE
20V	4.5A	90W	YES ✓

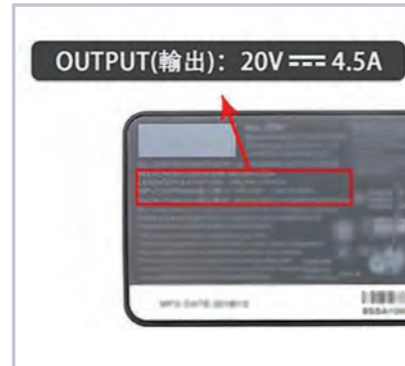

Check the Bottom info of your Laptop Power Adaptor

•To select the appropriate USB Type-C adapter, you must ensure that its output power is equal to or greater than the power requirements of your laptop. For instance, if your laptop requires a charging power of 20V 4.5A 90W, then your USB Type-C adapter must have an output power of at least 90W; otherwise, it will not function. Therefore, it's crucial to carefully check the specifications before placing an order.

USB 3.1 Type-C To Dc




Specification	SKU #
2.5MM x 5.5MM	ADP0126

USB 3.1 Type-C To Dc



Specification	SKU #
2.1MM x 5.5MM	ADP0127

USB 3.1 Type-C To Dc



Specification	SKU #
3.0MM x 5.0MM	ADP0128

USB 3.1 Type-C To Dc



Specification	SKU #
1.7MM x 5.5MM	ADP0110

USB 3.1 Type-C To Dc



Specification	SKU #
1.7MM x 4.8MM	ADP0111

USB 3.1 Type-C To Dc




Specification	SKU #
1.7MM x 5.5MM	ADP0112

USB 3.1 Type-C To Dc




Specification	SKU #
1.7MM x 4.8MM	ADP0113

USB 3.1 Type-C To Dc DELL



Specification	SKU #
5.0MM x 7.4MM	ADP0114

USB 3.1 Type-C To Dc HP




Specification	SKU #
5.0MM x 7.4MM	ADP0115

USB 3.1 Type-C To Dc YOGA3



Specification	SKU #
YOGA3	ADP0116

USB 3.1 Type-C To Dc HP



Specification	SKU #
3.0MM x 4.5MM	ADP0117

USB 3.1 Type-C To Dc




Specification	SKU #
1.7MM x 4.0MM	ADP0118

USB 3.1 Type-C To Dc



Specification	SKU #
1.35MM x 4.0MM	ADP0119

USB 3.1 Type-C To Dc DELL



Specification	SKU #
3.0MM x 4.5MM	ADP0120

USB 3.1 Type-C To Dc Lenovo



Specification	SKU #
6.0MM x 10.0MM	ADP0121

USB 3.1 Type-C To Dc



Specification	SKU #
0.7MM x 2.7MM	ADP0122

USB 3.1 Type-C To Dc



Specification	SKU #
1.7MM x 5.5MM	ADP0123

USB 3.1 Type-C To Dc



Specification	SKU #
1.35MM x 3.5MM	ADP0124

USB 3.1 Type-C To Dc



Specification	SKU #
3.7MM x 6.0MM	ADP0125

DB9 Gender M/F



SKU #

ADP0081

DB9 Gender F/F



SKU #

ADP0082

DB9 Gender M/M



SKU #

ADP0083

DB15 Gender M/F



SKU #

ADP0084

DB15 Gender F/F



SKU #

ADP0085

DB15 Gender M/M



SKU #

ADP0086

DB25 Gender M/F



SKU #

ADP0087

DB25 Gender F/F



SKU #

ADP0088

DB25 Gender M/M



SKU #

ADP0089

DB37 Gender M/F



SKU #

ADP0090

DB37 Gender F/F



SKU #

ADP0091

DB37 Gender M/M



SKU #

ADP0092

VGA 15P Gender M/F



SKU #

ADP0093

VGA 15P Gender F/F



SKU #

ADP0094

VGA 15P Gender M/M



DB9-M/DB25-M



SKU #

ADP0095

DB9-F/DB25-M



SKU #

ADP0096

DB9-F/DB25-F



SKU #

ADP0097

DB9-M/DB25-F



SKU #

ADP0098

DB9 Female to RJ45 Modular



SKU #

ADP0099

DB9 Male to RJ45 Modular



SKU #

ADP0100

DB15 Female to RJ45 Modular



SKU #

ADP0101

DB15 Male to RJ45 Modular



SKU #

ADP0102

DB25 Female to RJ45 Modular



SKU #

ADP0103

DB25 Male to RJ45 Modular









SKU #

ADP0104

HDMI DM to AF	HDMI AF to AF	HDMI AM to AF	HDMI AF to AF
			
Specification: 8K SKU #: ADP0057	Specification: 8K SKU #: ADP0058	Specification: 8K SKU #: ADP0059	Specification: 8K SKU #: ADP0060

HDMI AM to AM	HDMI AM to AF 90° angle	HDMI AM to AF right angle	HDMI AM to AF
			
Specification: 8K SKU #: ADP0061	Specification: 8K SKU #: ADP0062	Specification: 8K SKU #: ADP0063	Specification: 8K SKU #: ADP0064

HDMI 3 in 1 Adapter	HDMI AM to AF 90° angle	HDMI AM to AM	HDMI AM to AM
			
Specification: 8K SKU #: ADP0065	Specification: 8K SKU #: ADP0066	Specification: 8K SKU #: ADP0067	Specification: 8K SKU #: ADP0068

HDMI AM to AM	HDMI AM to AM	HDMI AM to AM	HDMI AM to AM
			
Specification: 8K SKU #: ADP0069	Specification: 8K SKU #: ADP0070	Specification: 8K SKU #: ADP0071	Specification: 8K SKU #: ADP0072

DVI M to HDMI F	DVI M to HDMI F	HDMI M to DVI F	DVI M to HDMI F 90°
			
Specification: 720/1080i/1080P SKU #: ADP0073	Specification: 720/1080i/1080P SKU #: ADP0074	Specification: 720/1080i/1080P SKU #: ADP0075	Specification: 720/1080i/1080P SKU #: ADP0076

DVI M to VGA F 90° angled	DVI M to VGA F	VGA 90° angled M/F	VGA 90° Right M/F
			
Specification: 720/1080i/1080P SKU #: ADP0077	Specification: 720/1080i/1080P SKU #: ADP0078	Specification: 720/1080i/1080P SKU #: ADP0079	Specification: 720/1080i/1080P SKU #: ADP0080

VGA 90° angled M/F	VGA 90° Left M/F	VGA M/M	VGA F/F
			
Specification: 720/1080i/1080P SKU #: ADP0081	Specification: 720/1080i/1080P SKU #: ADP0082	Specification: 720/1080i/1080P SKU #: ADP0083	Specification: 720/1080i/1080P SKU #: ADP0084

DB9 Female - Thumbscrews



Specification	SKU #
Terminal board	ADP0110

DB9 Male Thumbscrews



Specification	SKU #
Terminal board	ADP0111

DB9 Female Hex Nuts



Specification	SKU #
Terminal board	ADP0112

DB9 Male Hex Nuts



Specification	SKU #
Terminal board	ADP0113

DB15 Male Thumbscrews



Specification	SKU #
Terminal board	ADP0114

DB15 Female Thumbscrews



Specification	SKU #
40Gbps	ADP0115

DB15 Male Hex Nuts



Specification	SKU #
Terminal board	ADP0116

DB15 female Hex Nuts



Specification	SKU #
Terminal board	ADP0117

DB25 female Thumbscrews



Specification	SKU #
Terminal board	ADP0118

DB25 feale Hex Nuts



Specification	SKU #
Terminal board	ADP0119

DB25 Male Thumbscrews



Specification	SKU #
Terminal board	ADP0120

DB25 Male Hex Nuts



Specification	SKU #
Terminal board	ADP0121

VGA Female Thumbscrews



Specification	SKU #
Terminal board	ADP0122

VGA Male Thumbscrews



Specification	SKU #
Terminal board	ADP0123

VGA Female Hex Nuts



Specification	SKU #
Terminal board	ADP0124

VGA Male Hex Nuts



Specification	SKU #
Terminal board	ADP0125

3.5mm 4 Pole F to 4 Pin



Specification	SKU #
Terminal board	ADP0126

3.5mm 4 Pole M to 4 Pin



Specification	SKU #
Terminal board	ADP0127

6.35MM to 2 Pin



Specification	SKU #
Terminal board	ADP0128

6.35MM to 3 Pin



Specification	SKU #
Terminal board	ADP0129

RJ45 MAle to 4 Pin



Specification	SKU #
Terminal board	ADP0130

RJ45 male to 8 Pin



Specification	SKU #
Terminal board	ADP0131

RJ45 Female to 8 Pin



Specification	SKU #
Terminal board	ADP0132

USB2.0 A Female to 5 Pin



Specification	SKU #
Terminal board	ADP0133

USB2.0 A Male to 5 Pin



Specification	SKU #
Terminal board	ADP0134

USB2.0 Micro B F to 5 Pin



Specification	SKU #
Terminal board	ADP0135

USB2.0 Type-C M to 5 Pin



Specification	SKU #
Terminal board	ADP0136

USB2.0 Type-C F to 5 Pin



Specification	SKU #
Terminal board	ADP0137

USB2.0 A Male to 5 Pin



Specification	SKU #
Terminal board	ADP0138

USB2.0 A Female to 5 Pin



Specification	SKU #
Terminal board	ADP0139

USB2.0 B Male to 5 Pin




Specification	SKU #
Terminal board	ADP0140

RJ45 Female to 5 Pin



Specification	SKU #
Terminal board	ADP0141

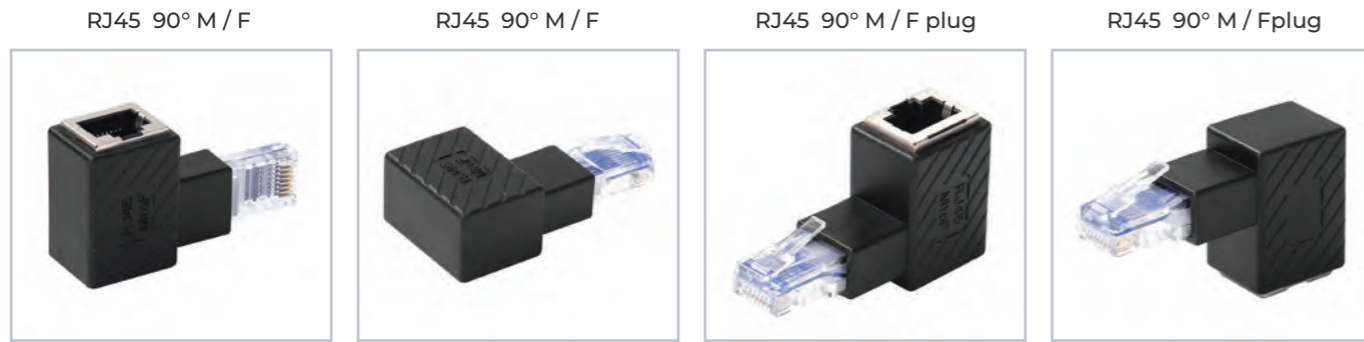

Specification	SKU #	Specification	SKU #	Specification	SKU #	Specification	SKU #
Cat5e Cat6 8P8C	ADP0029	Cat5e Cat6 8P8C	ADP0030	Cat5e Cat6 8P8C	ADP0031	Cat5e Cat6 8P8C	ADP0032



Specification	SKU #	Specification	SKU #	Specification	SKU #	Specification	SKU #
Cat5e Cat6 8P8C	ADP0033	40Gbps	ADP0034	Cat5e Cat6 8P8C	ADP0035	Cat5e Cat6 8P8C	ADP0036



Specification	SKU #	Specification	SKU #	Specification	SKU #	Specification	SKU #
Cat5e Cat6 8P8C	ADP0037	40Gbps	ADP0038	40Gbps	ADP0039	40Gbps	ADP0040



Specification	SKU #	Specification	SKU #	Specification	SKU #	Specification	SKU #
4K	ADP0041	40Gbps	ADP0042	5Gbps	ADP0043	5Gbps	ADP0044



Specification	SKU #	Specification	SKU #	Specification	SKU #	Specification	SKU #
5Gbps	ADP0045	5Gbps	ADP0046	5Gbps	ADP0047	5Gbps	ADP0048



Specification	SKU #	Specification	SKU #	Specification	SKU #	Specification	SKU #
5Gbps	ADP0049	5Gbps	ADP0050	5Gbps	ADP0051	5Gbps	ADP0052



Specification	SKU #	Specification	SKU #	Specification	SKU #	Specification	SKU #
5Gbps	ADP0053	5Gbps	ADP0054	5Gbps	ADP0055	5Gbps	ADP0056



CAT5E Cable Shielded (FTP) Booted

- High Quality 100% Pure Copper
- 50 Micron Gold Plated Rj45 Plugs
- Up to 100MHz / 1Gbps
- Meets or exceeds Category 5E performance in compliance with the TIA/EIA T-568B standard wiring.
- UI/Cul Listed. Rohs.

Specification	SKU #	Packaging	Other
0.0 M~ Up to 25 Meter	C5E001	poly bag	any color PVC and Jacket



CAT5E Cable UTP Booted

- High Quality 100% Pure Copper
- 50 Micron Gold Plated Rj45 Plugs
- Up to 100MHz / 1Gbps
- Meets or exceeds Category 5E performance in compliance with the TIA/EIA T-568B standard wiring.
- UI/Cul Listed. Rohs.

Specification	SKU #	Packaging	Other
0.0 M~ Up to 25 Meter	C5E002	poly bag	any color PVC and Jacket



CAT5E Cable UTP Non-Booted

- High Quality 100% Pure Copper
- 50 Micron Gold Plated Rj45 Plugs
- Up to 100MHz / 1Gbps
- Meets or exceeds Category 5E performance in compliance with the TIA/EIA T-568B standard wiring.
- UI/Cul Listed. Rohs.

Specification	SKU #	Packaging	Other
0.0 M~ Up to 25 Meter	C5E003	poly bag	any color PVC and Jacket



CAT6 Cable Shielded (SSTP/SFTP) Booted

- Our Cat6 Slim Cables Are Fully Backward Compatible With Existing Gigabit Or Cat5 Networks.
- High Quality 100% Pure Copper
- 50 Micron Gold Plated Rj45 Plugs
- Up to 250MHz / 1Gbps
- Tia/Eia* T-568B Standard Wiring.
- UI/Cul Listed. Rohs.

Specification	SKU #	Packaging	Other
0.0 M~ Up to 25 Meter	C6001	poly bag	any color PVC and Jacket



CAT6 Cable UTP Booted

- Our Cat6 cables are fully backward compatible with existing Cat5E cables
- High Quality 100% Pure Copper
- 50 Micron Gold Plated Rj45 Plugs
- Up to 250MHz / 1Gbps
- Tia/Eia* T-568B Standard Wiring.
- UI/Cul Listed. Rohs.

Specification	SKU #	Packaging	Other
0.0 M~ Up to 25 Meter	C6002	poly bag	any color PVC and Jacket



CAT6 Cable UTP Non-Booted

- Our Cat6 cables are fully backward compatible with existing Cat5E cables
- High Quality 100% Pure Copper
- 50 Micron Gold Plated Rj45 Plugs
- Up to 250MHz / 1Gbps
- Tia/Eia* T-568B Standard Wiring.
- UI/Cul Listed. Rohs.

Specification	SKU #	Packaging	Other
0.0 M~ Up to 25 Meter	C6003	poly bag	any color PVC and Jacket



CAT6A Cable UTP Booted

- Our Cat6 Slim Cables Are Fully Backward Compatible With Existing Gigabit Or Cat5 Networks.
- High Quality 100% Pure Copper
- 50 Micron Gold Plated Rj45 Plugs
- Speeds Of Up To 10 Gpbs, Our High Bandwidth 550 Mhz
- Tia/Eia* T-568B Standard Wiring.

Specification	SKU #	Packaging	Other
0.0 M~ Up to 25 Meter	C6A001	poly bag	any color PVC and Jacket



CAT6A Slim Cable UTP Booted

- Our Cat6 Slim Cables Are Fully Backward Compatible With Existing Gigabit Or Cat5 Networks.
- High Quality 100% Pure Copper
- 50 Micron Gold Plated Rj45 Plugs
- Speeds Of Up To 10 Gpbs, Our High Bandwidth 550 Mhz
- Tia/Eia* T-568B Standard Wiring.
- UI/Cul Listed. Rohs.

Specification	SKU #	Packaging	Other
0.0 M~ Up to 25 Meter	C6A002	poly bag	any color PVC and Jacket



CAT7 SSTP (double shield) Booted

- Our Cat7 Cables Are Fully Backward Compatible With Existing Gigabit Or Cat5, 6 Networks.
- High Quality 100% Pure Copper
- 50 Micron Gold Plated Rj45 Plugs
- Speeds Of Up To 10 Gpbs, Our High Bandwidth 660 Mhz - 10GBASE-T
- Tia/Eia-568-B-2-10 class EA ISO/IEC 11801, CENELEC EN 50173 and IEEE802.3an Standard Wiring.
- UI/Cul Listed. Rohs.

Specification	SKU #	Packaging	Other
0.0 M~ Up to 25 Meter	C7001	poly bag	any color PVC and Jacket



CAT8 SFTP Booted

- Our Cat8 Cables Are Fully Backward Compatible With Existing Gigabit Or Cat5, 6 & 7 Networks.
- High Quality 100% Pure Copper
- 50 Micron Gold Plated Rj45 Plugs
- Speeds Of Up To 40 Gpbs, Our High Bandwidth 550 Mhz
- Tia/Eia* T-568B Standard Wiring.
- UI/Cul Listed. Rohs.

Specification	SKU #	Packaging	Other
0.0 M~ Up to 25 Meter	C8001	poly bag	any color PVC and Jacket



CAT6 Flat Cable

- Our Cat6 Flat Cables Are Fully Backward Compatible With Existing Gigabit Or Cat5 Networks.
- High Quality 100% Pure Copper
- 50 Micron Gold Plated Rj45 Plugs
- Speeds Of Up To 10 Gpbs, Our High Bandwidth 550 Mhz
- Tia/Eia* T-568B Standard Wiring.
- UI/Cul Listed. Rohs.

Specification	SKU #	Packaging	Other
0.0 M~ Up to 25 Meter	C6004	poly bag	any color PVC and Jacket



CAT7 Flat Cable

- High Quality 100% Pure Copper
- 50 Micron Gold Plated Rj45 Plugs
- Speeds Of Up To 10 Gpbs, Our High Bandwidth 660 Mhz - 10GBASE-T
- UI/Cul Listed. Rohs.

Specification	SKU #	Packaging	Other
0.0 M~ Up to 25 Meter	C7002	poly bag	any color PVC and Jacket
0.0 M~ Up to 25 Meter	C7003	poly bag	any color PVC and braid


Cat5e SFTP Bulk Cable



Cat5e SFTP Lan Cable is in 4-pair with conductors in 24AWG/34AWG*7 pure copper conductor with insulation of Foamed polyolefin, every pair are shielded with Al-foil tape, grouped under metal wire braiding.

- Conductor: Solid Bare Copper
- Gauge: 24AWG
- Conductor Diameter: 0.517±0.02
- Insulation: Foam-skin PE
- UI/Cul Listed, Rohs.

Cat5e FTP Bulk Cable



Cat5e FTP Lan Cable is in 4-pair with conductors in 24AWG/34AWG*7 pure copper conductor with insulation of Foamed polyolefin, every pair are shielded with Al-foil tape.

- Conductor: Solid Bare Copper
- Gauge: 24AWG
- Conductor Diameter: 0.517±0.02
- Insulation: Foam-skin PE
- UI/Cul Listed, Rohs.

Cat5e UTP Bulk Cable



Cat5e UTP Lan Cable is in 4-pair with conductors in 24AWG/32AWG*7 pure copper conductor with insulation of HD polyolefin, protected by a thermoplastic and non-flame propagating sheath colored according to customer's special request.

- Conductor: Solid bare Copper
- Gauge: 24AWG
- Conductor Diameter: 0.51±0.02
- Thickness: 0.2mm
- UI/Cul Listed, Rohs.

Cat6 SFTP Bulk Cable



Cat6 SFTP Lan Cable is in 4-pair with conductors in 23AWG/34AWG*7/36AWG*7 pure copper conductor with insulation of Foamed polyolefin, every pair are shielded with Al-foil tape, grouped under metal wire braiding.

- Conductor: Solid Bare Copper
- Gauge: 23AWG
- Conductor Diameter: 0.57±0.02
- Insulation: Foam-skin PE
- UI/Cul Listed, Rohs.

Cat6 FTP Bulk Cable



Cat6 FTP Lan Cable is in 4-pair with conductors in 23AWG/34AWG*7/36AWG*7 pure copper conductor with insulation of Foamed polyolefin, every pair are shielded with Al-foil tape, grouped under metal wire braiding.

- Conductor: Solid Bare Copper
- Gauge: 23AWG
- Conductor Diameter: 0.57±0.02
- Insulation: Foam-skin PE
- UI/Cul Listed, Rohs.

Cat6 UTP Bulk Cable



Cat6 UTP Lan Cable is in 4-pair with conductors in 23AWG/34AWG*7/36AWG*7 pure copper conductor with insulation of Foamed polyolefin, every pair are shielded with Al-foil tape.

- Conductor: Solid Bare Copper
- Gauge: 23AWG
- Conductor Diameter: 0.57±0.02
- Insulation: Foam-skin PE
- UI/Cul Listed, Rohs.


Cat7 SFTP Bulk Cable



Cat7 SFTP Lan Cable is in 4-pair with conductors in 23AWG/1 /34AWG*7 pure copper conductor with insulation of Foamed polyolefin, every pair are shielded with Al-foil tape, grouped under metal wire braiding.

- Conductor: Solid Bare Copper
- Gauge: 23AWG
- Conductor Diameter: 0.583±0.02
- Insulation: Foam-skin PE
- UI/Cul Listed, Rohs.

Cat8 SFTP Bulk Cable



Cat6 UTP Lan Cable is in 4-pair with conductors in 23AWG/34AWG*7/36AWG*7 pure copper conductor with insulation of Foamed polyolefin, every pair are shielded with Al-foil tape.

- Conductor: Solid Bare Copper
- Gauge: 23AWG
- Conductor Diameter: 0.57±0.02
- Insulation: Foam-skin PE
- UI/Cul Listed, Rohs.

Outdoor Bulk Cables



Outdoor UTP Cable



Outdoor FTP Cable



Outdoor SFTP Cable

Bulk Pull Box



Bulk Wooden Spool



*All images used are for illustration purposes only and may not represent the actual product.



66 Type Adjustable Impact Punch Down

- Insert and cut cable terminations effortlessly
- Adjustable high/low actuation setting accommodates termination requirements
- Storage compartment with unique locking device provides convenient storage for spare blade
- Impact-absorbing cushioned grip reduces operator stress for high volume installers

SKU #	Packaging
TS0001	poly bag



Punch Down Tool Impact for 66 & 110 Type

- Insert and cut cable terminations effortlessly
- Adjustable high/low actuation setting accommodates termination requirements
- Storage compartment with unique locking device provides convenient storage for spare blade
- Impact punch down tool with impact mechanism inside divided from a turnable body
- Impact-absorbing cushioned grip reduces operator stress for high volume installers

SKU #	Packaging
TS0002	poly bag



66 Type Impact Punch Down Tool

- Terminates 66 block connections
- For termination of telephone and high-speed network data cables
- Impact punch down tool with impact mechanism inside divided from a turnable body
- Rugged frame with storage compartment in the body of the tool for storing one blade

SKU #	Packaging
TS0003	poly bag



110 Type Impact Punch Down Tool

- Terminates 110 block connections
- For termination of telephone and high-speed network data cables
- Impact punch down tool with impact mechanism inside divided from a turnable body
- Rugged frame with storage compartment in the body of the tool for storing one blade

SKU #	Packaging
TS0004	poly bag



Multi-Conductor Stripper and CutterTool

- Strips and cuts a wide range of computer/network cable
- Adjustment screws allow for a wide range of cable diameters
- Cuts and strips STP/UTP, modular cable, coax, speaker wire and more
- Strips both flat and round wire

SKU #	Packaging
TS0005	poly bag



RJ45 Crimping Tool without Ratchet

- Crimps keyed or un-keyed 8P8C modular telephone/networking plugs
- Wire cutter/stripper for stranded wire
- Hardened steel frame

SKU #	Packaging
TS0006	poly bag



Crimping Tool For RG58/RG59/RG62

- Crimp BNC and/or F coaxial terminators onto RG-58, RG-59 or RG-62 cable with this heavy-duty crimping tool.

SKU #	Packaging
TS0007	poly bag



RJ11/RJ12 Crimping Tool without Ratchet

- Crimps keyed or un-keyed 6P6C, 6P4C, 4P4C modular telephone/networking plugs
- Wire cutter/stripper for stranded wire
- Hardened steel frame

SKU #	Packaging
TS0008	poly bag



RJ11/RJ12/RJ45 Crimping Tool with Ratchet

- Crimps keyed or un-keyed 8P8C, 6P6C, 6P4C, 4P4C modular telephone/networking plugs
- Wire cutter/stripper for stranded wire
- Hardened steel frame
- Ratcheted handle movement for added precision
- Plastic-covered handles to reduce fatigue

SKU #	Packaging
TS0009	poly bag




RJ11, RJ45, USB and BNC Cable Tester

- Fast speed in testing
- Remote Unit is separable from the Main Unit for remote testing
- BNC terminator 25 Ohm/50 Ohm indication
- Straight or crossover indication
- Battery good or battery low indication
- LED clear indication
- RJ11/RJ45 are equipped with 50u" gold plating
- Fast reaction during test process
- Max. cable length : 300 ft

SKU #	Packaging
TS0010	poly bag


SIMPLEX FIBER OPTIC PATCH CORD

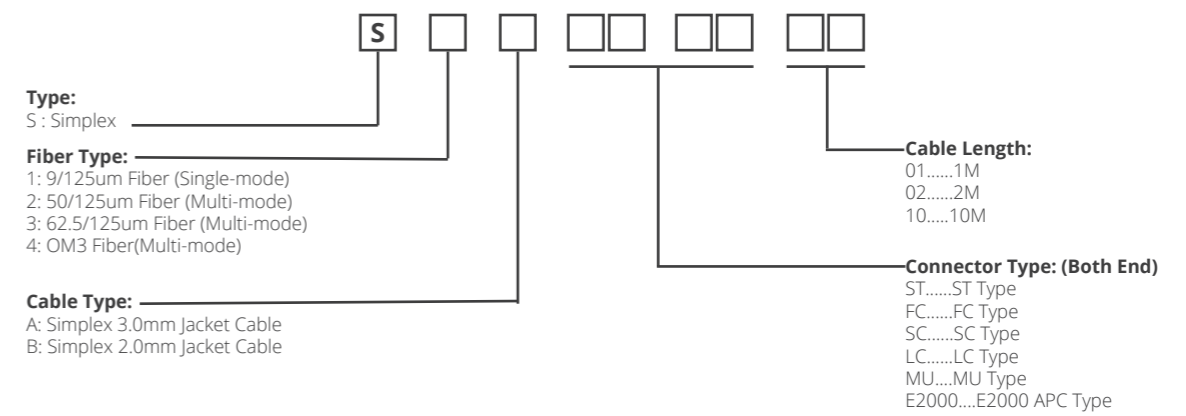

Example : S-1-A-ST-SC-02-02:3.0MM Single Mode ST-SC Simplex F/O Patch Cord 2M



DUPLEX FIBER OPTIC PATCH CORD

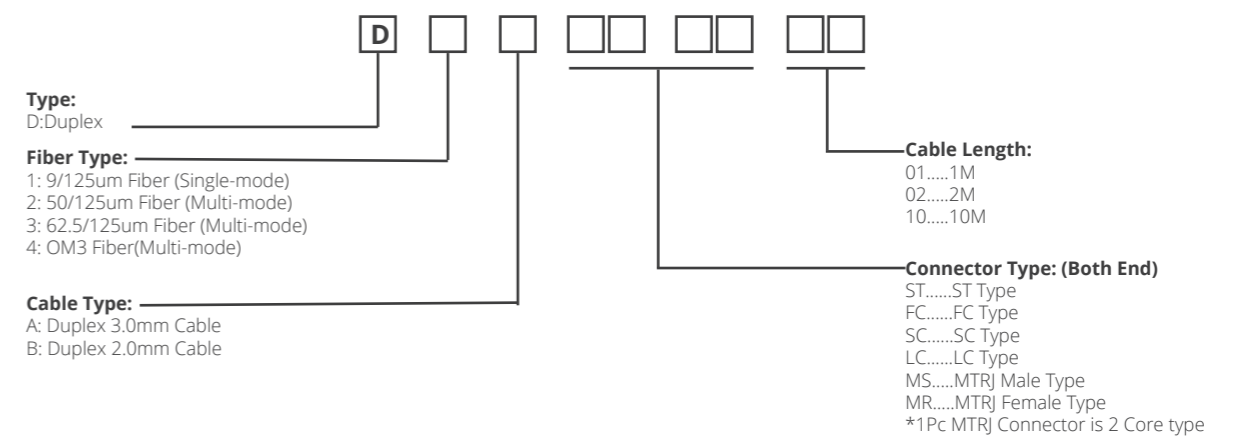

Website



Facebook Page



LinkedIn Page



Wechat Contact



WhatsApp Contact