

SUPER CLEAN ENJOY GREEN

TAIZHOU SHIWANG CLEANING EQUIPMENT CO.,LTD

TEL: +86 13736641561

E-mail: jack@spswashing.com

WEB: sps.en.alibaba.com

ADD: No.12, Workers' Rd, Zhaoqiao IZ, Hongjia St. Jiaojiang D.
Taizhou City, Zhejiang Pr, CN.





SPS



**SPS CLEANING
EQUIPMENT MANUFACTURE**

TAIZHOU SHIWANG CLEANING EQUIPMENT CO.,LTD

ADVANTAGE

20,000+

FACTORY m²

120+

DESIGNS


280+

MOLDINGS

SPS



PRODUCT DESIGN



TESTING EQUIPMENT



PARTS ASSEMBLE



PRODUCT TEST



PRODUCT PACKAGE



PRODUCT DELIVERY



SPS

Taizhou ShiWang Cleaning Equipment Co., Ltd has more than 1000 sets of various Products Molds, Machining Centers, CNC Lathes and other advanced processing equipment, covering metal processing, plastic processing, spraying, final assembly, testing, test identification etc.

We accept OEM&ODM,Even low MOQ customization service including logo, packaging and design. Samples can be offered anytime, we also have a perfect after-sales system to ensure you will not be in trouble for after-sales problems, we sincerely search for a long term cooperation with you .

SUPER CLEAN ENJOY GREEN

Gun



90%

O.E.M SERVICE

OEM / ODM Customization Service available here. We are a more experienced manufacturer.



R&D CAPABILITIES

We have senior engineers team, Which can design product according to your requirements.

24h



ONLINE SERVICE

We provide 24-hour online for sales service, ensuring a quick response within a short time.

PRODUCT

CATALOG

01 SPRAY GUNS

04 CLEANING
NOZZLES

02 FOAM LANCES

05 SURFACE
CLEANER

03 HOSE &
HOSE FITTINGS

06 WASHING
ACCESSORIES

SPRAY GUNS

**ENJOY
FIGHTING STYLE**

WHILE YOUR WASHING



SG-PA-01DR

MAX PRESSURE 5000PSI\350bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 40L/min



● Army Green



● Cobalt Blue



● Reddish Brown

SG-PA-01DR

MAX PRESSURE	5000PSI\350bar
MAX TEMPERATURE	60°C\140°F
MAX FLOW	40L/min

SG-PA-01DR

MAX PRESSURE	5000PSI\350bar
MAX TEMPERATURE	60°C\140°F
MAX FLOW	40L/min

SG-PA-01DR

MAX PRESSURE	5000PSI\350bar
MAX TEMPERATURE	60°C\140°F
MAX FLOW	40L/min



SG-3560M-01DG

MAX PRESSURE 5000PSI\350bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 60L/min

COLOR



SG-3560L-01DG

MAX PRESSURE 5000PSI\350bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 60L/min



SG-3200-01CY

MAX PRESSURE 4000PSI\350bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 35L/min

COLOR



SG-300-01DX

MAX PRESSURE 4350PSI\300bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 30L/min



SG-4H01DB

MAX PRESSURE 5700PSI\400bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 30L/min



SG-S3945-01DX

MAX PRESSURE 5650PSI\390bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 45L/min

COLOR



SG-BE-01DB

MAX PRESSURE 5000PSI\350bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 40L/min



SG-8HA01DB

MAX PRESSURE 4000PSI\280bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 40L/min

COLOR



SG-8HB01DB

MAX PRESSURE 5000PSI\350bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 40L/min

COLOR



SG-2H01DB

MAX PRESSURE 4350PSI\300bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 30L/min

COLOR



SG-1H01DB

MAX PRESSURE 4350PSI\300bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 30L/min



SG-6H01DB

MAX PRESSURE 5000PSI\350bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 38L/min

COLOR



SG-5H01DB

MAX PRESSURE 4000PSI\280bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 25L/min



SG-8HA01DB

MAX PRESSURE 5700PSI\400bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 30L/min

COLOR



SG-3900-01DB

MAX PRESSURE 5650PSI\390bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 30L/min

COLOR



SG-1825-01DR

MAX PRESSURE 4000PSI\275bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 40L/min



SG-LF-01DB

MAX PRESSURE 4000PSI\280bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 42L/min



SG-KEW-DR

MAX PRESSURE 4000PSI\280bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 25L/min



SG-PA-01DR

MAX PRESSURE 4000PSI\280bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 25L/min



SG-SH-01DR

MAX PRESSURE 5000PSI\345bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 30L/min



SG-YF-01DB

MAX PRESSURE 5000PSI\350bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 40L/min



SG-1825-01AR

MAX PRESSURE 4000PSI\275bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 40L/min



SG-JG-01AZ

MAX PRESSURE 4500PSI\310bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 40L/min



SG-LT-01AB

MAX PRESSURE 4000PSI\280bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 42L/min



SG-DN-01AO

MAX PRESSURE 4000PSI\280bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 25L/min

COLOR



SG-SH-01AR

MAX PRESSURE 5000PSI\345bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 30L/min

COLOR



SG-2H01AR

MAX PRESSURE 3600PSI\250bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 25L/min



SG-8H-B01DG

MAX PRESSURE 7250PSI\500bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 35L/min



SG-7300-01DR

MAX PRESSURE 10150PSI\700bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 60L/min



SG-8500-01DX

MAX PRESSURE 11600PSI\800bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 60L/min



SG-8L-04CB

MAX PRESSURE 7250PSI\500bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 40L/min



SG-YL-04CB

MAX PRESSURE 14500PSI\1000bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 20L/min



SG-1500L-04CB

MAX PRESSURE 21750PSI\1500bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 20L/min



SG-YS-04AB

MAX PRESSURE 3000PSI\200bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 20L/min



SG-YS-02AB

MAX PRESSURE 3000PSI\200bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 20L/min



SG-YL-01DX

MAX PRESSURE 350PSI\25bar

MAX TEMPERATURE 90°C\200°F

MAX FLOW 100L/min



SG-3600-04CB

MAX PRESSURE 5000PSI\350bar

MAX TEMPERATURE 60°C\140°F

MAX FLOW 40L/min



SG-2750-03C

MAX PRESSURE 2750PSI\190bar

MAX TEMPERATURE 150°C\300°F

MAX FLOW 25L/min



FOAM LANCES

THICK SNOW FOAMING

UPGRADE PROCESSING



SF-2CXG-01GT

PRESSURE 1450PSI-5000PSI

CAPACITY 1L

TEMPERATURE 60°C\140°F

FLOW 7L/min-20L/min



C-2C01



C-2C02



C-2C03



C-2C04



C-2C05



C-2C06



C-2C07



C-2C08



C-M01



C-1C



B-XG02



B-XG03



B-XG04



B-XG05



B-XG06



N-PT01



N-PT02



N-PT03



N-PT04



N-EY01

C-XH

PRESSURE	1450PSI-5000PSI
TEMPERATURE	60°C\140°F
FLOW	7L/min-20L/min

COLOR



C-DH

PRESSURE	1450PSI-5000PSI
TEMPERATURE	60°C\140°F
FLOW	7L/min-20L/min

COLOR



C-KH

PRESSURE	1450PSI-5000PSI
TEMPERATURE	60°C\140°F
FLOW	7L/min-20L/min



C-SE

PRESSURE 1450PSI-5000PSI

TEMPERATURE 60°C\140°F

FLOW 7L/min-20L/min



C-IB

PRESSURE 1450PSI-5000PSI

TEMPERATURE 60°C\140°F

FLOW 7L/min-20L/min



C-IA

PRESSURE 1450PSI-5000PSI

TEMPERATURE 60°C\140°F

FLOW 7L/min-20L/min



C-BL

PRESSURE 1450PSI-5000PSI

TEMPERATURE 60°C\140°F

FLOW 7L/min-20L/min



C-BS

PRESSURE 1450PSI-5000PSI

TEMPERATURE 60°C\140°F

FLOW 7L/min-20L/min

COLOR



C-BC

PRESSURE 1450PSI-5000PSI

TEMPERATURE 60°C\140°F

FLOW 7L/min-20L/min



C-TA

PRESSURE 1450PSI-5000PSI

TEMPERATURE 60°C\140°F

FLOW 7L/min-20L/min



C-TS

PRESSURE 1450PSI-5000PSI

TEMPERATURE 60°C\140°F

FLOW 7L/min-20L/min



C-TD

PRESSURE 1450PSI-5000PSI

TEMPERATURE 60°C\140°F

FLOW 7L/min-20L/min



C-DA

PRESSURE 1450PSI-5000PSI

TEMPERATURE 60°C\140°F

FLOW 7L/min-20L/min



C-DA01

C-DL

PRESSURE 1450PSI-5000PSI

TEMPERATURE 60°C\140°F

FLOW 7L/min-20L/min

COLOR



C-DL01

C-DH

PRESSURE 1450PSI-5000PSI

TEMPERATURE 60°C\140°F

FLOW 7L/min-20L/min

COLOR



B-LG

PRESSURE 1450PSI-5000PSI

CAPACITY 1L

TEMPERATURE 60°C\140°F



B-XG

PRESSURE 1450PSI-5000PSI

CAPACITY 1L

TEMPERATURE 60°C\140°F

COLOR



B-HL

PRESSURE 1450PSI-5000PSI

CAPACITY 1L

TEMPERATURE 60°C\140°F

COLOR



B-TF

PRESSURE 1450PSI-5000PSI

CAPACITY 1L

TEMPERATURE 60°C\140°F



B-YD

PRESSURE 1450PSI-5000PSI

CAPACITY 1L

TEMPERATURE 60°C\140°F



B-CA

PRESSURE 1450PSI-5000PSI

CAPACITY 1L

TEMPERATURE 60°C\140°F



B-LH

PRESSURE 1450PSI-5000PSI

CAPACITY 1L

TEMPERATURE 60°C\140°F



B-HX

PRESSURE 1450PSI-5000PSI

CAPACITY 1L

TEMPERATURE 60°C\140°F



B-LJ

PRESSURE 1450PSI-5000PSI

CAPACITY 1L

TEMPERATURE 60°C\140°F



T-001

PART NUMBER	DESCRIPTION	TUBE COLOR	FILTER BARD	OVERAL LENGTH
11040001A	Filter	N/A	OD-Ø7	N/A
11040001B	Tube with Filter	Clear	OD-Ø7	23cm

* Filter: Plastic material
 * Tube: PVC material, ID 6mm



T-002

PART NUMBER	DESCRIPTION	TUBE COLOR	FILTER BARD	OVERAL LENGTH
11040002A	Filter	N/A	OD-Ø7	N/A
11040002B	Tube w/ Filter	Clear	OD-Ø7	23cm
11040002C	Tube w/ Filter	Red	OD-Ø7	23cm

* Filter: Plastic material
 * Tube: PVC material, ID 6mm



T-003

PART NUMBER	DESCRIPTION	TUBE COLOR	FILTER BARD	OVERAL LENGTH
11040003A	Filter	N/A	OD-Ø7	N/A
11040003B	Tube w/ Filter	Clear	OD-Ø7	23cm
11040003C	Tube w/ Filter	Red	OD-Ø7	23cm

* Filter: Stainless steelball+Stainless steel wires net
 * Tube: Silicone material, ID 6mm



SF-PPY-03

PRESSURE	20PSI-80PSI
CAPACITY	2L
TEMPERATURE	60°C\140°F
FLOW	3L/min-5L/min



SF-PEQ-03

PRESSURE	20PSI-80PSI
CAPACITY	2L
TEMPERATURE	60°C\140°F
FLOW	3L/min-5L/min



SF-DYZ-02

PRESSURE	36PSI-100PSI
CAPACITY	0.8L
TEMPERATURE	60°C\140°F
FLOW	3L/min-7L/min

COLOR



SF-CBZ-02

PRESSURE 36PSI-100PSI

CAPACITY 0.9L

TEMPERATURE 60°C\140°F

FLOW 3L/min-7L/min

COLOR



SF-1CLB-01

PRESSURE 1450PSI-5000PSI

CAPACITY 1L

TEMPERATURE 60°C\140°F

FLOW 7L/min-20L/min

COLOR



SF-CZBJ-01

PRESSURE 1450PSI-5000PSI

CAPACITY 2L

TEMPERATURE 60°C\140°F

FLOW 7L/min-20L/min

COLOR





S1



S2



S3



S4



S5



S6



S7



S8



S9



S10



S12



S1



S2



S7



S10

S1

LAVOR

S2

NILFISK&ANLU

S3

KARCHER HD

S4

BOSCH AQT

S5

HIMORE

S6

NILFISK KEW

S7

BOSCH

S8

KARCHER K SERIES

S9

NILFISK GERNI

S10

KARCHER K

S11

1/4 Q PLUG

S12

NILFISK & YILI



FC-BS



FC-SS

MATERIAL	SS/Brass
MAX PRESSURE	5000 PSI
ORIFICE SIZE	0.97MM-1.65MM



MESH FILTER

DIMENSIONS	10mm*14mm
MATERIAL	SS Wires
WEIGHT	2.6g/3.6g/4g/5g

HOSE & HOSE FITTINGS



SH-CH1

WORKING PRESSURE	1750PSI/120BAR
MAX TEMPERATURE	60°C\140°F
MATERIAL	PVC
INNER DIAMETER	1/4"



SH-RHS2

WORKING PRESSURE	4000PSI/280BAR
MAX TEMPERATURE	60°C\140°F
MATERIAL	Rubber, Fiber braided layer
INNER DIAMETER	1/4"、5/16"、3/8"



SH-TH01

WORKING PRESSURE	120PSI/8BAR
MAX TEMPERATURE	150°C\140°F
MATERIAL	Silica gel
INNER DIAMETER	G1/4 Female



HC-001

Karcher QC Adapter



HC-002

Karcher



HC-008

3/8" quick socket



HC-012

M22-14 Female



HC-016

M22-15 Iron nuts Female



HC-017

M22-14/15 Universal Female



HC-018

3/8 Female



HC-019

C Clip



HC-020

M14D type



HC-021

M14C type



HC-022

NPT 1/4male



HC-024

NPT 1/4 Swivel Male



SH-HR001

PRESSURE	1450PSI-5000PSI
HOSE CAPACITY	60m
TEMPERATURE	60°C\140°F



SH-HR002

PRESSURE	1450PSI-5000PSI
HOSE CAPACITY	15m
TEMPERATURE	60°C\140°F



SH-HR003

PRESSURE	1450PSI-5000PSI
HOSE CAPACITY	15m/20m
TEMPERATURE	60°C\140°F



SH-HR004

PRESSURE	1450PSI-5800PSI
HOSE CAPACITY	20m
TEMPERATURE	60°C\140°F



SH-HR005

PRESSURE	1450PSI-5000PSI
HOSE CAPACITY	30m
TEMPERATURE	60°C\140°F



SH-HR006

PRESSURE	1450PSI-5000PSI
HOSE CAPACITY	15m
TEMPERATURE	60°C\140°F



SN-RN001

HOLES QUANTITIES A1B3/A1B6

THREAD SIZE 1/4" 3/8"



SN-RN002

HOLES QUANTITIES A1B3/A1B6

THREAD SIZE 1/4" 3/8"



SN-RN003

HOLES QUANTITIES A1B3/A1B6

THREAD SIZE 1/4" 3/8"



SN-RN004

HOLES QUANTITIES B3

THREAD SIZE 1/8" 1/4" 3/8"



SN-RN005

HOLES QUANTITIES A1B3

THREAD SIZE 1/4" 3/8"



SN-RN006

HOLES QUANTITIES A1B6

THREAD SIZE 1/4" 3/8"



SN-RN007

HOLES QUANTITIES A1B3/A1B6

SIZE M22-14 1/2"



SN-RN008

HOLES QUANTITIES B3

SIZE 1/8" 1/4"

CLEANING NOZZLES

360 DEGREE ROTARY NOZZLE

ORIFICE SIZE 0.97MM-3.0MM

MATERIAL Stainless steel nozzle body

MAX TEMPERATURE 60°C(140°F)

CONNECT SIZE 1/4"quick plug



0°



25°



40°



15°



0°



15°



25°



40°

7 COLORED NOZZLE

ORIFICE SIZE 0.97MM-3.0MM

MATERIAL Stainless steel nozzle body

MAX TEMPERATURE 60°C(140°F)

CONNECT SIZE 1/4"quick plug



SOAP



2.0 CYLINDRICITY



3.0 CYLINDRICITY



2IN1 NOZZLE



2IN1 NOZZLE



2IN1 NOZZLE



2IN1 NOZZLE

POROUS NOZZLE

ORIFICE SIZE	0.97MM-3.0MM
MATERIAL	SS Brass Nylon
MAX TEMPERATURE	60°C(140°F)
PRESSURE	1450PSI-5000PSI



5IN1 NOZZLE



5IN1 NOZZLE



5IN1 NOZZLE



6IN1 NOZZLE

ADJUSTABLE NOZZLE

ORIFICE SIZE	0.97MM-3.0MM
MATERIAL	SS Brass Nylon
MAX TEMPERATURE	60°C(140°F)
PRESSURE	1450PSI-5000PSI



CERAMIC NOZZLE



VARIABLE NOZZLE



HIGH-LOW NOZZLE



NOZZLE WITH VALVE



SN-TN002



SN-TN004



SN-TN010

TURBO NOZZLE

ORIFICE SIZE	0.97MM-3.0MM
MAX TEMPERATURE	60°C(140 °F)
ORIFICE SIZE	1/4"quick plug / 1/4"
PRESSURE	3000PSI-8700PSI



SN-TN009



SN-TN019



SN-TN029

SS NOZZLE

NOZZLE DEGREE	0°-65°
ORIFICE SIZE	0.97MM-3.0MM
MAX PRESSURE	10000PSI
MAX TEMPERATURE	150°C(300°F)



SN-SS01



SN-SS02



SN-SS03

SIZE		120bar	130bar	140bar	150bar	160bar	170bar	180bar
		1740PSI	1885PSI	2030PSI	2175PSI	2320PSI	2465PSI	2610PSI
020	0.87	4.9	5.2	5.4	5.6	5.8	5.9	6.1
025	0.97	6.2	6.5	6.7	7	7.2	7.4	7.6
030	1.05	7.5	7.8	8.1	8.4	8.6	8.9	9.2
035	1.12	8.7	9.1	9.4	9.8	10.1	10.4	10.7
040	1.21	10.0	10.4	10.8	11.2	11.5	11.9	12.2
045	1.30	11.2	11.2	12.1	12.6	13.0	13.4	13.8
050	1.35	12.5	12.5	13.5	14.0	14.4	14.9	15.3
055	1.40	13.7	13.7	14.8	15.4	15.9	16.3	16.8
060	1.50	15.0	15.0	16.2	16.7	17.3	17.8	18.3

SIZE		190bar	200bar	210bar	220bar	230bar	240bar	250bar
		2755 PSI	2900PSI	3045PSI	3190PSI	3335PSI	3480PSI	3625PSI
020	0.87	6.3	6.4	6.6	6.8	6.9	7.1	7.2
025	0.97	7.9	8.1	8.3	8.5	8.6	8.8	9.0
030	1.05	9.4	9.7	10.0	10.1	10.4	10.6	10.8
035	1.12	11.0	11.3	11.6	11.8	12.1	12.4	12.6
040	1.21	12.6	12.9	13.2	13.5	13.8	14.1	14.4
045	1.30	14.1	14.5	14.9	15.2	15.6	15.9	16.2
050	1.35	15.7	16.1	16.5	16.9	17.3	17.7	18.0
055	1.40	17.3	17.7	18.2	18.6	19.0	19.4	19.8
060	1.50	18.8	19.3	19.8	20.3	20.7	21.2	21.6

SURFACE CLEANER



SUPER CLEAN ENJOY GREEN


WSC-002

NAME	Surface cleaner
PRESSURE	4000PSI
TEMPERATURE	60°C/140°F
MATERIAL	Stainless steel
SIZE	20inch、 22inch、 24inch




UC-001

PRESSURE	4000PSI
TEMPERATURE	60°C\140°F
MATERIAL	Aluminum rod
SIZE	13inch

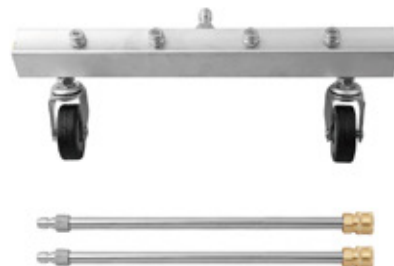

UC-002

PRESSURE	4000PSI
TEMPERATURE	60°C\140°F
MATERIAL	Aluminum rod
SIZE	13inch

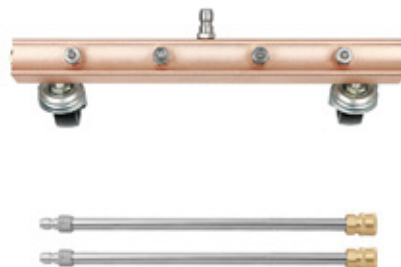

UC-003

PRESSURE	4000PSI
TEMPERATURE	60°C\140°F
MATERIAL	Aluminum rod
SIZE	13inch



UC-004

PRESSURE	4000PSI
TEMPERATURE	60°C\140°F
MATERIAL	Aluminum rod
SIZE	13inch



SWB-001

PRESSURE	4000PSI
TEMPERATURE	60°C\140°F
MATERIAL	Stainless steel
SIZE	15inch、20inch



SWB-001

PRESSURE	4000PSI
TEMPERATURE	60°C\140°F
MATERIAL	Stainless steel
SIZE	15inch、20inch



WB-001

PRESSURE	4000PSI
TEMPERATURE	60°C\140°F
MATERIAL	PP Aluminum rod
SIZE	15inch



WB-002

PRESSURE	4000PSI
TEMPERATURE	60°C\140°F
MATERIAL	PP Aluminum rod
SIZE	15inch



SC-001

PRESSURE	4000PSI
TEMPERATURE	60°C\140°F
MATERIAL	Aluminum rod
SIZE	13inch



UC-005

PRESSURE	4000PSI
TEMPERATURE	60°C\140°F
MATERIAL	Stainless steel
SIZE	20inch



SC-003

PRESSURE	4000PSI
TEMPERATURE	60°C\140°F
MATERIAL	PP SS Alloy rod
SIZE	20inch



SC-004

PRESSURE	4000PSI
TEMPERATURE	60°C\140°F
MATERIAL	Stainless steel
SIZE	46inch



WASHING ACCESSORIES

EXTENSION WEND



1/4 QC
CURVED ROD



NOZZLE
CURVED ROD



ATOMIZING
NOZZLE ROD



ALLOY
EXTENSION KIT



S S EXTENSION WAND



1/4QC
U-CURVED ROD



NOZZLE
U-CURVED ROD



S10 NOZZLE
CURVED ROD

SR001**SR002****SR003****SR004****SR005****SR006****SR007****SR008**

3/8 QUICKCONNECTOR



1/2" FEMALE



M14 FEMALE



M18 FEMALE



M22 FEMALE



3/8" FEMALE



M14 MALE



M14 CHAMFER MALE



M18 MALE



M18 FLAT MALE



M22-14/15 MALE



3/8" MALE



3/8" FLAT MALE

3/8" QUICK PLUG



M14 FEMALE



M18 FEMALE



M22 FEMALE



3/8" FEMALE



1/2" FEMALE



2/4" FEMALE



M14 MALE



M18 MALE



M22-14 MALE



M22-15 MALE



3/8" MALE



1/2" MALE

1/4" QUICK CONNECTOR



M10X1 FEMALE



M14 FEMALE



M18 FEMALE



M22 FEMALE



1/4" FEMALE



M14 MALE



M14 FLAT MALE



M18 MALE



M22-14MM MALE



M22-15MM MALE



1/4" MALE



M14 FEMALE

1/4" QUICK PLUG



M14 FEMALE



1/4" FEMALE SS



M14 MALE



M14 MALE SS



M14 MALE



M18 MALE



M22-14/15MM MALE



1/4" MALE SS

EXTENSION CONNECTOR



M14 MALE



M18 MALE



M22-14/15MM MALE



3/8 MALE SS

GUN CONNECTOR



3/8" QUICK PLUG



M22 FEMALE



M14 MALE



M14 FLAT MALE



M18 MALE



3/8" MALE



M22-14MM MALE



M22-15MM MALE



1/4" MALE QC



2 IN 1 T-1/4 QC



S-CE8.5-9



S-KS9.0-0



S-BD8.0-0



2 IN 1 Y-1/4 QC

SS-HH150

MAXIMUM PRESSURE 2000PSI

PRODUCT MATERIAL SS,Nylon

PRODUCT WEIGHT 0.78KG

HOSE LENGTH 300CM



SS-EP200

MAXIMUM PRESSURE 4000PSI

PRODUCT MATERIAL SS, Brass

PRODUCT WEIGHT 1.52KG

HOSE LENGTH 500CM



SU-01

MAX PRESSURE 174PSI

MAX TEMPERATURE 60°C\140°F

MATERIAL Brass PVC



SU-02

MAX PRESSURE 174PSI

MAX TEMPERATURE 60°C\140°F

MATERIAL Alloy Nylon



PG40

ACCURACY CLASS 2.5

TEMPERATURE RESISTANCE -10 ~ 40 °C

MEASURING RANGE 0~ 40 MPa

SW-NE-01

MATERIAL	Stainless Steel
UNEXTENDED LENGTH	120cm
HOSE LENGTH	200cm
WEIGHT	5.5KG




SW-NE-02

MATERIAL	Stainless Steel
UNEXTENDED LENGTH	125cm/145
HOSE LENGTH	200cm
WEIGHT	11KG



SW-PE-01

MATERIAL	Stainless Steel
UNEXTENDED LENGTH	120cm
HOSE LENGTH	200cm
WEIGHT	8.3KG



SW-PE-02

MATERIAL	Stainless Steel
UNEXTENDED LENGTH	145cm
HOSE LENGTH	200cm
WEIGHT	13KG



SW-RDL

MAX PRESSURE	4000 PSI
MATERIALS	Brass , G.F, Nylon , SS
FLOW RATE	25L/min



OEM/ODM

PROVIDING OEM/ODM SERVICES



