



AUTO SECURITY 
MAGECARE®



 +0086-15602597784 Sherry Liao



2025
CATALOGUE

中山市宝车仕电子有限公司
ZHONGSHAN BCS ELECTRONICS CO.,LTD

Contents



Auto LED
Headlight

01-43



Xenon
Bulb

44



LED
Work Light

45-53



LED
Strobe

54-60



LED
Rock Light

61-62



LED
Ambient Light

63



Shadow
Light

64



LED
Warning Light

65



Front
Grille Light

66



LED
Pilot Light

67



LED Light
Wiring

68-73





Company Profile

Founded in 2007, Zhongshan BCS Electronics Co., Ltd. has been specialized in production and expert of car alarms, motorcycle alarms, central lock system, parking sensors and power window system. Our products have been benchmarked to international quality standards and we have been optimizing our production technology to offer products with premium quality at a competitive price.

Since our foundation, we have established our brand name BCS. On top of branded products, we also take OEM/ODM contracts. Our R&D activities are dedicated to a team of professional engineers with years of experience in the field to ensure that our products are manufactured with precision.

Zhongshan BCS Electronics Co., Ltd. has been building our client network both domestically in China and internationally in the past decade. We have developed various distribution channels through our marketing network and we aim at providing high-quality pre-purchase and post-purchase experience for our customers. Client satisfaction has been our top priority in offering our products.

Strength And Honor

ZHONGSHAN BCS ELECTRONICS CO.,LTD





Auto LED Headlight

Series

- super energy saving
- super lighting
- longer lifetime
- simple installation

LED Headlight

Auto LED Headlight System



T8

- Power: 45W (Acrylic lens) High Beam: 45W Low Beam: 40W
- Driver: Outside
- LED Chip: 3570 55mil
- Power Supply: DC9V~36V



Y6

- Power: 36W (Acrylic lens)
High Beam: 36W
Low Beam: 22W
- Driver: Outside
- LED Chip: 3570 55/45mil
- Power Supply: DC 9V~36V





Y6-1

- Power: 36W (Acrylic lens)
High Beam: 36W
Low Beam: 22W
- Driver: Outside
- LED Chip: 3570 55/45mil
- Power Supply: DC 9V~36V



Y6 DOUBLE COLOR

- Power: 36W (Acrylic lens)
High Beam: 36W
Low Beam: 22W
- Driver: Outside
- LED Chip: 3570 55mil
- Power Supply: DC 9V~36V



White light



Yellow light

V6 waterproof charge

- Power: 36W (Acrylic lens)
High Beam: 36W
Low Beam: 22W
- Driver: Outside
- LED Chip: 3570 55mil
- Power Supply: DC 9V~36V



With waterproof charge



Auto LED Headlight

Series

Y7

- Power: 48W (Acrylic lens)
High Beam: 48W
Low Beam: 32W
- Driver: Outside
- LED Chip: 3570 55mil
- Power Supply: DC 9V~36V





T9

- Power: 36W (Acrylic lens)
High Beam: 36W
Low Beam: 22W
- Driver: Outside
- LED Chip: 3570 55/45mil
- Power Supply: DC 9V~36V



A7

- Power: 38W (Acrylic lens)
High Beam: 38W
Low Beam: 30W
- Driver: Outside
- LED Chip: 3570 55mil
- Power Supply: DC 9V~36V



U7


- Power: 36W (Acrylic lens)
High Beam: 36W
Low Beam: 27W
- Driver: Outside
- LED Chip: 3570 55mil
- Power Supply: DC 9V~36V



Auto LED Headlight Series

D series

- Power: 50W
- Driver/Fan: Inside with fan
- LED Chip: 7545
- Power Supply: 9-36V



D1S



D2S/D4S



D3S/D8S



D5S



D series Package



D series Package



D2S/R

- Power: 50W
- Driver/Fan: Inside/with fan
- LED Chip: 4575
- Power Supply: 9-36V



D4S/R

- Power: 50W
- Driver/Fan: Inside/with fan
- LED Chip: 4575
- Power Supply: 9-36V





D series Package

L2

- Power: 23W/12W
- Driver/Fan: Inside/without fan
- LED Chip: 5530 55mil
- Power Supply: 9-32V



H1

H3

H4

H7

H8/H11

H13

9005

9006

L3

- Power: 20W/12W
- Driver/Fan: Inside / With Fan
- LED Chip: 3570 55mil
- Power Supply: DC9V~16V




L series Package



2.75 inch

2.75 inch

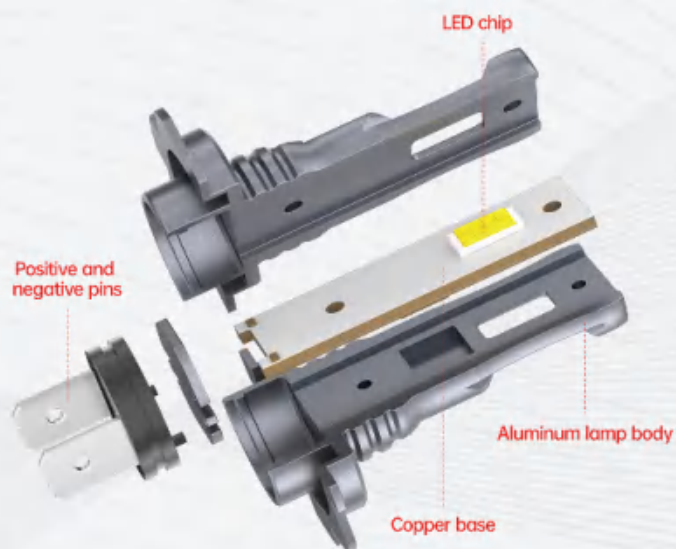

Positive and negative pins

LED chip

Aluminum lamp body

Copper base



L series Package

L4

- Power: 35W/26W
- Driver/Fan: Inside/with fan
- LED Chip: 3570
- Power Supply: 9-16V



9006



H1

H4

H7



L series Package

L6

- Power: 28W/20W
- Driver/Fan: Inside/with fan
- LED Chip: 3570
- Power Supply: 9-16V



H8/H11



H7



9005



9006



9012



T65Pro

- Power: 65W
- Driver: Outside
- LED Chip: 3570 55Mil
- Power Supply: DC9V~36V



E8 PROMAX

- Power: 50W
- Driver: Outside
- LED Chip: 3570 55mil
- Power Supply: 9~60V







E8 PRO

- Power: 45W
- Driver: Outside
- LED Chip: 3570 45mil
- Power Supply: DC9V~36V

Better light pattern, safer driving



30000 hrs

6000LM

45W



6 Lamp beads
on double sides



Fast Heat Dissipation

M8 PRO

- Power: 60W
- Driver: Outside
- LED Chip: 3570 55mil
- Power Supply: DC9V~36V



Fast Heat Dissipation



Auto LED Headlight

Series

E9 HIGH-POWER SUPER BRIGHT LED HEADLIGHT

- Power: 68W/45W
- Driver: Outside
- LED Chip: 3570 55mil
- Power Supply: DC9V~36V

Improve visibility
under extreme weather



Snowy Day



Foggy Day



Rainy Day





E9 PRO

- Power: 65W
- Driver: Outside
- LED Chip: 3570 55mil
- Power Supply: 9~60V



E9N


- Power: 30W
- Driver: Inside
- LED Chip: 1860
- Power Supply: 9V~16V



M20

- Power: 70W
- Driver: Outside
- LED Chip: 3570 55mil
- Power Supply: 9V~36V



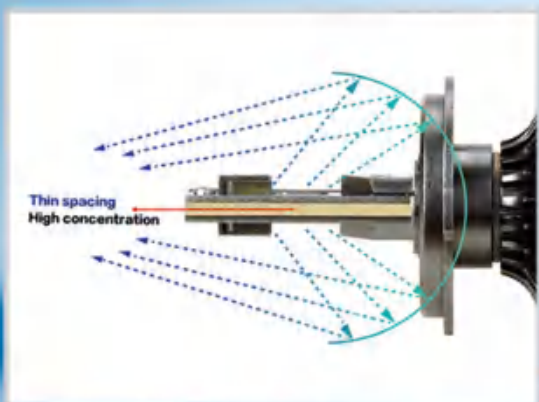

ULTRA-THIN SPACING TO
IMPROVE CONCENTRATING



- Power: 35W
- Driver: Inside
- LED Chip: 3570 55mil
- Power Supply: DC9V~36V

E10

**High brightness
LED chips**



V1

- Power: 24W
- Driver: Inside
- LED Chip: 1860 45mil
- Power Supply: DC9V~36V

V3

- Power: 27W
- Driver: Outside
- LED Chip: 1860 55mil
- Power Supply: DC9V~36V





V4

- Power: 24W
- Driver: Outside
- LED Chip: 1860 45mil
- Power Supply: DC9V~36V



V7

- Power: 27W
- Driver: Inside
- LED Chip: CSP
- Power Supply: DC9V~36V



V8

- Power: 25W
- Driver: Inside
- LED Chip: 1860 45mil
- Power Supply: DC9V~36V



V9

- Power: 32W
- Driver: Outside
- LED Chip: 3570 45mil
- Power Supply: DC9V~36V





V13

- Power: 40W
- Driver: Outside
- LED Chip: 7035 80mil
- Power Supply: DC9V~36V



H1



H7



H8/H11



H13


V14-S

- Power: 30W
- Driver: Outside
- LED Chip: 3570 45mil
- Power Supply: DC9V~36V



V14-R

- Power: 30W
- Driver: Outside
- LED Chip: 3570 45mil
- Power Supply: DC9V~36V

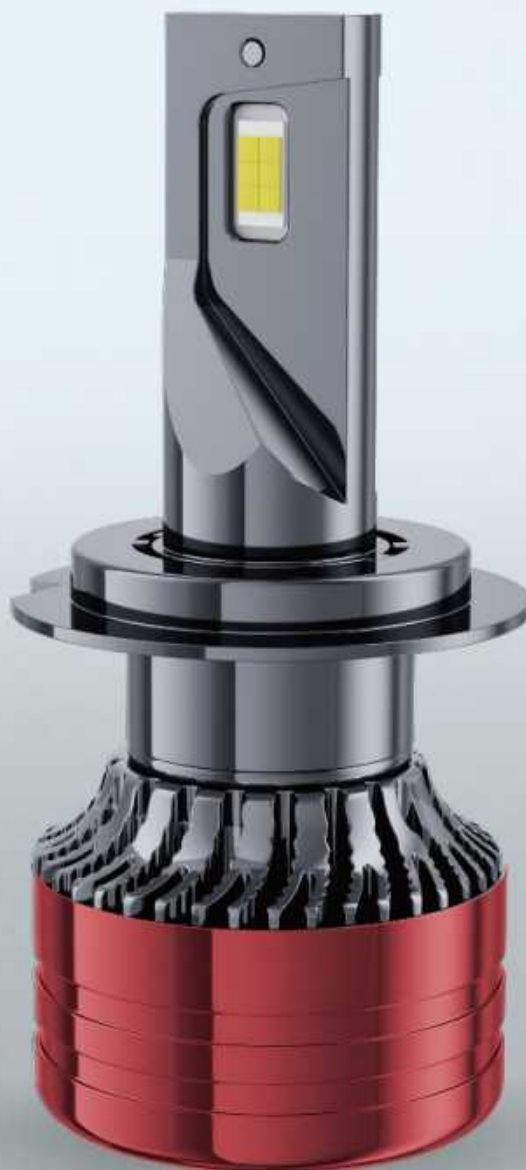

Excellent
beam pattern



High Power



IP65



Stable
Cooling



Aviation Grade



Quick
Installation



V15

- Power: 30W
- Driver: Outside
- LED Chip: 1860 3*6 360°luminous
- Power Supply: DC9V~36V



V16

- Power: 60W
- Driver: Outside
- LED Chip: 3570 55mil
- Power Supply: DC9V-36V





Auto LED Headlight

Series

V17

- Power: 55W
- Driver: Outside
- LED Chip: 3570 55mil
- Power Supply: DC9V~36V



200%
Brightness



6000 K



Intelligent
Spotlight




Smart Cooling
System



Long
Life



Plug and
Play

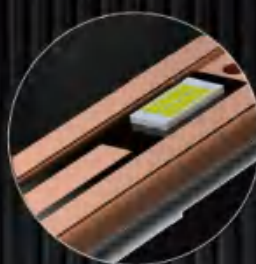

Double copper tube




Auto LED Headlight Series

V18

- Power: 65W
- Driver: Outside
- LED Chip: 3570 55Mil
- Power Supply: DC9V~36V

V18G

- Power: 65W
- Driver: Outside
- LED Chip: 3570 55Mil
- Power Supply: DC9V~36V

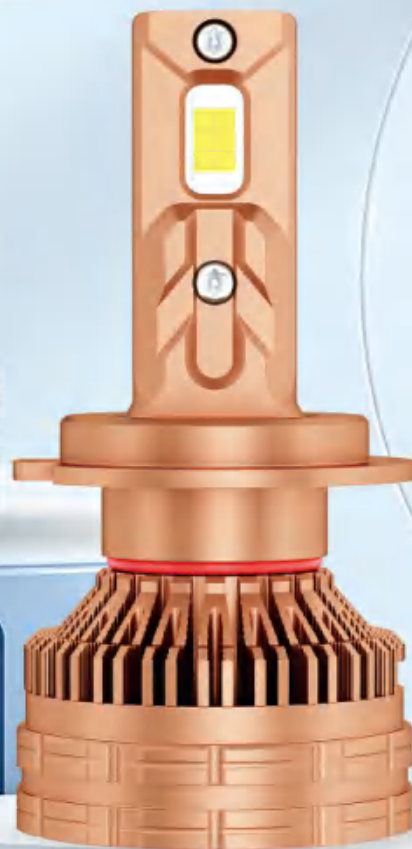



V19

- Power: 28W
- Driver: Inside
- LED Chip: 1860 45mil
- Power Supply: DC9V-36V



Excellent
beam pattern



High Power



IP65



Stable
Cooling



Aviation Grade



Quick
Installation



V19

EMC

CAN-BUS



AUTO SECURITY
MAGECARE

LED
HEADLIGHT KIT
6000K
30/10

V20

- Power: 30W
- Driver: Outside
- LED Chip: 3570 45mil
- Power Supply: DC9V~36V





Auto LED Headlight

Series

V21

- Power: 55W
- Driver: Outside
- LED Chip: 3570 55mil
- Power Supply: DC9V~36V


Temperature:




-40°C



+80°C

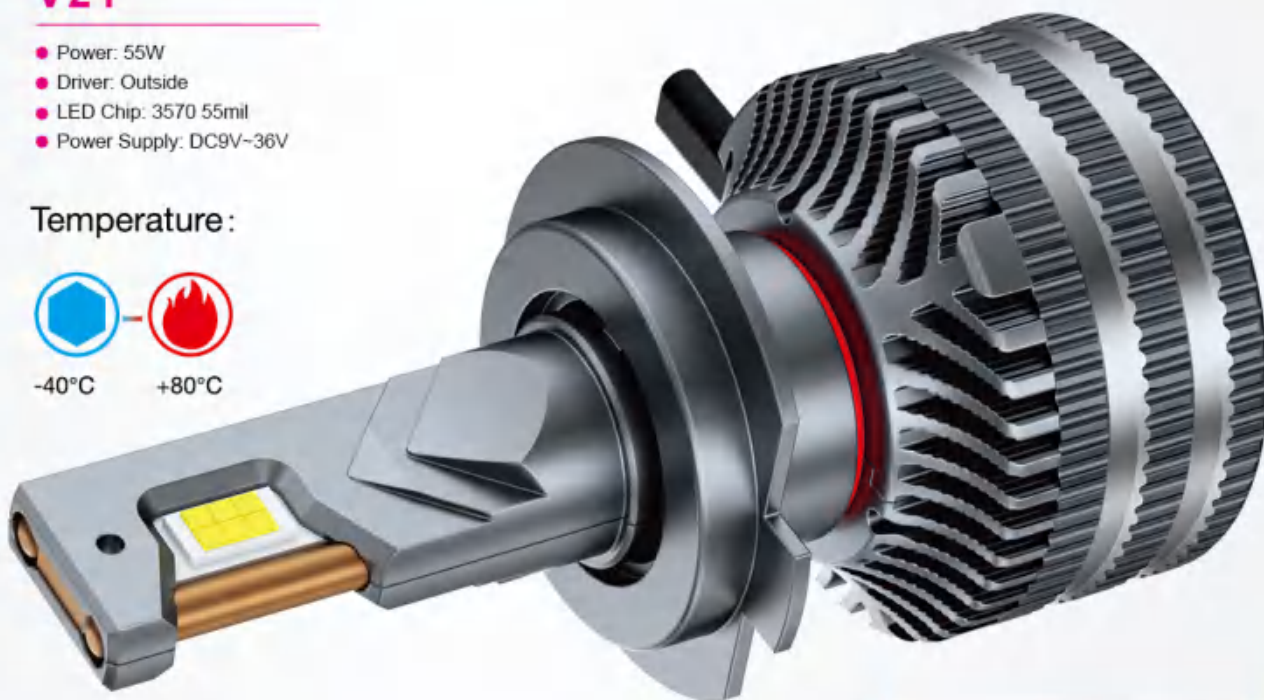

6000K Cool White Starts in 0.01s

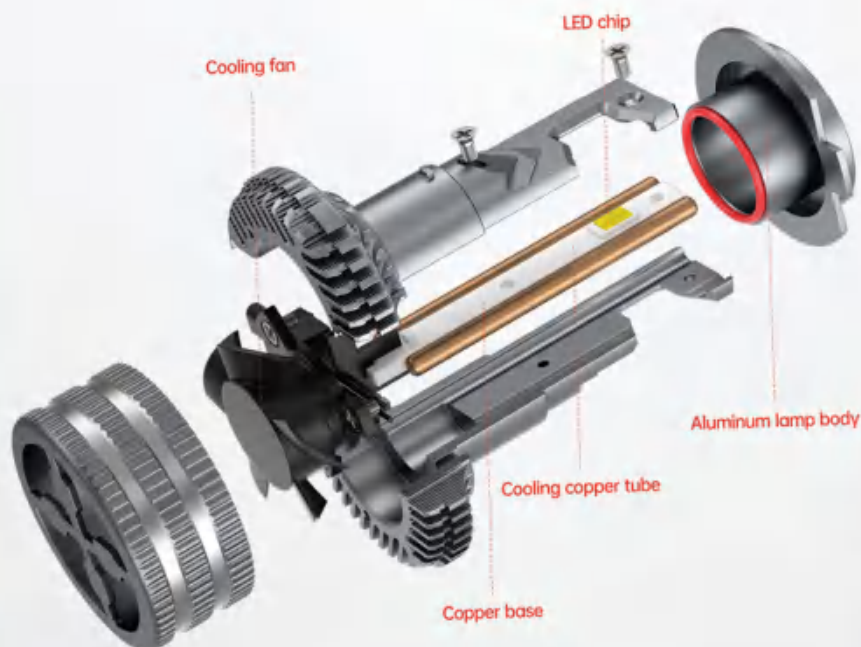



V22

- Power: 29W
- Driver: Inside
- LED Chip: 3570
- Power Supply: DC9V~30V



D21

- Power: 60W
- Driver: Outside
- LED Chip: 7035 55mil
- Power Supply: DC9V~36V



H4



Advanced Heat Conducting



High-Speed Fan



Super Bright



Smart Temperature Control

DETAILS DETERMINE QUALITY

Product selection / One step in place

High brightness LED chips

Multi 360° adjustable Card position

Aluminum alloy heat dissipation

Intelligent fan cooling



H1



H7



H8/H11



H13



9005



9006



9012



9004/9007

Z3-6P

- Power: 24-26W
- Driver: Outside
- LED Chip: COB
- Power Supply: DC9V~36V

6
sides





4
sides



Z3-4P

- Power: 24-26W
- Driver: Outside
- LED Chip: COB
- Power Supply: DC9V~36V

6
sides



360-6P

- Power: 24W
- Driver: Outside
- LED Chip: COB
- Power Supply: DC9V~36V

8
sides



Z3-8P

- Power: 24-26W
- Driver: Outside
- LED Chip: COB
- Power Supply: DC9V~36V

10
sides



Z3-10P

- Power: 24-26W
- Driver: Outside
- LED Chip: COB
- Power Supply: DC9V~36V

12
sides



Z3-12P

- Power: 24-26W
- Driver: Outside
- LED Chip: COB
- Power Supply: DC9V~36V

16
sides



Z3-16P

- Power: 24-26W
- Driver: Outside
- LED Chip: COB
- Power Supply: DC9V~36V



V10

- Power: 23W
- Driver: Outside
- Power Supply: DC9V~36V



Laser
LED



H15

- Power: 23W
- Driver: Inside
- LED Chip: 3570
- Power Supply: 9V~36V



C6

- Power: 18W
- Driver: Inside
- LED Chip: COB
- Power Supply: DC9V~36V





F2A

- Power: 24W
- Driver: Inside
- LED Chip: COB
- Power Supply: DC9V~36V



GT

- Power: 24W
- Driver: Outside
- LED Chip: COB
- Power Supply: DC9V~36V



G5

- Power: 28W
- Driver: Outside
- LED Chip: COB
- Power Supply: DC9V~36V



MI2

- Power: 18W
- Driver: Inside
- LED Chip: 3570 45mil
- Power Supply: DC9V~36V



G10

- Power: 28W
- Driver: Outside
- LED Chip: 3570
- Power Supply: 9-16V



G40(H4)

- Power: 38W
- Driver: Outside
- LED Chip: 5530
- Power Supply: 9-60V



K1

- Power: 24W
- Driver: Outside
- LED Chip: COB
- Power Supply: DC9V~36V



K9

- Power: 24W
- Driver: Outside
- LED Chip: COB
- Power Supply: DC9V~36V



T1

- Power: 25W
- Driver: Outside
- LED Chip: 3535
- Power Supply: DC9V~36V



T1S

- Power: 25W
- Driver: Outside
- LED Chip: 3535
- Power Supply: DC9V~36V



R11

- Power: 18W
- Driver: Inside
- LED Chip: COB
- Power Supply: DC9V~36V



X3

- Power: 17W
- Driver: Inside
- LED Chip: CSP1919
- Power Supply: DC9V~36V



S2

- Power: 24W
- Driver: Inside
- LED Chip: COB
- Power Supply: DC9V~36V



Color:



S2-4color

- Power: 18W
- Driver: Outside
- LED Chip: COB
- Power Supply: DC9V~36V



S2-4

- Power: 24W
- Driver: Inside
- LED Chip: COB
- Power Supply: DC9V~36V



4A

- Power: 24W
- Driver: Outside
- LED Chip: COB
- Power Supply: DC9V~36V

LIGHTER BRIGHTER SAFER



Excellent
beam pattern



High
penetration



Instant
start




Multiple heat
dissipation



Quick
installation

Super White
6000K

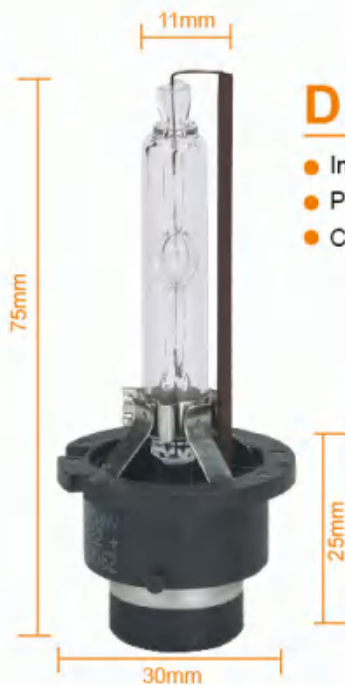

D2s

- Input Voltage: DC12V
- Power: 35W
- Color Temperature: 6000K



D4s

- Input Voltage: DC12V
- Power: 35W
- Color Temperature: 6000K





LED Work Light

Series

LED Work Light





LED Work Light Series



BCS-3E120 (三目40珠螺丝款)

LED Power: 120W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C-+ 100C



BCS-3E8R72 (三目八孔24珠螺丝款)

LED Power: 72W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C-+ 100C



BCS-2R36C (三目12珠+上下彩灯)

LED Power: 36W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C-+ 100C



BCS-2R36M (双排12珠)

LED Power: 36W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C-+ 100C



BCS-2R54M (双排18珠)

LED Power: 54W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C-+ 100C



BCS-2R72M (双排24珠)

LED Power: 72W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C-+ 100C



LED Work Light

Series



BCS-3R72M (三排24珠透镜款)

LED Power: 72W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K $\pm$ 500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C-+ 100C



BCS-4R144 (四排48珠螺丝款)

LED Power: 144W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K $\pm$ 500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C-+ 100C



BCS-3R72W (三排24珠)

LED Power: 72W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K $\pm$ 500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C-+ 100C



BCS-3R72WY (三排24珠黄白双色)

LED Power: 72W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K $\pm$ 500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C-+ 100C



BCS-3E64A (三目四孔64珠螺丝款)

LED Power: 64W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K $\pm$ 500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C-+ 100C



BCS-3E144A (三目144瓦透镜螺丝款)

LED Power: 144W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K $\pm$ 500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C-+ 100C



BCS-3E144B (三目144瓦螺丝款)

LED Power: 144W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K $\pm$ 500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C-+ 100C



LED Work Light Series



BCS-3E204

BCS-3E204 (三目204W)

LED Power: 204W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-3E162A

BCS-3E162A (三目162W 8#)

LED Power: 162W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-3E162B

BCS-3E162B (三目162W 9#)

LED Power: 162W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-3E180

BCS-3E180 (三目180W 7#)

LED Power: 180W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-3E216

BCS-3E216 (三目216W 6#)

LED Power: 216W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-3E288

BCS-3E288 (三目288W 3#)

LED Power: 288W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-S72

BCS-S72 (小单排24珠)

LED Power: 72W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-S90

BCS-S90 (小单排30珠)

LED Power: 90W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



LED Work Light

Series



BCS-2R18R (双排6珠螺丝款(红))

LED Power: 18W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-2R18BL (双排6珠螺丝款(蓝))

LED Power: 18W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-2R18B (双排6珠螺丝款(黑))

LED Power: 18W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-2R18A (双排6珠螺丝款(银))

LED Power: 18W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-2R18Y (双排6珠(金))

LED Power: 18W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-2R18W (双排6珠透镜款)

LED Power: 18W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-2R18C (双排6珠+上下彩灯)

LED Power: 18W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-2R36 (三目四孔12珠)

LED Power: 36W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-2R60 (三目20珠)

LED Power: 60W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



LED Work Light Series



BCS-3R36 (三排12珠双色透镜款)

LED Power: 36W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-3R36A (三排12珠双色)

LED Power: 36W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-4R72 (四排24珠)

LED Power: 72W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-1R18 (一字6珠+上下彩灯)




BCS-1R18B (一字6珠)



BCS-3ER96 (三排双孔32珠)

LED Power: 96W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C

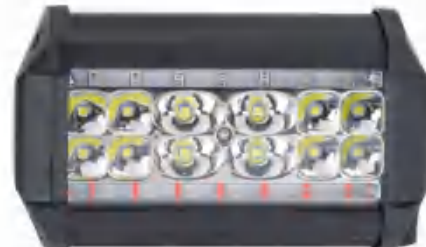

BCS-2R36D (双排12珠+上下彩灯(长)螺丝款)

LED Power: 36W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C

BCS-1R18/BCS-1R18B

LED Power: 18W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



72W

BCS-3E72 (三目24珠泛光螺丝款)



BCS-3E144 (三目48珠泛光螺丝款)

LED Power: 144W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-3E72T (三目24珠透镜款)

LED Power: 72W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-3E72H (三目24珠螺丝款)

LED Power: 72W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



LED Work Light

Series



BCS-4R72A (72W圆形LED黄光圈)

LED Power: 72W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-4R72B (72W圆形LED白光圈)

LED Power: 72W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-6R126A (126W双色爆闪)

LED Power: 126W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-6R126B (126W爆闪)

LED Power: 126W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-5R27R (27W圆款)

LED Power: 27W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-5R27S (27W方款)

LED Power: 27W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-4R42R (42W圆款)

LED Power: 42W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-4R48S (48W方款)

LED Power: 48W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-3R30R (三色雾灯圆黑)

LED Power: 30W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-3R30S (三色雾灯方黑)

LED Power: 30W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-2R20R (小牧马人雾灯圆款)

LED Power: 20W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-2R20S (小牧马人雾灯方款)

LED Power: 20W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



LED Work Light Series



BCS-3R36B (4寸36W)



BCS-3R45A (7寸45W蓝光圈)

LED Power: 45W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C




BCS-4R102R (102W爆闪圆款)

LED Power: 102W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-4R102S (102W爆闪方款)

LED Power: 102W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C

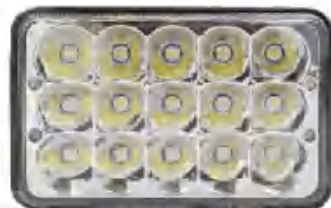

BCS-3R45B (5寸45W)



BCS-4R144T (椭圆爆闪白黄)

LED Power: 144W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-5R51 (51W圆形工作灯)

LED Power: 51W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-4R117R (117W爆闪圆款)

LED Power: 117W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-4R117S (117W爆闪方款)

LED Power: 117W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



BCS-2D48A (一字18珠)



BCS-2D48 (一字双孔)



BCS-2R54 (一字双排18珠)



BCS-1R18C (一字单排6珠)

BCS-2D48A

LED Power: 48W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C

BCS-2D48

LED Power: 48W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C

BCS-2R54

LED Power: 54W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C

BCS-1R18C

LED Power: 18W
Operating Volt: 10-80V
LED Chips: Pes Epistar LEDs/3030
Color Temperature: 6000K±500K
Beam: Flood light/Spotlight
Waterproof: IP67
Life span: above 30000 hours
Working temps: -40C+ 100C



LED Work Light

Series



BCS-4R36B (三面发光白+红蓝)

LED Power: 36W
 Operating Volt: 10-80V
 LED Chips: Pes Epistar LEDs/3030
 Color Temperature: 6000K±500K
 Beam: Flood light/Spotlight
 Waterproof: IP67
 Life span: above 30000 hours
 Working temps: -40C+ 100C



BCS-35W


LED Power: 35W
 Operating Volt: 10-80V
 LED Chips: Pes Epistar LEDs/3030
 Color Temperature: 6000K±500K
 Beam: Flood light/Spotlight
 Waterproof: IP67
 Life span: above 30000 hours
 Working temps: -40C+ 100C



BCS-45W

LED Power: 45W
 Operating Volt: 10-80V
 LED Chips: Pes Epistar LEDs/3030
 Color Temperature: 6000K±500K
 Beam: Flood light/Spotlight
 Waterproof: IP67
 Life span: above 30000 hours
 Working temps: -40C+ 100C

LED Daytime Running Light

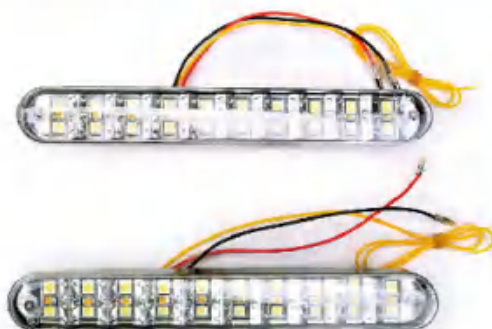

D30

LED Beads: 30LED
 Voltage: DC12V
 Beam: Bright white light during driving
 Flowing yellow light when make turns

LED Bar Light



双排长条灯 72W



双排长条灯 120W



双排长条灯 180W



双排长条灯 240W



双排长条灯 300W



LED Strobe Light





LED Strobe Light

Series



BCS-S1-6

Power: 1W×6LED
Dimension: 170×100×30 mm
Color: Red/Blue
Voltage: 9-32V
Operating Temperature: -40°C~80°C



BCS-S1-8

Power: 1W×8 LED
Dimension: 250×100×30 mm
Color: Red/Blue/White
Voltage: 9-32V
Operating Temperature: -40°C~80°C



BCS-S1-9

Power: 1W×9 LED
Dimension: 250×100×30 mm
Color: Red/Blue
Voltage: 9-32V
Operating Temperature: -40°C~80°C



BCS-S1-12

Power: 1W×12 LED
Dimension: 330×105×30 mm
Color: Red/Blue
Voltage: 9-32V
Operating Temperature: -40°C~80°C



BCS-S2-4

Power: 3W×4 LED
Dimension: 190×100×30 mm
Color: Red/Blue
Voltage: 9-32V
Operating Temperature: -40°C~80°C



BCS-S2-6

Power: 3W×6 LED
Dimension: 250×100×45 mm
Color: Red/Blue
Voltage: 9-32V
Operating Temperature: -40°C~80°C



BCS-S2-8

Power: 3W×8 LED
Dimension: 335×95×40 mm
Color: Red/Blue
Voltage: 9-32V
Operating Temperature: -40°C~80°C



BCS-S2-9

Power: 3W×9 LED
Dimension: 370×95×40 mm
Color: Red/Blue/White
Voltage: 9-32V
Operating Temperature: -40°C~80°C

LED Strobe Light Series



BCS-S3-8

Power: 1W×8 LED
Dimension: 256×97×49 mm
Color: Red/Blue
Voltage: 9-32V
Operating Temperature: -40℃~80℃



BCS-SA 4×2

Power: 3W×8 LED
Dimension: 140×120×65 mm
Color: Red/Blue
Voltage: 9-32V
Operating Temperature: -40℃~80℃



BCS-SB 3×8

Power: 3W×24 LED
Dimension: 336×95×45 mm
Color: Red/Blue
Voltage: 9-32V
Operating Temperature: -40℃~80℃



BCS-SC 9×4

Power: 3W×36 LED
Dimension: 255×125×65 mm
Color: Red/Blue
Voltage: 9-32V
Operating Temperature: -40℃~80℃



BCS-SD 6×4

Power: 3W×24 LED
Dimension: 255×125×65 mm
Color: Red/Blue
Voltage: 9-32V
Operating Temperature: -40℃~80℃



BCS-SE 8×2

Power: 3W×16 LED
Dimension: 215×72×40 mm
Color: Red/Blue
Voltage: 9-32V
Operating Temperature: -40℃~80℃

LED Color Display



BCS-S3-8



BCS-SA 4×2



BCS-SB 3×8



BCS-SC 9×4



BCS-SD 6×4



BCS-SE 8×2




LED Strobe Light

Series


BCS-P990

- Power: 24W
- Input Voltage: 12V
- Working Temperature: $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$
- Color: Red/Blue
- One-drive-four LED, 4×2 lamp beads
- Remote control ON/OFF, switch mode

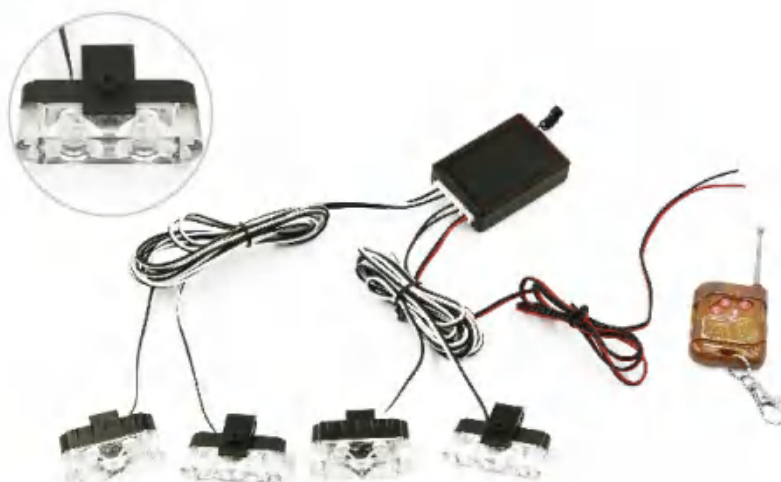

BCS-P990-8

- Power: 48W
- Input Voltage: 12V
- Working Temperature: $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$
- Color: Red/Blue
- One-drive-eight LED, 8×2 lamp beads
- Remote control ON/OFF, switch mode

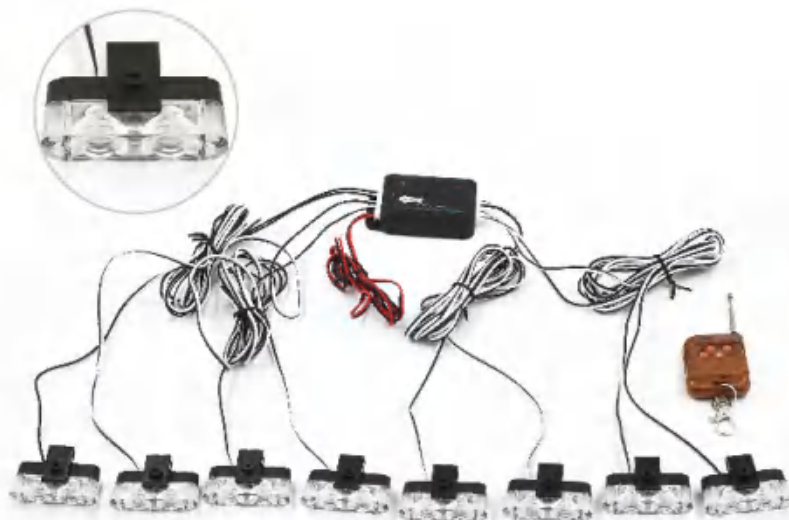

BCS-P991

- Power: 36W
- Input Voltage: 12V
- Working Temperature: $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$
- Color: Red/Blue
- One-drive-four LED, 4×3 lamp beads
- Remote control ON/OFF, switch mode





LED Strobe Light Series




BCS-P992

- Power: 48W
- Input Voltage: 12V
- Working Temperature: $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$
- Color: Red/Blue
- One-drive-four LED, 4x4 lamp beads
- Manual switch control ON/OFF, switch mode




BCS-P993

- Power: 48W
- Input Voltage: 12V
- Working Temperature: $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$
- Color: Red/Blue
- One-drive-four LED, 4x4 lamp beads
- Remote control ON/OFF, switch mode

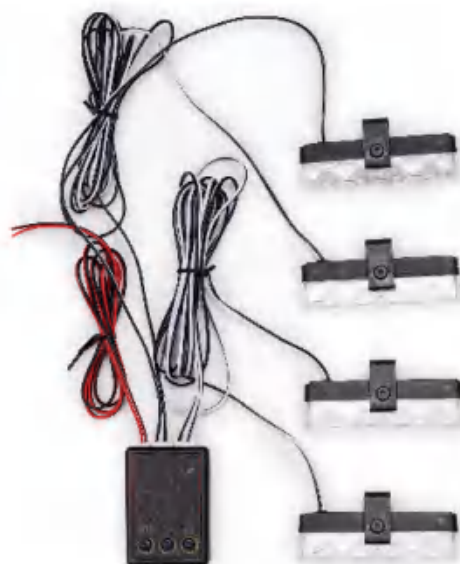

BCS-P993-8

- Power: 96W
- Input Voltage: 12V
- Working Temperature: $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$
- Color: Red/Blue
- One-drive-eight LED, 8x4 lamp beads
- Remote control ON/OFF, switch mode

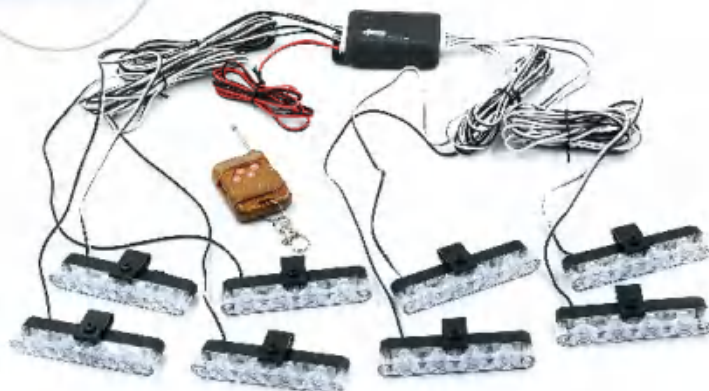



LED Strobe Light

Series

BCS-P994

- Power: 72W
- Input Voltage: 12V
- Working Temperature: -40℃~80℃
- Color: Red/Blue
- One-drive-four LED, 4×6 lamp beads
- Remote control ON/OFF, switch mode



BCS-P995

- Power: 72W
- Input Voltage: 12V
- Working Temperature: -40℃~80℃
- Color: Red/Blue
- One-drive-four LED, 4×6 lamp beads
- Remote control ON/OFF, switch mode



BCS-P996

- Power: 108W
- Input Voltage: 12V
- Working Temperature: -40℃~80℃
- Color: Red/Blue
- One-drive-four LED, 4×9 lamp beads
- Remote control ON/OFF, switch mode



Flash Bar Light



Power switch

Short press: switch mode
Long press: change color

Model	LED Beads	Power	Dimension	Color	Voltage	Weight
BCS-304-2	2×4 LED	24W	305×40×42 mm		9-30V	0.44kg
BCS-304-3	3×4 LED	36W	450×40×42 mm		9-30V	0.55kg
BCS-304-4	4×4 LED	48W	590×40×42 mm		9-30V	0.7kg
BCS-304-5	5×4 LED	60W	730×40×42 mm		9-30V	0.8kg
BCS-304-6	6×4 LED	72W	880×40×42 mm		9-30V	0.9kg
BCS-304-7	7×4LED	84W	1020×40×42 mm		9-30V	1.0kg
BCS-304-8	8×4 LED	96W	1170×40×42 mm		9-30V	1.1kg



LED Rock Light

Series



MultiColor



Bluetooth Connection



SYNC with Music



Brightness Adjustable



Speed Adjustable



PA0120


- One drive 12 Pods, 10×12LED
- APP/Remote/24-Button RF Remote Control



PA0144


- One drive 12 Pods, 12×12LED
- APP/Remote/24-Button RF Remote Control

LED Rock Light Series



PA0150

- One drive 10 Pods, 10×15LED
- APP/Remote /24-Button RF Remote Control




PA0180

- One drive 12 Pods, 12×15 LED
- APP/Remote/24-Button RF Remote Control



PA0912

- Light Strip Length: 90CM*2PCS + 120CM*2PCS
- APP/Remote/24-Button RF Remote Control

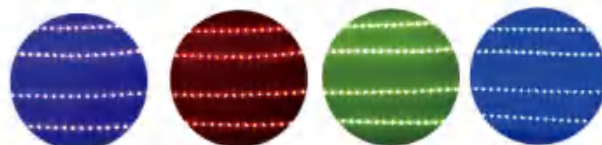



LED Ambient Light Series



PB05

- Voltage: DC12V
- LED Color: 64 Colors
- 5-in-1 LED, with 6 meters Fiber Optic
- Control Mode: Remote control/Mobile APP control (Optional)



(6 meters Fiber Optic)



Shadow Light Series



- Voltage: DC 12V
- Lifespan: >50,000 Hours
- Operating Temperature: -40℃~80℃
- Power: 3W
- Waterproof Rate: IP67
- Material: ABS+Aluminum alloy



YB01 BZ-C



YB02 LX



YB03 BZ-GLK



YB04 BZ-E



YB05 TY



YB06 BZ-4matic



YB07 BZ-164



YB08 BZ-ML



YB09 BZ-W204



YB10 BM



YB11 BZ-R



YB12 TY-LC



LED Warning Light Series



- Input Voltage: DC12-24V
- Waterproof: IP67
- Life Span: ≥ 30000 hours
- LED color: White, Blue, Red, Yellow, White&Yellow, White&Red, Red&Blue
- Application: for Car, Truck, SUV, etc



W01

- Power: 9W
- LED Beads: 3LED
- Dimension: 110×33×28mm
- Optional beam: Spot/Flood



W02

- Power: 12W
- LED Beads: 4LED
- Dimension: 110×33×28mm
- Optional beam: Spot/Flood



W03

- Power: 12W
- LED Beads: 4LED
- Dimension: 85×28×10mm
- Optional beam: Spot/Flood



W04

- Power: 18W
- LED Beads: 6LED
- Dimension: 112×28×10mm
- Optional beam: Spot/Flood



W05

- Power: 36W
- LED Beads: 12LED
- Dimension: 112×41×10mm
- Optional beam: Spot/Flood



W06

- Power: 30W
- LED Beads: 4D-10LED
- Dimension: 112×28×10mm
- Optional beam: Spot/Flood



W07

- Power: 36W
- LED Beads: 4D-12LED
- Dimension: 112×28×10mm
- Optional beam: Spot/Flood



W08

- Power: 60W
- LED Beads: 4D-20LED
- Dimension: 112×41×10mm
- Optional beam: Spot/Flood



W09

- Power: 72W
- LED Beads: 24LED
- Dimension: 190×41×10mm
- Optional beam: Spot/Flood



W10

- Power: 72W
- LED Beads: 4D-24LED
- Dimension: 190×28×10mm
- Optional beam: Spot/Flood



Front Grille Light Series

Voltage: DC12V

LED color: Yellow/White

Shell color: Yellow/Black



D100

LED Beads: 4×4LED
Dimension: 62×24mm



D102

LED Beads: 4×4LED
Dimension: 55×17mm



D103

LED Beads: 4×12LED
Dimension: 55×17mm



D104

LED Beads: 6×6LED
Dimension: 95×32mm




D105

LED Beads: 4×4LED
Dimension: 52×17mm



LED Pilot Light Series

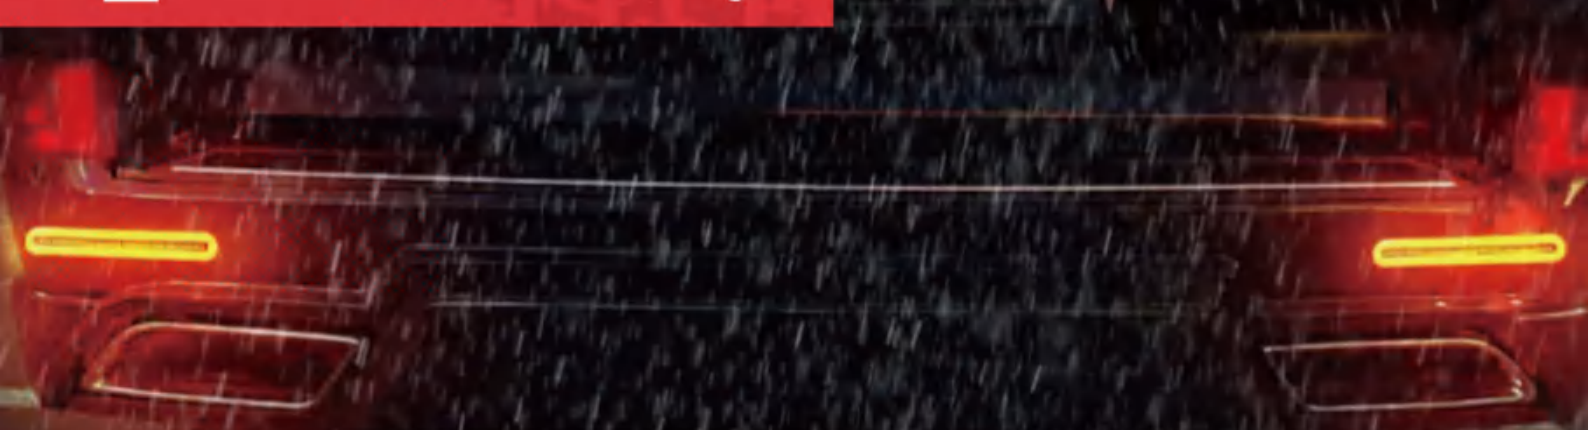

TA100

LED Beads: 100 LED
Voltage: DC12V
Function: Driving/Brake/Turn Signal
Dimension: 235×42×16mm

TB100

LED Beads: 100 LED
Voltage: DC12V
Function: Driving/Brake/Turn Signal
Dimension: 235×42×16mm

TC40

LED Beads: 40 LED
Voltage: DC12V
Function: Driving/Brake
Dimension: 135×40×13mm



LED Light Wiring Harness

遥控汽车LED暴闪灯线组


Remote control car LED stroble light wire harness



▲ G47M

产品说明:

- * 一拖一遥控汽车LED暴闪灯线组, 可接一个LED灯, 主要适用于汽车工作灯、长条灯、雾灯。
- * 高频无线遥控车灯开关, 操作方便。
- * 有多种闪灯模式(慢闪/快闪)可供选择, 在闪灯模式下可以提醒对方车辆, 使行车更安全。
- * 超远遥控距离, 遥控距离达100M, 方便在停车场寻车。
- * 可选配手动控制开关控制或手动开关和遥控器同时控制车灯
- * 一体式设计, 内部控制芯片采用进口芯片, 抗干扰强, 性能更稳定。
- * 电线使用PVC绝缘外皮, 耐温85℃, 耐压300V。
- * 电线PVC绝缘外皮具有抗碱、耐油、防腐、环保、阻燃等特性
- * 电线导体使用多股全铜芯

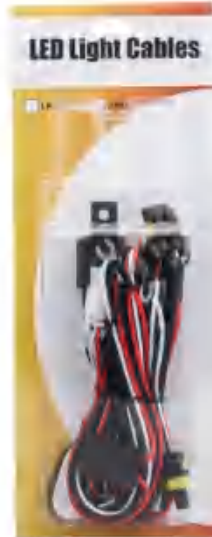

- * Remote control car LED stroble light wire harness, can match one piece of LED light, or apply for work light, bar light, fog light.
- * High-frequency wireless remote control lights switch, the operation more convenient.
- * There are a variety of flash mode (slow flash / fast flash) for your selection, in flashing mode can remind other vehicles, so that driving safer.
- * Super remote distance, remote control distance of 100M, easy to find cars in the parking lot.
- * Optional manual control switch, manual switch and remote control can simultaneously control the lights.
- * Integrated design, internal control chip using imported chips, anti-interference, more stable performance.
- * Wire used PVC insulation shuck, temperature resistance 85℃, withstand voltage 300V.
- * PVC insulated wire with anti-alkali, oil resistance, mould proof, environmental protection, inflammating retarding and other characteristics.
- * Wire conductor uses multi-strand copper wire

可选配件

Optional Accessories

遥控器 Remote Controller



控制开关 Manual Switch



连接器 Connector



产品编码 Item NO.	电线材质 material of wiresheath	输入线 (AWG) Input line	输入铜芯 截面积(mm²) Copper core sectional area	输出线 (AWG) output line	输出线 长度 Length of output line	输出线铜芯 截面积(mm²) Copper core sectional area	电压 (V) Voltage	连接器 (可选) Connector	控制开关 (可选) Control switch	控制开关 线长度 Length of control switch	继电器 (60A/40A) Relay	保险丝 Fuse	承载功率 Power
BLH-001	PVC	14#	2	14#	3M	2	12V/24V	①②③④⑤⑥	①②③④	3M	40A(12V/24V)	30A	≤300W
BLH-002	PVC	14#	2	14#	2.5M	2	12V/24V	①②③④⑤⑥	①②③④	3M	40A(12V/24V)	30A	≤300W
BLH-003	PVC	14#	2	14#	2M	2	12V/24V	①②③④⑤⑥	①②③④	3M	40A(12V/24V)	30A	≤300W
BLH-004	PVC	16#	1.3	16#	3M	1.3	12V/24V	①②③④⑤⑥	①②③④	3M	40A(12V/24V)	30A	≤180W
BLH-005	PVC	16#	1.3	16#	2.5M	1.3	12V/24V	①②③④⑤⑥	①②③④	3M	40A(12V/24V)	30A	≤180W
BLH-006	PVC	16#	1.3	16#	2M	1.3	12V/24V	①②③④⑤⑥	①②③④	3M	40A(12V/24V)	30A	≤180W
BLH-007	PVC	18#	0.65	18#	3M	0.65	12V/24V	①②③④⑤⑥	①②③④	3M	40A(12V/24V)	30A	≤180W
BLH-008	PVC	18#	0.65	18#	2.5M	0.65	12V/24V	①②③④⑤⑥	①②③④	3M	40A(12V/24V)	30A	≤180W
BLH-009	PVC	18#	0.65	18#	2M	0.65	12V/24V	①②③④⑤⑥	①②③④	3M	40A(12V/24V)	30A	≤180W



LED Light Wiring Harness Series

一拖一汽车LED灯线组

One-drive-one car LED light wire harness



▲ G61



G30 ▲



G47 ▲

产品说明:

- * 一拖一LED灯线组, 可接一个LED灯, 主要适用于汽车工作灯, 长条灯, 雾灯。
- * 电线使用PVC绝缘外皮, 耐温85℃, 耐压300V。
- * 电线PVC绝缘外皮具有抗碱、耐油、防腐、环保、阻燃等特性
- * 电线导体使用多股全铜芯
- * 采用60A防水保险盒

* one-drive-one LED car light wire harness, can match one piece of LED light, or apply for work light, bar light, fog light.

* Wire used PVC insulation shuck, temperature resistance 85℃, with standard voltage 300V.

* PVC insulated wire with anti-alkali, oil resistance, mould proof, environmental protection, inflaming retarding and other characteristics.

* Wire conductor uses multi-strand copper wire

* Use 60A waterproof fuse box

可选配件

Optional Accessories


遥控器 Remote Controller



控制开关 Manual Switch



连接器 Connector



60A防水保险盒
60A waterproof fuse box




30A保险盒
30A fuse



40A继电器
40A relay



60A大功率继电器座
60A high power relay



陶瓷继电器座
Ceramic relay socket

产品编码 ItemNO.	电线材质 material of wiresheath	输入线 (AWG) Inputline	输入铜芯 截面积(mm²) Inputline Coppercore sectionalarea	输出线 (AWG) output line	输出线 长度 Length of output line	输出线铜芯 截面积(mm²) output line Coppercore sectionalarea	电压 (V) Voltage	连接器 (可选) Connector	控制开关 (可选) Control switch	控制开关 线长度 Length of control switch	继电器 (60A/40A) Relay	保险丝 Fuse	承载功率 Power
BLH-010	PVC	10#	5.3	10#	3M	5.3	12V/24V	①②③④	①②③④	3M	60A(12V/24V)	60A	≤700W
BLH-011	PVC	10#	5.3	10#	2.5M	5.3	12V/24V	①②③④	①②③④	3M	60A(12V/24V)	60A	≤700W
BLH-012	PVC	10#	5.3	10#	2M	5.3	12V/24V	①②③④	①②③④	3M	60A(12V/24V)	60A	≤700W
BLH-013	PVC	12#	3.3	12#	3M	3.3	12V/24V	①②③④	①②③④	3M	60A(12V/24V)	60A	≤500W
BLH-014	PVC	12#	3.3	12#	2.5M	3.3	12V/24V	①②③④	①②③④	3M	60A(12V/24V)	60A	≤500W
BLH-015	PVC	12#	3.3	12#	2M	3.3	12V/24V	①②③④	①②③④	3M	60A(12V/24V)	60A	≤500W

LED Light Wiring Harness

一拖二汽车LED灯线组

One-drive-two car LED light wire harness



▲ G1



▲ G2



▲ G41

G49 ▶



产品说明:

- * 一拖二LED灯线组, 可接2个LED灯, 主要适用于汽车工作灯, 长条灯, 雾灯。
- * 电线使用PVC绝缘外皮, 耐温85℃, 耐压300V。
- * 电线PVC绝缘外皮具有抗碱、耐油、防腐、环保、阻燃等特性
- * 电线导体使用多股全铜芯

* one-drive-two LED car light wire harness, can match one piece of LED light, or apply for work light, bar light, fog light.

* Wire used PVC insulation shuck, temperature resistance 85℃, with standard voltage 300V.

* PVC insulated wire with anti-alkali, oil resistance, mould proof, environmental protection, inflaming retarding and other characteristics.

* Wire conductor uses multi-strand copper wire

可选配件

Optional Accessories

遥控器 Remote Controller



控制开关 Manual Switch



连接器Connector



产品编码 Item NO.	电线材质 material of wireshuck	输入线 (AWG) Inputline	输入铜芯 截面积(mm²) Coppercore sectionalarea	输出线 (AWG) output line	输出线 长度 Length of output line	输出线铜芯 截面积(mm²) Coppercore sectionalarea	电压 (V) Voltage	连接器 (可选) Connector	控制开关 (可选) Control switch	控制开关 线长度 Length of control switch	继电器 (60A/40A) Relay	保险丝 Fuse	承载功率 Power
BLH-055	PVC	12#	3.3	14#	3M	2	12V/24V	①②③④⑤⑥⑦	①②③④	3M	60A(12V/24V)	60A	≤500W
BLH-056	PVC	12#	3.3	14#	2.5M	2	12V/24V	①②③④⑤⑥⑦	①②③④	3M	60A(12V/24V)	60A	≤500W
BLH-057	PVC	12#	3.3	14#	2M	2	12V/24V	①②③④⑤⑥⑦	①②③④	3M	60A(12V/24V)	60A	≤500W
BLH-058	PVC	14#	2	16#	3M	1.3	12V/24V	①②③④⑤⑥⑦	①②③④	3M	40A(12V/24V)	30A	≤300W
BLH-059	PVC	14#	2	16#	2.5M	1.3	12V/24V	①②③④⑤⑥⑦	①②③④	3M	40A(12V/24V)	30A	≤300W
BLH-060	PVC	14#	2	16#	2M	1.3	12V/24V	①②③④⑤⑥⑦	①②③④	3M	40A(12V/24V)	30A	≤300W
BLH-061	PVC	16#	1.3	18#	3M	0.65	12V/24V	①②③④⑤⑥⑦	①②③④	3M	40A(12V/24V)	15A	≤160W
BLH-062	PVC	16#	1.3	18#	2.5M	0.65	12V/24V	①②③④⑤⑥⑦	①②③④	3M	40A(12V/24V)	15A	≤160W
BLH-063	PVC	16#	1.3	18#	2M	0.65	12V/24V	①②③④⑤⑥⑦	①②③④	3M	40A(12V/24V)	15A	≤160W



LED Light Wiring Harness

Series



▲ CYA-01



▲ CYA-06



▲ CY-F55



▲ G-H4



▲ G7



▲ CY-G803

LED Light Wiring Harness



▲ G101



▲ G103



▲ G31M



▲ G33M



▲ G160





产品说明:

* 整套线组可选配不同的配件去搭配线组, 如遥控器、手动开关、灯接灯、保险丝、继电器及其插座等, 也可选用没用规格、外皮的线材。

* You can choose different parts as remote controller, manual switch, light connector, fuse, relay, relay socket to match the wiring harness you want. Also can choose different material wire with different cable skin or different gauge.

遥控器 Remote Controller

可选配件

Optional Accessories



控制开关 Manual Switch



连接器 Connector



其它配件 Other parts



不同的线皮 Different wire skin:





中山市宝车仕电子有限公司

ZHONGSHAN BCS ELECTRONICS CO.,LTD

Factory address : No.7, Anhua road, Zhuyuan, Xiaolan town,
Zhongshan city, Guangdong, China (PC528415).

Tel: 86-760-22286376

Fax: 86-760-22625208

Homepage: <http://www.zsbcs.com>

Website: <http://bcs.en.alibaba.com>

E-mail: zsbcs@zsbcs.com.