

Introduction Company Profile

It was founded in 1992, now is located in the north of the famous and beautiful city of Hangzhou, principle of Zhejiang Province, occupying the area of about 38306 square meters, with a general stall of more than 1200, six subordinate functional departments and thirteen production workshops, its main production scope ranges from switch power supply, AC/AC & AC/DC adaptor, transformer, DC/DC car accessories, step up & down transformer, cables, Automatic Voltage .Regulator to tweeter and etc

With years of practices and incessant promotion, it has accumulated many valuable and precious experiences in mass production and management system, Until this days, it can adjust itself flexibly to meet the world market and supply customers with productions of high quality and competitive prices. Moreover, it has acquired TUV/CE/GS, E-mark and UL/CUL, FCC and ISO9001:2008 certifications.

It has established wide business relationships with many areas and countries with productions successfully entered such foreign markets as American, European, Asian, African, Middle East and South of American, enjoying a high reputation of Thinking much of contract and observing credit both in customers and governmental departments.

With the famous West Lake for its beauty and elegance in the world, the creative and vigorous staffs of lianlong welcome your honored guests warmly at any time!



ZHEJIANG LIANLONG ELECTRON & ELECTRIC APPLIANCES CO.,LTD

www.lianlong.com.cn

2019-2021

New Products



Zhejiang lianlong electron & electric appliances Co.,Ltd.

Add: No.2 Xiangfu Road, Hangzhou, China

P.C.: 310015

Tel: 0086-571-88262083, 88262084

Fax: 0086-571-88262081


E-mail: lianlong@lianlong.com

<http://www.lianlong.com.cn>

<http://www.globalsources.com/lianlong.co>



LLAS05400A

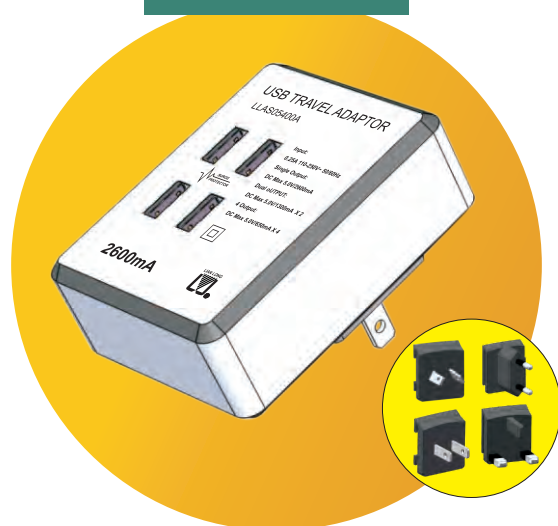**2600mA 4-Port Power USB Charger**

----suitable for use with most ipad,ipod,iphone,blackberry phones,other smart phones and camara,mp3 players.

Input: 100-240VAC 60/50Hz

Single output: DC5V 2600mA Max

Dual output: DC5V 1300mAx2 Max

4 Output: DC5V 650mAx4 Max

Input plug: AT. ST. UK. SAA.

Product Description and Features:

*4x650mA 5V output ports.

*13W Max intelligent power consumption-uses maximum power, it needs to charge and turns off when fully charged.

*Changable input plugs for your travel.

6-Port Power USB Charger with 1.5M AC cord

----suitable for use with most ipad,ipod,iphone,blackberry phones,other smart phones and camara,mp3 players.

Input: 100-240VAC 60/50Hz

USB1 output: DC5V 2100mAx1, 1000mAx2 Max


USB2 output: DC5V 1000mAx1, 500mAx2 Max

USB3 output: DC5V 1000mAx1, 500mAx2 Max

Product Description and Features:

*10W Max intelligent power consumption-uses maximum power, it needs to charge and turns off when fully charged.

LLAS05600

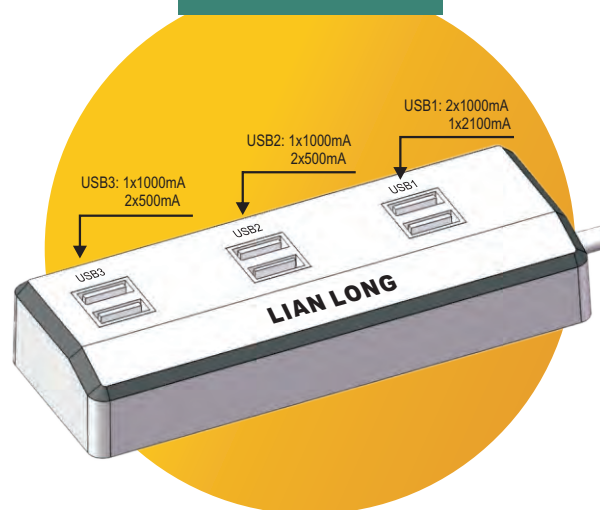

LLAS05100C

LLAS05210C



Switching Power Adapter With Two USB Outlets

---suitable for use with most Ipad, iPod, iPhone, Blackberry Phones, other Smart phones and Camara's, MP3 players.

---According to CE/EMC/LVD/ERP Design(LLAS05210C)

Model	Input plug	Input voltage	Output voltage	Output Current	Features
LLAS05100C	AT ST	AC100-240V 60/50Hz	5V	1x1000mA 2x500mA	*Short circuit protection *Over voltage protection *Over current protection *With 2 USB outlet
LLAS05210C	SAA UK RUK			1x2100mA 2x1000mA	

ERP/ROHS



LLAS/05100D

LLAS05210D



Switching Power Adapter With USB Outlet

---suitable for use with most Ipad, iPod, iPhone, Blackberry Phones, other Smart phones and Camara's, MP3 players.


Model	Input plug	Input voltage	Output voltage	Output Current	Features
LLAS/05100D	AT ST	AC100-240V 60/50Hz	5V	1x1000mA	*Short circuit protection *Over voltage protection *Over current protection *With USB outlet
LLAS05210D	SAA UK RUK			1x2100mA	

ERP/ROHS



LLAS/05800A

LLAS05800

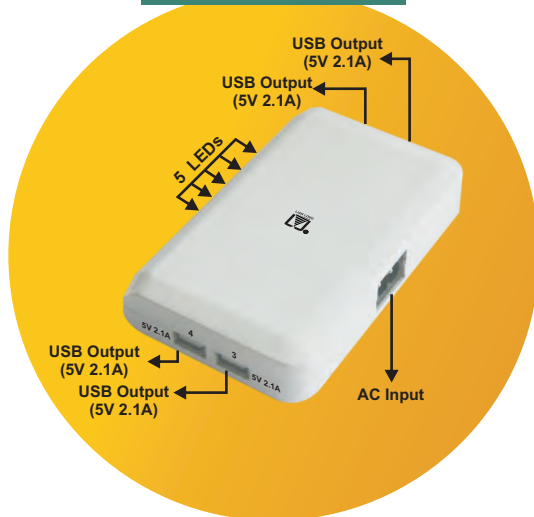

It can be sold to world wide exclusive of European market!(LLAS/05800A)

8400mA 4-Port Compact"Ultimate"Power USB Charger

----suitable for use with most ipad,ipod,iphone,blackberry phones,other smart phones and camara,mp3 players.

Input: 100-240VAC 60/50Hz

Output: DC5V 2.1Ax4

Input plug: AT: ET: BS: SAA:

Product Description and Features:

*4x2100mA 5V output ports.

*42W Max intelligent power consumption-uses maximum power, it needs to charge and turns off when fully charged.

*1Pcs red LED power indicator.


*4Pcs blue LED individual port indicators.

*PC+ABC V0 fire retardant case.

*Includes 5 protections: surge, short-circuit, overload, over current, over temp.

*1Pcs black 2x0.75mm2/0.75m, mains "figure 8" AC cable include.

LLAS05400

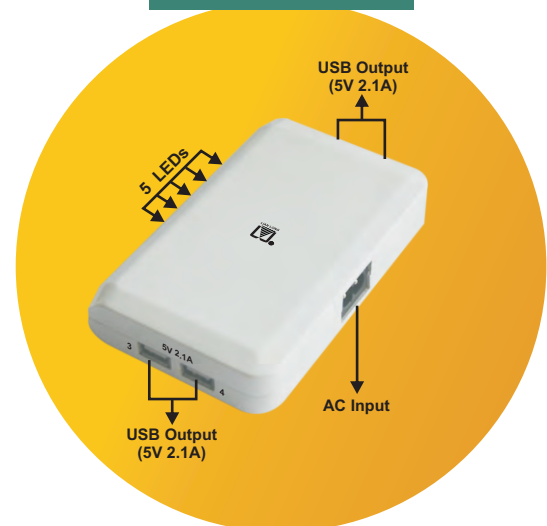

4200mA 4-Port Power USB Charger

----suitable for use with most ipad,ipod,iphone,blackberry phones,other smart phones and camara,mp3 players.

Input: 100-240VAC 60/50Hz

Output: DC5V 2.1Ax2

Input plug: AT: ET: BS: SAA:

Product Description and Features:

*2x2100mA 5V output ports.

*21W Max intelligent power consumption-uses maximum power, it needs to charge and turns off when fully charged.

*1Pcs red LED power indicator.

*4Pcs blue LED individual port indicators.

*PC+ABC V0 fire retardant case.

*Includes 4 protections: short-circuit, overload, over current, over temp.

*1Pcs black 2x0.75mm2/0.75m, mains "figure 8" AC cable include.



Add: No.2 Xiangfu Road, Hangzhou, China P.C.: 310015

Tel: 0086-571-88262083, 88262084

E-mail: lianlong@lianlong.com

<http://www.lianlong.com.cn>

Fax: 0086-571-88262081

<http://www.globalsources.com/lianlong.com>

ERP/ROHS

LLAS/05210M

LLAS05210B



USB

Switching Power Adapter With USB Outlet

---suitable for use with most Ipad, iPod, iPhone, Blackberry Phones, other Smart phones and Camara's, MP3 players.

Input: 100-240V AC 50/60Hz

Output: 5V DC 2100mA

Input plug: AT. ST. SAA. UK. RUK.

Features:

*Short circuit protection

*Over current protection

*With 1 USB outlet

*Over voltage protection

*With LED indicator

LLAS05210K

LLAS05150



Plug in Switching Power Adapter With USB Outlet

Model	Input plug	Input voltage	Output voltage	Output Current	Features
LLAS05210K	AT ST	AC100-240V 60/50Hz	5V	2100mA	*With LED Indicator *With USB Outlet
LLAS05150	SAA ET			1500mA	



Add: No.2 Xiangfu Road, Hangzhou, China P.C.: 310015

Tel: 0086-571-88262083, 88262084

E-mail: lianlong@lianlong.com

<http://www.lianlong.com.cn>

Fax: 0086-571-88262081

<http://www.globalsources.com/lianlong.com>

LLA41/030W

ERP/ROHS

**Plug-in Adapter**

Input voltage: 230V AC 50Hz

Selectable output voltage: 3.0/4.5/6.0/7.5/9.0/12V DC

Maximum load: 300 mA

Input plug: ST. UK.

Output plug: 6way universal connector

Plug in Switching Power Adapter

Input: 90-240V AC 60/50Hz

Output: 3/5/6/7.5/9/12V DC 1500mA

Input plug: AT. ST. UK. RUK. SAA.

Output plug: With 6 detachable plugs
DC 5V USB connector

LLAS/1500CW

ERP/ROHS

LLAS1500C

**Plug in Switching Power Adapter**

Input: 100-240V AC 60/50Hz

Output: 3/5/6/7.5/9/12V DC 1200mA

Input plug: AT. ST. UK. RUK. SAA.

Output plug: With 6 detachable plugs

LLAS/1200CW

**Plug in Switching Power Adapter**

Input: 100-240V AC 60/50Hz

Output: 12V DC 3000mA


Input plug: AT. ST. UK. RUK. SAA.

Output plug: With 5.5x2.5mm plugs

LLAS12300

**According to CE/EMC/LVD/ERP Design**

LLAS06100

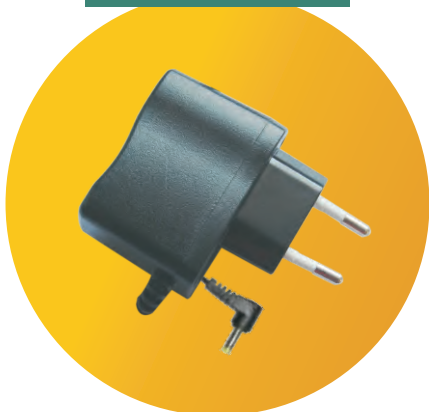**Plug in Switching Power Adapter**

---For wireless telephone

Input voltage: 220VAC 50Hz

Output voltage: 5.5VDC

Output current: 500mA max

Input plug: ST.

Output plug: 4.8*1.7mm DC jack.

Polarity: positive

With power LED indication.

Plug in Switching Power Adapter

Input: 100-240V AC 50/60Hz

Output: 12V DC

Current: 0-900mA

Input plug: AT. ST. UK. RUK. SAA.

Output plug: any DC jack

LLAS12090



LLAS12090A

LLAS05200

**Plug in Switching Power Adapter**

Input: 100-240V AC 50/60Hz

Output: 5V DC 2000mA

Input plug: AT. ST. UK. RUK. SAA.

Output plug: With 5.5x2.5 plugs

Plug in Switching Power Adapter

Input: 100-240V AC 60/50Hz

Output: 12V DC 1000mA

Input plug: AT. ST. UK. RUK. SAA.

Output plug: With 5.5x2.5mm plugs

LLAS12100S

**According to CE/EMC/LVD/ERP Design**

LLAS05080

**Mobile phone charger****---For Blackberry Mobilephone**

Input: 100-240V AC 50/60Hz 200mA

Output: 5V DC

Current: 0-800mA max

Input plug: AT. 

Output plug: Micro USB 5P

Mobile phone Charger kit
(Including LLAS05080 and LLCS05080B)
Technical Specification:

Model: LLAS05080

Rated supply voltage: 100-240V AC

Rated supply voltage: 5V DC

Rated output current: 600mA Max

Rated output: 3VA

Input plug: AT. 

Output plug: Micro USB 5P

Model: LLCS05080B

Rated supply voltage: 12-14V DC

Rated supply voltage: 5V DC

Rated output current: 800 mA Max

Rated output: 4VA

Output plug: Micro USB 5P

LLACS-08KIT



LLCS05080B

**Mobile phone charger****---For Blackberry Mobilephone**

Input: 12-14VDC

Output: 5V DC

Current: 0-800mA max

Input plug: Cigarette lighter socket with 4 springs

Output plug: Micro USB 5P

LLCS05210C



DC/DC 2 USB Port Charger

Input: 12-24VDC Output: 5VDC
 Maximum load: 1x2100mA; 2x1000mA
 Input plug: Cigarette lighter socket with 2 springs
 Output plug: 2 USB port
 *with short circuit protection
 *with over current protection
 *with over temp protection
 *with LED indication: 1.LED On: charging
 2.LED Off: fully charged

USB Charger kit (Including LLAS05400A and LLCS05210C)

Technical Specification:**Model: LLAS05400A**

Input: 100-240VAC 60/50Hz
 Single Output: 5VDC 2600mA Max
 Dual Output: 5VDC 1300mA x2 Max
 4 Output: 5VDC 650mA x4 Max
 Input plug: AT. ST. UK. SAA.

Model: LLCS05210C

Input: 12-24VDC Output: 5VDC
 Maximum load: 1x2100mA; 2x1000mA
 Input plug: Cigarette lighter socket with 2 springs
 Output plug: 2 USB port

LLACS-09KIT



LLACS-10KIT



USB Charger kit (Including LLAS05210C and LLCS05210C)

Technical Specification:**Model: LLAS05210C**

Input: 100-240VAC 60/50Hz Output: 5VDC
 Maximum load: 1x2100mA; 2x1000mA
 Input plug: AT. ST. SAA. UK. RUK.
 Output plug: 2 USB port

Model: LLCS05210C

Input: 12-24VDC Output: 5VDC
 Maximum load: 1x2100mA; 2x1000mA
 Input plug: Cigarette lighter socket with 2 springs
 Output plug: 2 USB port

LLCS05210U

**DC/DC Car Power Adaptor With USB Outlet**

Input voltage: 12-24V DC

Output voltage: 5V DC

Maximum Load: 2100mA

Input plug: Cigarette lighter socket with 4 springs

Output plug: USB Outlet

**USB Charger kit
(Including LLAS05210K and LLCS05210U)****Technical Specification:**

Model: LLAS05210K

Rated supply voltage: 100-240V AC

Rated supply voltage: 5V DC

Rated output current: 2100mA Max

Rated output: 10.5VA

Input plug: AT. ET. ST. SAA.

Output plug: USB Outlet

With over-current protection

With power LED indication

Model: LLCS05210U

Rated supply voltage: 12-24V DC

Rated supply voltage: 5V DC

Rated output current: 2100 mA Max

Rated output: 10.5VA

Output plug: USB Outlet

LLACS-07KIT



LLCS05210A

**DC/DC Car Power Adaptor With USB Outlet**


Input: 12-24V DC

Output: DC5V 2.1A MAX

Input plug: cigarette lighter socket with 4 springs

Output plug: USB outlet

LLCS2100N

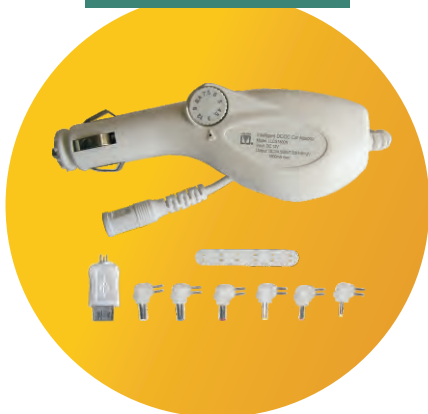

INTELLIGENT DC/DC CAR ADAPTOR

This intelligent DC/DC power adaptor with switching technology is compact and light weight. Its wide output voltage range makes it an ideal power adaptor for almost all kinds of electronic products.

SPECIFICATIONS:

- Input voltage: DC12-24V
- Output voltage: DC3/4.5/5/6/7.5/8.4/9/12V 2100mA MAX.
- USB Output: DC5V 2100mA
- Short circuit Protection
- Regulated output voltage
- Power: 25W MAX.
- Power LED indicator

INTELLIGENT DC/DC CAR ADAPTOR

This intelligent DC/DC power adaptor with switching technology is compact and light weight. Its wide output voltage range makes it an ideal power adaptor for almost all kinds of electronic products.

SPECIFICATIONS:

- Input Voltage: DC 12V
- Output Voltage: DC 3/4.5/5/6/7.5/8.4/9/12V 3000mA Max.
- USB Output: DC5V 2000mA
- Power: 36W Max.
- Regulated output voltage
- Short Circuit Protection
- Power LED indicator

LLCS3000NB



LLCS3500A



DC/DC CAR CONVERTER

- Input Voltage: DC 12-24V
- Output Voltage: DC 1.5/3/4.5/6/7.5/9/12V 3500mA Max.
- LED red light indicator.
- Fused plug fit all different cars with a cigarette lighter socket.
- Enjoy unlimited use of radio,tape-recorder,phones,electronic games, calculator, etc. by running them from the car battery.
- Wide range of safely features i.e.
 - a)Short circuit protection.
 - b)Automatic thermal cut off.
 - c)Automatic overload cut off.
 - d)Switching circuit design.

LLCI100U



DC-AC power inverter

Rated Power: 75W Peak Power: 150W
 Input voltage: 11-15VDC Output voltage: 220V or 110V
 Output frequency: 50Hz or 60Hz
 Output voltage for USB charging port: 5VDC 1A max
 Converter efficiency: >95%
 Over voltage shutdown: DC15-16V
 Low voltage shutdown: DV10-11V

4-in-ONE 12 Volt DC Socket Multiplier With Two USB Connector Fit All Different Cars

Model	Input voltage	Output voltage (3 Cigarette Sockets)	Output voltage (USB Outlet)	Output Current (USB Outlet)
LLC109B	12V	12V	5V	1x1000mA, 2x500mA
LLC109C				1x2100mA

FEATURE:

- *Convert your car's existing cigarette lighter socket into TWO USB DC 5V connector and THREE 12V DC socket.
- *Text all 12V negative ground battery system.
- *It is ideal use for running 12 volt accessories such as cellular phone, portable TV set, video games, lamps, car vacuum cleaner etc.
- *Fuse protection: 10A

LLC109B



Color of LED	Indication
Red	High
Yellow	Normal
Green	Low

LLC109C



LLCS2100NR



DC/DC CAR CONVERTER----REGULATED

Input voltage: 12-24V DC
 Output voltage: 1.5-12V DC
 Maximum Load: 2100mA

Packing: Individual double blister

Model	Pcs.Per Exp.Ctn	N.W (Kg)	G.W (kg)	Measurement (cm)	CBM
LLCS2100NR	72	9	11	49×40.5×45	0.089

Led table lamp

*Start Eye protection
light source*

**New
revolution**

■ NO STROBOFLASH ■ SIDE-GLOWING ■ SOFT LIGHT

LLCQ-001

■ LED TABLE LAMP Parameters

MODEL: LLCQ-001
VOLTAGE: AC 100-240V
POWER: MAX 8W
COLOR: WHITE
COLOR TEMPERATURE: -20°C~40°C
DIMMER: 3 MODES DIMMABLE
APPLICATION: OFFICE/BEDROOM/SCHOOLROOM
LIGHTING: SIDE-GLOWING



LLE500B



Refrigerator Protector

Input plug: American type 3pin
Working voltage: AC 115V or AC 220V
Safety range: AC 90-130V $\pm$ 5V or AC 190-240V $\pm$ 10V
Capacity: 3600W, 1/2HP
Surge suppressor: 90 Joules, 2mS
Safety cycle: About 3 minutes

Led Indicators:

Power on(Green): This indicator is illuminated when the power line voltage is within the range where electrical appliances can operate safely.

Power off(Red): This indicator will be illuminated whenever there is a power surge or power line voltage is higher or lower than the safety range. The output socket is deactivated to protect the appliances.

Safety cycle(Yellow): This indicator will be illuminated for about 3 minutes after a power flicker, surge, or blackout. When it is illuminated, the power to your electrical appliance is blocked in order to protect it.

Instructions:

The refrigerator's compressor would be damaged when electricity's AC voltage is lower or higher than normal, especially when voltage is bricking. Voltage bricking is the major cause of damage to the compressor/refrigerator. This protector will cut off power when the voltage is not normal. When the voltage becomes normal, the protector will change into safety cycle mode until the voltage is steady in the safety range up to 3 minutes. The protector will then resume connection of the power to refrigerator. This safety cycle can avoid voltage bricking to cause damage to the refrigerator.

Note: For first time connection, it will be a 3 minute delay to start the refrigerator.



Add: No.2 Xiangfu Road, Hangzhou, China P.C.: 310015
Tel: 0086-571-88262083, 88262084
E-mail: lianlong@lianlong.com <http://www.lianlong.com.cn>

Fax: 0086-571-88262081
<http://www.globalsources.com/lianlong.co>

LLA0300PC

**Dual function adapter & charger****---thermal fuse protection**

Input voltage: 110V or 220V AC

Selectable output voltage: 6.0/9.0/12/15V DC

Maximum load: 3000mA

Input plug: ET. AT. BS. SAA.

Charger(Green lamp) for:

various voltage rechargeable such as car battery rechargeable, lead-acid sealed battery.

Adapter(Red lamp) for:

car audio system; Mobile CD charger, FM/CB transceiver, all battery operated device up to DC 3000mA.

Dual function adapter & charger**---thermal fuse protection**

Input voltage: 110V or 220V AC

Selectable output voltage: 6.0/9.0/12/13.8V DC

Maximum load: 6000mA

Input plug: ET. AT. BS. SAA.

Charger(Green lamp) for:

various voltage rechargeable such as car battery rechargeable, lead-acid sealed battery.

Adapter(Red lamp) for:

car audio system; Mobile CD charger, FM/CB transceiver, all battery operated device up to DC 6000mA.

LLA0600PC

**Dual function adapter & charger****---thermal fuse protection**

Input voltage: 110V or 220V AC

Selectable output voltage: 12V DC 8Amp 24V DC 4Amp

Input plug: ET. AT. BS. SAA.

Charger(Green lamp) for:

various voltage rechargeable such as car battery rechargeable, lead-acid sealed battery.

Adapter(Red lamp) for:

car audio system; Mobile CD charger, FM/CB transceiver, all battery operated device up to DC 8000mA.

LLA0800PC





LLD12020CT

Car Battery Charger with 6/12V DC Output Voltage and Reverse Polarity

Input voltage: AC100-240V 50/60Hz

Output voltage: DC6V or 12V

Charger current: 2000mA

INSTRUCTION:

1. Connect the charger to Battery and plug in Charger, red charging light will turn on .
2. When charging the red charging light is flashing .
3. Green charged light will turn on when complete .
4. Polarity protection light can against reverse battery connection .
5. Do not over charge the battery .

FEATURE:

- * Battery capacity: all types of 6V/12V lead-acid batteries (WET, MF, AGM and gel).
- * Reverse polarity, overcharge and short-circuit protection.
- * LED power and charging indicators.
- * Detachable and interchangeable lead sets, clamps and eyelet terminals.
- * Can automatically adjust the charging current according to the battery's capacity rating.
- * Be able to adjust the charging parameter according to the temperature of environment, charge the battery more fully switched mode power supply.



LLD12020IT

Car Battery Charger with 6/12V DC Output Voltage and Reverse Polarity

Input voltage: AC100-240V 50/60Hz 0.7A(MAX)

Output voltage: 12V position: DC13.8V 2000mA(MAX)
6V position: DC7.2V 2000mA(MAX)

INSTRUCTION:

1. Charging: Connect the charger to Battery and Plug in the charger, Red LED will turn on and flashing, while Green and Yellow LED does not. In this case, the charger is OK
2. Fully charged: Green light will turn on and red light will off when completed. The floating charging current: 200-300mA.
3. Suggestion: floating charge about 1-2 hours, it can make the battery better to store energy.
4. If battery polarity reversed, the yellow LED will turn on.
5. Battery Spec: 20-50Ah

FEATURE:

- * This charger is smart controlled by MCU.
- * Can automatically identify 6V or 12V charging current according to the battery's capacity rating.
- * With Reverse polarity protection, Overcharge protection, Short-circuit protection, Temp protection.
- * LED power and charging indicators.
- * Battery capacity: all types of 6V/12V lead-acid batteries (WET, MF, AGM and gel).

LLD12140IT**6/12V 1400mA Smart Charger For Sealed Batteries**

Input: 120V AC 60Hz 30W

Output: 6V/12V DC 1400mA

Time charging table:

Battery capacity (ampers)	85% charged	100% charged
4	3 hrs	6.5 hrs
7	5.5hrs	11.5hrs
12	10hrs	20hrs

LLD12050CT**6/12V 500mA Plug-in Lead Acid Battery Charge****----voltage limiting function**

Input: 230V AC 50Hz

Output: 6V/12V DC

Current: 500mA max

Input plug: AT. ST. ET.

Output plug: red and black battery clip.

LLD06010**Battery Charger**

Input voltage: 100-240VAC 60/50Hz

Output voltage: 6VDC

Output current: 1000mA max

Input plug: ST.

Output plug: any DC jack.

With power LED indication.

LLD12050CT**LLD06010****LLCS2000P****DC/DC CAR CONVERTER**

Input: DC12-14V

Output: DC1.5/3/4.5/6/7.5/9V

Output current: 2000mA max

Input plug: red and black battery clip

Output plug: any jacket

LLD300WA



BACK

AUTOMATIC VOLTAGE REGULATOR

Input voltage: 95-150VAC 10A
 Output voltage: 120VAC 3A MAX
 Frequency: 60Hz
 Power: 350W Max
 Fuse: 15A

- *Have TV&Computer in stable clear picture
- *Supply constant voltage with electricity
- *AC Automatic voltage regulator
- *Extend life of appliance
- *Avoid damage of appliance due to unstable input voltage
- *Fuse Protection
- *Power ON/OFF Switch
- *Over & under voltage cut off

AUTOMATIC VOLTAGE REGULATOR

Input voltage: 95-140VAC
 Output voltage: 115VAC 2A MAX
 Frequency: 60Hz
 Power: 250W Max

- *Have TV&Computer in stable clear picture
- *Supply constant voltage with electricity
- *AC Automatic voltage regulator
- *Power ON/OFF Switch with reset
- *Extend life of appliance
- *Avoid damage of appliance due to unstable input voltage

LLD250WT



BACK

LLE810



DOUBLE USB 5V




LLE810B

19" RACK POWER STRIP

Input : 125VAC 60Hz 15A
 Dissipation power output: 84 Joules
 RH: 10-80% non-condensed
 Operational temperature: -10 to 45°C

USB Output: DC5V 2100mA x1, 1000mA x2 Max

LLE954KIT

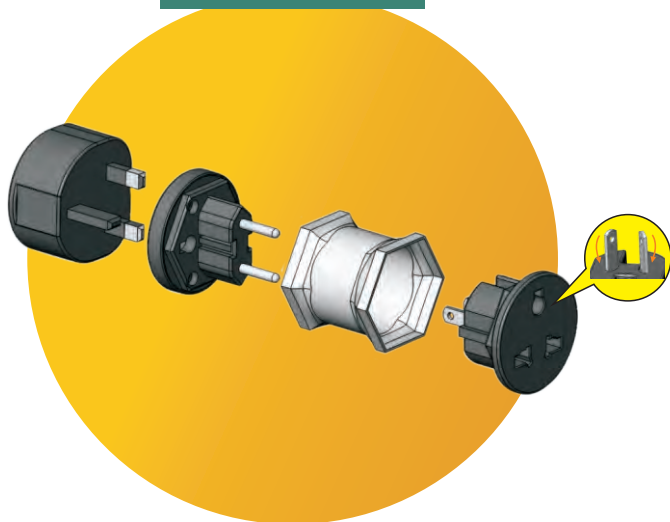

World travel adaptor plugs

- a. A must item for frequent travelers.
- b. Suits the use in over 150 countries.
- c. Compatible with worldwide standard, 3 plug socket outlets of the Plug Adapter: UK, USA, EURO, AUS.
- d. All in one adapter design, no longer need to carry multiple adapters when traveling around the world.
- e. Each socket outlet is of safety design, in case of accident happens due to misuse.
- f. Protect yours valuable electronic appliances from spikes & surges.
- g. Compact design and combination style for high portability in your journey.
- h. This adapter does NOT convert voltage. You are required to have a converter or transformer for your single voltage appliance.



British Type



Europe Type



American Type




Australian Type



LLE980



FRONT



BACK


AMERICAN TYPE



LLE980I



FRONT



BACK


BRITISH TYPE



LLE980G



FRONT




BACK


ITALY TYPE



LLE980F




FRONT



BACK

EUROPE TYPE

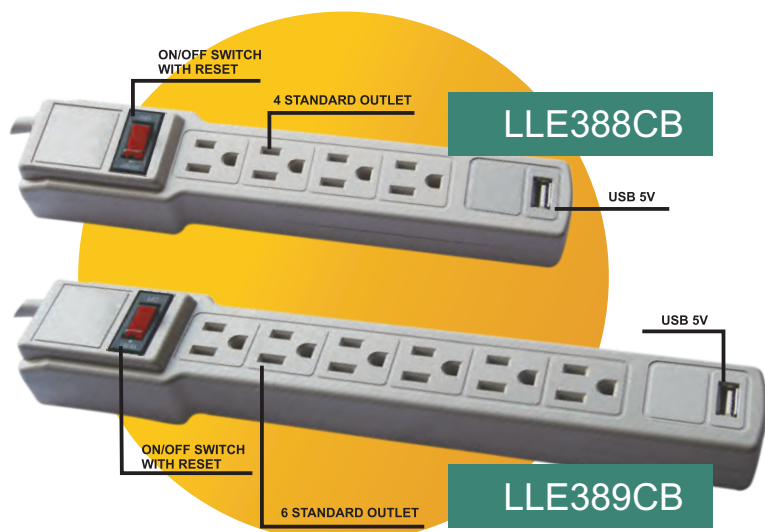

With USB 5V Outlet

Specification:

- *Clamping voltage: 250V
- *Max load: 10A
- *USB Output: DC5V 2.1A
- *With RESET

USE FOR:

- *Home Entertainment
- *Computer Hardware
- *Major Appliances
- *Small Kitchen Appliances
- *Office Products
- *Shop & Hobby Equipment

With Double USB 5V Outlet

Specification:

- *Clamping voltage: 250V
- *Max load: 10A
- *USB Output: DC5V 2100mA x1, 1000mA x2 Max

USE FOR:

- *Home Entertainment
- *Computer Hardware
- *Major Appliances
- *Small Kitchen Appliances
- *Office Products
- *Shop & Hobby Equipment

