



GLOBAL
CONNEXIONS
CONNECTING WORLD

OFFICE & GAMING cabinets



Partnership

beyond boundaries

We are delighted to welcome you to Global Connexions Pvt Ltd! We are a reputable company with 17 years of experience, providing high quality products such as computer and laptop hardware.

Our primary product categories include Computer Case, SSD/HDD enclosures, Bluetooth dongles, multi-port hubs, and USB hubs. We offer full procurement services, from sourcing to logistics and quality control, and have a strong position in China. Our primary objective is to establish enduring partnerships that are founded on trust and dependability, with a focus on customer satisfaction.



Our Services

► OEM/ODM Services

We offer OEM and ODM services, providing customized solutions, branding, and packaging options to meet your needs.

► Manufacturing Unit

Our cutting-edge Shenzhen factory manufactures HDD enclosures, Type-C docks, USB hubs, and more with top-notch quality and innovation.

► Trade Expertise

We deal in computer peripherals, hardware, and medical furniture to meet customers specific needs through global supplier partnerships.

► Procurement Solutions

Our customized procurement solution streamlines sourcing, logistics, and quality control with a single point of contact.

► Customized Services

We understand your requirements and align them with your goals to provide tailored business solutions for smooth business experience.

► Fruitful Partnership

We prioritize trust and consistency in building partnerships, based on open communication, collaboration, and shared values.





GLOBAL
CONNEXIONS
CONNECTING WORLD

1

GAMING CABINETS



• GC9501



• GC9504

195B Specification

- Model NO.:GC9501
- IO Surface :USB1.0*2+Fake USB3.0*1+AUDIO/MIC
- Structure size (L*W*H) : 285*195*380 MM
- Product size (L*W*H) : 320*195*395 MM
- Material : 0.4/SPCC
- Front panel: Mesh/Tempered glass/ABS
- Side panel: Tempered glass
- M/B support : Micro-ATX / ITX
- Driver bays :1*3.5"HDD+1*2.5"SSD OR 2*2.5"SSD
- CPU Max height :165 MM
- VGA Max length :280 MM
- PCI-E slots : 4
- Water cooling :
Top 240 MM cooling (Cable limited 278 MM)
- Fan port :
Top 2*12CM
PSU cover 2*12CM
Rear 1*12CM
- 40HQ:1595PCS



D200 Specification


- Model NO.:GC-D201
- IO Surface:USB1.0*1+Real USB3.0*1+HD AUDIO/MIC
- Structure size (L*W*H) :382*200*340 MM
- Product size (L*W*H) :385*200*375 MM
- Material:0.5-0.6/SPCC
- M/B Support:Micro-ATX / ITX
- Drive bays:1*3.5"HDD+2*2.5"SSD
- CPU Max height:165 MM
- VGA Max length:335 MM(Front with fan)
- PCI-E slots:5
- Water cooling:
 - Top 240 MM cooling
- Fan port:
 - Top 2*12CM OR 2*14CM
 - Bottom 2*12CM
 - Front 1*12CM
 - Rear 1*12CM
- 40HQ:1310PCS



• GC-D201 BK



• GC-D201 WH

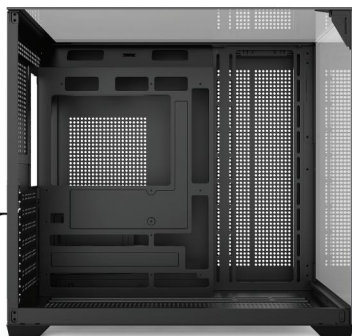

285B Specification


- Model NO.:GC-H02
- IO Surface:USB1.0*2+Real
- USB3.0*1+Fake Type C*1+HD AUDIO/MIC
- Structure size (L*W*H) : 420*285*385 MM
- Product size (L*W*H) : 420*285*400 MM
- Material : 0.7/SPCC
- M/B Support : ATX/Micro-ATX / ITX
- Support motherboard rear connection
- Driver bays:1*3.5"HDD+2*2.5"SSD
- CPU Max height :165 MM
- VGA Max length : 400 MM
- PCI-E slots : 7
- Water cooling :
Bottom 360 MM, M/B 240/280 MM cooling
- Fan port :
Bottom 3*12CM OR 2*14CM
M/B 3*12CM OR 2*14CM
Rear 1*12CM
- 40HQ:823PCS



• GC-H02 WH



• GC-H02 BK

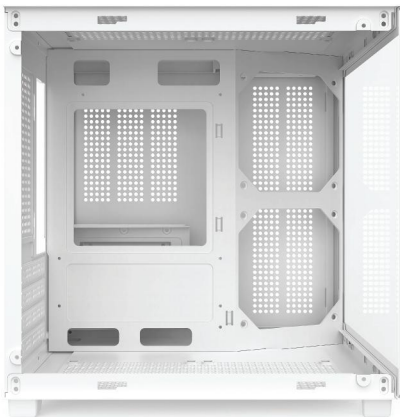

275M Specification

- Model NO.:GC-M02
- IO Surface : USB1.0*2+Fake USB3.0*1+HD AUDIO/MIC
- Structure size (L*W*H) : 295*275*295 MM
- Product size (L*W*H) : 300*275*298 MM
- M/B Support : Micro-ATX / ITX
- Driver bays : 1*3.5"HDD+2*2.5"SSD
- CPU Max height : 155 MM
- VGA Max length : 290 MM
- PCI-E slots : 4
- Water cooling :
Top 240 MM water cooling
- Fan port :
Top 2*12CM
Bottom 2*12CM
PSU cover 2*12CM
Rear 1*12CM
- 40HQ:1428PCS



• GC-M01



• GC-M02




● GC-S02 BK



● GC-S02

S01 Specification

- Model NO.:GC-S02
- IO Surface: USB1.0*2+Fake USB3.0*1+HD AUDIO/MIC
- Structure size (L*W*H) : 330*275*340 MM
- Product size (L*W*H) : 335*275*355 MM
- Material : 0.45/SPCC
- M/B Support : Micro-ATX / ITX
- Driver bays : 1*3.5"HDD+3*2.5"SSD
- CPU Max height : 160 MM
- VGA Max length : 330 MM
- PCI-E slots : 5
- Water cooling :
Top 240 MM, M/B 240 MM water cooling
- Fan port :
Top 2*12CM OR 2*14CM
Bottom 2*12 OR 2*14CM
M/B 2*12CM
Rear 1*12CM
- 40HQ:1218PCS

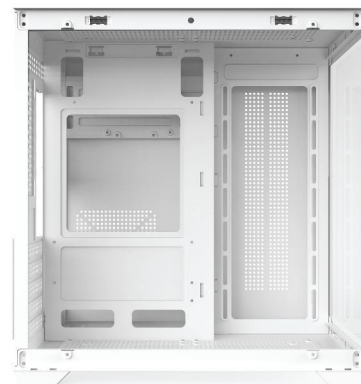



• GC-T2 BK



• GC-T2 WH



• GC-T3 BK



• GC-T3 WH

350 Specification

- Model NO.:GC-T3
- IO Surface:USB1.0*2+Fake
- USB3.0*1+Fake Type-C+AUDIO/MIC
- Structure size (L*W*H) : 353*210*400 MM
- Product size (L*W*H) : 350*210*380 MM
- Material : 0.4-0.45/SPCC
- M/B Support : Micro-ATX / ITX
- Driver bays :1*3.5"HDD+1*2.5"SSD
- CPU Max height :165 MM
- VGA Max length :345 MM
- PCI-E slots :7
- Water cooling :
Top 360 MM water cooling
- Fan port :
Top 2*12CM
Bottom 2*12CM
M/B :2*12CM
Rear 1*12CM
- 40HQ:1340PCS





• GC-T8 BK



• GC-T8 WH



195 specification

- Model NO.:GC-T8
- IO Surface:USB1.0*2+Fake USB3.0*1+AUDIO/MIC
- Structure size (L*W*H) :285*195*375MM
- Product size (L*W*H) :295*195*386MM
- Material :0.4/SPCC
- Panel :PS Plastic
- M/B Support :Micro-ATX / ITX
- Driver bays:1*3.5"HDD+1*2.5"SSD
- CPU Max height :165 MM
- VGA Max length :280 MM
- PCI-E slots :4
- Water cooling :Top 240 MM water cooling
Top 240 MM water cooling
- Fan port :
Top 2*12CM
PSU Cover 2*12CM
Rear 1*12CM
- 40HQ:1870PCS

240 specification


- Model No.:GC240
- IO Surface: USB1.0*2+Fake USB3.0*1+AUDIO/MIC
- Structure size (L*W*H) : 320*278*330 MM
- Product size (L*W*H) : 320*278*330 MM
- Material: 0.4-0.45/SPCC
- M/B Support: Micro-ATX / ITX
- Drive bays: 2*3.5"HDD+2*2.5"SSD
- CPU Max height: 160 MM
- VGA Max length: 320 MM
- PCI-E slots: 7
- Water cooling: Top 240 MM water cooling
- Fan port:
 - Top 2*12CM
 - Bottom 2*12CM
 - M/B 2*12CM
 - Rear 1*12CM
- 40HQ: 1260PCS



• GC240



• GC360

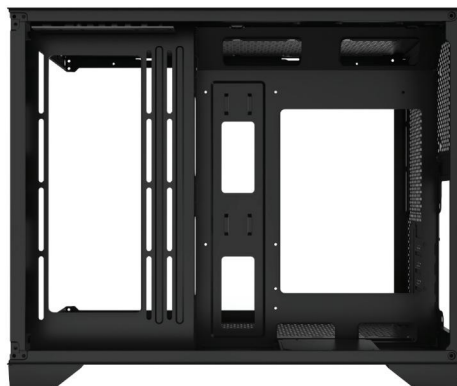

360 specification

- Model No.:GC360
- IO Surface: USB1.0*2+Fake USB3.0*1+AUDIO/MIC
- Structure size (L*W*H) : 420*278*330 MM
- Product size (L*W*H) : 420*278*330 MM
- Material: 0.45/SPCC
- M/B Support: Micro-ATX / ITX
- Drive bays: 2*3.5"HDD+2*2.5"SSD
- CPU Max height: 160 MM
- VGA Max length: 420 MM
- PCI-E slots: 9
- Water cooling: Top 360 MM, M/B 240 MM water cooling
- Fan port:
 - Top 3*12CM
 - Bottom 3*12CM
 - M/B 2*12CM
 - Rear 1*12CM
- 40HQ: 960PCS



• GC420A




• GC420B



• GC420C



• GC420D



420 specification

- Model NO.:GC420D
- IO Surface: USB1.0*2+Fake USB3.0*1+HD AUDIO/MIC
- Structure size (L*W*H) : 420*285*335 MM
- Product size (L*W*H) : 420*285*360 MM
- Material : 0.5/SPCC
- Side panel : SPCC or Acrylic
- M/B Support : Micro-ATX / ITX
- Driver bays : 2*3.5"HDD+2*2.5"SSD
- CPU Max height : 168 MM
- VGA Max length : 380 MM
- PCI-E slots : 5
- Water cooling :
 - Top 240 MM/280 MM/360 MM cooling
 - M/B 240 MM/280 MM cooling
- Fan port :
 - Top 3*12CM OR 2*14CM
 - Bottom 3*12CM OR 2*14CM
 - M/B 2*12CM OR 2*14CM
 - Rear 1*12CM
- 40HQ:960PCS



- Model NO.:GC425D
- IO Surface :USB1.0*2+Fake USB3.0*1+HD AUDIO/MIC
- Structure size (L*W*H) : 420*285*400 MM
- Product size (L*W*H) : 420*285*425 MM
- Material : 0.5/SPCC
- M/B Support : ATX/Micro-ATX / ITX
- Support motherboard rear connection
- Driver bays : 2*3.5"HDD+2*2.5"SSD
- CPU Max height : 168 MM
- VGA Max length : 380 MM
- PCI-E slots : 7
- Water cooling :
Top 240 MM/280 MM/360 MM cooling
M/B 240 MM/280 MM cooling
- Fan port :
Top 3*12 OR 2*14CM
Bottom 3*12CM OR 2*14CM
M/B 3*12CM OR 2*14CM
Rear 1*12CM
- 40HQ : 835PCS



• GC1717



• GC1719



• GC1706



• GC1707

170 specification

- Model No.:GC1706
- IO Surface: USB1.0*1+AUDIO/MIC
- Structure size (L*W*H) :275*170*350MM
- Product size (L*W*H) :305*170*350MM
- Material: 0.35/SPCC
- Side panel: SPCC or Acrylic
- M/B Support: Micro-ATX / ITX
- Driver bays: 1*3.5"HDD+2*2.5"SSD
- CPU Max height: 155MM
- VGA Max length: 270MM
- PCI-E slots: 4
- Fan port:
 - Rear 1*8CM
 - Left 1*12CM
- 40HQ:2485PCS



185 specification

- Model NO.:GC1809
- IO Surface:USB1.0*2+Fake USB3.0*1+AUDIO/MIC
- Structure size (L*W*H):310*185*410 MM
- Product size (L*W*H):340*185*420 MM
- Material : 0.4/SPCC
- Side panel : Acrylic or Tempered glass
- M/B Support : ATX / Micro-ATX / ITX
- Driver bays :1*3.5"HDD+2*2.5"SSD
- CPU Max height :160 MM
- VGA Max length :305 MM (270 MM if front with fan)
- PCI-E slots :7
- Fan port :
Front 3*12CM,
Rear 1*12CM,
PSU cover 2*12CM
- 40HQ:1590PCS



- GC1801



- GC1802



- GC1809



• GC3607



• GC-D01

465 Specification

- Model NO.:GC3607
- IO Surface :USB1.0*2+Real USB3.0*1+HD AUDIO/MIC
- Structure size (L*W*H) :465*220*430MM
- Product size (L*W*H) :475*220*445MM
- Material :0.6/SPCC
- Front panel :Tempered glass or ABS
- M/B Support :Micro-ATX / ATX/E-ATX/ITX
- Driver bays :2*3.5" HDD+1*2.5" SSD
- CPU Max height :170 MM
- VGA Max length :430 MM
- PCI-E slots :7
- Water cooling :
Top 240 MM/360MM cooling (RAM 46 MM height limited)
- Fan port :
Top 2*12CM OR 2*14CM
M/B 2*12CM
PSU cover 3*12CM
Front 3*12CM OR 3*14CM
Rear 1*12CM
- 40HQ:826PCS






• GC8501 BK



• GC8501 WH

285C Specification

- Model NO.:GC8501
- IO Surface : USB1.0*2+Real USB3.0*1+HD AUDIO/MIC
- Structure size (L*W*H) : 420*285*350 MM
- Product size (L*W*H) : 450*285*365 MM
- Material : 0.6/SPCC
- M/B Support : Micro-ATX / ITX
- Driver bays : 1*3.5"HDD+2*2.5"SSD
- CPU Max height : 165 MM
- VGA Max length : 400 MM
- PCI-E slots : 5
- Water cooling
Top 360/280 MM, M/B 240/280 MM cooling
- Fan port :
Top 3*12CM OR 2*14CM
Bottom 3*12CM OR 2*14CM
M/B 2*12CM OR 2*14CM
Rear 1*12CM
- 40HQ : 835PCS

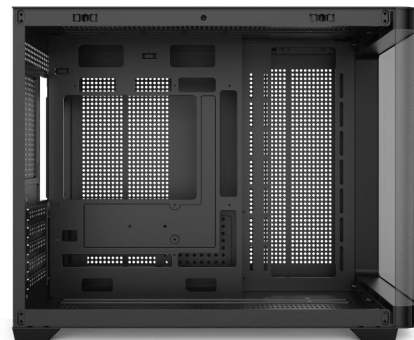



GLOBAL
CONNEXIONS
CONNECTING WORLD

2

OFFICE CABINETS



165 Specification

- Model NO.:GC165-4
- IO Surface :USB1.0*2+AUDIO/MIC
- Structure size (L*W*H) :265*165*350 MM
- Product size (L*W*H) :300*165*350 MM
- Material :0.35/SPCC
- Front panel :ABS
- Left panel :SPCC or Acrylic
- M/B Support :Micro-ATX / ITX
- Driver bays :2*3.5"HDD+ 2*2.5"SSD OR 1*3.5"HDD
+ 3*2.5"SSD OR 4*2.5"SSD
- CPU Max height :160 MM
- VGA Max length :330 MM
- PCI-E slots :4

- Fan port :
Front 2*12CM
Left panel 1*12CM
Rear 1*12CM
- 40HQ:2630PCS



180 Specification

- Model NO.:GC180-6
- IO Surface :USB1.0*2+AUDIO/MIC
- Structure size (L*W*H) : 275*180*350 MM
- Product size (L*W*H) : 305*180*350 MM
- Material : 0.4/SPCC
- Front panel : ABS
- Left panel : SPCC or Acrylic
- M/B Support : Micro-ATX / ITX
- Driver bays : 3*3.5"HDD+ 1*2.5"SSD
- CPU Max height : 136 MM
- VGA Max length : 320 MM
- PCI-E slots : 4

- Fan port :
Rear 1*12CM
40HQ : 2260PCS



• GC180-6



• GC180-7



• GC258-10



• GC258-4



• GC258-5



258 Specification

- Model NO.:GC258-4
- IO Surface :USB1.0*2+Audio /USB1.0*2+3.0+AUDIO/MIC
- Structure size (L*W*H) : 258*165*345 MM
- Product size (L*W*H) : 270*165*34 MM
- Material : 0.35/SPCC
- M/B Support : MicroATX\MiniATX
- CPU Max height : 140 MM
- VGA Max length : 240 MM
- PCI-E slots : 4

- Fan port :
Rear 1*8CM
40HQ : 2860PCS



320 Specification

- Model NO.:GC3206
- IO Surface : USB1.0*2+Fake USB 3.0*1+AUDIO/MIC
- Structure size (L*W*H) : 320*180*410 MM
- Product size (L*W*H) : 360*180*410 MM
- Material : 0.35/SPCC
- Front panel : ABS
- Left panel : SPCC or Acrylic
- M/B Support : ATX/Micro-ATX / ITX
- Driver bays : 2*3.5"HDD+ 3*2.5"SSD
- CPU Max height : 160 MM
- VGA Max length : 300 MM
- PCI-E slots : 7
- Fan port :
Rear 1*12CM
40HQ : 1570PCS



• GC3202



• GC3206



- GC-N604



- GC- N6016



- GC-N6015

Private Mould

N610 Specification

- N610 SERIES
- IO Surface : USB1.0*2 + AUDIO/MIC
- Structure size (L*W*H) : 225*160*325MM
- Product size (L*W*H) : 237*160*327MM
- Material : 0.3/SPCC
- M/B Support: ITX/MicroATX (Max 226*215mm)
- Driver bays : 1*3.5"HDD+1*2.5"SSD
- CPU Max height : 137 MM
- VGA Max length : 220 MM
- PCI-E slots : 3
- Fan port :
Rear 1*8CM
40HQ : 3495PCS



160 Specification

- Model NO.:GC160-1
- IO Surface:USB1.0*2+AUDIO/MIC
- Structure size (L*W*H):257*160*305 MM
- Product size (L*W*H):270*165*305 MM
- Material:0.6/SPCC
- M/B Support:Micro-ATX / ITX
- Driver bays:3*3.5"HDD+1*2.5"SSD
- CPU Max height:135 MM
- VGA Max length:235~260 MM
- PCI-E slots:4
- Fan port:
Left panel 1*12CM
Rear 1*8CM
- 40HQ:3000PCS



● GC-H2



● GC-H6



● GC-H7



● GC160-1



**GLOBAL
CONNEXIONS**
CONNECTING WORLD

Global Connexions PVT. LTD

Hong Kong Office

26/F, F, Sung Fung Court, 1 - 5 Fook Yum Road,
North Point, Hong Kong.

Shenzhen Office

3618C, Jiahui Xincheng Huishang Center, No.3027,
Shennan Middle Road, Funan Community,
Fumin street, Futian District.

-  +86 13510285595
-  0086-755-83647773
-  0086-755-83038392
-  sales@szglobalconnexions.com
-  <https://www.szglobalconnexions.com/>



For more, scan to visit
www.szglobalconnexions.com