SMARTWARE

# Shenzhen Smartware Technology Co.,Ltd



Andrew

Smartware  has decided to issue our first catalogue. It is always a challenge as we all know, the day you send the catalogue out, new products are already on the way into the company product range.

Smartware is a professional manufacture / provider of LED Lighting products. We are able to assist you in choosing the right product(s) within these fields: Forestry, Agriculture, Mining, Automotive, Engineering - all kinds of vehicles / trucks / heavy machines...also within Marine

Have a good look at our catalogue, try us by sending your inquiry.
Try us out on technical challenges as well.
We are here to make sure you get the right solution(s)
OEM solution is also our strength.

Also if you want a product within the above product range, but cannot see it, contact us.

Smartware wish you a prosperous happy New Year (Ox year) and may many of your wishes come through.
We also wish you (your nearest family / friends) will be healthy and well


# FACTORY



Integrating Sphere Machine



Humidity and Temperature testing equipment

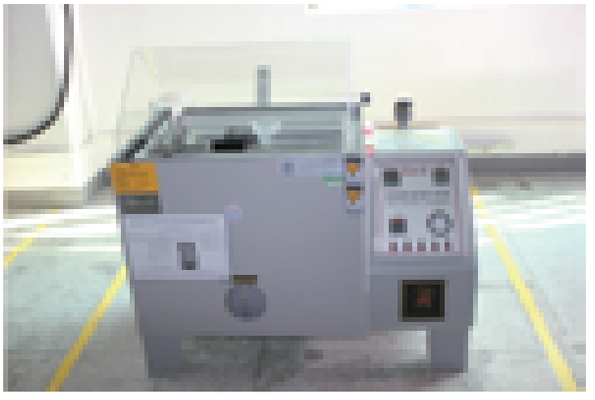

Salt Spray Chamber



Vibration test




Water-proof test

# CERTIFICATIONS

## Part Of The Certifications



English Version

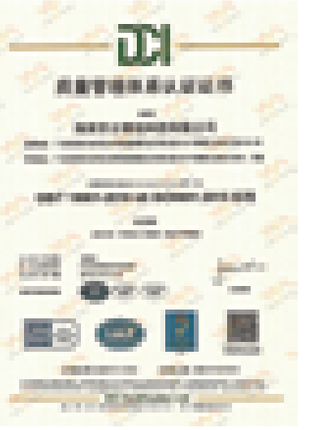

Chinese Version




ET1-B018




ET1-D002




ET1-E0017 / ET1-E017C




ET1-A022 / ET1-A022(R-Y-B-C)
ET1-A016 / ET1-A016(R-Y-B-C)





ET1-A015 / ET1-A015(R-Y-B-C)
ET1-A014 / ET1-A014(R-Y)
ET1-A022B / ET1-A030 / ET1-A030A




ET1-E012(A-N-Y-R) / ET1-E013(A-B-Y-R)
ET1-E014(A-B-Y-R) / ET1-E005(A-B-Y-R)
ET1-E006(A-B-Y-R) / ET1-E007(A-B-Y-R)
ET1-E013

SMARTWARE

# RECHARGEABLE WORK LIGHT

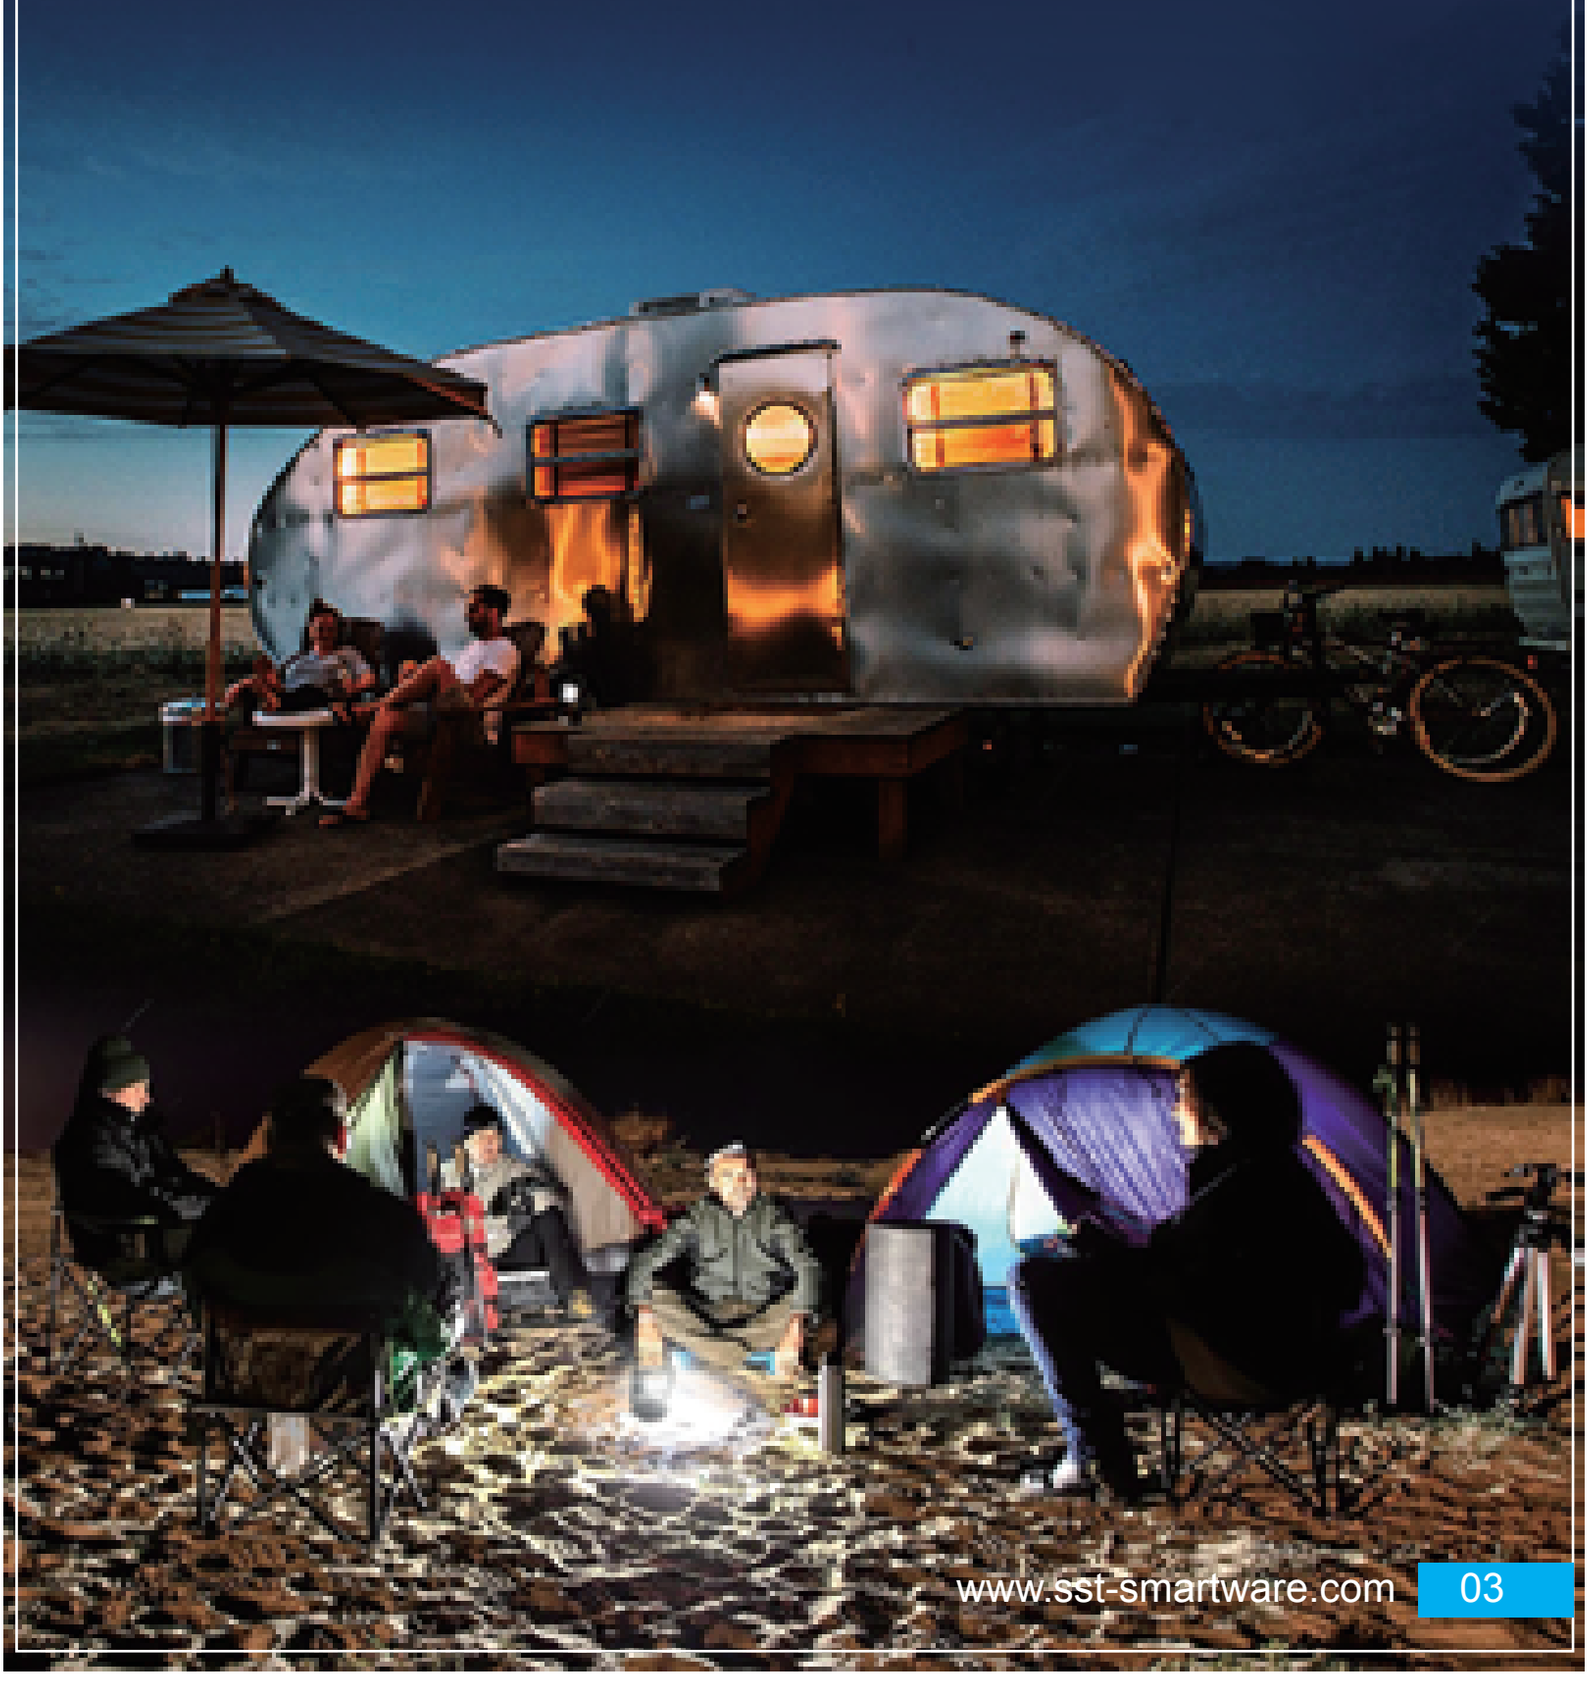

RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging





# ET1-E001

## Rechargeable LED Work Light

| Model | LED Power | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span of Battery | Lumens | Material |
|---|---|---|---|---|---|---|---|---|
| ET1-E001 | 15W(5pcs*3w) | IP 65 | DC12V/AC100~240V | Spot/Flood | 3000~6500k (Optional) | 500 times charge-discharge | 900lm | Aluminum Heatsink Housing |



RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging



# ET1-E017

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E017 | 5X1W Osram | White | IP 65 | DC 5V | Flood | 6000~6500k (Optional) | ≥2Years | 1000 ±100lm | Aluminum Heatsink Housing |



RechargeabLe Magnetic LED Worklight

Working Mode: High (100%), Low(30%), SOS flashing

USB recharging



# ET1-E017C

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E017C | 5X1W Osram | White | IP 65 | DC 5V | Flood | 6000~6500k (Optional) | ≥2Years | 1000 ±100lm | Aluminum Heatsink Housing |

RechargeabLe Magnetic LED Worklight

Working Mode: High (100%), Low(30%), SOS flashing

USB recharging





# ET1-E022

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E022 | 18W(6pcs*3W) CREE | White | IP 65 | DC 5V | Flood | 6000~6500k (Optional) | ≥2Years | 1200±50lm | Aluminum Heatsink Housing |

RechargeabLe Magnetic LED Worklight

Working Mode: High (100%), Low(30%), SOS flashing

USB recharging





# ET1-E023

## Rechargeable LED Work Light


| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E023 | 10W(1pcs*I0W) COB LED | White | IP 65 | DC 5V | Flood | 3000~6500k (Optional) | ≥2Years | 1000 ±100lm | Aluminum Heatsink Housing |

RechargeabLe Magnetic LED Worklight

Working Mode: High (100%), Low(30%), SOS flashing

USB recharging



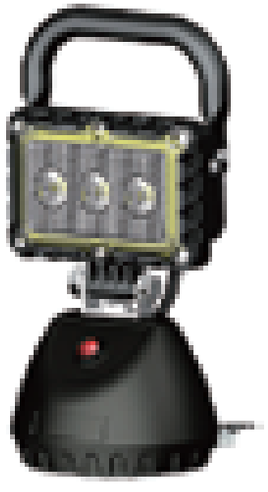

# ET1-E024

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|
| ET1-E024 | 9W(3pcs*3W) Dual Color | White/Red/Yellow/Blue | IP 65 | Flood | 3000~6500k (Optional) | ≥2Years | 540±50lm | Aluminum Heatsink Housing |



RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging




# ET1-E025

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degreen | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E025 | 16*0.5W 5730 | Work light/dimmer/Red (Yellow) flashing/SOS | IP 65 | DC 5V | Flood | 2600~8000K±500K (Optional) | ≥2Years | 540±50lm | Aluminum Heatsink Housing |

RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging



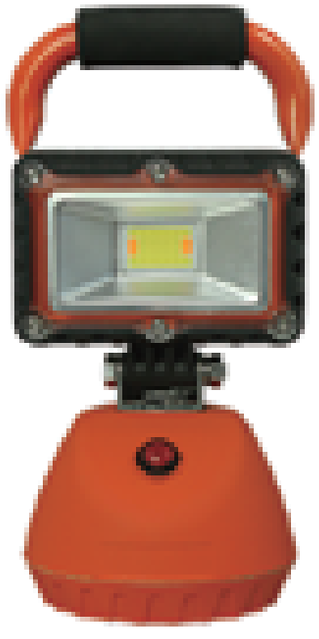

# ET1-E026


## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E026 | 12W COB LED | White | IP 65 | DC 5V | Flood | 6000~6500k (Optional) | ≥2Years | 1200±50lm | Aluminum Heatsink Housing |

RechargeabLe Magnetic LED Worklight

Working Mode: High (100%), Low(30%), SOS flashing

USB recharging

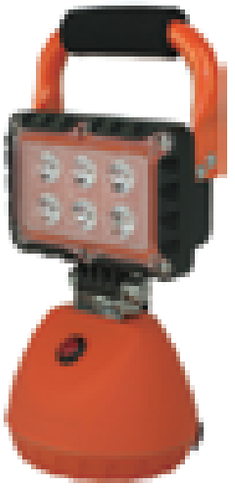



# ET1-E027

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E027 | 18W (6*3W) CREE | White | IP 65 | DC 5V | Spot/Flood | 6000~6500k (Optional) | ≥2Years | 1200 ±50lm | Aluminum Heatsink Housing |



RechargeabLe Magnetic LED Worklight

Working Mode: High (100%), Low(30%), SOS flashing

USB recharging



# ET1-E028

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E028 | 10W (1pcs*10W) COB | White | IP 65 | DC 5V | Flood/Spot | 6000~6500k (Optional) | ≥2Years | 1000 ±100lm | Aluminum Heatsink Housing |



RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging



# ET1-E007

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E007 | 9W(3pcs*3W) Dual Color | Red/Yellow/Blue | IP 65 | DC 5V | Spot/Flood | 6000~6500k (Optional) | ≥2Years | 540±50lm | Aluminum Heatsink Housing |

RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging





# ET1-E008

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E008 | 8W(16pcs*0.5W) | White/Red/Yellow/Blue | IP 65 | DC 5V | Flood | 2600~8000K±500K (Optional) | ≥2Years | 540±50lm | Aluminum Heatsink Housing |

RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging





# ET1-E011

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E011 | 10W(1*10W) COB LED | White | IP 65 | DC 5V | Flood | 6000~6500k (Optional) | ≥2Years | 1000±100lm | Aluminum Heatsink Housing |



RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging




# ET1-E014

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E014 | 18W (6*3W) CREE LED | White | IP 65 | DC 5V | Spot/Flood | 6000~6500k (Optional) | ≥2Years | 1200 ±100lm | Aluminum Heatsink Housing |



RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging

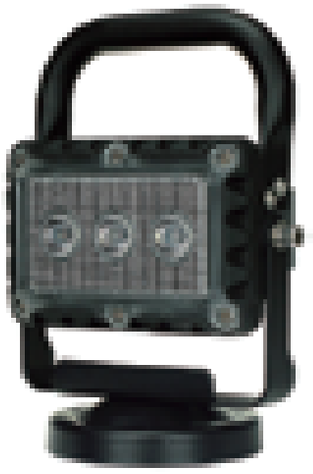

# ET1-E005

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E005 | 9W(3pcs*3W) Dual Color | White/Red/Yellow/Blue | IP 65 | DC 5V | Flood | 2600~8000K±500K (Optional) | ≥2Years | 540±50lm | Aluminum Heatsink Housing |

RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging





# ET1-E013

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E013 | 18W(6*3W) CREE LED | White | IP 65 | DC 5V | Spot/Flood | 6000~6500K(optional) | ≥2Years | 1200±50lm | Aluminum Heatsink Housing |

RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging





# ET1-E013C

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E013C | 18W(6pcs*3W) CREE LED | White | IP 65 | DC 5V | Spot/Flood | 6000~6500k (Optional) | ≥2Years | 1200±50lm | Aluminum Heatsink Housing |



RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging



# ET1-E030

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E030 | 12W(1pcs*12W) COB LED | White | IP 65 | DC 5V | Flood | 2600~8000K±500K (optional) | ≥2Years | 1200±50lm | Aluminum Heatsink Housing |



RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging



# ET1-E004

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E004 | 8W(16pcs*0.5W) Dual Color | White/Red/Yellow/Blue | IP 65 | DC 5V | Flood | 2600~8000K±500K (Optional) | ≥2Years | 540±50lm | Aluminum Heatsink Housing |

RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging





# ET1-E006

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E006 | 9W(3pcs*3W) Dual Color | White/Red/Yellow/Blue | IP 65 | DC 5V | Flood | 2600~8000K±500K (Optional) | ≥2Years | 540±50lm | Aluminum Heatsink Housing |

RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging





# ET1-E009

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E009 | 10W(1pcs*10W) COB LED | White | IP 65 | DC 5V | Flood | 6000~6500k (Optional) | ≥2Years | 1000±100lm | Aluminum Heatsink Housing |



RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging




# ET1-E012

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-E012 | 18W (6*3W) CREE LED | White | IP 65 | DC 5V | Spot/Flood | 6000~6500k (Optional) | ≥2Years | 1200 ±50lm | Aluminum Heatsink Housing |

RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging

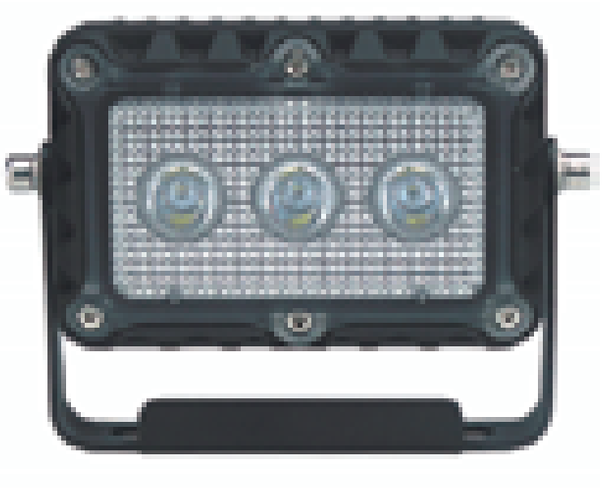




# ET1-A014

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-A014 | 15W(3pcs*5W) CREE LED | White/Red/Yellow/Blue | IP 67 | DC 12-60V | Spot/Flood | 2600~8000K±500K (Optional) | ≥2Years | 600±50lm | Aluminum Heatsink Housing |

RechargeabLe Magnetic LED Worklight
Working Mode: High (100%), Low(30%), SOS flashing
USB recharging



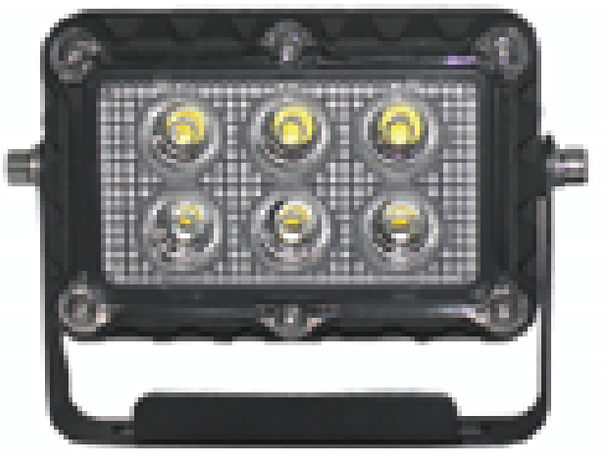

# ET1-A015

## Rechargeable LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-A015 | 18W(6pcs*5W) CREE LED | White/Red/Yellow/Blue | IP 67 | DC 12-60V | Spot/Flood | 2600~8000K±500K (Optional) | ≥2Years | 1200±10lm | Aluminum Heatsink Housing |

# LED WORK LIGHT







# ET1-A001

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-A001 | 15W(5pcs*3W) | White | IP 67 | DC 12-36V/DC36-60V | Flood | 3000-6500K (Optional) | ≥2Years | 900lm | Aluminum Heatsink Housing |






# ET1-A002

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-A002 | 18W(6pcs*3W) | White | IP 67 | DC12-36V/DC36~DC60V/AC85-265V | Flood/Spot | 3000-6500k | ≥2Years | 1200lm | Aluminum Heatsink Housing |

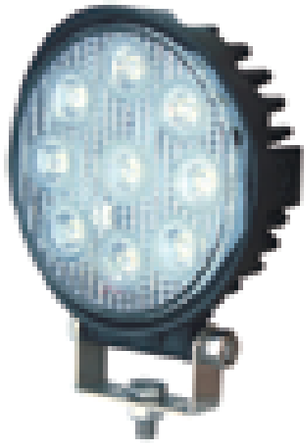



# ET1-A003

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-A003 | 27W(9pcs*3W) | White | IP 67 | DC12-36V/DC36~DC60V/AC85-265V | Flood/Spot | 3000-6500k | ≥2Years | 1620lm | Aluminum Heatsink Housing |





# ET1-A004

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-A004 | 27W(9pcs*3W) | White | IP 67 | DC12-36V/DC36~DC60V/AC85-265V | Flood/Spot | 3000-6500k | ≥2Years | 1620lm | Aluminum Heatsink Housing |





# ET1-A007

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-A007 | 10W(2pcs*10W) CREE | Blue | IP 67 | DC 9-50V | Spot | | ≥2Years | 1400lm | Aluminum Heatsink Housing |





# ET1-A008

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-A008 | 10W(1*10W) CREE | White | IP 67 | DC 9-60V | Spot | 6000~6500k (Optional) | ≥2Years | 720lm | Aluminum Heatsink Housing |





# ET1-A009

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-A009 | 18W(6pcs*3W) | White | IP 67 | DC 10-30V | Spot/Flood | 6000~6500k (Optional) | ≥2Years | 1200m | Aluminum Heatsink Housing |





# ET1-A010

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-A010 | 12W(4pcs*3W) CREE | White/Red/Yellow/Blue | IP 67 | DC 10-30V | Spot/Flood | 6000k | ≥2Years | 800lm | Aluminum Heatsink Housing |





# ET1-A011

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-A011 | 18W(6pcs*3W) CREE | White | IP 67 | DC 9-50V | Spot/Flood | 6000~6500k (Optional) | ≥2Years | 1620lm | Aluminum Heatsink Housing |





# ET1-A016

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-A016 | 15W(5pcs*3W) | White/Rde/Yellow/Blue | IP 67 | DC 12-60V | Spot/Flood | 2600~8000K±500K (Optional) | ≥2Years | 900±100lm | Aluminum Heatsink Housing |





# ET1-A017

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-A017 | 15W(5pcs*3W) | White | IP 67 | DC 9-60V | Spot | 6000~6500k (Optional) | ≥2Years | 720lm | Aluminum Heatsink Housing |






# ET1-A036-1

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-A036-1 | 12W(4pcs*3W) | White/Red/Yellow/Blue | IP 67 | DC 10-30V | Spot/Flood | 6000k | ≥2Years | 800lm | Aluminum Heatsink Housing |




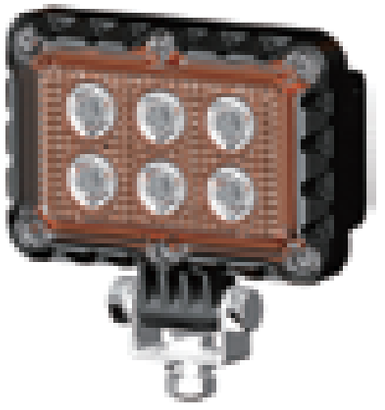

# ET1-A030

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-A030 | 18W(6pcs*3W) CREE | White | IP 67 | DC 12-36V | Flood | 6000 ± 6500K (optional) | ≥2Years | 1000 ±50lm | Aluminum Heatsink Housing |

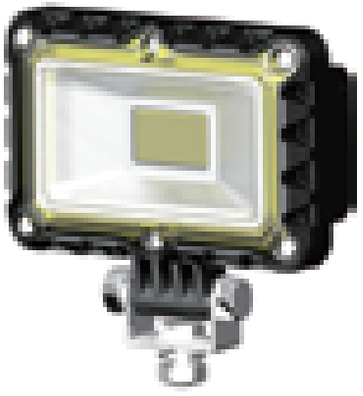



# ET1-A031

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-A031 | 10W(1pcs*10W) COB LED | White | IP 67 | DC 12-36V | Flood | 6000~6500k (Optional) | ≥2Years | 1200±50lm | Aluminum Heatsink Housing |





# ET1-A037

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-A037 | 20W(2pcs*10W)) CREE | White | IP 67 | DC 10-30V | Flood | 6000k | ≥2Years | 540 ±50lm | Aluminum Heatsink Housing |





# ET1-B001

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-B001 | 48W(16*3W) | White | IP 67 | DC 10-36V | Spot/Flood | 6500k | ≥2Years | 3360lm | Aluminum Heatsink Housing |





# ET1-B006

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-B006 | 33W(11pcs*3W) CREE LED | White | IP 67 | DC 12-36V | Flood/Spot | 6000k | ≥2Years | 2200lm | Aluminum Heatsink Housing |





# ET1-B007

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-B007 | 45W(15pcs*3W) CREE LED | White | IP 67 | DC 12-36V | Flood/Spot | 6000k | ≥2Years | 3000lm | Aluminum Heatsink Housing |





# ET1-B018

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-B018 | 40W(8pcs*5W) CREE | White | IP 67 | DC 9-36V | Flood | 6000k | ≥2Years | 3200m | Aluminum Heatsink Housing |





# ET5-H013

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET5-H013 | 25W(1pcs*25W)CREE | White | IP 67 | DC 10-30V | Flood/Spot | 6000k | ≥2Years | 2000lm | Aluminum Heatsink Housing |





# ET5-H009

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET5-H009 | 80W(4pcs*20W) | White | IP 67 | DC 10-30V | Spot | 6000k | ≥2Years | 6400lm | Aluminum Heatsink Housing |






# ET5-H010

## LED Work Light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET5-H010 | 30W(2pcs*15W) | White | IP 67 | DC 10-30V | Spot | 3000K | ≥2Years | 2400lm | Aluminum Heatsink Housing |


# AC LED TRIPOD STAND

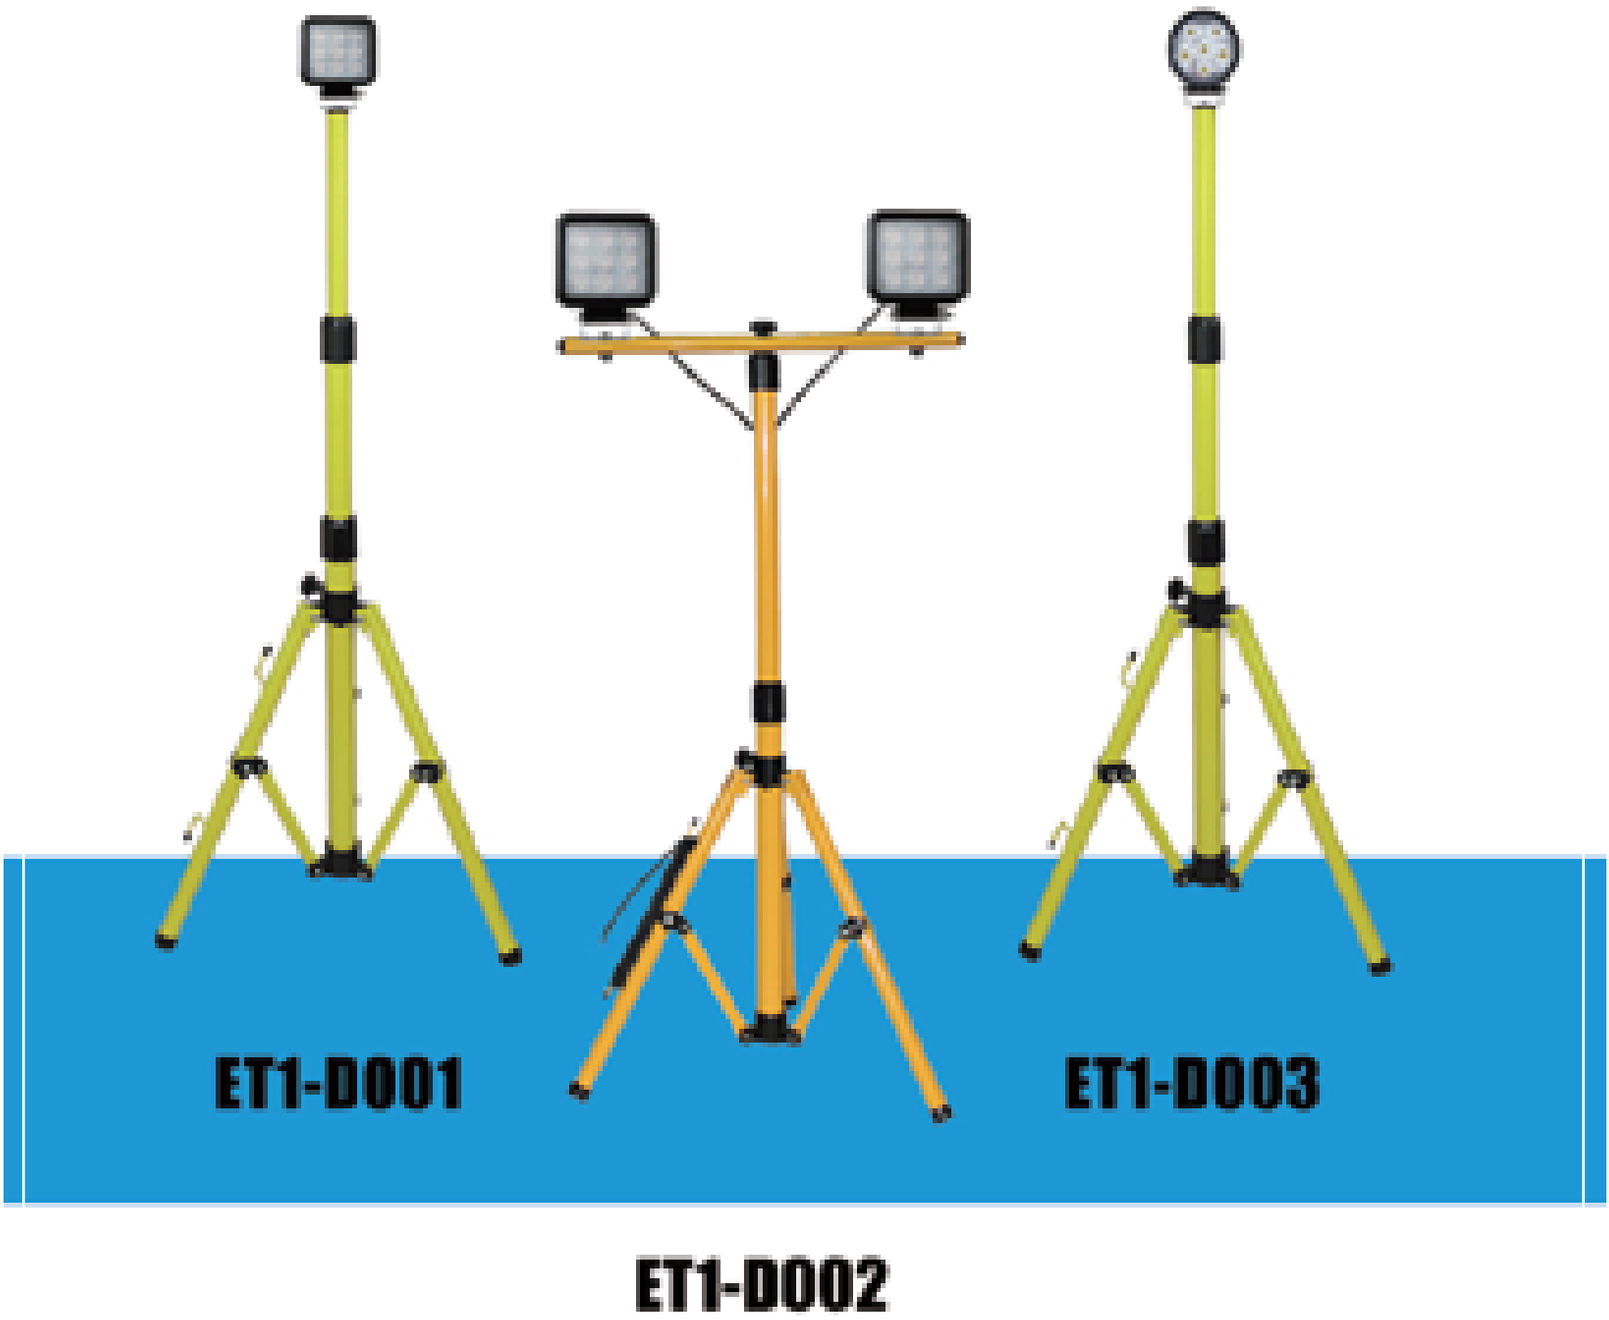


## LED Tripod

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-D001 | 27W(9pcs*3W) | White | IP 67 | DC12-36V/36-60V/AC85-265V | Spot//Food | 3000-6500k | ≥2Years | 1620lm | Aluminum Heatsink Housing |
| ET1-D002 | 27W(9pcs*3W*2) | White | IP 67 | AC100-240V | Spot//Food | 3000-6500k | ≥2Years | 3240lm | Aluminum Heatsink Housing |
| ET1-D003 | 18W(6pcs*3W) | White | IP 67 | DC12-36V/36-60V/AC85-265V | Spot//Food | 3000-6500k | ≥2Years | 1200lm | Aluminum Heatsink Housing |

# WORK LIGHT

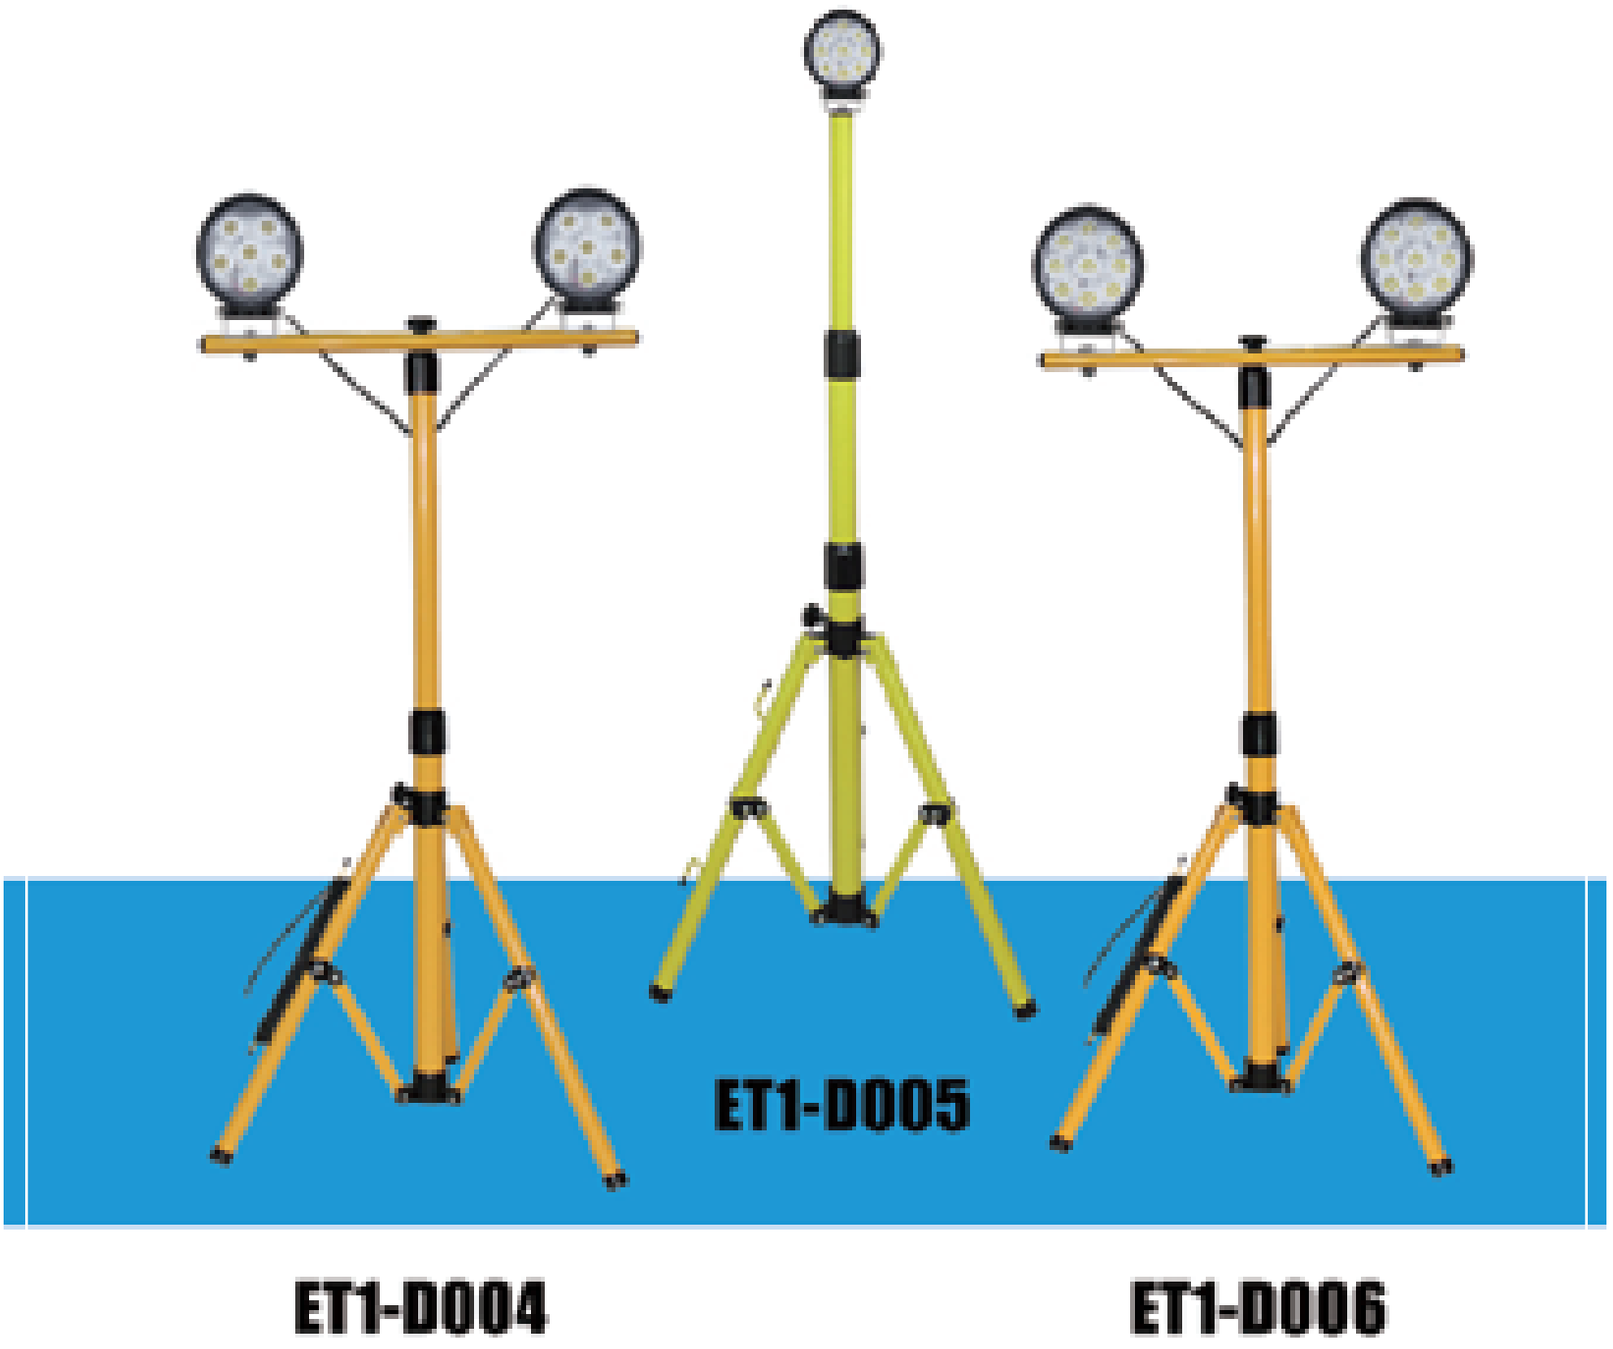



ET1-D004

ET1-D006

## LED Tripod

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-D004 | 18W(6pcs*3W*2) | White | IP 67 | DC12-36V/36-60V/AC85-265V | Spot//Food | 3000-6500k | ≥2Years | 1200lm | Aluminum Heatsink Housing |
| ET1-D005 | 27W(9pcs*3W) | White | IP 67 | DC12-36V/36-60V/AC85-265V | Spot//Food | 3000-6500k | ≥2Years | 1620lm | Aluminum Heatsink Housing |
| ET1-D006 | 27W(9pcs*3W*2) | White | IP 67 | DC12-36V/36-60V/AC85-265V | Spot//Food | 3000-6500k | ≥2Years | 3240lm | Aluminum Heatsink Housing |


# TRIPOD WITH RECHARGEABLE

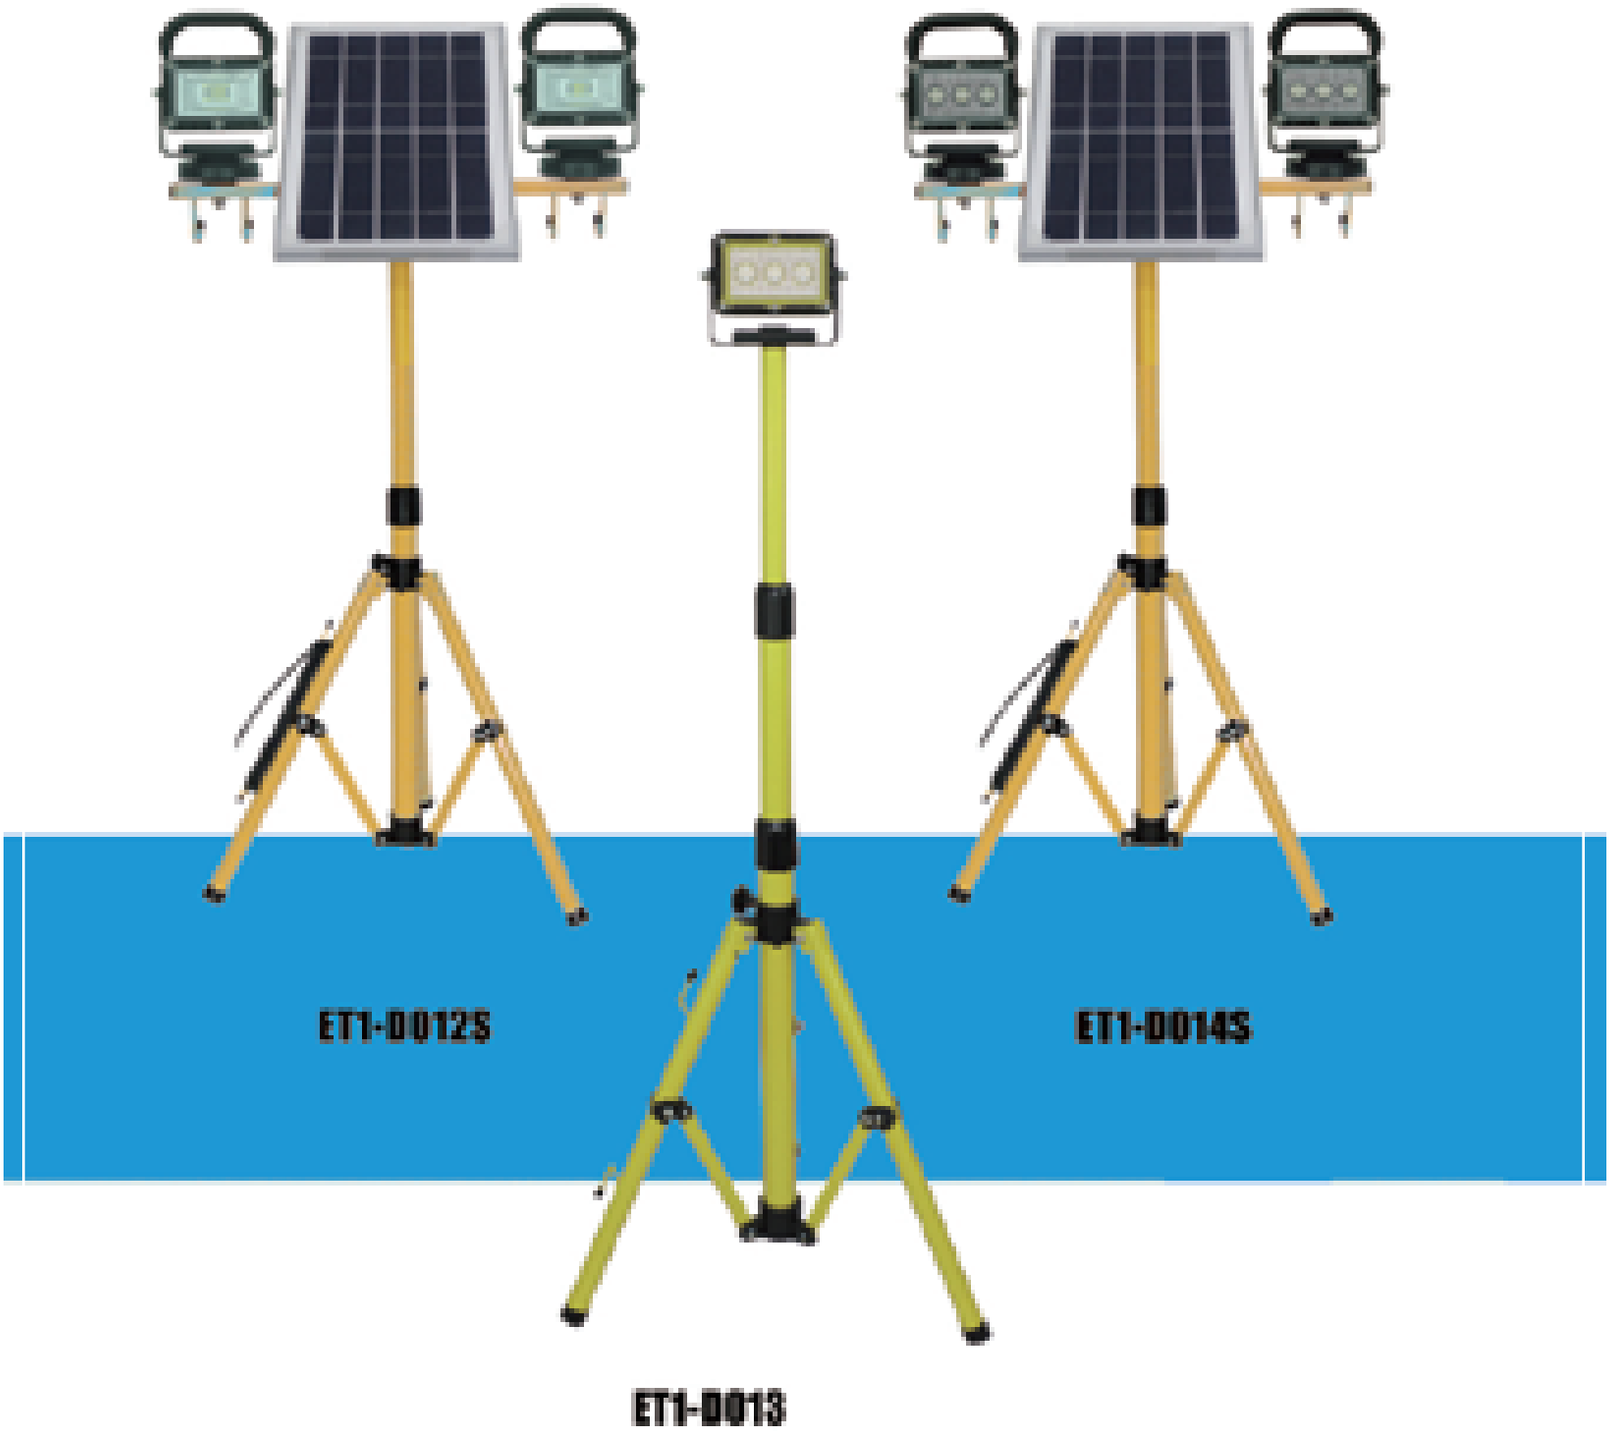


## LED Tripod

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-D002S | 8W(16pcs*0.5W*2) | White | IP 65 | DC 5V | Food | 6000-6500k | ≥2Years | 1080±50lm | Aluminum Heatsink Housing |
| ET1-D013 | 9W(3pcs*3W) | White | IP 65 | DC 5V | Spot//Food | 6000-6500k | ≥2Years | 540±50lm | Aluminum Heatsink Housing |
| ET1-D014S | 3W(3pcs*3W*2) | White | IP 67 | DC 5V | Spot//Food | 6000-6500k | ≥2Years | 1080±50lm | Aluminum Heatsink Housing |

# LED WORK LIGHT

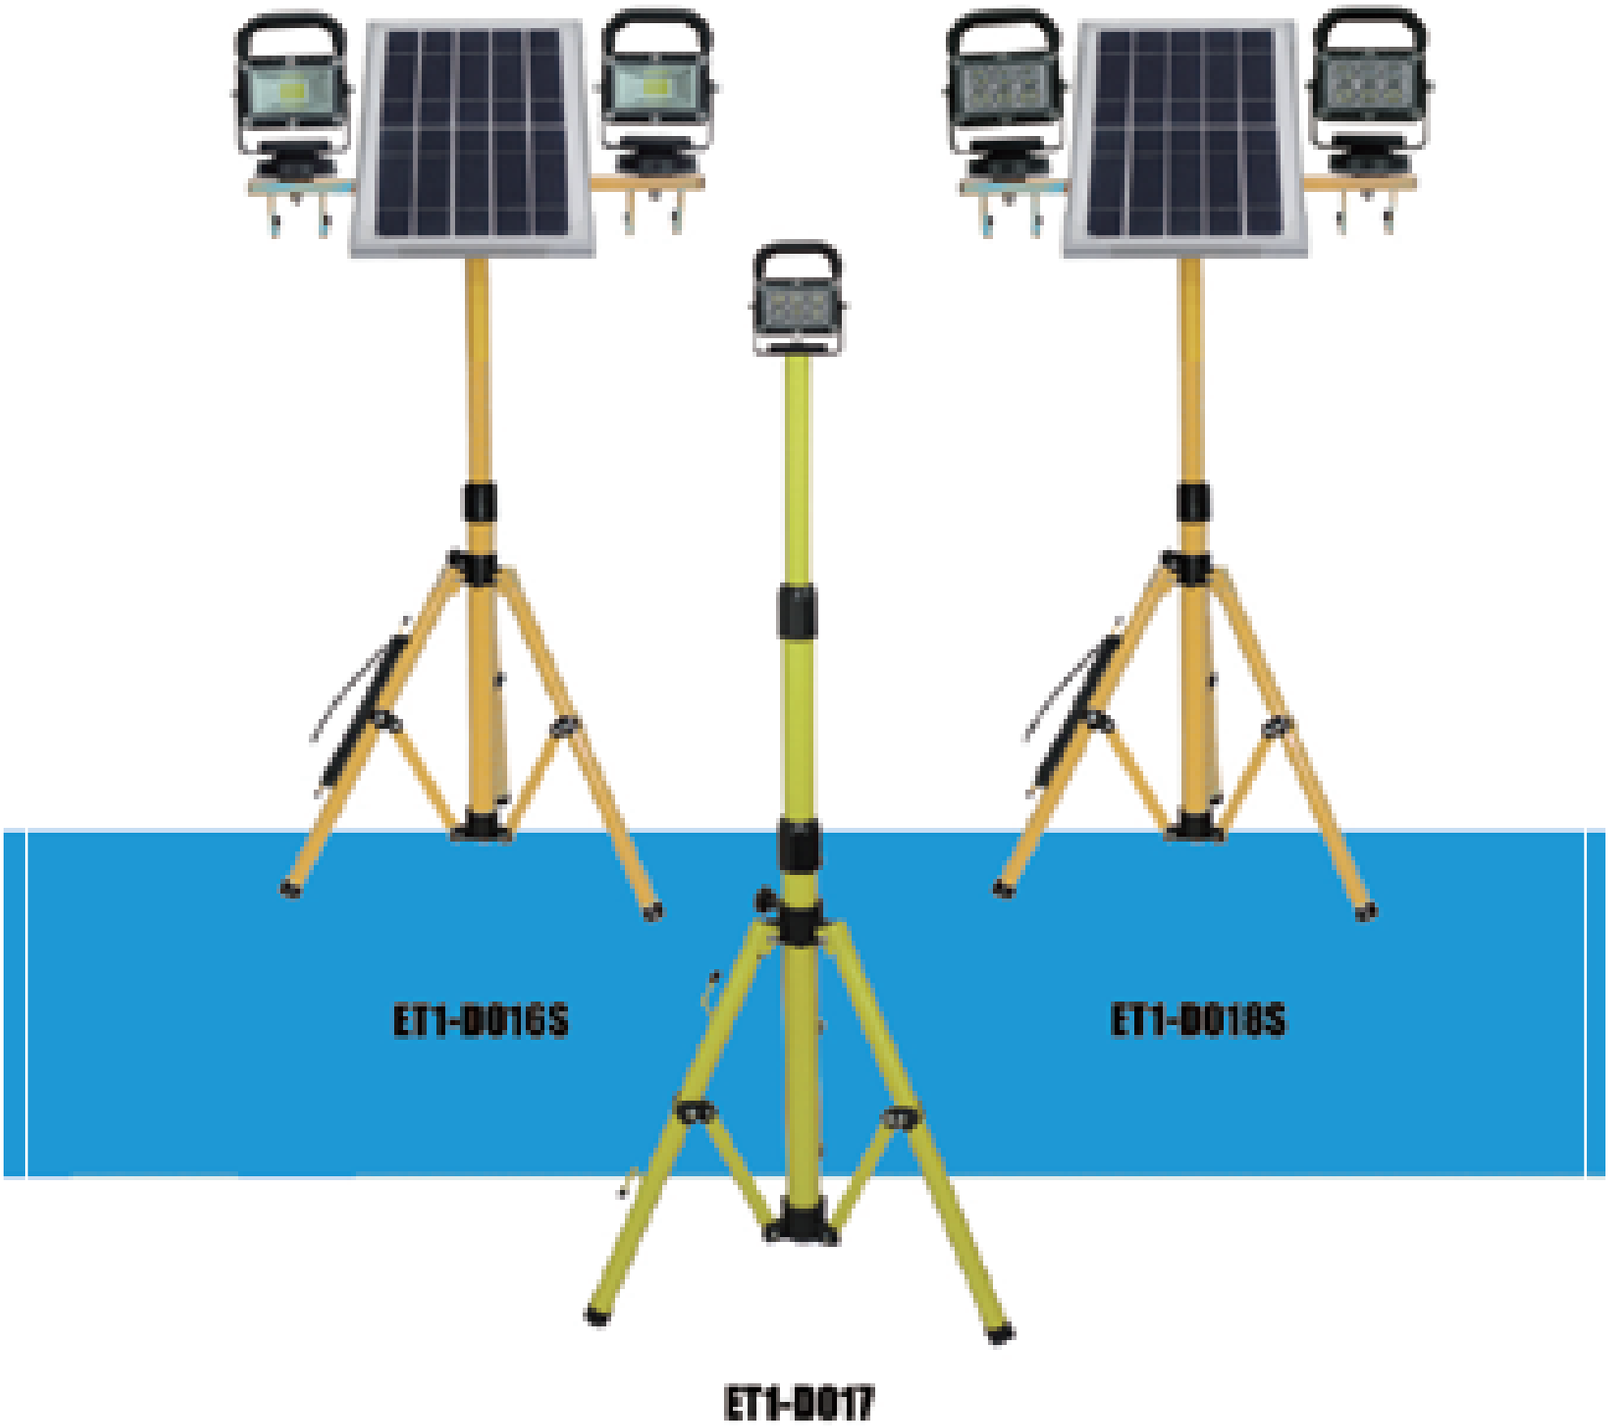


## LED Tripod

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-D016S | 10W(2pcs*10W) COB LED | White | IP 65 | DC 5V | Food | 6000-6500k | ≥2Years | 2000±100lm | Aluminum Heatsink Housing |
| ET1-D017 | 18W(6pcs*3W) CREE LED | White | IP 65 | DC 5V | Spot//Food | 6000-6500k | ≥2Years | 1200±50lm | Aluminum Heatsink Housing |
| ET1-D018S | 18W(6*3W*2W) CREE LED | White | IP 65 | DC 5V | Spot//Food | 6000-6500k | ≥2Years | 2400±50lm | Aluminum Heatsink Housing |

SMARTWARE

# PORTABLE LED




## ET1-H001



## ET1-H002



## ET1-H003



## G-clip work light

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-H001 | 27W(9pcs*3W) | White | IP 67 | DC11~36V/36~60V/AC85~265V | Flood | 3000~6500k (Optional) | ≥2Years | 1600lm | Aluminum Heatsink Housing |
| ET1-H002 | 27W(9pcs*3W) | White | IP 67 | DC11~36V/36~60V/AC85~265V | Flood | 3000~6500k (Optional) | ≥2Years | 1600lm | Aluminum Heatsink Housing |
| ET1-H003 | 18W(6pcs*3W) | White | IP 67 | DC12~36V/36~60V/AC85~265V | Spot/Foold | 3000~6500k (Optional) | ≥2Years | 1200lm | Aluminum Heatsink Housing |




## ET1-H004



## ET1-H005



## ET1-H006



| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET1-H004 | 15W(5pcs*3W) | White | IP 67 | DC 12~36V | Flood | 3000~6500k (Optional) | ≥2Years | 900lm | Aluminum Heatsink Housing |
| ET1-H005 | 18W(6pcs*3W) | White | IP 67 | DC12~36V/36~60V/AC85~265V | Spot/Foold | 3000~6500k (Optional) | ≥2Years | 1200lm | Aluminum Heatsink Housing |
| ET1-H006 | 27W(9pcs*3W) | White | IP 67 | DC12~36V/36~60V/AC85~265V | Spot/Foold | 3000~6500k (Optional) | ≥2Years | 1600lm | Aluminum Heatsink Housing |




ET2-B014



## LED Light Bar

| Model | LED Power | Emiting color | IP Degree | Input Voltage |
|---|---|---|---|---|
| ET2-B014 | 36W(12pcs*3W) | Black / White | IP 67 | DC10-30V |
| ET2-B005 | 72W(24pcs*3W) | Black / White | IP 67 | DC10-30V |
| ET2-B012 | 120W(40pcs*3W) | Black / White | IP 67 | DC10-30V |

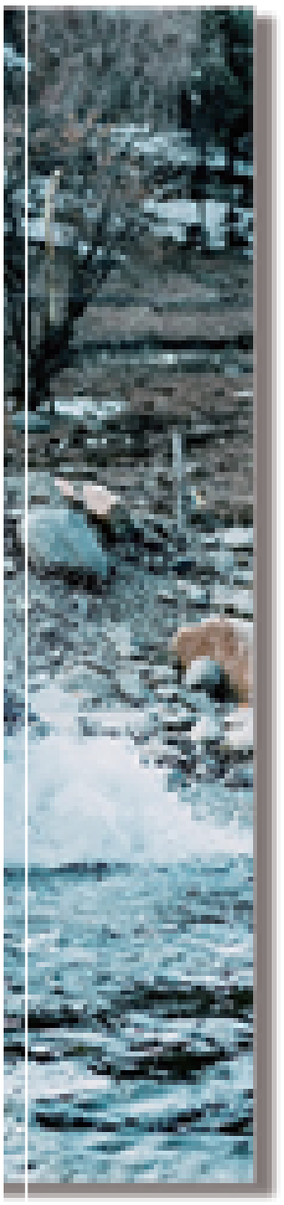

# LED LIGHT BAR

## CONTACT US AS WE HAVE LOT TO OFFER



ET2-B005



ET2-B012

| Beam Angle | Color Temperature | Life Span | Material |
|---|---|---|---|
| Spot/Foold | 6000K | ≥2Years | Aluminum Heatsink Housing |
| Spot/Foold | 6000K | ≥2Years | Aluminum Heatsink Housing |
| Spot/Foold | 6000K | ≥2Years | Aluminum Heatsink Housing |


# LED LIGHT BAR



ET2-D020

## LED Light Bar

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Material |
|---|---|---|---|---|---|---|---|---|
| ET2-D020 | 45w(15pcs x 3w) CREE | White | IP 67 | DC 9-32V | Spot/Flood/Combo | 6500k | ≥2Years | Aluminum Heatsink Housing |

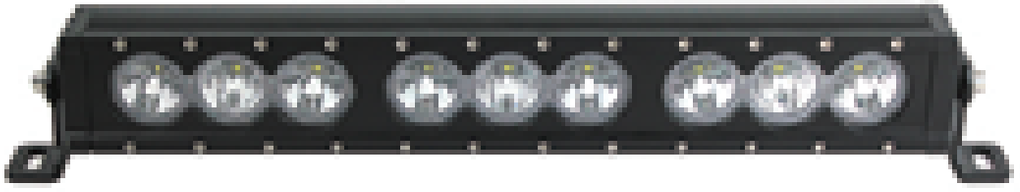

ET2-D015

## LED Light Bar


| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Material |
|---|---|---|---|---|---|---|---|---|
| ET2-D015 | 90W(9pcs*10W)OSRAM LED chip | White | IP 67 | DC 9-32V | Combo / With / DRL | 6500k | ≥2Years | Aluminum Heatsink Housing |



ET2-D018

## LED Light Bar

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Material |
|---|---|---|---|---|---|---|---|---|
| ET2-D018 | 40w(2pcs x 20w) CREE | White | IP 67 | DC 9-32V | Spot/Flood/Combo | 6500k | ≥2Years | Aluminum Heatsink Housing |

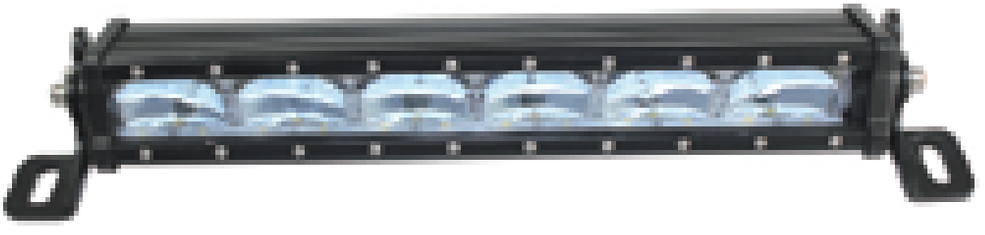

ET2-D014

## LED Light Bar

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Material |
|---|---|---|---|---|---|---|---|---|
| ET2-D014 | 60W(6pcs*10W) CREE | White | IP 67 | DC 9-32V | Combo / With / DRL | 6500k | ≥2Years | Aluminum Heatsink Housing |

# LED LIGHT BAR




## LED Light Bar

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Material |
|---|---|---|---|---|---|---|---|---|
| ET2-D016 | 120W(12pcsX10W) OSRAM LED chip | White | IP 67 | DC 9-32V | Combo / with / DRL | 6500k | ≥2Years | Aluminum Heatsink Housing |




## LED Light Bar

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Material |
|---|---|---|---|---|---|---|---|---|
| ET2-D017 | 140W(14pcs*10W) OSRAM LED chip | White | IP 67 | DC 9-32V | Spo / Flood / Combo | 6500k | ≥2Years | Aluminum Heatsink Housing |




## LED Light Bar

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Material |
|---|---|---|---|---|---|---|---|---|
| ET2-D019 | 180w(18pcs x 10w) CREE | White | IP 67 | DC 9-32V | Spot/Flood/Combo | 6500k | ≥2Years | Aluminum Heatsink Housing |




## LED Light Bar

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Material |
|---|---|---|---|---|---|---|---|---|
| ET2-D021 | 240W(48pcs*5W) CREE | White | IP 67 | DC 9-32V | Spot / Flood / Combo | 6500k | ≥2Years | Aluminum Heatsink Housing |








ET6-E019

## Road Flare Kits

| Mode | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET6-E019 | 12W COB LED | | IP 67 | DC 5V | Amber,Blue.Red.Yellow | 6000~6500k(Optional) | ≥2Years | 620lm | Aluminum Heatsink Housing |



# ET6-E022


## Road Flare Kits

| Model | LED Power | Emiting color | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|---|
| ET2-E022 | 8 F8 bulbs, plus 7 SMD bulbs | | IP 65 | DC 12-24V | Flood | 6000~6500k(Optional) | ≥2Years | 1000±100lm | Aluminum Heatsink Housing |



# LED STRIP LIGHT



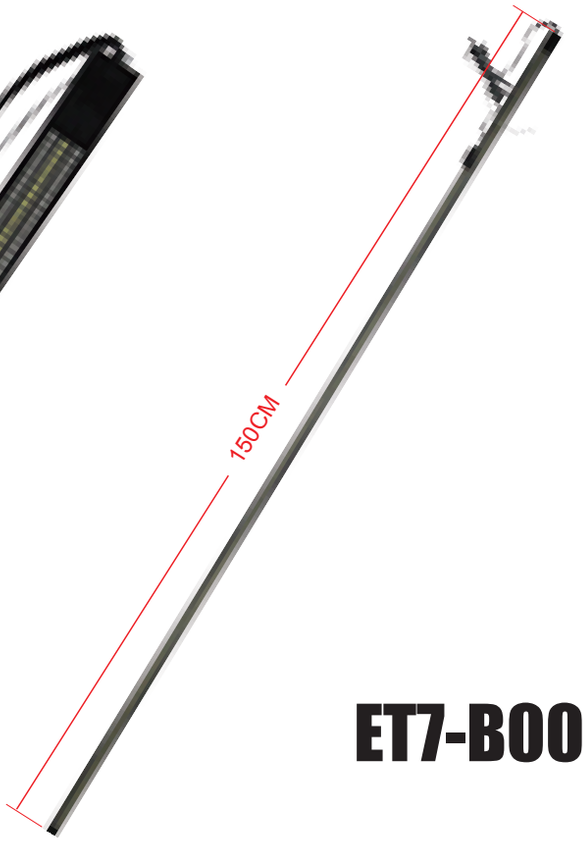


## ET7-B006

**Rigid**

| Model | Aluminum housing reversing light+brake light a total of | Package | Each box weighs | Outer box size |
|---|---|---|---|---|
| ET7-B006 | | 12PCS | 15KG | 22*27*158CM |







# ET7-B007

## Flexible

| Model | LED Power | IP Degree | Input Voltage | Beam Angle | Power cord length | Connector |
|---|---|---|---|---|---|---|
| ET7-B007 | SMD 2835 | IP 65 | DC 12V | White light + red light + orange light | 110CM | Standard 4PIN |

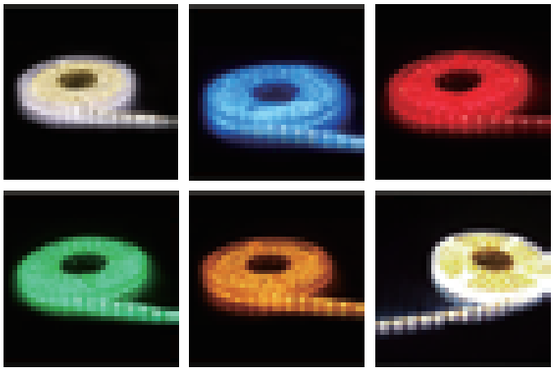

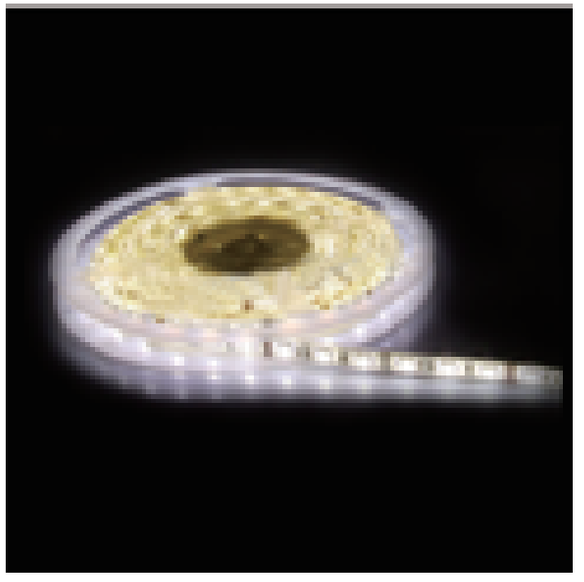

# ET7-A001

## RGB

| Model | LED Power | Lamp Power | IP Degree | Input Voltage | Emitting Color | Light output/LED | Beam Angle |
|---|---|---|---|---|---|---|---|
| ET7-A001 | SMD 5050 | 14.4W/M | IP 67 | DC 12V | White | 18-20lm/LED | 120° |



# LED SOLAR LIGHT




# ET10-A001

## LED Solar Light

| Model | LED Power | IP Degree | Input Voltage | Beam Angle | Color Temperature | Life Span | Lumens | Material |
|---|---|---|---|---|---|---|---|---|
| ET10-A001 | 10W(108pcs)LEDs | IP 65 | DC 4.2V | Spot | 4000-6000k | ≥2Years | 2000lm | Aluminum Heatsink Housing |



# ET8-A008

## LED Solar Light

| Model | LED Power | Voltage current | Temperature Range | Junction Box Type | Charging Efficiency | Life Span | Frame |
|---|---|---|---|---|---|---|---|
| ET8-A008 | 10W | 5V 2A | -40℃~+ 85℃ | USB | > 16.8% | ≥2Year | Aluminum |




# ET11-A004

## LED Solar Battery


| Model | LED Power | Lithium battery capacity | DC output | AC output | Components, accessories |
|---|---|---|---|---|---|
| ET11-A004 | 18V/10Wp \| 18V/20Wp | 12V/5000MA \| 12V/10000MA 3<br>DC output (12V/5A), 2 (USB5V/1.5A) | 4 (12V/5A), 4 (USB5V/2A) | Correct 300W (220V/110V optional) | 1 set of host, 1 solar panel, 1 lithium iron phosphate, 2 sets of 3W lamps, 1 part of instruction manual package |

# INDUSTRIAL PARTS

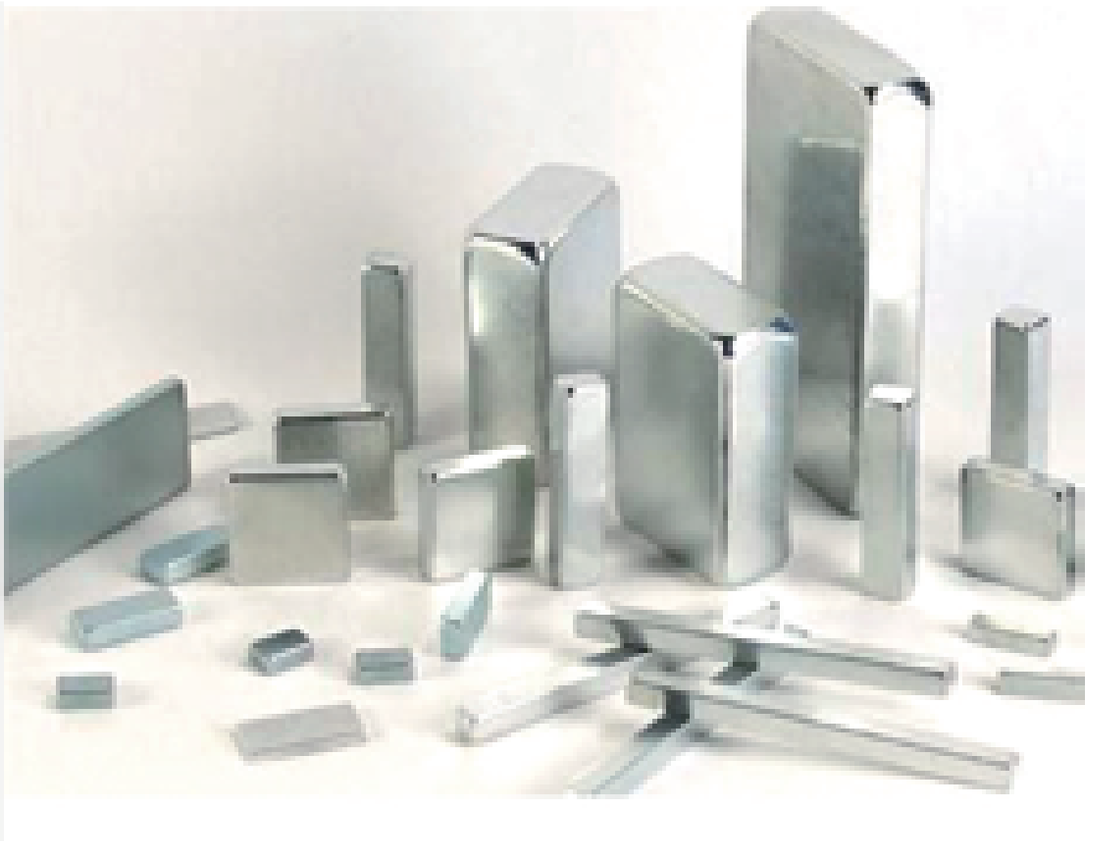

**Magnets**




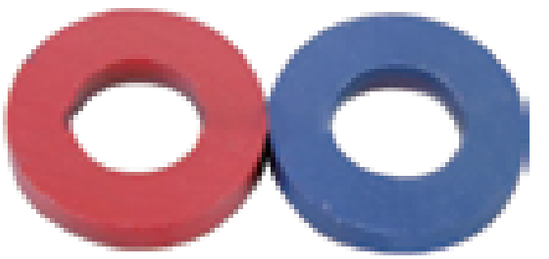


# ET8-A002

**Industrial parts**

| Model | Coating | Grade | Certificates |
|---|---|---|---|
| ET8-A002 | Zn,Ni,silver,gold,copper,epoxy | N33-N52 and so on | CE, RoHS |

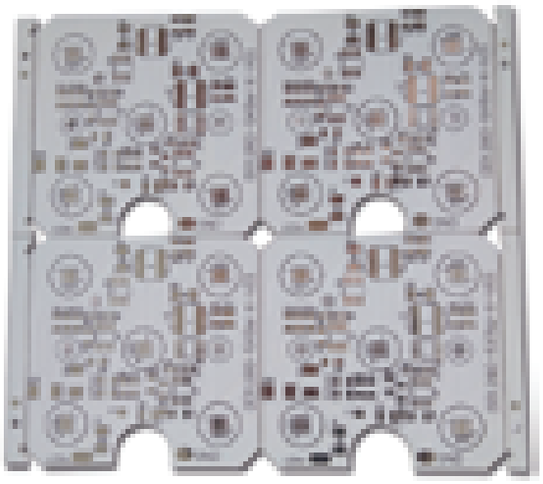

PCB

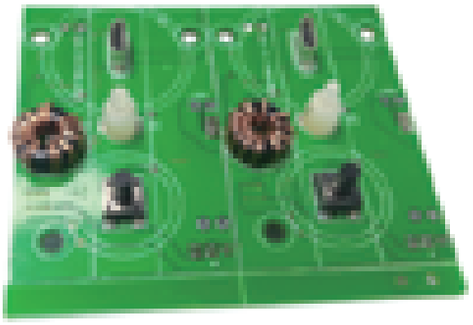

PCBA

## PCB & PCBA



ET8-B014



## Brackets-Any kinds

| Model | Material | Application |
|---|---|---|
| ET8-B014 | Stainless steel | 1999--2014 Ford F250 / F350 Superduty; 2000-2005 Ford Excursion |


SMARTWARE
BICYCLE LIGHTS
NEW



## ET3-E001

| | |
|---|---|
| Color | Black |
| Dimension | 10.7*3.3cm |
| Packaging dimension | 20*10*4.5cm |
| Certified Product | CE Approved |
| Net weight | 190g |
| Gross weight | 225g |
| Lumens | 400lm |
| Battery capacity | 4000mAh |
| Function | 1. USB charging,charge as a power bank<br>2. 360 degree optional bracket, efficient heat dissipation |
| Qty/carton | 60pcs |
| Measurement/carton | 51.5*44*26.5cm |
| Weight/carton | 14.5kg |





## ET3-E002

| | |
|---|---|
| Material | Aluminum alloy, ABS |
| Flood angle | 85° |
| Irradiation distance | >200 meters |
| Lamp beads | 2*T6LED |
| Color | Black, Silver |
| Dimension | 10.8*4.9cm |
| Packaging dimension | 16*12.5*3.8cm |
| Certified Produc | CE Approved |
| Net weight | 276g |
| Gross weight | 315g |
| Lumens | 500lm |
| Battery capacity | 4000mAh |
| Function | 1. Press once to highlight, the second time to low light, press sos three times, press four times, work light is on, long press work light to turn on<br>2. USB charging, can be used as a power bank |
| Qty/carton | 40pcs |
| Measurement/carton | 43.5*34*41cm |
| Weight/carton | 13.6kg |







## ET3-E003

| | |
|---|---|
| Color | Black, Red, Blue,Silver |
| Certified Product | CE Approved |
| Dimension | 10.8*4.9cm |
| Packaging dimension | 16*12.5*3.8cm |
| Net weight | 120g |
| Gross weight | 150g |
| Lumens | 800lm |
| Battery capacit | 2500mAh |
| Function | 1. Four lighting modes: strong light mode for 3 hours, low light mode for 5 hours, alternately flashing yellow for 3 hours, warning light for 1 hour<br>2. USB direct charge, convenient and fast<br>3. Multi-mode charging<br>4. Display the battery status of the lights<br>5. Long range, not dazzling |
| Qty/carton | 40pcs |
| Measurement/carton | 43.5*34*41cm |
| Weight/carton | 13.6kg |







## ET3-E004


| | |
|---|---|
| Color | Black ,White |
| Dimension | 6.6*3*2.1cm |
| Packaging dimension | 16.5*10.3*4.5cm |
| Net weight | 43g |
| Gross weight | 63g |
| Lumens | 300lm |
| Battery capacity | 800mAh |
| Function | 100%--3 hours; 50%--5 hours; Flashing--12 hours |
| Qty/carton | 120pcs |
| Measurement/carton | 40*36.5*41cm |
| Weight/carton | 8.56kg |





## ET3-E005

| | |
|---|---|
| Color | Red light, white light, red-blue dimming, stepless dimming Red-white dimming Bubble bag red light Bubble bag white light |
| Dimension | 5.3*4.5*3.5cm |
| Packaging dimension | 10.8*5.4*7.5cm |
| Net weight | 57g |
| Gross weight | 83g |
| Lumens | 50lm |
| Battery capacity | 650mAh |
| Function | 4-speed mode, charging time 2-3 hours, battery life 2-8 hours, high-quality waterproof silicone switch |
| Qty/carton | 100pcs |
| Measurement/carton | 48*31*57cm |
| Weight/carton | 9.3kg |







## ET3-E006

| | |
|---|---|
| Color | Black |
| Dimension | 7*4*2cm |
| Packaging dimension | 9.2*7.2*5.2cm |
| Certified Product | CE Approved |
| Net weight | 60g |
| Gross weight | 114g |
| Lumens | 400lm |
| Battery capacity | 1200mAh |
| Function | 1.①. 4 operating modes: smart mode, strong light, low light, flashing, screen flashing<br>②. Aurora mode can be used continuously for 2 hours, and power saving mode for 6 hours.<br>2.180 degree ultra-wide reflective ring technology, you can see from the corner clear |
| Qty/carton | 120pcs |
| Measurement/carton | 52.5*30*29cm |
| Weight/carton | 15kg |







## ET3-E007

| | |
|---|---|
| Color | Black |
| Dimension | 7.5*4.5*4.1cm |
| Packaging dimension | 9.5*8**5.3cm |
| Certified Product | CE Approved |
| Net weight | 88g |
| Gross weight | 116g |
| Battery capacity | 1200mAh |
| Function | 1. Four operating modes: smart mode, day running light, strong light + day running light, power saving + day running light, screen flashing<br>2.180 degree ultra-wide reflective ring technology, all corners can be seen clearly |
| Qty/carton | 125pcs |
| Measurement/carton | 49.5*42*28.5cm |
| Weight/carton | 15.5kg |







## ET3-E008

| | |
|---|---|
| Material | ABS+LED wick+Aluminum alloy |
| Color | Black |
| Dimension | 6*8*8cm |
| Packaging dimension | 9*8.2*6cm |
| Net weight | 179g |
| Gross weight | 211g |
| Battery capacity | 1200mAh |
| Function | 1. High light, low light, burst flash, red and blue slow flash<br>2. USB fast charge, hide the USB charging port<br>3. Convenient switch, high light LED light<br>4. Red light on the left, blue light on the right, LED light in the middle |
| Qty/carton | 75pcs |
| Measurement/carton | 43*32*28.5cm |
| Weight/carton | 16.83kg |









## ET3-E009

| | |
|---|---|
| Color | Gold |
| Dimension | 8*6*5cm |
| Packaging dimension | 6.2*5*14.3cm |
| Net weight | 168g |
| Gross weight | 184g |
| Lumens | 500lm |
| Battery capacity | 1200mAh |
| Function | 1. Fast charging, low power consumption and long life<br>2. Three gears adjustable: strong light, low light, flash, can be adjusted according to different places |
| Qty/carton | 120pcs |
| Measurement/carton | 52.5*32*35.5cm |
| Weight/carton | 23.08kg |








## ET3-E010

| | |
|---|---|
| Main material | ABS |
| Color | Black |
| Dimension | 10*8.5*3.5cm |
| Packaging dimension | 14.3*6*10.5cm |
| Net weight | 118g |
| Gross weight | 148g |
| Lumens | 200lm |
| Battery capacity | 1200mAh |
| Function | 1. High light, medium light, low light, flash<br>2. Suitable for most bicycle handles (18-38mm) |
| Qty/carton | 120pcs |
| Measurement/carton | 59*34*36cm |
| Weight/carton | 18.76kg |







## ET3-E011

| | |
|---|---|
| Color | Black |
| Dimension | 9*4.5*4.2cm |
| Packaging dimension | 17.3*10.4*4.5cm |
| Net weight | 60g |
| Gross weight | 88g |
| Lumens | 120lm |
| Battery capacity | 1200mAh |
| Function | 1.Independent dual lamp design<br>2.Small and exquisite, saving space<br>3.15 modes to choose from, free combination of high beam + floodlight<br>4. Range 150 meters |
| Qty/carton | 240pcs |
| Measurement/carton | 67*55*44cm |
| Weight/carton | 22.12kg |








## ET3-E013

| | |
|---|---|
| Color | Red, Blue, Black |
| Dimension | 7.5*8*6cm |
| Packaging dimension | 9.2*9.2*9cm |
| Net weight | 126g |
| Gross weight | 156g |
| Lumens | 1200lm |
| Battery capacity | 1800mAh |
| Function | 1.Strong light + red warning light<br>2.IPX-6 waterproof<br>3.360 degree rotation |
| Qty/carton | 120pcs |
| Measurement/carton | 46*39*58.5cm |
| Weight/carton | 19.72kg |





## ET3-E014

| | |
|---|---|
| Color | Black,Red, Blue |
| Dimension | 8.7*4.5**157.5cm |
| Packaging dimension | 9.8*5.1*245cm |
| Net weight | 89g |
| Gross weight | 115g |
| Lumens | 250lm |
| Battery capacity | 1200mAh |
| Function | 1. Anti-theft high-decibel 130 decibel car light horn, double sound and light buttons, free control of 5 sound effects<br>2.IPX5 waterproof<br>3.Three modes, strong light mode, low light mode, burst flash |
| Qty/carton | 80pcs |
| Measurement/carton | 46*32*29.5cm |
| Weight/carton | 10.2kg |





## ET3-E015

| | |
|---|---|
| Color | Black,Red, Blue |
| Dimension | 10*4.5*3cm |
| Packaging dimension | 10.5*7*5.5cm |
| Net weight | 65g |
| Gross weight | 95g |
| Lumens | 250lm |
| Battery capacity | 3 AAA batteries |
| Function | 1.With alarm function, intelligent anti-theft<br>2.120 high decibels, five sound effects<br>3.Three modes: strong light for 2.5 hours, low light for 5 hours, burst flash for 3.5 hours |
| Qty/carton | 120pcs |
| Measurement/carton | 46.5*45.5*29.5cm |
| Weight/carton | 12.4kg |







## ET3-E016

| | |
|---|---|
| Material | ABS |
| Color | Black |
| Dimension | 10.5*6*4cm |
| Packaging dimension | 10.6*7*5.5cm |
| Net weight | 127g |
| Gross weight | 160g |
| Lumens | 350lm |
| Battery capacity | 2000mAh |
| Function | 1. Light mode: strong light, 6 hours of battery life, low light, 3 hours of battery life, flashing<br>2.120 dB<br>3. Waterproof design, work normally regardless of rain or fog |
| Qty/carton | 120pcs |
| Measurement/carton | 46.5*45.5*29.5cm |
| Weight/carton | 20.2kg |







## ET3-E017

| | |
|---|---|
| Color | Black,Golden |
| Dimension | 7.5*6.5*4.3cm |
| Packaging dimension | 9*8.6*9cm |
| Net weight | 182g |
| Gross weight | 215g |
| Lumens | 350lm |
| Battery capacity | 1806mAh |
| Function | 1. USB charging car headlight<br>2. Three gears control light: touch to switch gears, strong light, low light, burst flashing<br>3. Life-level waterproof, rainproof, damp, please do not soak in rain for a long time<br>4. Free zoom, turn left and right to adjust the light |
| Qty/carton | 120pcs |
| Measurement/carton | 55*36*46cm |
| Weight/carton | 26.8kg |








## ET3-E018


| | |
|---|---|
| Color | Black,Orange |
| Dimension | 10*5.5*4cm |
| Packaging dimension | 17*11.2*5.2cm |
| Net weight | 75g |
| Gross weight | 95g |
| Battery capacity | 3 AAA batteries |
| Function | 1.Three modes: always on, slow flashing, fast flashing<br>2.Four modes of sound<br>3.There is a switch for the horn and the light to save power |
| Qty/carton | 120pcs |
| Measurement/carton | 54.5*33.5*46cm |
| Weight/carton | 12.4kg |

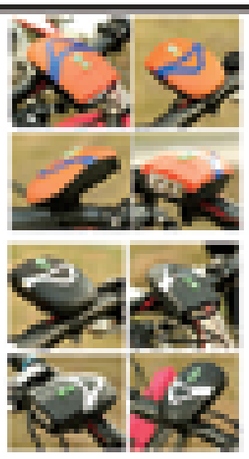



## ET3-E019

| | |
|---|---|
| Color | Silver,Gold,Red, Blue |
| Dimension | 9*5*3cm |
| Packaging dimension | 12*11*4.3cm |
| Net weight | 101g |
| Gross weight | 134g |
| Lumens | 300lm |
| Battery capacity | 1200mAh |
| Function | 1.Built-in anti-theft alarm function, newly upgraded alarm horn light, lightly press to switch the light, turn off the light and long press for three seconds to open the anti-theft function 2.Three kinds of brightness are adjustable, the light effect is different every time you press it, long press for three seconds can make an alarm sound 3. Five kinds of sound effects are free to control |
| Qty/carton | 100pcs |
| Measurement/carton | 58*25*23cm |
| Weight/carton | 14.4kg |

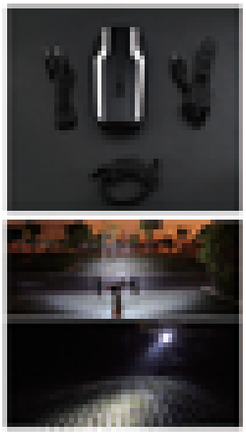



## ET3-E020


| | |
|---|---|
| Product | Horn with light / Horn without light |
| Color | Red, Black,Blue,Orange,Green |
| Dimension | 9*5*3cm |
| Packaging dimension | 12*11*4.3cm |
| Net weight | 138g |
| Gross weight | 168g |
| Lumens | 300lm |
| Battery capacity | Two AAA batteries |
| Function | 1.Frosted shell, 100 decibel sound, long beep, double siren mode<br>2.Six pronunciation modes, lights flicker with sound |
| Qty/carton | 100pcs |
| Measurement/carton | 62*23*47cm |
| Weight/carton | 17.8kg |





## ET3-E021

| | |
|---|---|
| Color | Red, Blue,Orange,Green |
| Dimension | 10*5*4.5cm |
| Packaging dimension | 10.5*5.5*7cm |
| Net weight | 95g |
| Gross weight | 127g |
| Lumens | 250lm |
| Battery capacity | 1200mAh |
| Function | 1. Not only the headlights, but also the electric horn and anti-theft alarm mode<br>2.140 high decibel, 5 kinds of sounds<br>3.80 meters long shot<br>4.3 modes: strong light, low light, burst flash 5. New alarm function<br>6. Free adjustment, split wire control 7. Life waterproof; shell material: ABS |
| Qty/carton | 80pcs |
| Measurement/carton | 46*32*29.5cm |
| Weight/carton | 11.16kg |

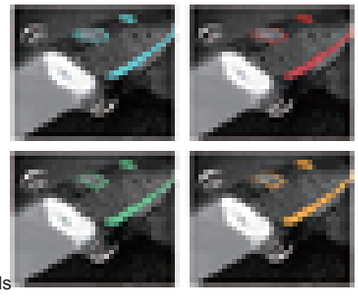



## ET3-E023

| | |
|---|---|
| Color | Green, Red,Blue |
| Dimension | 11*5.2*3.1cm |
| Packaging dimension | 11.2*6.2*5.5cm |
| Net weight | 200g |
| Gross weight | 230g |
| Lumens | 800lm |
| Battery capacity | 2000mAH / 4000mAh |
| Function | 1.Double lights are on, the brightness can be adjusted naturally<br>2.Five horn sounds, long press for 5 seconds to switch the horn sound<br>3.Use function while charging<br>4.Large capacity battery<br>5.4 grid battery display function<br>6.Smart mode function |
| Qty/carton | 80pcs |
| Measurement/carton | 45*30*29cm |
| Weight/carton | 19.4kg |






## ET3-E024

| | |
|---|---|
| Color | Same as picture |
| Dimension | 8.5*2*3cm |
| Packaging dimension | 10.8*3.5*12.4cm |
| Certified Product | CE Approved |
| Net weight | 113g |
| Gross weight | 147g |
| Lumens | 350lm |
| Battery capacity | 2600mAH |
| Function | 1.T6 bright lights, anti-skid design, USB charging<br>2.Five modes: weak, mid-range, high-end, flash, SOS |
| Qty/carton | 100pcs |
| Measurement/carton | 39*57*22cm |
| Weight/carton | 15.7kg |







## ET3-E025

| | |
|---|---|
| Color | Black |
| Dimension | 10.5*5*3cm |
| Packaging dimension | 15.5*9.3*6cm |
| Certified Product | CE Approved |
| Net weight | 214g |
| Gross weight | 244g |
| Lumens | 600-2000lm |
| Battery capacity | 4400mAH |
| Function | 1.Deep waterproof<br>2.USB direct charge, no battery removal, convenient and practical<br>3. Double light source, the illumination range is about 120 degrees<br>4. Four-speed mode: low light, medium light, high light, burst flash |
| Qty/carton | 50pcs |
| Measurement/carton | 48*34*33.5cm |
| Weight/carton | 13.2kg |







## ET3-E026

| | |
|---|---|
| Material | ABS |
| Color | Red, Blue,Black |
| Dimension | 7.5*2.5*6cm |
| Packaging dimension | 15*7.5*5.4cm |
| Net weight | 70g |
| Gross weight | 100g |
| Lumens | 350lm |
| Battery capacity | 1200mAH |
| Function | 1. 5 kinds of sound modes, 140 high-decibel speakers, long press for 5 seconds to switch 5 kinds of sounds<br>2. Multi-mode front light, switch at will: low light, strong light, breathing light, strobe light, SOS |
| Qty/carton | 100pcs |
| Measurement/carton | 56*26*39cm |
| Weight/carton | 11kg |





## ET3-E027

| | |
|---|---|
| Color | Black,White |
| Dimension | 10*5*4cm |
| Packaging dimension | 13.5*9*5.5cm |
| Net weight | 70g |
| Gross weight | 145g |
| Lumens | 240lm |
| Battery capacity | 100mAH |
| Function | 1. Lighting mode: strong light, low light, burst flash, long press for 3 seconds SOS<br>2. 360 rotating car clip<br>3. Charging time: USB charging 6 hours, solar energy 12 hours<br>4. Discharge time: 6 hours in strong light, low light |
| Qty/carton | 120pcs |
| Measurement/carton | 55.5*30.5*59.5cm |
| Weight/carton | 18kg |







## ET3-E028

| | |
|---|---|
| Lamp beads | L2/T6 optional |
| Battery life | U2: 3-6 hours, T6: 6-12 hours |
| Input voltage | 5.5V |
| Waterproof rating | IPX-4 |
| Color | Black-Orange,Silver-Orange |
| Dimension | 12*5*3cm |
| Packaging dimension | 18.5*13.3*4cm |
| Certified Product | CE Approved |
| Net weight | 165g |
| Gross weight | 195g |
| Lumens | 500lm |
| Battery capacity | 4000mAh 18650 Lithium battery/2pcs |
| Function | 1. Double-lamp large floodlight front light, strong light/low light/burst flash, strong light of work light, weak light of work light<br>2. Bottom magnet COB work light 3.USB interface |
| Qty/carton | 90pcs |
| Measurement/carton | 57.5*42*42cm |
| Weight/carton | 18.55kg |







## ET3-E029

| | |
|---|---|
| Color | Black |
| Dimension | 10.5*4.8*3.6cm |
| Packaging dimension | 16.6*16.5*4cm |
| Certified Product | CE Approved |
| Net weight | 191g |
| Gross weight | 211g |
| Lumens | 1000lm |
| Battery capacity | 5200mAH |
| Function | 1.Three light modes: strong light, low light flash<br>2. Highlight COB LED light board<br>3.USB fast charge |
| Qty/carton | 100pcs |
| Measurement/carton | 65*34*35cm |
| Weight/carton | 22.1kg |







## ET3-E030

| | |
|---|---|
| Color | Black |
| Dimension | 8*2.9*4.8cm |
| Packaging dimension | 20*7.5*3.8cm |
| Certified Product | CE Approved |
| Waterproof rating | IP64 |
| Net weight | 152g |
| Gross weight | 182g |
| Lumens | 450lm |
| Battery capacity | 1800mAH |
| Function | Illumination gear: 5 gear modes (low-medium-high-strobe flash-SOS) |
| Qty/carton | 50pcs |
| Measurement/carton | 40*40*47cm |
| Weight/carton | 10.1kg |







## ET3-E031

| | |
|---|---|
| Color | Black,Red,Blue,White |
| Dimension | 6.1*4.5*5.5cm |
| Net weight | 56g |
| Gross weight | 76g |
| Battery capacity | Use 3 ordinary AAA batteries |
| Function | There are 7 LEDs, 5 white LEDs + 2 red LEDs (2 red LEDs on 2 sides, 5 white LEDs on the front) It lights up very beautifully at night. The brightness is very good and can be used as a warning headlight. |
| Qty/carton | 240pcs |
| Measurement/carton | 54*40*50cm |
| Weight/carton | 19.24kg |





## ET3-E032

| | |
|---|---|
| Light source | 10W T6LED |
| Color | Aluminum alloy (black) |
| Dimension | 12*5*3cm |
| Packaging dimension | 18.5*13.3*4cm |
| Protection level | IP65 |
| Certified Product | CE Approved |
| Net weight | 109g |
| Gross weight | 133g |
| Lumens | 380lm |
| Use time | 4 hours under strong light |
| Shell material: | 6063-T6 aluminum alloy + PC plastic parts |
| Battery capacity | 2500mAh 18650 lithium battery |
| Function | 1. Rotary switch: OFF->strong light->medium light->low light->burst flash<br>2. Strong light about 100 meters range |
| Qty/carton | 120pcs |
| Measurement/carton | 57.5*42*42cm |
| Weight/carton | 16.96kg |



## ET3-E033

| | |
|---|---|
| Light source | XML2 U3 |
| Color | Carbon fiber (black) |
| Dimension | 12*5*3cm |
| Packaging dimension | 18.5*13.3*4cm |
| Protection level | IP65 |
| Certified Product | CE Approved |
| Net weight | 109g |
| Gross weight | 133g |
| Lumens | 400lm |
| Use time | 4 hours under strong light |
| Shell material | Carbon fiber + PC plastic parts |
| Battery capacity | LG 3350mAh 18650 lithium battery |
| Function | 1.Rotary switch: OFF->strong light->medium light->low light->burst flash<br>2.Strong light about 100 meters range |
| Qty/carton | 120pcs |
| Measurement/carton | 57.5*42*42cm |
| Weight/carton | 16.96kg |



## ET3-E065

| | |
|---|---|
| Material | Aluminum alloy |
| Lamp beads | CREE XPG |
| Waterproof rating | Daily life waterproof |
| Color | Black |
| Dimension | 10.2*20*14cm |
| Packaging dimension | 14.2*91*45cm |
| Dimension | 100*23*30mm |
| Net weight | 106g |
| Gross weight | 136g |
| Lumens | 200lm-400lm (optional) |
| Battery capacity | 300lm |
| Voltage frequency | 50/60Hz |
| AC voltage | 100-240 volts |
| Function | Highlight - medium - blink |
| Charging time | About 3/h battery life 2-8/h |
| Qty/carton | 150pcs |
| Measurement/carton | 47.5*47*44.5cm |
| Weight/carton | 21.4kg |







## ET3-E034

| | |
|---|---|
| Color | Black |
| Dimension | 10.5*5*3cm |
| Packaging dimension | 14.5*12*4cm |
| Certified Product | CE Approved |
| Net weight | 127g |
| Gross weight | 157g |
| Lumens | 350lm |
| Battery capacity | 2200mAh |
| Function | High light 4.5h/ low light 8h/blink/10h |
| Qty/carton | 100pcs |
| Measurement/carton | 68*32*40cm |
| Weight/carton | 16.7kg |









## ET3-E035

| | |
|---|---|
| Color | Black |
| Dimension | 8.5*4.5*3.8cm |
| Packaging dimension | 12*9.5*4cm |
| Certified Product | CE Approved |
| Net weight | 272g |
| Gross weight | 302g |
| Lumens | 600-2400lm |
| Battery capacity | 4000mAh |
| Function | The main light is switched to five levels, high bright, medium bright, low bright, double-click fast flashing, long press SOS, Auxiliary lamp 4 levels adjustment, white light is high and low light/red light is long and red light is flashing |
| Qty/carton | 60pcs |
| Measurement/carton | 44*26*29.5cm |
| Weight/carton | 19.12kg |









## ET3-E036



| | |
|---|---|
| LED | T6 |
| Color | Red,Blue, Yellow,Green,Pink |
| Dimension | 11*4.5*3.5cm |
| Packaging dimension | 11.7*7.6*5cm |
| Waterproof | IP45 dustproof and waterproof |
| Net weight | 112g |
| Gross weight | 142g |
| Lumens | 400lm |
| Charging method | USB direct charging |
| Battery capacity | 2000mAh 18650 lithium battery (with protection board) |
| Function | 1.The front light switch is a hidden touch switch (the light is turned on for about 3 seconds when the finger touches the switch, and the operation of turning off the light is the same) 2.Volume decibels: 130 decibels 3. Five modes: strong light, medium light, low light, fast flash, slow flash |
| Qty/carton | 75pcs |
| Measurement/carton | 40*37*27cm |
| Weight/carton | 11.65kg |



## ET3-E037

| | |
|---|---|
| Color | Black |
| Dimension | 10.5*3.5*2cm |
| Packaging dimension | 14*9.2*4.7cm |
| Certified Product | CE Approved |
| Net weight | 99g |
| Gross weight | 129g |
| Lumens | 250lm |
| Battery capacity | 1500mAh18650 Lithium Battery |
| Function | 1.Four modes: smart mode, strong light, low light, screen flash<br>2.Strong light battery life up to 3 hours<br>3.The power display is 75%, 50%, 25%, the power display is clearer |
| Qty/carton | 100pcs |
| Measurement/carton | 48*29.3*49.5cm |
| Weight/carton | 13.9kg |







## ET3-E038

| | |
|---|---|
| Color | Blue, Black,Silver |
| Dimension | 10*5*3.5cm |
| Packaging dimension | 16.7*8.5*4cm |
| Net weight | 100 |
| Gross weight | 130 |
| Lumens | 250lm |
| Battery capacity | 1200mAh |
| Function | 1.Light/Speaker//USB&Solar Charge 3 in 1<br>2. High-decibel speakers 140<br>3.Three modes: high light, low light, flashing |
| Qty/carton | 200pcs |
| Measurement/carton | 67*31*22.5cm |
| Weight/carton | 27kg |







## ET3-E039

| | |
|---|---|
| Color | Black, Blue, Silver |
| Dimension | 9.2*4.2*4.5cm |
| Packaging dimension | 10.8*5.2*11.2cm |
| Net weight | 83 |
| Gross weight | 111 |
| Lumens | Upper light: 120 / Lower light: 90 |
| Battery capacity | 3.7v Lithium Battery |
| Function | Independent double lamp design, high beam + floodlight, free combination of brightness |
| Qty/carton | 60pcs |
| Measurement/carton | 56*26.5*23cm |
| Weight/carton | 7.66kg |







## ET3-E040

| | |
|---|---|
| Material | Plastic |
| Color | Black |
| Dimension | 8*4.5*2.5cm |
| Packaging dimension | 8*7*5cm |
| Net weight | 69 |
| Gross weight | 104 |
| Lumens | 300lm |
| Battery capacity | 1200mAh |
| Function | 1.Touch to switch on, convenient and sensitive control, longer service life<br>2. Multiple modes, three levels of brightness: ultra-low brightness, medium brightness, and ultra-high brightness; two special modes: strobe, beacon<br>3. Automatic adjustment: advanced temperature control module, strong heat dissipation performance |
| Qty/carton | 120pcs |
| Measurement/carton | 37.5*34.5*34cm |
| Weight/carton | 13.48kg |







## ET3-E041

| | |
|---|---|
| Color | Black,Golden |
| Dimension | 7.5*6.5*4.3cm |
| Packaging dimension | 9*8.6*9cm |
| Net weight | 182g |
| Gross weight | 207g |
| Lumens | 350lm |
| Battery capacity | 1806mAh |
| Function | 1. USB charging car headlight<br>2. Three gears control light: touch to switch gears, strong light, low light, burst flashing<br>3. Life-level waterproof, rainproof, damp, please do not soak in rain for a long time<br>4. Free zoom, turn left and right to adjust the light |
| Qty/carton | 75pcs |
| Measurement/carton | 48*48*27.5cm |
| Weight/carton | 16.53kg |







## ET3-E043

| | |
|---|---|
| Color | Black, black pull tube+gun clip+ruby taillight |
| Dimension | 8*4.5*2.5cm |
| Packaging dimension | 8*7*5cm |
| Net weight | 51g |
| Gross weight | 81g |
| Lumens | 300lm |
| Battery capacity | 1200mAh |
| Qty/carton | 125pcs |
| Measurement/carton | 42*37*27cm |
| Weight/carton | 11.13kg |





## ET3-E044

| | |
|---|---|
| Color | Black |
| Dimension | 9*5*2.5cm |
| Packaging dimension | 16.2*10*4.5cm |
| Certified Product | CE Approved |
| Net weight | 158g |
| Gross weight | 188g |
| Lumens | 350lm |
| Battery capacity | 1800mAh |
| Function | The method and function of the remote control button: long press the front light switch, when the main light is on, press the linking component of the remote control, the main light conversion function, the linking is successful. |
| Qty/carton | 90pcs |
| Measurement/carton | 51.5*50.5*29cm |
| Weight/carton | 17.92kg |





## ET3-E045

| | |
|---|---|
| Color | Black |
| Dimension | 10.7*4*3.5cm |
| Packaging dimension | 11*6*5.5cm |
| Certified Product | CE Approved |
| Net weight | 118g |
| Gross weight | 148g |
| Lumens | 350lm |
| Battery capacity | 1800mAh |
| Function | 1.140 decibel single speaker, 5 kinds of sounds, long press the horn switch to freely switch between five modes<br>2. Four modes: high light, medium light, slow flash, burst flash<br>3. USB charging,automatic power off when full |
| Qty/carton | 80pcs |
| Measurement/carton | 49.5*34*56cm |
| Weight/carton | 15.72kg |





## ET3-E046

| | |
|---|---|
| Color | Black,Red,Silver |
| Dimension | 10.5*5.7*4.1cm |
| Packaging dimension | 11*6*7.5cm |
| Net weight | 100g |
| Gross weight | 132g |
| Lumens | 300lm |
| Battery capacity | 1500mAh |
| Function | 1. Four lighting modes: strong light, low light, flashing light, flood light yellow<br>2. Power display with code meter system<br>3.120 decibel tweeter, six sound effects, one-key switch. 38CM extended split wire control<br>4. Daily waterproof |
| Qty/carton | 125pcs |
| Measurement/carton | 57*52*39.5cm |
| Weight/carton | 17.5kg |





## ET3-E047

| | |
|---|---|
| Color | Black,Red,Silver |
| Dimension | 10.5*5.7*4.1cm |
| Packaging dimension | 11*6*7.5cm |
| Certified Product | CE Approved |
| Net weight | 100g |
| Gross weight | 130g |
| Lumens | 300lm |
| Battery capacity | 1500mAh |
| Function | 1. Four lighting modes: strong light, low light, flash, floodlight yellow<br>2.120 decibel tweeter, six sound effects, one key switch. 38CM extended split wire control<br>3. Daily waterproof |
| Qty/carton | 100pcs |
| Measurement/carton | 39.5*39.5*47cm |
| Weight/carton | 14kg |







## ET3-E048

| | |
|---|---|
| Color | Black |
| Dimension | 8*3.5*3cm |
| Packaging dimension | 9*5.3*6.5cm |
| Net weight | 190g |
| Gross weight | 210g |
| Lumens | 300lm |
| Battery capacity | 1200mAh |
| Function | 1.Three modes, adjustable focus: strong light, low light, burst flash<br>2. Removable lithium battery<br>3. Aluminum alloy material, USB direct charge |
| Qty/carton | 75pcs |
| Measurement/carton | 29*28.5*28.5cm |
| Weight/carton | 19.75kg |








## ET3-E049

| | |
|---|---|
| Color | Black |
| Dimension | 6.4*3.2*2.5cm |
| Packaging dimension | 7.6*4.2*14.1cm |
| Certified Product | CE Approved |
| Net weight | 130g |
| Gross weight | 160g |
| Lumens | 300lm |
| Battery capacity | 2200mAh |
| Function | 1. Light weight and small size<br>2. Efficient heat dissipation and protection of lamp beads<br>3. Life waterproof<br>4. Five lighting modes: high brightness, medium brightness, low brightness, fast flashing, SOS |
| Qty/carton | 75pcs |
| Measurement/carton | 43.8*39.5*23cm |
| Weight/carton | 13kg |



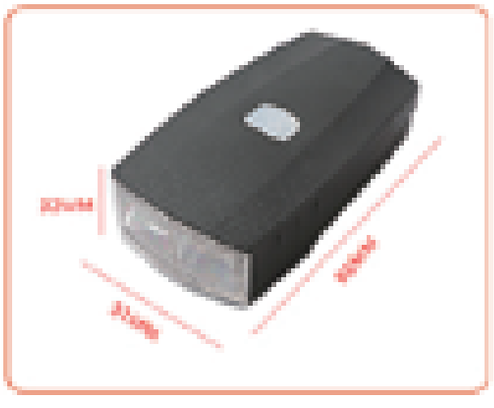

## ET3-E050

| | |
|---|---|
| Color | Black,Red,Silver |
| Dimension | 8.8*5.1*3.2cm |
| Packaging dimension | 15.5*11.5*7.5cm |
| Net weight | 190g |
| Gross weight | 220g |
| Battery capacity | 2000mAh lithium battery |
| Function | 1.Far and near beam design, high beam endurance 2.5 hours, low beam endurance 5 hours<br>2. Silicone waterproof switch, long press the switch button for 3 seconds to turn on<br>3.120 high-decibel speaker<br>4. High brightness XPE lamp beads, intelligent vibration sensor, USB charging, high quality Waterproof performance |
| Qty/carton | 45pcs |
| Measurement/carton | 48*39.5*36cm |
| Weight/carton | 10.9kg |







## ET3-E053

| | |
|---|---|
| Color | Silver + Black With speaker/without speaker (optional) |
| Dimension | 10.2*2*2.1cm |
| Packaging dimension | 10*5*2.5cm |
| Net weight | 110g |
| Gross weight | 160g |
| Battery capacity | 800mAh |
| Function | 1. Mode: flashing, always on, off<br>2. USB charging, solar panel, built-in speaker, 120 decibel loud speaker<br>3. 5 LED highlight beads |
| Qty/carton | 75pcs |
| Measurement/carton | 525*520*295cm |
| Weight/carton | 13kg |







## ET3-E054

| | |
|---|---|
| Color | Black,Red,Blue With speaker/without speaker (optional) |
| Dimension | 5*14*5.5cm |
| Packaging dimension | 17*10*5cm |
| Certified Product | CE Approved |
| Net weight | 243g |
| Gross weight | 273g |
| Material | ABS engineering plastic |
| Battery capacity | 4000mAh |
| Function | 1.130 high-decibel speaker<br>2. Mobile phone holder, front light, power bank, speaker function integrated<br>3 three modes: strong light, low light, burst flash |
| Qty/carton | 150pcs |
| Measurement/carton | 530*520*520cm |
| Weight/carton | 41.95kg |







## ET3-E055

| | |
|---|---|
| Material | ABS |
| Lamp beads | XPE |
| Waterproof rating | IPX6 |
| Color | Blue/red/green/orange/pink/black |
| Dimension | 10.2*5.1cm |
| Packaging dimension | 10.5*5.5*7cm |
| Net weight | 85g |
| Gross weight | 111g |
| Lumens | 250lm |
| Function | Rechargeable; strong light/low light/SOS Battery type: strong light/fast flash/slow flash |
| Qty/carton | 125pcs |
| Measurement/carton | 54.5*29.5*37cm |
| Weight/carton | 14.9kg |







## ET3-E056

| | |
|---|---|
| Material | ABS |
| Lamp beads | T6 |
| Waterproof rating | IPX5 |
| Color | Blue/Gray/Black Red/Black Blue/Black Orange/ |
| Dimension | 10.4*6.5cm |
| Packaging dimension | 10.5*5.5*7cm |
| Net weight | 16g |
| Gross weight | 46g |
| Volume decibel | 140 decibels |
| Lumens | 350lm |
| Battery capacity | 2000mAh |
| Function | Bright light file: 350 lumens battery life ~ 3.2 hours / Low light level: 180 lumens battery life ~ 6 hours / Flash file: 180 lumens battery life ~ 4 hours / Slow flash file: 320 lumens battery life ~ 5 hours |
| Qty/carton | 125pcs |
| Measurement/carton | 54.5*29.5*37cm |
| Weight/carton | 6.75kg |







## ET3-E057

| | |
|---|---|
| Material | ABS |
| Waterproof rating | Daily life waterproof |
| Color | Black/red/blue/silver/gold |
| Dimension | 8*3.5*3cm |
| Packaging dimension | 11.6*9.7*3.5cm |
| Net weight | 46g |
| Gross weight | 76g |
| Lumens | 55lm |
| Battery capacity | 500mAh（14500） |
| Function | Four modes: strong light mode (>3h), medium light mode (>5h), low light mode (>7.5h), blinking mode (>4.5h) / Long press for 5 tseconds to turn off the light |
| Qty/carton | 120pcs |
| Meansurement/carton | 56.5*24.5*41cm |
| Weight/carton | 10.12kg |







## ET3-E058

| | |
|---|---|
| Material | ABS |
| Lamp beads | LED |
| Color | Black |
| Dimension | 10.5*3.6*3.6cm |
| Packaging dimension | 16.8*16.5*4.1cm |
| Net weight | 105kg |
| Gross weight | 135kg |
| Lumens | 700lm |
| Function | Strong light/low light/flas |
| Qty/carton | 90pcs |
| Meansurement/carton | 52*51.5*43cm |
| Weight/carton | 13.15kg |







## ET3-E059

| | |
|---|---|
| Material | ABS |
| Lamp beads | LED |
| Waterproof rating | IPX5 |
| Color | Black |
| Dimension | 8*3.5*3cm |
| Packaging dimension | 13.8*4.7*11.6cm |
| Net weight | 67g |
| Gross weight | 85g |
| Lumens | 300lm |
| Battery capacity | 1200mAh |
| Function | Touch: strong light->medium light->low light->OFF; double-click: strobe flash-> slow flash->S0S->OFF; long press: enter forced constant current high powerwhite light 10W high power LED |
| Charging time | 1.5-2.5 hours to fully charge |
| Qty/carton | 90PCS |
| Meansurement/carton | 49*43.5*36.8cm |
| Weight/carto | 8.65kg |








## ET3-E060

| | |
|---|---|
| Material | ABS |
| Lamp beads | LED |
| Waterproof rating | IPX5 |
| Color | Black |
| Dimension | 7.7* 4* 2.5cm |
| Packaging dimension | 10*3.7*5.8cm |
| Net weight | 67g |
| Gross weight | 85g |
| Lumens | 300lm |
| Battery capacity | 200mAh |
| Function | Touch: strong light->medium light->low light->OFF; double-click: strobe flash->slow flash->S0S->OFF; long press: enter forced constant current high power white light 10W high power LED |
| Charging time | 1.5-2.5 hours to fully charge |
| Qty/carton | 100pcs |
| Measurement/carton | 40.5*26.5*35.5cm |
| Weight/carton | 9.5kg |





## ET3-E061

| | |
|---|---|
| Material | T6+PA |
| Lamp beads | T6 |
| Waterproof rating | TP65 |
| Color | Black |
| Input | DC5V 1A |
| Dimension | 3.9*2*7.3cm |
| Packaging dimension | 11.3*63*56 |
| Net weight | 117g |
| Gross weight | 133kg |
| Lumens | 600lm |
| Battery capacity | 2200mAh |
| Function | Strong light-medium light-low light-OFF / double tap switch: burst flash-slow flash-S0S-OFF |
| Qty/carton | 150PCS |
| Meansurement/carton | 58*40*335cm |
| Weight/carton | 20.95kg |








## ET3-E062

| | |
|---|---|
| Material | ABS |
| Material | ABS Plastic |
| Lamp beads | T6 |
| Color | Black |
| Dimension | 13*3.4*3.6m |
| Packaging dimension | 16*12*4.7cm |
| Net weight | 107g |
| Gross weight | 137g |
| Lumens | 450lm |
| Function | 1:Strong light mode (infinitely dimmable) / low light mode (infinitely dimmable) light sensing mode / Mode<br>2:fast flash mode/slow flash mode/SOS mod |
| Qty/carton | 150pcs |
| Meansurement/carton | 62*49.5*49cm |
| Weight/carton | 21.55kg |







## ET3-E063

| | |
|---|---|
| Material | ABS Plastic |
| Lamp beads | T6 |
| Color | Black / blue / red |
| Dimension | 3.9*2*7.3cm |
| Packaging dimension | 8.5*4.5*6.5cm |
| Net weight | 65g |
| Gross weight | 95g |
| Lumens | 300lm |
| Battery capacity | 1200mAh |
| Function | High light / low light / S05 flashing / fast flashing off |
| Discharge time | 4 hours of strong light-8 hours of low light-8 hours of fast flashing-16 hours of SOS mode, tail light: 90 hours of constant light-180 hours of flashing. |
| Qty/carton | 200pcs |
| Measurement/carton | 44.5*38*34.5cm |
| Weight/carton | 20kg |








## ET3-E064

| | |
|---|---|
| Material | PVC |
| Lamp beads | T6 |
| Waterproof rating | IPX4 |
| Color | Black / blue / red |
| Dimension | 10*3.2*2.4cm |
| Packaging dimension | 10*10*5cm |
| Net weight | 134g |
| Gross weight | 152g |
| Lumens | 350lm |
| Battery capacity | 1200mAh |
| Voltage frequency | 50/60Hz |
| AC voltage | 100-240 volts |
| Function | High light / low light - S05 flashing / fast flashing off |
| Discharge time | 3.5-5 hours |
| Qty/carton | 120pcs |
| Measurement/carton | 51*30*47cm |
| Weight/carton | 19.24kg |






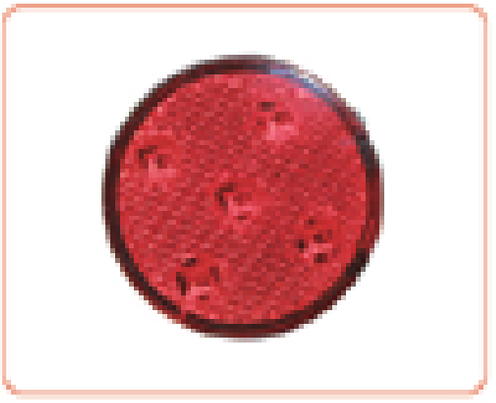

## ET3--D001

| | |
|---|---|
| Product material | high-strength PC material |
| Opening method | Long press on/off device for 1.58 seconds |
| Product size | 2.5*4*4cm |
| Product weight | 56 grams (including packaging) |
| Charging method | long light/50% long light/fast flashing / respiratory flashing / bounce flashing / |
| Dimension | 2.5*4*4cm |
| Packaging dimension | 8*3*12.5cm |
| Net weight | 33g |
| Gross weight | 53g |
| Battery capacity | 5V adapter USB |
| Function mode | 3.7V 200mA |
| Lighting time | Long light 4h 50% 7h fast flash 7h breathing flash 7h family flash 1-6h flash 2-8h |
| QMeasurement/carton | 42*32*39.5cm |
| ty/carton | 150pcs |
| Weight/carton | 8.95kg |







## ET3--D002

| | |
|---|---|
| Product information | L68mm*W28mm*H25mm |
| Material | High-strength PC material |
| Battery | 3.7V 501mA |
| Charging time | 2h |
| Use time | Stable for 10h, fast flashing for 15h, forward flashing for 18h, fast flashing for 15h, continuous flashing for 20h |
| USB charging coil | 25 cm 1A |
| Charging method | 5V adapter, computer |
| Turn on or off | Press and hold for 1.5 seconds |
| Dimension | 6.8*2.8*2.5cm |
| Packaging dimension | 8*3*12.5cm |
| Net weight | 47g |
| Gross weight | 62g |
| Function mode | Stable, fast flash, fast flash, fast flash, running flash |
| QMeasurement/carton | 42*32*39.5cm |
| ty/carton | 150pcs |
| Weight/carton | 10.3kg |






## ET3-D003

| | |
|---|---|
| Color options | White |
| Dimension | 7*2*1.7cm |
| Packaging dimension | 9.5*7*4.5cm |
| Net weight | 38g |
| Gross weight | 53g |
| Battery Capacity | 330mAh Polymer battery |
| Packing | Color box |
| Qty/carton | 125pcs |
| Measurement/carton | 49.5*37*24.5cm |
| Weight/carton | 7.63kg |







## ET3-D004

| | |
|---|---|
| Color options | Blue,Red,White,Red-blue, Red-white. opp bag-Blue. opp bag- Red. opp bag-White. opp bag- Red-blue. opp bag- Red-white. |
| Function | Multiple flashing modes, fast flashing, slow flashing, constant light, built-in rechargeable battery. |
| Product Dimension | 8.3*2.6*2cm |
| Packaging | 10.7*8*3cm |
| Net weight | 45g |
| Gross weight | 60g |
| Qty/carton | 150pcs |
| Measurement/carton | 35*33.5*32cm |
| Weight/carton | 10g |








## ET3-D005

| | |
|---|---|
| Material | Aluminum alloy middle frame and ABS plastic |
| Color selection | Same as picture |
| lumen | 100lm |
| Battery | 3.7V 500MAH polymer lithium battery |
| Handle diameter | 12-32mm |
| Dimension | 4*4*1.5cm |
| Packaging dimension | 7.3*5.3*9cm |
| Product net weight | 37g |
| Packed weight | 67g |
| Smart brake | low light-fast flash-medium flash-slow flash . About 5 hours of battery life |
| Ordinary gears | High light-medium light-weak light-fast flash-medium flash-slow flash .3-5 hours of battery life |
| Qty/carton | 125pcs |
| Measurement/carton | 47*38.5*28.5cm |
| Weight/carton | 9.38kg |





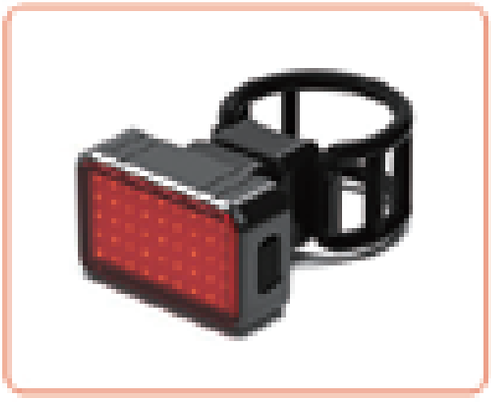

## ET3-D006

| | |
|---|---|
| Color options | Same as picture |
| Dimension | 4.3*3*1.5cm |
| Packaging dimension | 7.3*5.3*9cm |
| Net weight | 21g |
| Gross weight | 51g |
| Function | The bike light will automatically enhance the brightness for 5s if any downhill, brake, deceleration is detected by G-sensor. 180-Degree field of view width, visibility up to 150m, utilization of high-brightness COB LED+EnSca lens, bright light but not dazzling, all clearly visible for night no matter rain or fog. |
| Qty/carton | 125pcs |
| Measurement/carton | 47*38.5*28.5cm |
| Weight/carton | 7.38kg |







## ET3-D007

| | |
|---|---|
| Color options | Red,White,dual color Red/Blue,dual color Red/White,three color Red/Blue/Pink |
| Waterproof grade | IPX6 |
| Shell material | PC shell, base ABS05 |
| Power supply | High brightness COB lamp beads |
| Battery | 3.7V600MAH lithium battery |
| Dimension | 7.1*2.1*2.1cm |
| Packaging dimension | 7.1*4.5*6.5cm |
| Net weight | 35g |
| Gross weight | 60g |
| Lumens | 110lm |
| Qty/carton | 125pcs |
| Measurement/carton | 37.5*24.5*34.5cm |
| Weight/carton | 8.5kg |








## ET3-D008

| | |
|---|---|
| Light source | 16 bright SMD red LEDs |
| Protection level | IP65 |
| Battery | 380mAh |
| Function | Marquee -> Tai Chi -> Breath -> Fast flash -> Slow flash |
| Long press the switch | OFF |
| Double click switch | Turn on/off smart brake mode |
| Double-click the switch | Turn on/off the smart brake modeVisual distance 200 meters |
| Visual distance | 200 meters |
| Same as picture | 4*4*2.3cm |
| Single package size | 10*5.3*2.8cm |
| Net weight | 51g |
| Gross weight | 71g |
| Lumens | 15lm |
| Qty/carton | 150pcs |
| Measurement/carton | 32*30*28.5cm |
| Weight/carton | 11.65kg |








## ET3-D009

| | |
|---|---|
| Light source | 16 bright SMD red LEDs |
| Protection level | IP65 |
| Battery | 380mAh |
| Function | Marquee -> Tai Chi -> Breath -> Fast flash -> Slow flash |
| Long press the switch | OFF |
| Visual distance | 200 meters |
| Use time | 5 hours in strong light mode, more than 10 hours in other files |
| Color options | Black,Blue,Gold,Grey,Dark Red |
| Same as picture | 4*4*2.3cm |
| Single package size | 10*5.3*2.8cm |
| Net weight | 51g |
| Gross weight | 71g |
| Lumens | 15lm |
| Qty/carton | 150pcs |
| Measurement/carton | 32*30*28.5cm |
| Weight/carton | 11.65kg |





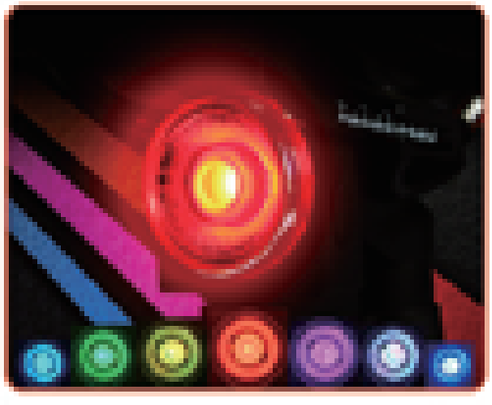

## ET3-D011

| | |
|---|---|
| Color options | Black |
| Dimension | 7.6*2.6*2.2cm |
| Packaging dimension | 10.5*3.2*15.8cm |
| Net weight | 59g |
| Gross weight | 79g |
| Battery | 700mAh |
| Function | Smart light + constant light mode, smart off mode Intelligent displacement recognition technology, precise braking and super bright signal light Accidental fall and the tilt angle is greater than 50 degrees, intelligently identify and send out SOS distress signal |
| Qty/carton | 100pcs |
| Measurement/carton | 43*27*61cm |
| Weight/carton | 8.9kg |





## ET3-D011

| | |
|---|---|
| Color options | Black |
| Dimension | 7.6*2.6*2.2cm |
| Packaging dimension | 10.5*3.2*15.8cm |
| Net weight | 59g |
| Gross weight | 79g |
| Battery | 700mAh |
| Function | Smart light + constant light mode, smart off mode Intelligent displacement recognition technology, precise braking and super bright signal light Accidental fall and the tilt angle is greater than 50 degrees, intelligently identify and send out SOS distress signal |
| Qty/carton | 100pcs |
| Measurement/carton | 43*27*61cm |
| Weight/carton | 8.9kg |








## ET5-D011


◆The main body of tough ABS and rubber materials
◆With transparent cover
◆1pc 3W COB high-luminance LED in the front---180~200LM;50~60Mins
◆Power by 1S1P 10440 rechargeable Li-ion batteries(3.7V 300mAh) inside
◆Included 0.8M Micro USB cord
◆GS AC home charger (No included)
◆Charging time:30mins if input 5V 1A
◆Overcharge & Overdischarge protection
◆Charging indication at the bottom
（Red LED indicator turns green after fully charged）
◆Strong magnet in the clip to attract iron object
◆Discretionary adjust lighting direction by rotatable clip(180°)
◆Ideal optical and no screw design
◆Surface with rubber spray-painting feels good
◆On/off switch on the top
◆Different color available





## ET5-D026


◆The main body of tough ABS and rubber materials
◆With transparent cover
◆1pc 3W COB high-luminance LED in the front---200LM
◆Power by 3pcs AAA batteries（not included）
◆Strong magnet in the clip to attract iron object
◆Discretionary adjust lighting direction by rotatable clip(180°)
◆Ideal optical and no screw design
◆Surface with rubber spray-painting feels good
◆Camo color are optional（not included）
◆Different color available
◆On/off switch on the top





## ET5-E041

| | |
|---|---|
| Power | 8W COB |
| LED | CREE |
| Power supply | 2200 mAh |
| Protection class | IP67 |
| Voltage | DC5V |
| Working time | 3.5-20 hours |
| Output | 10lm-600lm |

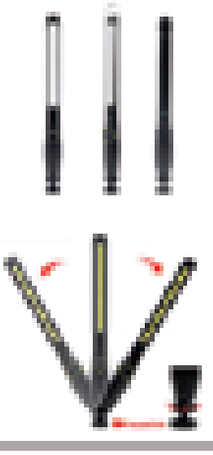



## ET5-E043

| | |
|---|---|
| Power | 6W+5W |
| LED | COB+XPE lamp beads |
| Voltage | 10-30V |
| Operating time | Glare 2H |
| Material | Aluminum Alloy |
| Weight | 92g |
| Effective distance | 50M or more |
| Lumens | 800lm |
| Size | Extension length 215*20*25MM,<br>Folded length extension length 115*20*25MM |
| Battery | 123 lithium battery(built-in)USB charging |
| Function | 5 levels of main light(strong +weak)+1 level of side light(yellow light)+main light (red light+red light flash) |
| Remarks | Move up and down,there is a magnet at the tail,often press 2 seconds to automatically turn off the light |





## ET5-E044

| | |
|---|---|
| Power | 60W |
| LED | Epistar |
| Lumens | 220lm |
| Battery | 1200mAH |





## ET6-B018

| | |
|---|---|
| LED Power | 2W |
| LED Type | Customize |
| Beam Angle | Spot(30°)/flood(60°) |





# LED Garden & Street light



## ET10-B059

| | |
|---|---|
| LED power | 3W |
| LED type | COB |
| Input voltage | 3.6V |
| Battery | 1800mAh |
| Solar panel | 2.8w |
| Material | Aluminum |
| Product size (MM) | 250*250*330mm |
| Carton size (MM) | 610*310*380mm |
| Quantity | 2pcs/carton |





## ET10-B060

| | |
|---|---|
| LED power | 6W |
| LED type | LED |
| Protection grade | IP68 |
| Input voltage | 220V |
| Battery | 7200mAh |
| Solar panel | 6w |
| Material | Die-cast aluminum Transparent glass lampshade |
| Product size (MM) | 500*500*450mm |
| Carton size (MM) | 515*515*520mm |
| Quantity | 1pcs/carton |




# LED street light



## ET12-A001

| | |
|---|---|
| LED power | Philips 3030 |
| LED type | Taiwan Mingwei |
| Input voltage | AC180-277V |
| Color temperature | 2700-6500K |
| Protection level | IP66 |
| Color rendering | ≥80 |
| Beam angle | 30°60°, 90°120° |
| Light efficiency | >120lm/W |
| Working temperature | 40℃~60℃ |





## ET5-B012

| | |
|---|---|
| Material | ABS, PC |
| Light SOuree | 1pe CREE 5W LED Powered by 3pes X AA Batery |
| Switch | 40%-100%-flash-oft |
| Waterproof | IPX4 |
| lumens | 220lm |
| Brightness range | 100 meters (100%) |
| Continuous work | 4.5 times (100%) |





## ET5-B013

| | |
|---|---|
| Material | ABS |
| LED type | COB |
| Operation mode | Highl/Low/Flash |
| Batteries | 3 X AAA |
| lumens | 100lm |
| Run time | 2-3hrs |








Henry Wolff



Jasmine



Jason

# We are ready to serve YOU

Email: sales@ sst-smartware. com