



CONSUMER
ELECTRONICS

2026

NEW PRODUCT CATALOG



Smart TFT Screen Series



TR-477

Smart TFT Screen 240W Charger

Material:ABS+PC

Size:87.4*107*40.9mm

Input:AC 100~240V 50/60Hz 3.5A

C1/C2 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,15.0V/3.0A,
20.0V/5.0A,28.0V/5.0A (140W Max)

C3/C4 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,15.0V/3.0A,
20.0V/5.0A (100W Max)

A1/A2 Output:5.0V/3.0A,9.0V/3.0A,12.0V/2.5A,20.0V/1.5A (30W Max)

Two Ports in Use: Up to 240W Max

Three Ports in Use: Up to 235W Max

Four Ports in Use: Up to 240W Max

Five Ports in Use: Up to 235W Max

Six Ports in Use: Up to 229W Max

Total Output Power: 240W Max

AVS



TR-437A

Smart TFT Screen 45W Charger

Material:ABS+PC

Size:35.8*35.8*79.1mm(EU)

Input:AC 100~240V 50/60Hz 1.2A

Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/2.25A (PD 45.0W)

Power:45.0W Max

AVS



Smart TFT Screen 65W Charger

Input:AC 110~240V 50/60Hz 1.5A

Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/3.25A (PD 65.0W)

Power:65.0W Max

AVS



Smart TFT Screen 100W Charger

Input:AC 220~240V 50/60Hz 1.5A

Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/5.0A (PD 100.0W)

Power:100.0W Max

AVS



TR-456/457/458

Smart TFT Screen 70W Charger

Material:ABS+PC

Size:65.0*37.2*98.3mm (EU)

Input:AC 100-240V 50/60Hz 1.6A Max

C1(Cable)/C2 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/3.5A (70W Max)

A Output:5.0V/3.0A,9.0V/3.0A,12.0V/2.5A,20.0V/1.5A (30W Max)

C1+C2:45W+20W C1+A:45W+20W C2+A:5.0V/2.0A+5.0V/2.0A

C1+C2+A:45W+5.0V/2.0A+5.0V/2.0A

AVS:9.0-20.0V/3.0-3.5A PPS:5.0-21.0V/3.35A

Total:70W Max

AVS



Smart TFT Screen 100W Charger

Size:65.0*37.2*108.3mm (EU)

Input:AC 100-240V 50/60Hz 1.8A Max

C1/C2 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/5.0A (100W Max)

A Output:5.0V/3.0A,9.0V/3.0A,12.0V/2.5A,20.0V/1.5A (30W Max)

C1+C2:65W+30W C1+A:65W+30W C2+A:5.0V/2.0A+5.0V/2.0A

C1+C2+A:65W+5.0V/2.0A+5.0V/2.0A

AVS:9.0-20.0V/3.0-5.0A PPS:5.0-21.0V/5.0A(100W Max)

Total:100W Max

AVS



Smart TFT Screen 140W Charger

Size:65.0*37.2*118.3mm (EU)

Input:AC 100-240V 50/60Hz 2A Max

C1 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,15.0V/3.0A,20.0V/5.0A
28.0V/5.0A(140W Max)

C2 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,15.0V/3.0A,20.0V/5.0A
(100W Max)

A Output:5.0V/3.0A,9.0V/3.0A,12.0V/2.5A,20.0V/1.5A (30W Max)

C1+C2:100W+30W C1+A:100W+30W C2+A:5.0V/2.0A+5.0V/2.0A

C1+C2+A:100W+5.0V/2.0A+5.0V/2.0A

AVS:9.0-20.0V/3.0-5.0A PPS:5.0-21.0V/5.0A(100W Max)

Total:140W Max

AVS



TR-463/464

Smart TFT Screen 70W Charger

Size:65.0mm*38.0mm*109.3mm

Input:AC 100-240V 50/60Hz 1.6A Max

C1(Cable)/C2 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/3.5A (70W Max)

A Output:5.0V/3.0A,9.0V/3.0A,12.0V/2.5A,20.0V/1.5A (30W Max)

C1+C2:45W+20W C1+A:45W+20W C2+A:5.0V/2.0A+5.0V/2.0A

C1+C2+A:45W+5.0V/2.0A+5.0V/2.0A

AVS:9.0-20.0V/3.0-3.5A PPS:5.0-21.0V/3.35A

Total:70W Max

AVS



Smart TFT Screen 100W Charger

Size:65.0mm*38.0mm*109.3mm

Input:AC 100-240V 50/60Hz 1.8A Max

C1/C2 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/5.0A (100W Max)

A Output:5.0V/3.0A,9.0V/3.0A,12.0V/2.5A,20.0V/1.5A (30W Max)

C1+C2:65W+30W C1+A:65W+30W C2+A:5.0V/2.0A+5.0V/2.0A

C1+C2+A:65W+5.0V/2.0A+5.0V/2.0A

AVS:9.0-20.0V/3.0-5.0A PPS:5.0-21.0V/5.0A(100W Max)

Total:100W Max

AVS



Smart TFT Screen 140W Charger

Size:65.0mm*38.0mm*119.3mm

Input:AC 100-240V 50/60Hz 2A Max

C1 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,15.0V/3.0A,20.0V/5.0A
28.0V/5.0A(140W Max)

C2 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,15.0V/3.0A,20.0V/5.0A
(100W Max)

A Output:5.0V/3.0A,9.0V/3.0A,12.0V/2.5A,20.0V/1.5A (30W Max)

C1+C2:100W+30W C1+A:100W+30W C2+A:5.0V/2.0A+5.0V/2.0A

C1+C2+A:100W+5.0V/2.0A+5.0V/2.0A

AVS:9.0-20.0V/3.0-5.0A PPS:5.0-21.0V/5.0A(100W Max)

Total:140W Max

AVS



Super Mini Series



20W-25W-30W-35W-45W-65W GaN Charger

Port	C	AC	CC	A2C
Dynamic Port Allocation	/	√	√	√
PPS	√	√	√	√
AC Plug Type	EU	EU	EU	EU
Safety Certification	CE/ERP/ROHS	CE/ERP/ROHS	CE/ERP/ROHS	CE/ERP/ROHS
Product Features	Portable mini size in high power, PD GAN 20W/25W/35W/45W/65W/100W charger TUV certified CE testing			

GaN PD 20W Wall Charger

Power:20W Max



GaN PD 25W Wall Charger

Power:25W Max

GaN PD 30W Wall Charger

Power:30W Max

GaN PD 35W Wall Charger

Colour: ● ○ ● ● ● ● ●



GaN PD 20W Wall Charger

Total:20W Max



GaN PD 25W Wall Charger

Total:25W Max

GaN PD 30W Wall Charger

Total:30W Max

GaN PD 35W Wall Charger

Colour: ☒ Black ☐ White ☐ Blue ☐ Pink ☐ Red ☐ Grey ☐ Brown



TR-417-C

GaN PD 45W Wall Charger

Size:35.8*35.8*75.1mm

Input:AC 100-240V 50/60Hz 1.2A

Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/2.25A (PD 45W)

Power:45W Max

AVS

GaN PD 45W Wall Charger

Input:AC 100-240V 50/60Hz 1.2A

C1/C2 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/2.25A (PD 45W)

C1+C2:5.0V/3.0A 15W

Power:45W Max

GaN PD 45W Wall Charger

Input:AC 100-240V 50/60Hz 1.2A

C Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/2.25A (PD 45W)

A Output:5.0V/3.0A,9.0V/2.0A,
12.0V/1.5A (18W Max)

C+A:5.0V/3.0A 15W

Power:45W Max



GaN PD 65W Wall Charger

Input:AC 110-240V 50/60Hz 1.5A

Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/3.25A (PD 65W)

Power:65W Max

AVS

TR-437

GaN PD 65W Wall Charger-AC

Material:PC

Size:35.8*35.8*79.1mm

Input:AC 110-240V 50/60Hz

C Output:5.0V/3.0A,9.0V/3.0A,
12.0V/3.0A,15.0V/3.0A,
20.0V/3.25A (65.0W Max)

A Output:5.0V/3.0A,9.0V/2.0A,12.0V/1.5A

C+A:45.0W+18.0W

Total:65.0W Max

AVS



GaN PD 65W Wall Charger-CC

Input:AC 110-240V 50/60Hz 1.5A

C1 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/3.25A (65.0W Max)

C2 Output:5.0V/3.0A,9.0V/2.22A,12.0V/1.67A (20.0W Max)

C1+C2:45.0W+20.0W

Total:65W Max

AVS

GaN PD 65W Wall Charger-2C1A

Input:AC 110-240V 50/60Hz 1.5A

A Output:5.0V/3.0A,9.0V/2.0A,12.0V/1.5A (18W Max)

C1 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/3.25A (65W Max)

C2 Output:5.0V/3.0A,9.0V/2.22A,12.0V/1.67A (20.0W Max)

C1+C2:45.0W+20.0W C1+A:45.0W+18.0W C2+A:5.0V/3.0A

C1+(C2+A):45.0W+15.0W Total:65.0W Max

AVS

TR-417/437

GaN PD 100W Wall Charger-C

Material:PC

Size:35.8*35.8*75.1mm (C) /35.8*35.8*79.1mm(Other)

Input:AC 220-240V 50/60Hz

C Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/5.0A (100.0W Max)

Total:100.0W Max

AVS

GaN PD 100W Wall Charger-CC

Input:AC 220-240V 50/60Hz 1.5A

C1 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/5.0A (100.0W Max)

C2 Output:5.0V/3.0A,9.0V/2.22A,12.0V/1.67A (20.0W Max)

C1+C2:70.0W+20.0W

Total:100.0W Max

AVS

GaN PD 100W Wall Charger-AC

Input:AC 220-240V 50/60Hz 1.5A

C Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/5.0A (100.0W Max)

A Output:5.0V/3.0A,9.0V/2.0A,12.0V/1.5A (18.0W Max)

C+A:70.0W+18.0W

Total:100.0W Max

AVS



GaN PD 100W Wall Charger-2C1A

Input:AC 220-240V 50/60Hz 1.5A

A Output:5.0V/3.0A,9.0V/2.0A,12.0V/1.5A (18.0W Max)

C1 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/5.0A (100.0W Max)

C2 Output:5.0V/3.0A,9.0V/2.22A,12.0V/1.67A (20.0W Max)

C1+C2:70.0W+20.0W C1+A:70.0W+18.0W C2+A:5.0V/3.0A

C1+(C2+A):45.0W+15.0W

Total:100.0W Max

Colour:●●●●●●●●

AVS



M-Flat Charger Series



30W / 36W / 45W / 65 W GaN Charger

Port	C	AC	CC	AC	AC
Dynamic Port Allocation	✓	✓	✓	✓	✓
PPS	✓	✓	✓	✓	✓
AC Plug Type	EU	EU/US/UK/AU	EU/US/UK/AU	EU/US/UK/AU	EU/US/UK/AU
Safety Certification	CE/ERP/ROHS	CE/ERP/ROHS	CE/ERP/ROHS	CE/ERP/ROHS	CE/ERP/ROHS
Product Features	Space Saving and Fits in Tight Spaces, The slim and thin design enables the Super slim Charger accesses to most hard-to-reach outlets behind furniture such as couches, beds and night stands to charge your devices.				

TR-397/TR-398 GaN PD 30W-C

Material:ABS+PC
Size:66.0*44.5*51.9mm
Input:AC 100-240V 50/60Hz
Output:5.0V/3.0A,9.0V/3.0A,12.0V/2.5A,
15.0V/2.0A,20.0V/1.5A (30.0W Max)
Power:30.0W Max

GaN PD 36W-AC

Size:85.44*48.04*51.9mm(EU) 89.0*44.93*14.6mm(US)
Input:AC 100-240V 50/60Hz
C Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/2.4A,20.0V/1.8A (36.0W Max)
A Output:5.0V/3.0A,9.0V/2.0A,12.0V/1.5A
C+A:5.0V/3.0A 15W
Total:36.0W Max

GaN PD 45W-CC

Input:AC 100-240V 50/60Hz
C1 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/2.25A (45.0W Max)
C2 Output:5.0V/3.0A,9.0V/2.22A,
12.0V/1.67A (20W Max)
C1+C2:25.0W+20.0W
Total:45.0W Max



GaN PD 45W-AC

Input:AC 100-240V 50/60Hz
C Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/2.25A (45.0W Max)
A Output:5.0V/3.0A,9.0V/2.0A,12.0V/1.5A
C+A:20.0W+18.0W
Total:45.0W Max

GaN PD 65W-AC

Input:AC 100-240V 50/60Hz
C Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/3.25A (65.0W Max)
A Output:5.0V/3.0A,9.0V/3.0A,12.0V/2.25A
20.0V/1.35A (27.0W Max)
C+A:45.0W+5.0V/2.4A
Total:65.0W Max





20W / 25W / 30W / 35W GaN Charger

CE VI

TR-421-2C

GaN PD 20W Wall Charger

Material:PC
Size:48.0*23.4*86.76mm (EU)
Input:AC 100-240V 50/60Hz 0.8A
C1 Output:5.0V/3.0A,9.0V/2.22A,12.0V/1.67A (PD 20W)
C2 Output:5.0V/3.0A,9.0V/2.22A,12.0V/1.67A (PD 20W)
C1+C2:5.0V/3.0A 15W
Total:20W Max



GaN PD 25W Wall Charger

Input:AC 100-240V 50/60Hz 0.8A
C1 Output:5.0V/3.0A,9.0V/2.77A,12.0V/2.08A (PD 25W)
C2 Output:5.0V/3.0A,9.0V/2.77A,12.0V/2.08A (PD 25W)
C1+C2:5.0V/3.0A 15W
Total:25W Max

GaN PD 30W Wall Charger

Input:AC 100-240V 50/60Hz 1.0A
C1 Output:5.0V/3.0A,9.0V/3.0A,12.0V/2.5A, 15.0V/2.0A, 20.0V/1.5A (PD 30W)
C2 Output:5.0V/3.0A,9.0V/3.0A,12.0V/2.5A, 15.0V/2.0A, 20.0V/1.5A (PD 30W)
C1+C2:5.0V/3.0A 15W
Total:30W Max

GaN PD 35W Wall Charger

Input:AC 100-240V 50/60Hz 1.0A
C1 Output:5.0V/3.0A,9.0V/3.0A, 15.0V/2.33A, 20.0V/1.75A (PD 35W)
C2 Output:5.0V/3.0A,9.0V/3.0A, 15.0V/2.33A, 20.0V/1.75A (PD 35W)
C1+C2:5.0V/3.0A 15W
Total:35W Max
Colour:●○●●●●●●



TR-421-AC

GaN PD 20W Wall Charger

Material:PC
Size:48.0*23.4*86.76mm (EU)
Input:AC 100-240V 50/60Hz 0.8A
C Output:5.0V/3.0A,9.0V/2.22A,12.0V/1.67A (PD 20W)
A Output:5.0V/3.0A,9.0V/2.0A,12.0V/1.5A (18W Max)
C+A:5.0V/3.0A 15W
Total:20W Max



GaN PD 25W Wall Charger

Input:AC 100-240V 50/60Hz 0.8A
C Output:5.0V/3.0A,9.0V/2.77A,12.0V/2.08A, (PD 25W)
A Output:5.0V/3.0A,9.0V/2.0A,12.0V/1.5A (18W Max)
C+A:5.0V/3.0A 15W
Total:25W Max

GaN PD 30W Wall Charger

Input:AC 100-240V 50/60Hz 1.0A
C Output:5.0V/3.0A,9.0V/3.0A,12.0V/2.5A, 15.0V/2.0A,20.0V/1.5A (PD 30W)
A Output:5.0V/3.0A,9.0V/2.0A,12.0V/1.5A (18W Max)
C+A:5.0V/3.0A 15W
Total:30W Max

GaN PD 35W Wall Charger

Input:AC 100-240V 50/60Hz 1.0A
C Output:5.0V/3.0A,9.0V/3.0A,15.0V/2.33A, 20.0V/1.75A (PD 35W)
A Output:5.0V/3.0A,9.0V/2.0A,12.0V/1.5A (18W Max)
C+A:5.0V/3.0A 15W
Total:35W Max
Colour:●○●●●●●●



M-Cube Charger Series



35W GaN Charger

65W GaN Charger

100W GaN Charger

Port	C+Cable-C	C+Cable-C	A2C+Cable-C
Dynamic Port Allocation	√	√	√
PPS	√	√	√
AC Plug Type	EU/US/UK	EU/US/UK	AC
Safety Certification	CE/FCC	CE/FCC	CE/FCC
Product Features	Dual-Port USB C Charger Block with Retractable Cable,Charge Smarter, Pack Lighter		

TR-406 GaN PD 35W Charger with Retractable Cable

Material:ABS+PC
Size:49.3*50.0*45.7mm (US)
49.3*50.0*60.7mm (UK)
49.3*50.0*75.97mm (EU)
Input:AC 100-240V 50/60Hz
C Output:5.0V/3.0A,9.0V/3.0A,12.0V/2.92A
15.0V/2.33A,20.0V/1.75A (35W Max)
Cable Output:5.0V/3.0A,9.0V/3.0A,12.0V/2.92A
15.0V/2.33A,20.0V/1.75A (35W Max)
C+Cable:20W+15W
Total:35W Max
Colour:Customize



TR-407

GaN PD 65W Charger with Retractable Cable

Material:ABS+PC

Size:49.3*50.0*57.9mm (US)

49.3*50.0*72.7mm (UK)

49.3*50.0*87.67mm (EU)

Input:AC 100~240V 50/60Hz

C Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,

15.0V/3.0A,20.0V/3.25A (65W Max)

Cable Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,

15.0V/3.0A,20.0V/3.25A (65W Max)

C+Cable:45W+20W

Total:65W Max

Colour:Customize



TR-409

GaN PD 100W Charger with Retractable Cable

Material:ABS+PC

Size:65.0*68.0*65.5mm

Input:AC 110V~240V 50/60Hz 1.8A

A Output:5.0V/3.0A,9.0V/2.0A,12.0V/1.5A (18W Max)

Cable/C1 Output:5.0V/3.0A,9.0V/3.0A,

12.0V/3.0A,15.0V/3.0A,

20.0V/5.0A (100W Max)

C2 Output:5.0V/3.0A,9.0V/2.22A,

12.0V/1.67A (20W Max)

Cable+C1:65W+35W

Cable/C1+C2:65W+20W

Cable/C1+A:65W+18W

C2+A:5.0V/3.0A

Cable/C1+A:65W+18W

Cable+C1+C2:45W+20W+20W

Cable+C1+A:45W+20W+18W

Cable+C1+(C2+A):45W+20W+15W

Total:100W Max



M-Ideal Charger Series



20/25/30W GaN Charger

35/45W GaN Charger

65W GaN Charger

100W GaN Charger

Port	C	C/CC/AC	C/CC/A2C/3C	A2C/A3C/4C
Dynamic Port Allocation	√	√	√	√
PPS	√	√	√	√
AC Plug Type	EU/US/UK	EU/US/UK	EU/US/UK	EU/US/UK
Safety Certification	CE/ERP/ROHS	CE/ERP/ROHS	CE/ERP/ROHS	CE/ERP/ROHS
Product Features	20w-100w Multi Port PD GaN Charger Options , family series design			

TR-392 GaN PD 20W-C

Material:ABS+PC
Size:29.6*31.2*71.0mm
Input:AC 100-240V 50/60Hz
Output:5.0V/3.0A,9.0V/2.22A,
12.0V/1.67A (20W Max)
Power:20W Max
Colour:Customize

GaN PD 25W-C

Input:AC 100-240V 50/60Hz
Output:5.0V/3.0A,9.0V/2.77A,
12.0V/2.08A (25W Max)
Power:25W Max

GaN PD 30W-C

Input:AC 100-240V 50/60Hz
Output:5.0V/3.0A,9.0V/3.0A,
12.0V/2.5A,15.0V/2.0A,
20.0V/1.5A (30W Max)
Power:30W Max



TR-393

GaN PD 35W-CC

Material:ABS+PC

Size:30.6*45.0*81.3mm

Input:AC 100-240V 50/60Hz

C1/C2 Output:5.0V/3.0A,9.0V/3.0A,12.0V/2.92A,
15.0V/2.33A,20.0V/1.75A (35.0W Max)

C1+C2:20.0W+15.0W

Total:35.0W Max

GaN PD 35W-AC

Input:AC 100-240V 50/60Hz

C1 Output:5.0V/3.0A,9.0V/3.0A,12.0V/2.92A,
15.0V/2.33A,20.0V/1.75A (35.0W Max)

A Output:5.0V/3.0A,9.0V/2.0A,12.0V/1.5A

C+A:20.0W+5.0V/2.4A

Total:35.0W Max

GaN PD 45W-C

Input:AC 100-240V 50/60Hz

C1 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/2.25A (45.0W Max)

Power:45.0W Max



GaN PD 45W-CC

Input:AC 100-240V 50/60Hz

C1/C2 Output:5.0V/3.0A,9.0V/3.0A,
12.0V/3.0A,15.0V/3.0A,
20.0V/2.25A (45.0W Max)

C1+C2:25.0W+20.0W

Total:45.0W Max

GaN PD 45W-AC

Input:AC 100-240V 50/60Hz

C1 Output:5.0V/3.0A,9.0V/3.0A,15.0V/3.0A,
20.0V/2.25A (45.0W Max)

A Output:5.0V/3.0A,9.0V/2.0A,
12.0V/1.5A (18.0W Max)

C+A:25.0W+18.0W

Total:45.0W Max

TR-394

GaN PD 65W-C

Material:ABS+PC

Size:54.0*31.8*88.4mm

Input:AC 110-240V 50/60Hz 1.8A

Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/3.25A (65.0W Max)

Power:65W Max

GaN PD 65W-2C1A

Input:AC 110-240V 50/60Hz 1.8A

A Output:5.0V/3.0A,9.0V/2.0A,12.0V/1.5A (18W Max)

C1/C2 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/3.25A (65W Max)

C1+C2:45W+20.04W

C1+A:45W+18W C2+A:5.0V/3.0A

C1+(C2+A):45W+15W

Total:65W Max



GaN PD 65W-CC

Input:AC 110-240V 50/60Hz 1.8A

C1/C2 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/3.25A (65.0W Max)

C1+C2:45.0W+20.04W

Total:65W Max

GaN PD 65W-3C

Input:AC 110-240V 50/60Hz 1.8A

C1/C2/C3 Output:5.0V/3.0A,9.0V/3.0A,
12.0V/3.0A,15.0V/3.0A,20.0V/3.25A (65.0W Max)

C1+C2/C3:45.0W+20.0W C2+C3:5.0V/3.0A

C1+(C2+C3):45.0W+15.0W

Total:65W Max

TR-395

GaN PD 100W-2C1A

Material:ABS+PC Size:69.5*33.4*102.97mm

Input:AC 110V-240V 50/60Hz 1.8A

A Output:5.0V/3.0A,9.0V/3.0A,12.0V/2.5A,20.0V/1.5A (30W Max)

C1/C2 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/5.0A (100W Max)

C1+C2:65W+35W C1+A:65W+30W C2+A:5.0V/3.0A

C1/C2+C3:65W+20W Total:100W Max

GaN PD 100W-3C1A

A Output:5.0V/3.0A,9.0V/2.0A,12.0V/1.5A 18W Max

C1/C2 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,
15.0V/3.0A,20.0V/5.0A (100W Max)

C3 Output:5.0V/3.0A,9.0V/2.22A,12.0V/1.67A (20W Max)

C1+C2:65W+35W C1/C2+C3:65W+20W

C1/C2+A:65W+18W C3+A:5.0V/3.0A

C1+C2+C3:45W+20W+20W C1+C2+A:45W+20W+18W

C1+C2+(C3+A):45W+20W+15W

Total:100W Max

GaN PD 100W-4C

C1/C2 Output:5.0V/3.0A,9.0V/3.0A,12.0V/3.0A

15.0V/3.0A,20.0V/5.0A (100.0W Max)

C3/C4 Output:5.0V/3.0A,9.0V/2.22A,
12.0V/1.67A (20.0W Max)

C1+C2:65.0W+35.0W Max

C1+C2:65.0W+35.0W Max

C3+C4:5.0V/3.0A

C1/C2+C3:65.0W+20.0W Max

C1/C2+C4:65.0W+20.0W Max

C3+C4:5.0V/3.0A 15.0W

C1+C2+C3:45.0W+20.0W+20.0W Max



C1+C2+C4:45.0W+20.0W+20.0W Max

C1+C2+(C3+C4):45.0W+20.0W+15.0W

Total:100.0W Max

Colour:Customize





CONSUMER
ELECTRONICS

2026


NEW PRODUCT CATALOG



Works with
Apple Find My



Works with Android
Find My Device

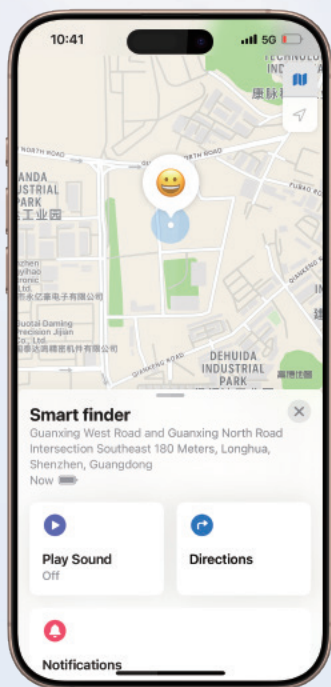

M-Tag Series



Google / Apple Find My

Volume

70-90dB

Battery

CR2032 220mAh@3V

LIR2450
100mAh

Battery life

8-10months

6-8months

8-10months

Rechargeable

Compatibility

Works with Google / Apple Find My

Communication
distance

10-30 meters indoors 50-70 meters outdoors

Product
Features

Compact design, real-time tracking via app, proximity alerts,
water-resistant durability, long battery life, wide device compatibility,
and user-friendly operation.

Rechargeable
Flashing LED

CP-088

Smart Finder

Material:ABS+Zinc alloy

Size:φ32.0*8.2mm

Volume:70-90dB


Battery:CR2032 220mAh@3V

Battery life: 6-8 months
(calculated by using 15 times a day)

Product net weight: 8.1g

Communication distance:
10-30 meters indoors
50-70 meters outdoors

Colour:Customize



CP-118

Smart Finder

Material:ABS

Size:φ31.9*8.2mm

Volume:70-90dB

Battery:CR2032 220mAh@3V

Battery life: 8-10 months

(calculated by using 15 times a day)

Communication distance:

10-30 meters indoors

50-70 meters outdoors

Colour:Customize



CP-119

Smart Finder

Material:ABS

Size:31.9*31.9*8.2mm

Volume:70-90dB

Battery:CR2032 220mAh@3V

Battery life: 8-10 months

(calculated by using 15 times a day)

Communication distance:

10-30 meters indoors

50-70 meters outdoors

Colour:Customize



CP-107

Smart Finder

Material:ABS+PC

Size:φ35.0*8.0mm

Volume:70-90dB

Battery:CR2032 220mAh@3V

Battery life: 8-10 months

(calculated by using 15 times a day)

Product net weight: 6.4g

Communication distance:

10-30 meters indoors

50-70 meters outdoors

Colour:Customize



CP-078

Smart Finder

Material:ABS

Size:φ36.95*8.85mm

Volume:70-90dB

Battery:CR2032 220mAh@3V

Battery life: 8-10 months

(calculated by using 15 times a day)

Product net weight: 15g


Communication distance:

10-30 meters indoors

50-70 meters outdoors

Colour:Customize

Support Google UWB



CP-111

Smart Finder

Material: ABS+Silicone

Size: 55.77*31.8*10.5mm

Volume: 70-90dB

Battery: LIR2450 120mAh

Battery charging way: Type-C

Communication distance:

10-30 meters indoors

50-70 meters outdoors

Colour:Customize



CP-121

Basketball / Football Smart Finder

Material:ABS+Silicone

Size:40.0*40.0*45.2mm

Volume:70-90dB

Battery:CR2032 220mAh@3V

Battery life: 8-10 months

(calculated by using 15 times a day)

Product net weight: 21g

Communication distance:

10-30 meters indoors

50-70 meters outdoors

Colour:Customize



CP-123

E-ink display Card Smart Finder

Material:PVC

Size:64.0*46.0*3.3mm

Volume:70-90dB

Battery:80mAh@3V

Battery charging way: wireless

Screen size: 1.54 inches

Communication distance:

10-30 meters indoors

50-70 meters outdoors

With wireless charging function

Colour:Customize



CP-124

Bamboo Card Smart Finder

Material:Bamboo

Size:85.5*54.0*1.9mm

Volume:70-90dB

Battery:155mAh@3V

Battery charging way: wireless

Communication distance:

10-30 meters indoors

50-70 meters outdoors

With wireless charging function

Colour:Customize



Card Smart Finder Series



Mini Wireless Card Finder

Wireless Card Finder

Pogo-pin Card Finder

Volume

70-90dB

Battery

80mAh@3V

540mAh@3V

100mAh@3V

Battery life

Rechargeable

30-36 months

Rechargeable

Compatibility

Works with Google / Apple Find My

Communication distance

10-30 meters indoors 50-70 meters outdoors

Product Features

Ultra-slim design, seamlessly fitting into most wallets, Quickly find your Smart Tracker using the Find My app or ask Siri. can locate it via FindMy app and Sound location. wireless recharging

CP-100

Mini Wireless/Pogo-Pin Charging Card Smart Finder

Material:PVC

Size:33.0*44.33*3.2mm

Volume:70-90dB

Battery:80mAh@3.7V

Battery charging way: wireless / pogo-pin


Product net weight: 7.8g

Communication distance:

10-30 meters indoors

50-70 meters outdoors

Colour:Customize



CP-095

Card Smart Finder

Material:PVC

Size:85.5*54.0*1.6mm

Volume:70-90dB

Battery:non-rechargeable lithium
polymer batter 540mAh@3V

Battery life: 30-36 months
(calculated by using 15 times a day)

Product net weight: 11.5g

Communication distance:
10-30 meters indoors
50-70 meters outdoors

Colour:Customize



CP-096

Wireless Charging Card Smart Finder

Material:PVC

Size:85.5*54.0*1.6mm

Volume:80-100dB


Battery:155mAh@3.7V

Battery charging way: wireless

Product net weight: 11.5g

Communication distance:
10-30 meters indoors
50-70 meters outdoors

Colour:Customize



CP-099

Pogo-Pin Charging Card Smart Finder

Material:PVC

Size:85.5*54.0*1.6mm

Volume:70-90dB


Battery: 155mAh@3.7V

Battery charging way: Pogo-Pin

Product net weight: 11.5g

Communication distance:
10-30 meters indoors
50-70 meters outdoors

Colour:Customize



CP-108

Wireless/Pogo-Pin Charging Card Smart Finder

Material:PC/ABS

Size:85.85*54.15*2.5mm

Volume:80-100dB

Battery:100mAh@3.7V

Battery charging way: wireless / pogo-pin

Product net weight: 11.5g

Communication distance:

10-30 meters indoors

50-70 meters outdoors

Colour:Customize



CP-100A

Wireless Charging MINI Card Smart Finder

Material:PVC

Size:Customize

Volume:70-90dB

Battery:80mAh


Battery charging way: wireless

Communication distance:

10-30 meters indoors

50-70 meters outdoors

Colour:Customize



CP-122

Brooch Smart Finder

Material:ABS+PC

Size:35.0*35.0*11.95mm

Volume:70-90dB

Battery:CR2032 220mAh@3V

Battery life: 8-10 months


(calculated by using 15 times a day)

Communication distance:

10-30 meters indoors

50-70 meters outdoors

Colour:Customize



Car Charger Series



Car Charger Series

Port	AA	AA	AC	AC	AC	AC
Dynamic Port Allocation	/	/	√	√	√	√
Light Ring	/	√	√	√	√	√
Safety Features	√	√	√	√	√	√
Safety Certification	CE/ROHS					
Product Features	Glossy PC shell – sleek, tough and eye-catching			Matte PC & aluminum alloy – sleek tough, and premium		

SC-249 Car Charger with Apple Find My Function

Material:PC+ABS
Size:φ32.0*70.9mm
Input:12-24V
Output: 5.0V/3.0A,9.0V/3.0A,12.0V/2.5A,
15.0V/2.0A,20.0V/1.5A PD30W
Colour:Customize



SC-246/247

Car Charger

Material:PC

Size:φ25.4*60.15mm

Input:12-24V

A1/A2 Output: 5.0V/2.4A

A1+A2 Output: 5.0V/2.4A

Total: 12W

A1/A2 Output: 5.0V/2.4A

A1+A2 Output: 5.0V/2.4A

Total: 12W

USB-C Output: 5.0V/2.4A,9.0V/2.22A

USB-A Output: 5.0V/2.4A,9.0V/2.0A

A+C Output:5.0V/2.4A

Total: 20W

USB-C Output: 5.0V/3.0A,9.0V/2.5A,12.0V/2.5A

USB-A Output: 5.0V/3.0A,9.0V/2.5A,

10.0V/2.25A,12.0V/2.25A

A+C Output:5.0V/3.0A

Total: 30W



SC-252/248/245

Car Charger

Material:PC+Aluminum alloy

Size:φ25.41*63.43mm Input:12-24V

USB-C Output: 5.0V/3.0A,9.0V/2.5A,10.0V/2.5A,12.0V/2.25A

USB-A Output: 5.0V/3.0A,9.0V/2.5A,12.0V/2.5A

A+C Output:5.0V/3.0A

Total: 30W

Size:φ28.7*69.95mm

USB-C Output: 5.0V/3.0A,9.0V/3.0A,12.0V/2.5A

USB-A Output: 5.0V/3.0A,9.0V/3.0A,10.0V/2.25A,12.0V/2.5A

A+C Output:30W+30W

Total: 60W

Size:φ28.48*74.05mm

USB-C Output: 5.0V/3.0A,9.0V/2.22A,12.0V/1.67A

USB-A Output: 5.0V/2.4A,9.0V/2.0A,10.0V/2.25A

A+C Output:22.5W+20.0W

Total: 42.5W

USB-C Output: 5.0V/3.0A,9.0V/3.0A,12.0V/2.5A

USB-A Output: 5.0V/2.4A,9.0V/2.0A,10.0V/2.25A

A+C Output:22.5W+30.0W

Total: 52.5W



Y-C01 SE/PRO/MAX

Car Charger

Material:PC+ABS Cable length:80cm

Size:135.2*50.6*19.6mm Input:12-24V

Cable C Output: 5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,15.0V/3.0A,

20.0V/2.25A (45W Max) PPS:3.3-11.0V/3.0A(30W Max)

USB-C Output: 5.0V/3.0A USB-A Output: 5.0V/2.4A

Cable C+(Cable L+C+A): 45W+5.0V/3.0A (60.0W Max)

Size:135.2*50.6*30.8mm

Cable C Output: 5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,15.0V/3.0A,

20.0V/2.25A (45W Max) PPS:3.3-11.0V/3.0A(30W Max)

Cable L Output:5.0V/2.4A

USB-C Output: 5.0V/3.0A USB-A Output: 5.0V/2.4A

Cable C+(C+A): 45W+5.0V/3.0A (60.0W Max)

Size:135.2*50.6*30.8mm

Cable C Output: 5.0V/3.0A,9.0V/3.0A,12.0V/3.0A,15.0V/3.0A,

20.0V/2.25A (45W Max) PPS:3.3-11.0V/3.0A(30W Max)

Cable L Output:5.0V/2.4A USB-C1 Output: 5.0V/3.0A

USB-C2 Output: 5.0V/3.0A USB-A Output: 5.0V/2.4A

Cable C+(Cable L+C1+C2+A): 45W+5.0V/3.0A (60.0W Max)



A collection of various multi-colored and multi-stranded cables, including USB, FireWire, and Ethernet cables, arranged in a row. The cables are shown in different colors like red, blue, brown, black, and pink, and some have multiple strands or connectors.

100W Cable

USB Type	CC	CL	C-CC	C-CCC	C-CLW	C-CCW
Material	TPE+Braided					
Cable lenght	1m-2m					
Compability	iPhone/Laptop/Watch/iPad/MacBook/Android devices					
Data Transfer Speed	480Mbps					
Product Features	Dual-color injection-molded cable with high-power transmission					

2-Color double injection cable

240W

2-Color double injection cable

Colour: Customiz

27W

CA-102

2-Color double injection cable

Material:TPE+Braided

Cable length:1m-2m

USB Type:C TO C+C

Input:20V/5A Max

C1 output: 100W Max

C2 output: 100W Max

C1+C2:70W+30W Max

Data Transfer Speed: 480Mbps

100W

USB Type:C TO C+C+C

Input:20V/5A Max

C1 output: 100W Max

C2 output: 100W Max


C3 output: 5W Max

C1+C2+C3:65W+30W+5W Max

Data Transfer Speed: 480Mbps

Colour:Customize

100W

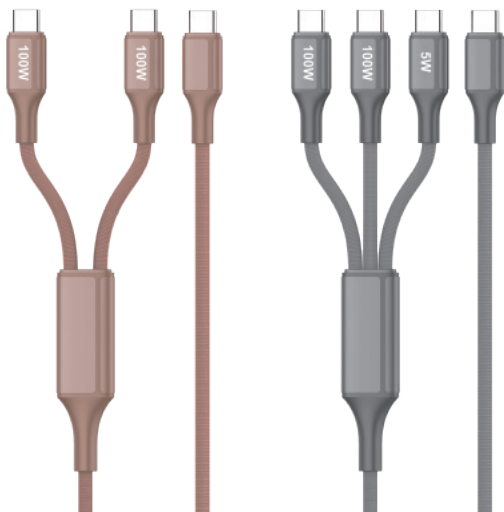

CA-102

2-Color double injection cable

Material:TPE+Braided

Cable length:1m-2m

USB Type:C TO C+C+Watch

Input:20V/5A Max

C1 output: 100W Max

C2 output: 100W Max

Apple Watch output: 2.5W Max

C1+C2+Watch:65W+30W+2.5W

Data Transfer Speed: 480Mbps

Colour:Customize

100W

USB Type:C TO L+C+Watch

Input:20V/5A Max

C output: 100W Max

L output: 27W Max


Apple Watch output: 2.5W Max

C+L+Watch:65W+27W+2.5W

Data Transfer Speed: 480Mbps

Colour:Customize

100W

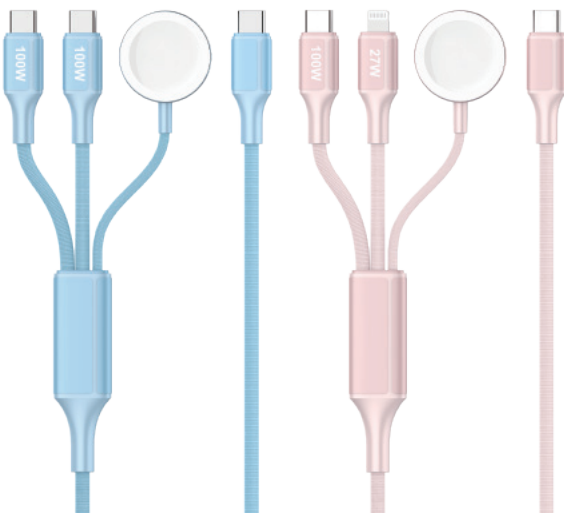

CA-104

Lanyard Cable

Material:TPE+Braided

Cable length:1.5m

USB Type:C TO C

Input:20V/3A,20V/5A, 48V/5A Max

Output: 60W/100W/240W Max

Data Transfer Speed: 480Mbps

Support adjusting cable length freely

Colour:Customize

60W

100W

240W



CA-106

Lanyard Cable

Material:TPE+Zinc Alloy

Cable lenght:1.5m

USB Type:C To C

Input:20V/3A Max

Output: 20V/3A,20V/5A, 48V/5A Max

Data Transfer Speed: 480Mbps

Support adjusting cable length freely

Colour:Customize

60W

100W

240W



CA-111

Smart Power-Off Cable

Material:TPE+PC

Cable lenght:1-2m

USB Type:CC/CL

Input:20V/3A , 20V/5A Max

Output: 60W/100W Max

Data Transfer Speed: 480Mbps

Colour:Customize

Smart Power-Off Cable with intelligent chip:

Auto power off when fully charged to prevent overcharging

60W

100W



CA-114

Flat Magnetic Cable

Material:TPE+Aluminum alloy

Cable lenght:1-2m

USB Type:C TO C

Input:20V/3A,20V/5A, 48V/5A Max

Output: 60W/100W/240W Max

Data Transfer Speed: 480Mbps

Colour:Customize

Flat Magnetic Cable,


Tangle-Free Design,

Always Ready to Charge

60W

100W

240W

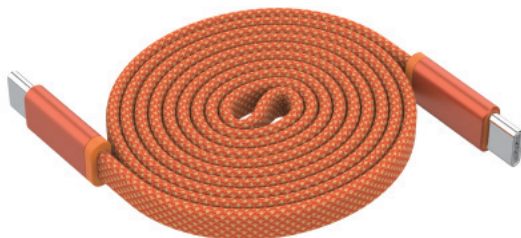

CA-119

3 IN 1 Invisible Holder Charger Cable

Material:TPE+Zinc alloy+Aaluminum alloy

Cable lenght:1-2m

USB Type:A/C TO C

Input:20V/3A, 20V/5A Max


Output: 60W/100W Max

Data Transfer Speed: 480Mbps

Colour:Customize

60W

100W

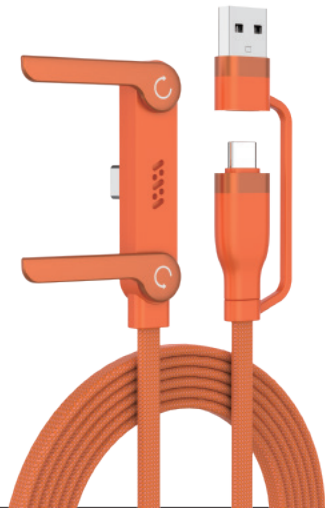

CA-121

Rechargeable Mobile Phone Holder

Material:TPE+Zinc alloy+Aluminum alloy

USB Type:C TO C

Input:20V/3A,20V/5A, 48V/5A Max

Output: 60W/100W/240W Max

Data Transfer Speed: 480Mbps

Colour:Customize

60W

100W

240W



CA-122

TFT Screen Fast Charging Cable

Material:TPE+Aluminum alloy

Cable lenght:1-2m

USB Type:C TO C

Input:20V/3A,20V/5A,48V/5A Max

Output: 60W/100W/240W Max

Data Transfer Speed: 480Mbps

Colour:Customize

60W

100W

240W





深圳市美顺和电子有限公司

Mei Shun He Electronic Limited



Newest products



Full Products

ADDRESS

7/F-8/F, 4th Building,
Hongchuang Technology Centre, Xikeng Community,
Fucheng Street, Longhua District ,ShenZhen,
China

E-MAIL

ammy.hu@meishunhe.com

TEL

+86 755 2956 1266
+86 137 1450 4149

FAX

+86 755 2956 1766

WEB

www.meishunhe.com