



Shenzhen Weigu Electronic Technology Co.,Ltd

We are a professional manufacturer of LED display

Shenzhen Weigu Electronic Technology co.,Ltd

☎ +86 15118043086

✉ Linda@vegooled.com

🌐 www.vegooled.com

📍 806, Building 1, Geya Technology Building, Mashantou Community
Clock Base, Matian Street, Guangming District, Shenzhen

ABOUT US



ShenZhen WeiGu Electronic Technology Co.,Ltd is a new high-tech enterprise which specializes in the R&D, manufacture, sales and service of LED displays. Our factory covers an area of nearly 10,000 square meter, monthly production reach to 8,000 square meters of LED display with 18 sets high-speed SMD machine.

Shenzhen Weigu Electronic Technology Co.,Ltd (Vegoo) is a high-tech company that is committed to manufacturing LED panels, and provides LED displays and accessory parts. The company is established in 2016, and has developed into an expert team of more than 300 employees. Our factory covers an area of nearly 10,000 square meters, Monthly production reach to 8,000 square meters of LED display with 18 sets high-speed SMD machine.

QUALITY & PERFORMANCE

Vegoo builds R&D department since 2016 that develop new products to satisfy customers' demands. All our products have the certificates of RoHS, CE, BIS, FCC.PSE

A WIDE RANGE OF PRODUCTS

Main products include indoor/outdoor rental/Fixed Led display, small pixel pitch COB series, transparent, Flexible series Led Panel, Dance Floor LED Screen and other customized shaped series LED Display.

WIDELY, CREATIVE COMMERCIAL APPLICATIONS

Our products are widely used in different fields, Such as plazas, shopping mall, stadiums, transportation areas, entertainment venues, etc. Our products are mainly exported to India, Dubai, south America, Malaysia, Europe, America, Australia and other countries, We have many agents in foreign countries, such as New Delhi, Mumbai, Bangalore, Peur, Rome Malay, Lumpur, etc.

START BUSINESS TODAY

After more than two years of economic fight, we managed it and will continue our business, longer and farther, to do business with you. Call us, email us, or leave a comment - It is a chance, it will be a surprise.



» Corporate Culture

Corporate Mission: Let the Vision more splendid!

Corporate Target: Create a famous brand of VEGOO LED DISPLAY!

Corporate Philosophy: Give us a chance, We return you a surprise !

Corporate Spirit:
Hard working, Positive and Uplifting ! Humility loyalty, Never give up ! Never too late to learn!

Operate and Progress Policy: Gratitude, Pragmatic and responsible!

Corporate View of talent:

Ability and political integrity!

Be in the same camp

Dare to innovation, develop together!

目录 CATALOG

About us	01-02
Corporate Culture	03
Catalog	04
HD-T Series-High Definition LED/COB	05
HD-K Series-Fixed LED	06
RD Series-Rental LED	07-08
FD Series-Fixed LED	09-10
Perimeter Advertising LED Screen	11
DD Series-Dance Floor LED	12
SD Series-Special LED	13-20
TD Series-Transparent LED	21
Application Case	22-28

HD-T Series-High Definition LED/COB- Indoor

FEATURES

- 1.Die-casting aluminum case,super light thin
- 2.Lock design,quickly assembled
- 3.High refresh,low light high gray
- 4.High precision,seamless splicing
- 5.No fan,mute design
- 6.Low power,Eco-friendly




Item	P0.78	P0.93	P1.25	P1.56	P1.875
Pixel Pitch(mm)	0.78	0.93	1.25	1.56	1.875
Pixel Configuration	SMD 4 -in-1/ flip chip	SMD 4 -in-1/ flip chip	SMD 1010 /flip chip	SMD 1010 /flip chip	SMD 1515 /flip chip
Physical Density(Pixels/m)	1638400 points	576000	640000	409600	284444
ModuleSize(LxW)mm	150*168.75mm	300*168.75mm	150×168.75×10mm		
Cabinet Size(L×W×H)mm	600×337.5×38mm				
Cabinet Resolution (Dots)	192*216	320*180	480*270	384*216	320*180
Brightness(cd/m ²)	600	400-500	200-500	600	600
AVE. Power Consumption(w/m)	177 W /m ²	≤ 177 W /m ²	<100-300	<100-300	<300
Cabinet Weight (kg)	5				
Viewing Angle	160°	H: 110° ; V: 110°	H:140° ;V:140°		
Control Distance	Cable100m, Multimode500m, Single mode 2km				
Refresh Rate(Hz)	3840				
Input Voltage	AC 100~240V 50/60Hz	AC 220V /50Hz	AC 110-220V/5V60Hz		
Operating Temperature/Humidity(C/RH)	Working: -20-65°C;Storage: -40-85°C/-30°C to 60°C;humidity Rh10%to 95%				

The final interpretation belongs to Vegoo

HD-K Series-Fixed LED- Indoor

FEATURES

- 1.High definition
- 2.Light weight
- 3.Wide viewing angle
- 4.High refresh rate, High grey scale
- 5.Quick installation

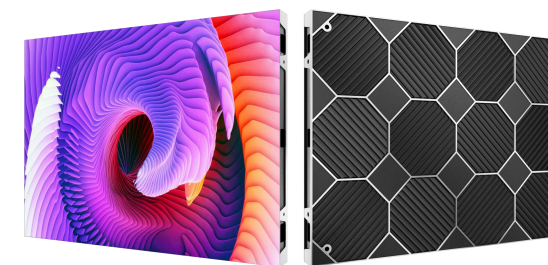


Item	P1.25-64s	P1.53-52s	P1.86-43s	P2-40s	P2.5-32s	P3.076-26s
Pixel Pitch(mm)	1.25	1.53	1.86	2	2.5	3.076
Pixel Configuration	SMD 3IN1-1010	SMD 3IN1-1212	SMD 3IN1-1515	SMD 3IN1-1515	SMD 3IN1 -2121	SMD 3IN1 -2020
Physical Density(Pixels/m)	640000	422500	288906	250000	160000	105625
Driver IC	ICN2163	ICN2163	ICN2163	ICN2163	ICN2153	ICN2153
ModuleSize(LxW)mm	320mm*160mm					
Cabinet Size(L×W×H)mm	W640mm*H480mm					
Module Resolution	256dots(W)*128dots(H)	208dots(W)*104dots(H)	172dots(W)*86dots(H)	160dots(W)*80dots(H)	128dots(W)*64dots(H)	104dots(W)*52dots(H)
Brightness(cd/m ²)	700cd/m ²					
Max. Power Consumption(w/m)	220	220	220	240	150-250	220
AVE. Power Consumption(w/m)	550	500	550	600	600	600
Best Viewing Angle	H:140° ;V:120°				H:120° ;V:120°	H:120° ;V:120°
Refresh Rate(Hz)	3840					
Input Voltage	110-220V;AC±10%					
Operating Temperature/Humidity(C/RH)	-20°C ~+50°C					

RD Series-Rental LED-Indoor

FEATURES

1. Die-casting aluminum, low temp-rise
2. High refresh, low light high gray
3. High precision, seamless splicing
4. No fan, mute design, noise-free
5. Low power, Eco-friendly

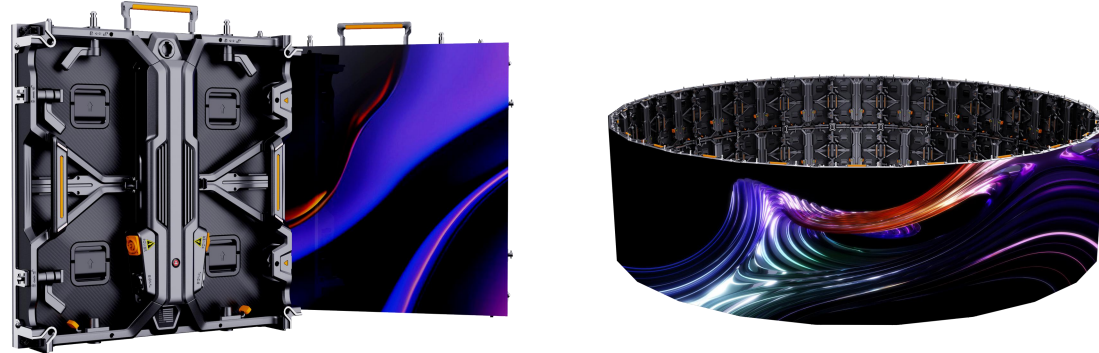

Item	P1. 95-32s	P2. 5-32s	P2. 064-24S	P2. 976-28S	P3. 91-16S
Pixel Pitch(mm)	1.95	2.5	2.064	2.976	3.91
Pixel Configuration	SMD 3IN1-1515	SMD2121	SMD2121	SMD2121	SMD2121
Physical Density(Pixels/m)	262144	160000	147456	112896	65536
ModuleSize(L×W×H)mm	250x250	160x160	250×250	250×250	250×250
Cabinet Size(LxWxH)mm	500×500×90	480x480x60	500×500×90	500×500×90	500×500×90/500×1000×90
Cabinet Resolution	128x128	192x192	192×192	168×168	128×128/128×256
IC	ICN2163	ICN2163	ICN2163	ICN2163	ICN2163
Brightness(cd/m²)	700	600	800	800	1000
Gray Scale(bit)	16				
Max. Power Consumption(w/m)	800	<900	<600	<440	<480
AVE. Power Consumption(w/m)	350	<270	<300	<220	<240
Cabinet Weight(kg)	7.5	4.2	7.5	7.5	7.5/15
Viewing Angle	H:140° ;V:140°				
Control Distance	Cable100m, Multimode500m, Single mode 2km				
Frame Frequency(Hz)	65				
Refresh Rate(Hz)	3840-7680				
OLifetime(hrs)	100000				
Input Voltage	AC110-220V/5V 60Hz				
Operating Temperature/Humidity(C/RH)	Working:-20-65°C;Storage:-40-85°C/-30°C to 60°C;humidity Rh10%to 95%				

RD Series-Rental LED-Outdoor

FEATURES

1. Die-casting aluminum ,low temp-rise
2. personal designed cabinet, beautiful appearance
3. Waterproof, high-efficiency cooling
4. High precision, seamless splicing
5. No fan, mute design, noise-free
6. Low power, Eco-friendly




Item	P2. 064-24S	P2. 976-28S	P3. 91-16S	P4. 81-13S
Pixel Pitch(mm)	2.064	2.976	3.91	4.81
Pixel Configuration	SMD1415	SMD1415	SMD1912	SMD1921
Physical Density(Pixels/m)	147456	112896	65536	43243
ModuleSize(LxW)mm	250×250	250×250	250×250	
Cabinet Size(L×W×H)mm	500×500×90	500×500×90	500×500×90/500×1000×90	500×500×90/500×1000×90
Cabinet Resolution	192×192	168×168	128×128/128×256	104×104/104×208
IC	FM6353	FM6353	MBI5124	
Brightness(cd/m)	6500	6500	4500	4500
Gray Scale(bit)	16			
Max. Power Consumption(w/m)	<600	<440	<560	<560
AVE. Power Consumption(w/m)	<300	<220	<280	<280
Cabinet Weight(kg)	7.5	7.5	11.5/23	11.5/23
Viewing Angle	H:140° ;V:140°			
Control Distance	Cable100m, Multimode500m, Single mode 2km			
Frame Frequency(Hz)	65			
Refresh Rate(Hz)	7680-10000			
Lifetime(hrs)	1000000			
Input Voltage	AC110-220V/5V60Hz			
Operating Temperature/Humidity(C/RH)	Working:-20-65°C;Storage:-40-85°C/-30°C to 60°C;humidity Rh10%to 95%			

FD Series-Fixed LED-Indoor

FEATURES

1. Die-casting aluminum, ultra power saving
2. High refresh, low light high gray
3. High precision, seamless splicing
4. No fan, mute design, noise-free
5. Low power, Eco-friendly



Item	P2-40s	P2.5-32s	P3.076-26S	P4-20S	P5-16S
Pixel Pitch(mm)	2	2.5	3.076	4	5
Pixel Configuration	SMD1515	SMD2020	SMD2020	SMD2020	SMD2020
Physical Density(Pixels/m)	250000	160000	105625	62500	40000
ModuleSize(LxW)mm	320*160	320*160	320*160	320*160	320*160
Module weight (kg)	0.35	0.2	0.325	0.32	0.16
Cabinet Size (mm)	960×960×75				
Brightness(cd/m ²)	≥860	≥860	700	700	≥1200
Gray Scale(bit)	16				
AVE. Power Consumption(w/m)	<320	>300	220	165	<220
Frame Frequency(Hz)	65				
Refresh Rate(Hz)	3840				
Input Voltage	AC110 /AC240V±10%				
Operating Temperature/Humidity(C/RH)	Working:-20-65°C;Storage:-40-85°C/-30°C to 60°C;humidity Rh10%to 95%				

The final interpretation belongs to Vegoo

FD Series-Fixed LED-Outdoor

FEATURES

1. High refresh, high gray
2. High precision, seamless splicing
3. Low power, Eco-friendly



Item	P2-20S	P2.5-16S	P3-16S	P4-8S	P5-8S	P8-5S	P10-2S	P10-4S
Pixel Pitch(mm)	2	2.5	3	4	5	8	10	10
Pixel Configuration	SMD1211	SMD1415	SMD1921	SMD1921	SMD2727	SMD3535	SMD3535	SMD3535
Physical Density(Pixels/m)	250000	160000	111111	62500	40000	15625	10000	10000
ModuleSize(L×W×H)mm	160X160	160X160	160×160	320×160	320×160	320×160	320×160	320×160
Cabinet Size(LxWxH)mm	960×960x75							
Brightness(cd/m ²)	≥4500	≥5300	6000	6000	6000	5500	7500	5500
Gray Scale(bit)	16							
AVE. Power Consumption(w/m)	210	<400	<350	<400	<325	<350	<350	<250
Module Weight(kg)	0.2	0.16	0.16	0.2	0.16	0.2	0.35	0.35
Viewing Angle	H:140° ;V:140°							
Control Distance	Cable100m, Multimode500m, Single mode 2km							
Frame Frequency(Hz)	65							
Refresh Rate(Hz)	3840							
Lifetime(hrs)	100000							
Input Voltage	AC110-220V/5V 60Hz							
Operating Temperature/Humidity(C/RH)	Working:-20-65°C;Storage:-40-85°C/-30°C to 60°C;humidity Rh10%to 95%							

Perimeter Advertising LED Screen

FEATURES

- 1.High refresh rate
- 2.Top protect rubber
- 3.Soft mask
- 4.Ip67 water-proof
- 5.Adjustable back support
- 6.Solidly-built architecture



Item	P10-2s
Pixel Pitch(mm)	10
Pixel Configuration	SMD3535
Physical Density(Pixels/m)	10000
ModuleSize(L×W×H)mm	320x160
Cabinet Size(LxW×H)mm	960x960x130
Cabinet Resolution)	96x96
IC	ICN 2038S
Brightness(cd/m²)	7000CD /m²
Gray Scale(bit)	16
Max.Power Consumption(w/m)	800
AVE. Power Consumption(w/m)	230
Cabinet Weight(kg)	38
Viewing Angle	H:140° ;V:120°
Control Distance	cable100m or Multimode500m
Frame Frequency	60
Refresh Rate(Hz)	3840
Lifetime(hrs)	100,000 Hours
Operating Temperature/Humidity(C/RH)	Working : -20 ~ 65°C;Storage:Storage : -40 ~ 85°C;Environment Temperature:-30°C ~ 60°C

The final interpretation belongs to Vegoo

DD Series-Dance Floor LED Screen

FEATURES

1. Rail installation:
2. High load-bearing performance
3. High safety performance
4. Heat dissipation function.
5. High contrast
6. High quality technology
7. Super wide viewing angle
8. Play: computer synchronization point-to-point playback, pictures and video arbitrary switch.



Item	P2. 5	P2. 976	P3. 91	P4. 81
Pixel Pitch(mm)	2. 5	2. 976	3. 91	4. 81
Pixel Configuration	SMD1415	SMD1415	SMD1415	SMD1921
Physical Density(Pixels/m)	160000	112896	65536	43264
Modules Size(L*W)mm	250*250			
Cabinet Size	500*500/500*1000mm			
Module resolution/L*W	100*100	84*84	64*64	52*52
Brightnesscd (cd/m²)	800-1000	1600-2000	3500-4000	3000-3500
AVE. Power Consumption(w/m)	300			
Max. Power Consumptionw/m²	800			
Refresh Rate(Hz)	3840			

SD Series-Special LED -LED ball

Indoor(P1.95/2/2.5/3/4/5/)


FEATURES

- 1.High definition; narrow pixel pitches
- 2.Secured with screws; front service
- 3.Plastic moulding
- 4.Seamless assembly and no equator

Outdoor (P3/4/5/6)

FEATURES

- 1.High brightness up to 7500cd/m²
- 2.High waterproof rate IP68
- 3.Plastic back shell
- 4.Various methods of installation

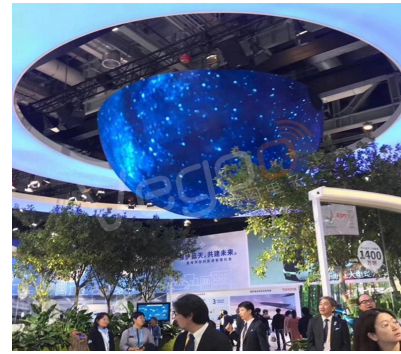

The final interpretation belongs to Vegoo

Item	P1.95-64s
Pixel Pitch(mm)	1.95
Package Mode	SMD1010
Physical Density(Pixels/m)	262144
Screen Area(W*H)	500mm*500mm spherical
Cadbinet Weight (kg)	30
Gray Scale(bit)	16
Power Consumption	Average: 150W/PCS Max.: 500W/PCS
Protection Level	IP43
Refresh Rate(Hz)	3840Hz
Brightness(cd/m ²)	≥800CD/m ²
Operating Temperature/Humidity(C/RH)	Operating: -20°C~70°C Storage: -40°C~85°C Work: 10%~90%, NoCondensation Store: 10%~90%, NoCondensation

Item	P6-8s
Pixel Pitch(mm)	6
Package Mode	SMD1921
Physical Density(Pixels/m)	27777
Module size(W*H)	customize
Module Weight (kg)	customize
Gray Scale(bit)	16
Power Consumption	Average: 150W/m ² Max.: 500W/m ²
Protection Level	IP65
Refresh Rate(Hz)	3840Hz
Brightness(cd/m ²)	7000CD/m ²
Operating Temperature/Humidity(C/RH)	Operating: -20°C~70°C Storage: -40°C~85°C Work: 10%~90%, NoCondensation Store: 10%~90%, NoCondensation

SD Series-Special LED-Poster LED (P1.875/2/2.5)

FEATURES

- 1.Presentation on multiple screen
- 2.Asynchronous remote control
- 3.Extra-thin and portable
- 4.High definition and compatibility



Item	P1.875-32s	P2	P2.5-32s
Pixel Pitch(mm)	1.875	2	2.5
Pixel Configuration	SMD1515	SMD1515	SMD2121
Physical Density(Pixels/m)	284444	250000	160000
Display size(m*m)	0.72*1.2	0.64*1.92	0.64*1.92
Net weight (kg)	21.5	30	30
Gray Scale(bit)	16	16	16
AVE.Power Consumption(w/m)	<300	<380	<380
Protection level	43		
Refresh Rate(Hz)	1920 or 3840		
Input Voltage	AC110 /AC220V±15% 40~65Hz		
Operating Temperature/Humidity(C/RH)	Working:-20~65°C;Storage:-40~85°C/-30°Cto 60°C;humidity Rh10%to 95%		

SD Series-Special LED-Outdoor Poles LED- (P2.94/3/3.3/3.84/4/5/6)

FEATURES

1. One installation, asynchronous remote control, update the picture at any time
2. High brightness up to 6,000cd/m²
3. High resolution, smooth imaging



Item	P3-16s	P4-8s	P5-8s
Pixel Pitch(mm)	3	4	5
Pixel Configuration	SMD1921	SMD1921	SMD2727
Physical Density(Pixels/m)	111111	62500	40000
Display size(mm)	768*1452/576*1260mm	640*1580/960*1740mm	640*1420/960*1740mm
Module size (mm)	192*192	320*160	320*160
Best view angle	140° (W) 120° (H)		
Power Consumption(w/m)	Average: 310W, Max.: 860W	Average: 330W, Max.: 960W	Average: 330W, Max.: 960W
White balance brightness	5500cd/m ²		
Refresh Rate(Hz)	3840		
Working voltage	AC110~240V±10%		
Operating Temperature/Humidity(C/RH)	Storage: -35Working: -20, 10%~95% No condensation		

The final interpretation belongs to Vegoo

SD Series-Special LED-Taxi LED- (P3/4/5) / Vehicle LED- (P5/8/10)

FEATURES

1. High waterproof, can withstand car wash straight
2. Heat dissipation structure, can be exposed to high temperature
3. Brightness 6000cd/m², eye-catching bright
4. Asynchronous remote control, timely information release
5. 7*24 hours of transmission, covering a wide range of people



Item	P4-10s	P5-16s
Pixel Pitch(mm)	4	5
Pixel Configuration	SMD1921	SMD1921
Physical Density(Dot/m)	62500	40000
Module size(m*m)	320*160	320*160
Module Weight (kg)	0.5	0.5
Gray Scale(bit)	16	16
Power Consumption(w/m)	Average: 160W/PCS, Max.: 480W/PCS	
Protection level	IP65	
Refresh Rate(Hz)	3840	
Working Voltage	DC12~24V±15% 40~65HZ	
Operating Temperature/Humidity(C/RH)	Work: 10%~90%, No Condensation Store: 10%~90%, No Condensation	

SD Series-Special LED-Flexible LED Screen

FEATURES

- 1.360 degree radian
- 2.Light and thin
- 3.Easy installation
- 4.Highly customizable
- 5.We can design any shape of structure as you need



Item	P1. 875-32s	P2-32s	P2. 5-32s	P3-20s	P4-16s	P5-16s
Pixel Pitch(mm)	1.875	2	2.5	3	4	5
Pixel Configuration	SMD 3IN1 -1515	SMD 3IN1 -1515	SMD 3IN1 -2020	SMD 3IN1 -2020	SMD 3IN1 -2020	SMD 3IN1 -2020
Physical Density	284444 dots/m ²	250000 dots/m ²	160000 dots/m ²	111111 dots/m ²	62500 dots/m ²	40000 dot/m ²
Pixel resolution	128dots(W)*64 dots(H)	160dots(W)*80 dots(H)	128dots(W)*64 dots(H)	80dots(W)*40 dots(H)	64dots(W)*32 dots(H)	64dots(W)*32 dots(H)
Module size (mm)	240mm*120mm	320mm*160mm	320mm*160mm	240mm*120mm	256mm*128mm	320mm*160mm
Best view angle	140. (W) 120. (H)					
Power Consumption(w/m)	Average: <300W/m ² Max: <600W/m ²	Average: <320W/m ² Max: <650W/m ²	Average: <250W/m ² Max: <500W/m ²	Average: <2750W/m ² Max: <550W/m ²	Average: <250W/m ² Max: <500W/m ²	Average: <150W/m ² Max: <300W/m ²
White balance brightness(cd/m ²)	≥1000CD/m ²	≥1000CD/m ²	≥1000CD/m ²	≥900CD/m ²	≥900CD/m ²	≥900CD/m ²
Refresh Rate(Hz)	3840					
Working voltage	AC220V±10%					
Operating Temperature/Humidity(C/RH)	storage:-35°C~+80°C working:-20°C~+50°C, 10%-95% No condensation					

The final interpretation belongs to Vegoo

SD Series-Special LED-640mm Diameter Round LED Screen

FEATURES

- 1.Fan Module,Seamless spliced
- 2.Thin wrap edge, creative border
3. Light and thin, support variety installation



Item	P2. 5-32s Indoor	P2. 5-32s Outdoor
Pixel Pitch(mm)	2.5	2.5
Pixel Configuration	SMD2020	SMD1415
Physical Density(Dot/m)	160000Dots/m ²	160000Dots/m ²
Module size(m*m)	320mm*320mmFan Modul	320mm*320mmFan Modul
Module Weight (kg)	0.4Kg	0.5kg
Resolution(WXH)	128Dots*128Dots	128Dots*128Dots
Power Consumption(w/m)	Avg: 45W/PCS Max.: 140W/PCS	Avg: 60W/PCS Max.: 240W/PCS
Protection level	IP43	IP65
Brightness(cd/m ²)	≥600CD/m ²	≥6000CD/m ²
Refresh Rate(Hz)	3840	
Install Way	Support rod, lifting, roller base, wall mounting, side mounting	
Operating Temperature/Humidity(C/RH)	Working: 10%~90%, No condensation Storage: 10%~90%, No condensation	

SD Series-Special LED-Cube screen-Indoor

FEATURES

1. Industry outdoor minimum distance products, waterproof grade IP65
2. Any size can be designed and manufactured according to customer requirements
3. 360 Visual angle, any angle can feel good visual effect
4. Convenient installation, support a variety of installation methods




Item	P2.5	P3	P4
Model	5 Face hanging/4 Face side hanging	5 Face hanging/4 Face side hanging	5 Face hanging/4 Face side hanging
resolution (Dots)	128*128*5/128*128*4 192*192*5/128*128*4	128*128*5/128*128*4 192*192*5/128*128*4	128*128*5/128*128*4
Size	320*320*320mm 480*480*480mm	384*384*384mm 576*576*576mm	512*512*512mm
Weight (kg)	8kg/7kg/14kg/13kg	12kg/11kg/17kg/16kg	17kg/16kg
Volume	128*128-0.03Sq 192*192-0.11Sq	128*128-0.05Sq 192*192-0.19Sq	0.14Sq
System/PKGs	Special box/Wood box		
Life span	100000 hours		
brightness (cd/m ²)	500-900cd		
Refresh rate (Hz)	3840		
Cabinet material	Alumium/Iorn		
Certificate	CE/CCC/FCC/ROHS/ISO9001		

The final interpretation belongs to Vegoo

SD Series-Special LED-Cube screen-Outdoor

FEATURES

1. Fan Module, Seamless spliced
2. Thin wrap edge, creative border
3. Light and thin, support variety installation methods

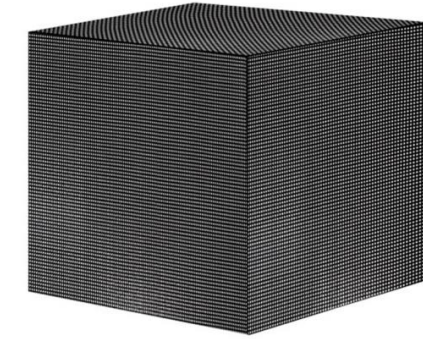


Item	P2.5	P3	P2.604
Model	5 Face hanging/4 Face side hanging	5 Face hanging/4 Face side hanging	5 Face hanging/4 Face side hanging
resolution (Dots)	128*128*5/128*128*4 192*192*5/128*128*4	128*128*5/128*128*4 192*192*5/128*128*4	192*192*5/192*192*4
Size	320*320*320mm 480*480*480mm	384*384*384mm 576*576*576mm	500*500*500mm
Weight (kg)	10kg/11kg/18kg/19kg	16kg/17kg/21kg/22kg	21kg/22kg
Volume	128*128-0.03Sq 192*192-0.11Sq	128*128-0.05Sq 192*192-0.19Sq	0.12Sq
System/PKGs	Special box/Wood box		
Life span	100000 hours		
brightness (cd/m ²)	6500CD/sqm		
Refresh rate (Hz)	3840		
Cabinet material	Alumium/Iorn		
Certificate	CE/CCC/FCC/ROHS/ISO9001		

TD Series-Transparent LED

FEATURES

- 1.Light weight: Only 11kg/m²
- 2.Thin: thin up to 8mm
- 3.Custom: Tailorable size and custom shape
- 4.Front service: Easy to perform front service
- 5.Stable: structure of aluminum, tidy and simple, and fast in heat dissipation.

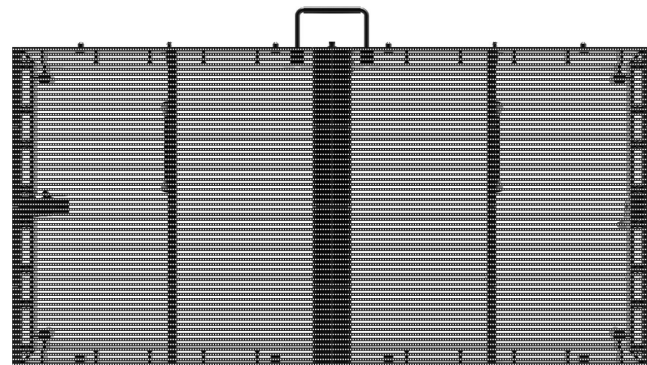



Item	P3. 91-8s	P7. 81-4s
Pixel Pitch(mm)	3.91	7.81
Physical Density(Pixels/m)	64,512	16,384
Module resolution(m*m)	126*32	64*16
Cabinet Resolution(dots)	252*128	128*64
Transmittance (kg)	42%	65%
Brightness(cd/m ²)	800-3,000	800-6,000
Cabinet Size	1000*500mm (Customizable size)	
Power Requirements	100V~240V ± 10% ; AC 50/60 Hz	
Power Consumption(w/m)	high brightness models: 800W/m ² ; low and medium brightness models: 400W/m ²	
Refresh Rate(Hz)	3840HZ	
Operating Temperature	-40°C to 45°C	



CASE SHOW

Vegoo-Restore the real beauty of the world for you

Indoor screen case

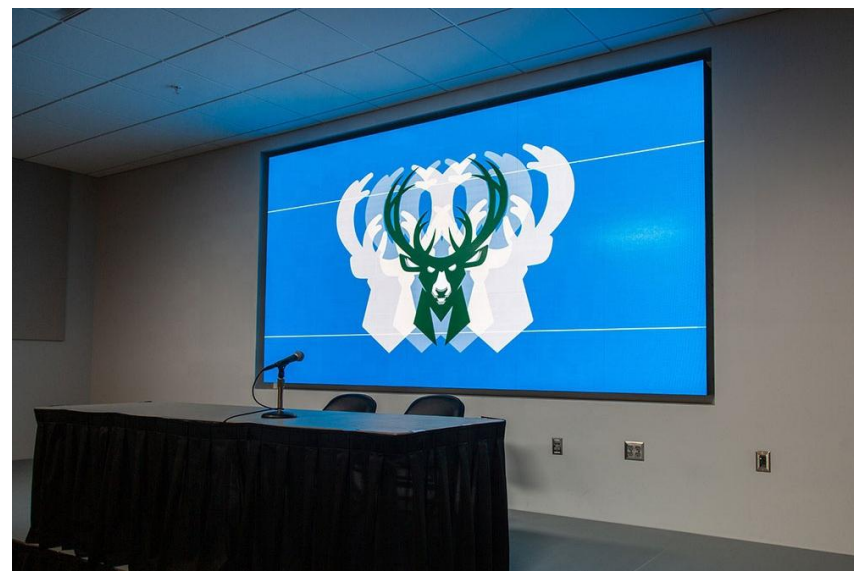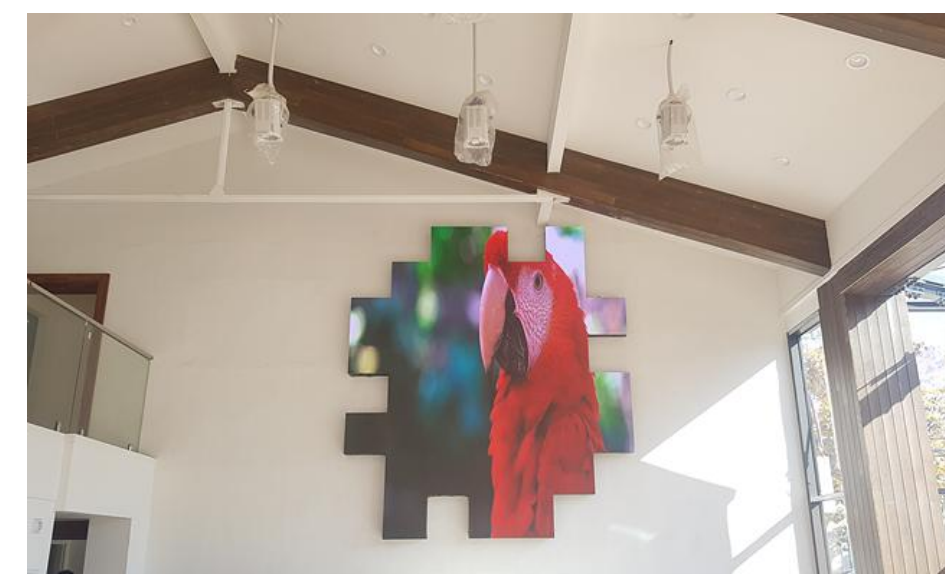


Outdoor screen case



Rental screen case




Special screen case

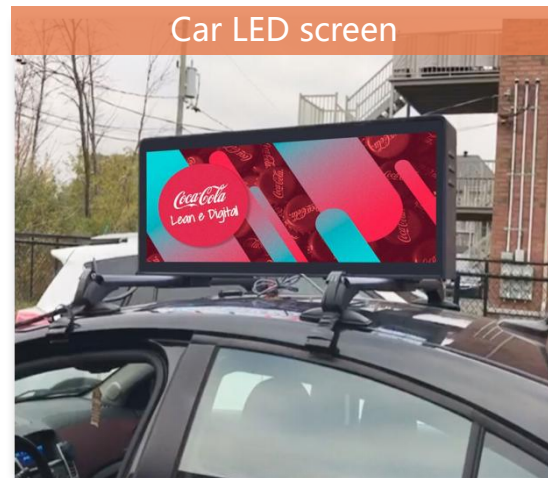


Car LED screen



Flexible LED screen

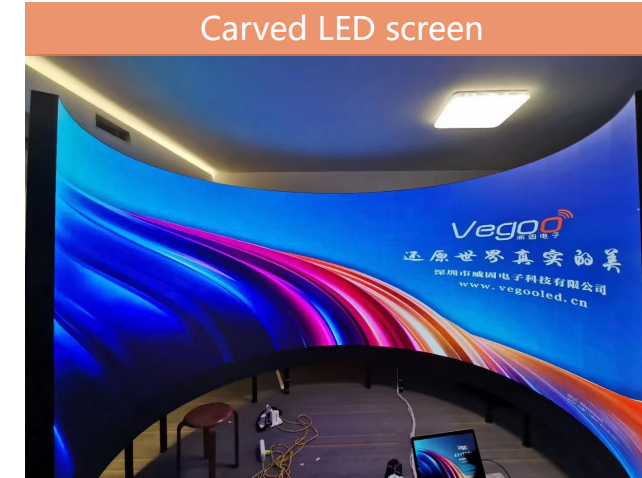


Carved LED screen

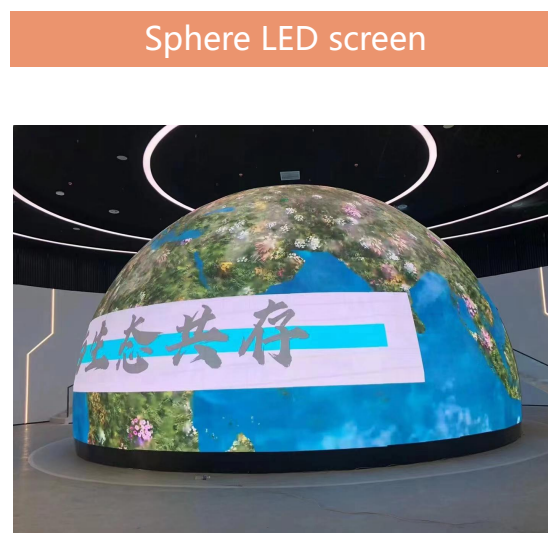

Sphere LED screen



Cube LED screen

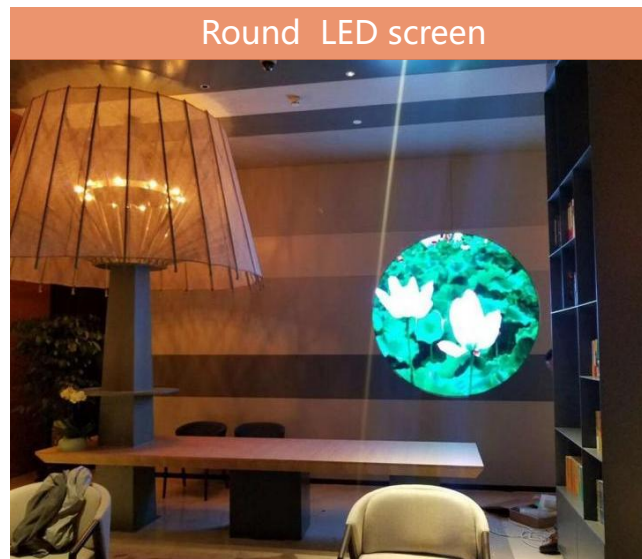

Round LED screen

▶ Poster screen case



▶ Transparent screen case

