Notebook，SAMSUNG Note 10&iPhone 12 and after

Super Eagle

CH74-PD345W

NEW

•Input： 100-240Vac

•Output: PD45W
5V/3A,9V/3A,12V/3A,15V/3A,20V/2.25A

•Body Dimension： L*W*T=51*45.7*26.5mm

•Color： White or black

•Finishing： Shinning

•Certification： CE RACH ROHS ERP VI



Dual ports PD45W

Super Eagle

CH32-P45W24

NEW

Plug: EU, AU

•Input：100-240Vac 50/60Hz 1.5A

•Output：Single C PD45W， A+C：PD30W+5V2.4A

•Body Dimension：L*W*T=57*51*27mm

•Color：White or black

•Finishing：Shinning



•Certification：CE RACH ROHS ERP VI

Dual ports PD65W

Super Eagle

CH32-P65W24

NEW



Plug: EU, AU

•Input：100-240Vac 50/60Hz 1.5A

•Output：Single C PD65W, A+C:PD45W+5V2.4A

•Body Dimension：L*W*T=57*51*27mm

•Color：White or black

•Finishing：Shinning

•Certification：CE RACH ROHS ERP VI



Dual ports PD45W

Super Eagle

CH32-P45Q18

NEW

Plug: EU, AU

•Input：100-240Vac 50/60Hz 1.5A

•Output：PD45W+QC18W

•Body Dimension：L*W*T=57*51*27mm

•Color：White or black

•Finishing：Shinning



•Certification：CE RACH ROHS ERP VI

iPhone 12 and after, nano housing

Super Eagle

P938 PD30W

NEW

- The charger EU,
- Input：110-240Vac 50/60Hz 0.5A
- Output：PD30W 5Vdc/3A,9Vdc/3A,12Vdc/2.25A,15Vdc/2A,20Vdc/1.5A
- Body Dimension：L*W*T=68*35*30mm
- Color：White or black
- Finishing：matte
- Certification：CE RACH ROHS ERP VI



iPhone 12 and after， nano housing

Super Eagle

P938 PD20W

NEW

•The charger EU,

•Input：110-240Vac 50/60Hz 0.5A

•Output：PD20W 5Vdc/3A，9Vdc/2.22A，12Vdc/1.67A

•Body Dimension：L*W*T=68*35*30mm

•Color：White or black

•Finishing：matte

•Certification：CE RACH ROHS ERP VI



•P937

NEW

•Input: 110-240Vac 50/60Hz 1A

•Body Dimension：L*W*T=107*45*31mm

•Color：White or black

•Finishing：matte

•Certification：CE

•L*W*H=107.6*45.6*31MM(INCLUDE AC PIN)

•Input: 100-240Vac

•Output1: PD65W, 5V/3A,9V/3A,12V/3A,15V/3A,20V3.25A
•Output2: PD27W, 5V/3A,9V/3A,12V/2.25A
•Output3: QC18W, 5V/3A,9V/2A,12V/1.5A
•3 PORT USE TOGETHER: 45W



iPhone 12 and after, samilar to apple original shape

Super Eagle

NEW

CH28-PD320W-EU PD20W

- The charger EU plug
- Input：100-240Vac 50/60Hz 0.5A
- Output：PD20W 5Vdc/3A，9Vdc/2.22A，12Vdc/1.67A
- Dimension：L*W*T=74*45*24mm
- Color：White or black
- Finishing：shinning
- Certification：CE RACH ROHS ERP VI



Notebook，SAMSUNG Note 10&iPhone 12 and after

Super Eagle

CH74-PD330W PD30W
CH74-PD325W PD25W

•Input：100-240Vac

•OutputPD30W 5V/3A,9V/3A,12V/2.25A,15V/2A,20V/1.5A,PPS:3.3-11V/3A,max 25W

•Output：PD25W 5V/3A,9V/2.77A, PPS:3.3-5.9V/3A or 3.3-11V/2.25A

•Body Dimension：L*W*T=51*45.7*26.5mm

•Color：White or black

•Finishing：Shinning

•Certification：GS, CE



Dual ports PD30W

Super Eagle

CH32-P33024-EU

Plug: EU, AU

•Input：100-240Vac 50/60Hz 1.5A

•Output：Single C PD30W， A+C：PD20W+5V2.4A

•Body Dimension：L*W*T=57*51*27mm

•Color：White or black

•Finishing：Shinning

•Certification：CE



Dual ports PD30W， foldable

Super Eagle

P934
Plug: EU, AU，UK



•Input：100-240Vac

•Output：Single C PD30W， A+C：PD20W+5V2A

•Body Dimension：L*W*T=xxmm



•Color：White or black

•Finishing：matte

•Certification：CE

Single port PD65W， foldable

Super Eagle

P945
Plug: EU, AU，UK

- Input：100-240Vac
- Output：PD65W
- Body Dimension：L*W*T=xxmm
- Color：White or black
- Finishing：matte
- Certification：CE





Single port, travel charger

Super Eagle

P961-050210-EU

Plug： EU,US,KR,UK,AU,JP





•Input：100-240Vac 50/60Hz 0.3A

•Output：5Vdc/2-2.1A

•Body Dimension：L*W*T=42.5*42.7*30.3mm

•Color：White or black

•Finishing：matte

•Certification:UL62368，SAA, KC60950,

•UL1310(P960-050200-UL,dual Y-cap)

iPhone 12 and after

Super Eagle

P961-PD320W-EU PD20W



- The charger EU,US,KR,UK ,AU,JP plug
- Input：100-240Vac 50/60Hz 0.5A
- Output：PD20W 5Vdc/3A，9Vdc/2.22A，12Vdc/1.67A
- Body Dimension：L*W*T=42.5*42.7*30.3mm
- Color：White or black
- Finishing：matte
- Certification：CE-EMC，GS，FCC



QC3.0 18W for wireless charger

Super Eagle

P961-QC318W-EU QC3.0 18W





•The charger EU,US,KR,UK ,AU,JP plug

•Input：100-240Vac 50/60Hz 0.5A

•Output：QC18W 5Vdc/3A，9Vdc/2A，12Vdc/1.5A



•Body Dimension：L*W*T=42.5*42.7*30.3mm

•Color：White or black

•Finishing：matte

•Certification：CE-EMC，GS，FCC

iPhone 12 and after PD20W or QC18W

Super Eagle

P961-PQ320W-EU



- The charger EU,US,KR,UK ,AU,JP plug
- Input：100-240Vac 50/60Hz 0.5A
- Output：PD20W 5Vdc/3A，9Vdc/2.22A，12Vdc/1.67A
- Or QC18W 5Vdc/3A，9Vdc/2A，12Vdc/1.5A or 5Vdc/3A
- Body Dimension：L*W*T=42.5*42.7*30.3mm
- Color：White or black
- Finishing：matte
- Certification：CE-EMC，GS，FCC



iPhone 12 and after PD20W or QC18W

Super Eagle

P961B-PQ320W-EU



- The charger EU,US,KR,UK ,AU,JP plug
- Input：100-240Vac 50/60Hz 0.5A
- Output：PD20W 5Vdc/3A，9Vdc/2.22A，12Vdc/1.67A
- Or QC18W 5Vdc/3A，9Vdc/2A，12Vdc/1.5A or 5Vdc/3A
- Body Dimension：L*W*T=42.5*42.7*30.3mm
- Color：White or black
- Finishing：matte
- Certification：CE-EMC，GS，FCC





iPhone 12 and after PD20W or QC18W

Super Eagle

P972-PQ320W-EU



- Input：100-240Vac 50/60Hz 0.5A
- Output：PD20W 5Vdc/3A，9Vdc/2.22A，12Vdc/1.67A
- Or QC18W 5Vdc/3A，9Vdc/2A，12Vdc/1.5A or 5Vdc/3A
- Color：White or black
- Finishing：matte
- Certification：CE-EMC，GS，FCC



iPhone 12 and after PD20W or QC18W

Super Eagle

CH41-PQ320W

- Input：100-240Vac 50/60Hz 0.5A
- Output：PD20W 5Vdc/3A，9Vdc/2.22A，12Vdc/1.67A
- Or QC18W 5Vdc/3A，9Vdc/2A，12Vdc/1.5A or 5Vdc/3A
- Dimension：L*W*T=80*43.2*24.6mm
- Color：White or black
- Finishing：Shinning
- Certification：CE-EMC，GS



Dual ports charger 5V2.1A

Super Eagle

CH42-050210-EU



- Input：100-240Vac 50/60Hz 0.3A
- Output：5Vdc/2-2.1A
- Dimension：L*W*T=80*43.2*24.6mm
- Color：White or black
- Finishing：Shinning
- Certification：CE REACH ROHS ERP VI

Information&Audio&Video charger

Super Eagle

•P917 1C+3A
•Input： 110-240Vac
•1C+3A：
•Type C only： 65W PD
•3*USB A only:5V4A，
•Type C+3*USB A:PD45W+5V4A,65Wmax
Body Dimension:L*W*T=91*87.2*19.5mm

•Color： White or black
•Finishing： matte
•Certification： CE



• P918 2C+2A
•Input： 110-240Vac
•2C+2A：
•Type C1 only： 45W PD
•Type C2 only： PD20W
•USB A1 only: QC18W
•Type C2+ USB A1： 5V3A
•USB A2 only: 5V2.1A
•Type C1+USB A2:5V3A
•Type C1+C2:PD45W+PD20W,total 65Wmax
•2*USB-A+2* USB-C:5V3A+5V2.1A+PD30W



Charger with timer switch

CH44-050240-EU with timer
---charging 3hrs, then shut down automaticly
---repeat charging after new insertion



- Input：100-240Vac 50/60Hz 0.3A
- Output：5Vdc/2.4A
- Dimension：L*W*T=80*43.2*24.6mm
- Color：White or black
- Finishing：Shinning
- Certification：CE

Dual ports charger， small shape

Travel Charger

- CH79-050210-EU
- Input：100-240Vac 50/60Hz 0.3A
- Output：5Vdc/2-2.1A
- Output：5Vdc2.4A
- Body Dimension：L*W*T=37*36.5*24.5mm
- Color：White or black
- Finishing：Shinning
- Certification：CE



Dual ports charger， small shape

Super Eagle

Travel Charger

- P961-050240-EU
- Input：100-240Vac 50/60Hz 0.3A
- Output：5Vdc/2-2.4A
- Output：5Vdc2.4A
- Body Dimension L*W*T=42.5*42.7*30.3mm
- Color：White or black
- Finishing：MATT
- Certification：CE REACH ROHS ERP VI





Dual or triple ports charger

Super Eagle

CH74-050310-EU

Plug: EU, UK



•Input：100-240Vac 50/60Hz 0.3A

•Output：5Vdc/2-3.1A

•Body Dimension：L*W*T=37*36.5*24.5mm

•Color：White or black

•Finishing：Shinning

•Certification：CE



Single port, samilar SAMSUNG charger shape

Super Eagle

CH37-050210-EU

•Input：100-240Vac 50/60Hz 0.3A

•Output：5Vdc/0.1-2.1A

•Dimension：L*W*T=74.2*37.5*22.5mm

•Color：White or black

•Finishing：Matte

•Certification：CE



Single port, samilar SAMSUNG charger shape

Super Eagle

CH37-QC215W QC15W

- Input：100-240Vac 50/60Hz 0.5A
- Output：QC15W 5Vdc/2.4A，9Vdc/1.7A
- Dimension：L*W*T=74.2*37.5*22.5mm
- Color：White or black
- Finishing：Matte
- Certification：CE



Slim charger

Super Eagle

CH38-050100-EU 5V1A

- Input：100-240Vac 50/60Hz 0.20A
- Output：5Vdc/1A
- Dimension：L*W*T=74.2*37.5*22.5mm
- Color：White or black
- Finishing：Shinning
- Certification：CE



Slim charger

Super Eagle

CH09-050100-EU



- Input：100-240Vac 50/60Hz 0.3A
- Output：5Vdc/1A
- Dimension：L*W*T=67.2*38.3*19.3mm
- Color：White or black
- Finishing：Matte
- Certification：GS

Slim charger

Super Eagle

CH45-050100-EU

•Input：100-240Vac 50/60Hz 0.3A

•Output：5Vdc/1A

•Dimension：L*W*T=67.2*38.3*19.3mm

•Color：White or black

•Finishing：Matte

•Certification：CE



Dual ports, A+A or A+C

Super Eagle

CH23-050240-EU

•Input：100-240Vac 50/60Hz 0.5A

•Output：5Vdc/2.4A with smart IC

•Dimension：L*W*T=74.5*37.6*22.6mm

•Color：White or black

•Finishing：Matte

•Certification：CE





Multiple ports 65Wmax

Super Eagle

P930

- Input：100-240Vac 50/60Hz 1.5A
- Output：C1+C2+A1+A2 65W
- Dimension：L*W*T=103*70*29mm
- Color：White+Gray or white
- Finishing：Matte
- Certification：CE，FCC，CCC



Multiple ports 65Wmax

Super Eagle

P931

- Dimensions: L*W*H=91*58*27mm

- Input: 100-240Vac
- USBA1+USBA2:5V/3.2A 16W
- USBA1+USBA2:5V/3.2A 16W
- QC PORT: 5V/3A,9V/2A,12V/1.5A 18W

- TOTAL: 50W



Dual ports PD18W+5V2A

Super Eagle

CH32-P3182A

- Input：100-240Vac
- Output：PD18W+5V2A
- Body Dimension：L*W*T=57*51*27mm
- Color：White or Black
- Finishing：Shinning
- Certification：CE，



Dual ports QC18W+5V2A

Super Eagle

CH32-Q3182A

•Input：100-240Vac

•Output：QC18W+5V2A

•Body Dimension：L*W*T=57*51*27mm

•Color：White or Black

•Finishing：Shinning

•Certification：CE，



Multiple ports 5V/4.8-6A

Super Eagle

CH32-050600-EU

- Input：110-240Vac
- Output：5V/3A+5V/3A
- Body Dimension：L*W*T=57*51*27mm
- Color：White or Black
- Finishing：Shinning
- Certification：CE



Multiple ports 5V/4.8 Korean standard

Super Eagle

CH32-050480-KR

- Input：100-240Vac
- Output：5V/2.4A+5V/2.4A
- Body Dimension：L*W*T=57*51*27mm
- Color：White or Black
- Finishing：Shinning
- Certification：KC60950



Single ports 5V/1A Japan standard

Super Eagle

CH07-050100-JP

•Input：100-240Vac

•Output：5V/1A

•Body Dimension：L*W*T=47*35*23mm

•Color：White or Black

•Finishing：Shinning

•Certification：PSE




Socket with charger,Germany standard

Super Eagle

CH50-050440-EU SE-001


- Input：100-240Vac 50/60Hz 10A
- Output：C1+A1:5Vdc/2.4A,A2+A3:5Vdc/2A
- Dimension：Dia*Length=82.5*81mm
- Weight：164g
- Color：White+Gray , white+red,White+green,
- white+white or white+blue
- Finishing：Shinning
- Certification：GS

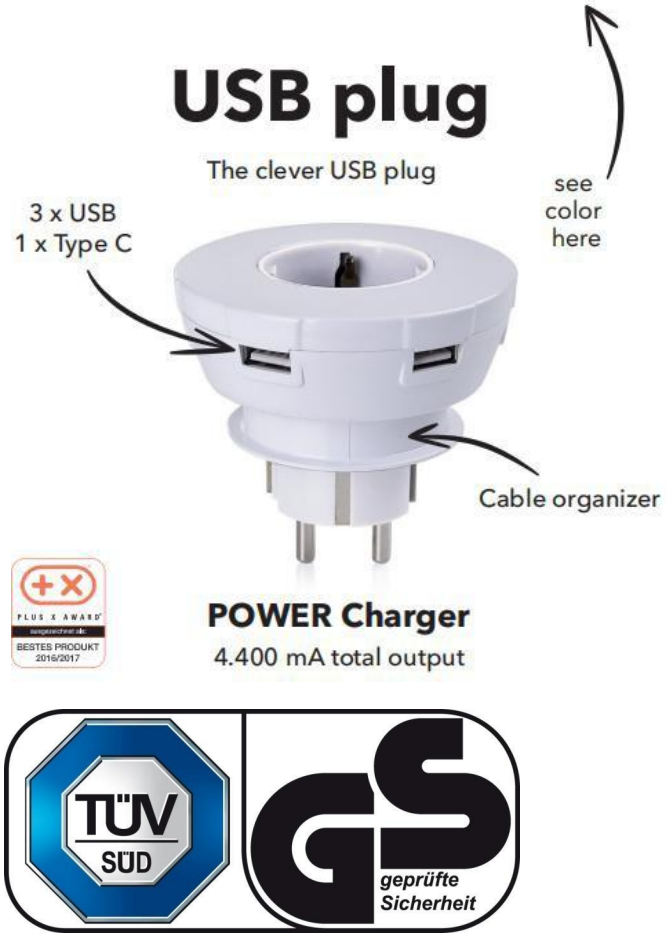

Socket with charger, France standard

Super Eagle

CH51-050440-FR

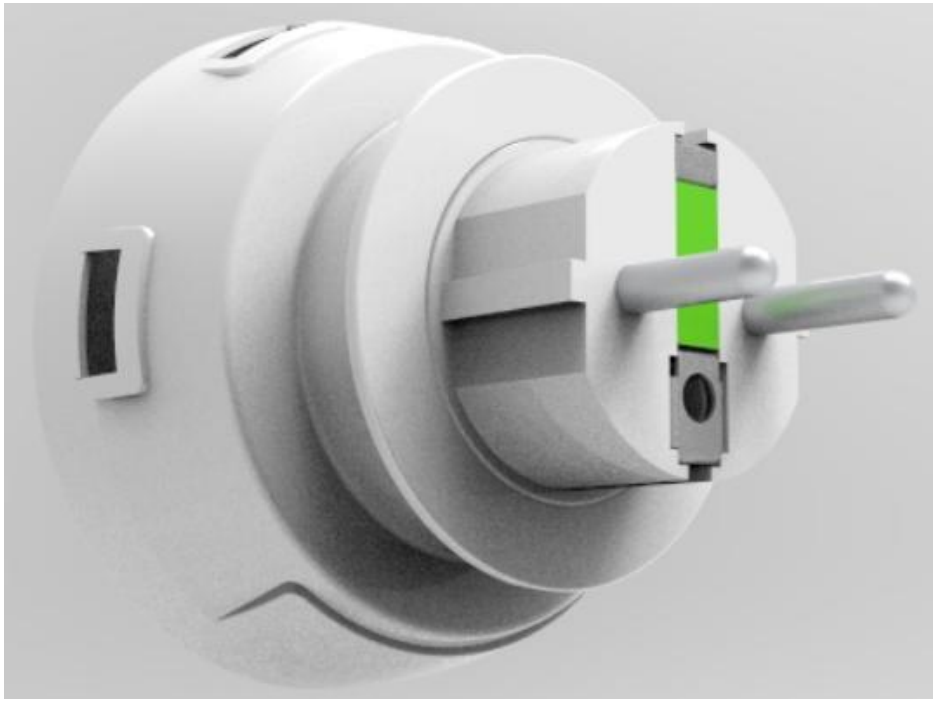

•Input：100-240Vac 50/60Hz 10A

•Output：C1+A1:5Vdc/2.4A,A2+A3:5Vdc/2A

•Dimension：Dia*Length=82.5*81mm

•Color：White+Gray , white+red,White+green,

•white+white or white+blue

•Finishing：Shinning

•Certification：CE

Charger with fixed cable

Super Eagle

CH15-120100-EU 12W series

Plug: EU, UK, US, PSE, CN, AU,

•Input：100-240Vac 50/60Hz 0.3A

•EN62368: 5-19Vdc 12Wmax
•EN60601: 5-19Vdc 12Wmax
•EN61558: 5-19Vdc 12Wmax
•UL62368: 5-19Vdc 12Wmax
•UL1310: 5-19Vdc 12Wmax

•Dimension：L*W*T=mm

•Color：Black or white

•Finishing：Matte





Charger with fixed cable

Super Eagle

CH16-120150-EU 18W series

Plug: EU, UK, US, PSE, CN, AU,



•Input：100-240Vac 50/60Hz 0.5A

•EN62368: 9-15Vdc 18Wmax
•UL62368: 9-15Vdc 18Wmax
•UL1310: 9-15Vdc 18Wmax Dual Y-cap



•Body Dimension：L*W*T=75*45*39mm

•Color：Black or white

•Finishing：Matte

Charger with fixed cable

Super Eagle

CH86-120300-EU 36W series

Plug: EU, UK, US, PSE, CN, AU,



•Input：100-240Vac 50/60Hz 0.5A

•EN62368: 9-15Vdc 36Wmax
•PSE 62368: 9-15Vdc 36Wmax
•UL62368: 9-15Vdc 36Wmax



•Body Dimension：L*W*T=81*50*31mm

•Color：Black or white

•Finishing：Matte

Super Eagle

In-Car Charger



- C900-PD320W
- Input： 12-24Vdc
- Output： PD20W 5Vdc/3A, 9Vdc/2.25A, 12Vdc/1.67A
- Dimension： Dia.*Length=23*43.5mm
- Color： White or black
- Finishing： matte
- Certification： CE-EMC

Super Eagle

In-Car Charger



- C900-P27Q18W
- Input： 12-24Vdc
- Output： PD27W or QC18W or 5V3A(A+C share)
5Vdc/3A, 9Vdc/3A, 12Vdc/2.5A
- Dimension： Dia.*Length=23*43.5mm
- Color： White or black
- Finishing： matte
- Certification： CE-EMC

Super Eagle

In-Car Charger

- In-Car Charger
- C900-050480
- Input： 12-24Vdc
- Output： 5Vdc 0.1-4.8A with smart IC
- Dimension： Dia.*Length=23*43.5mm
- Weight： 13g
- Color： White or black
- Finishing： matte
- Certification： CE-EMC



Super Eagle

In-Car Charger

- C900-QC318W
- Input： 12-24Vdc
- Output： QC18W 5Vdc/3A,9Vdc/2A,12V/1.5A
- Dimension： Dia.*Length=23*43.5mm
- Weight： 12g
- Color： White or black
- Finishing： matte
- Certification： CE-EMC



CH12-XXXYYY-EU

Output voltage: 5-12V， step 0.1V

Output current:0.1-2A， step 0.1A

Output max Power： 12W

- Certification： EN60601



P941-XXXYYY-ZZ

- Output voltage: 5-42V， step 0.1V
- Output current: 0-4A， step 0.01A
- Output max Power： 15-27W
- Certification： GS CB EN61558 EN60335



P960-050200-US double Y, UL1310

- Output voltage: 5V
- Output current: 2A
- Output max Power: 10W
- Certification： UL1310, CE60601

