


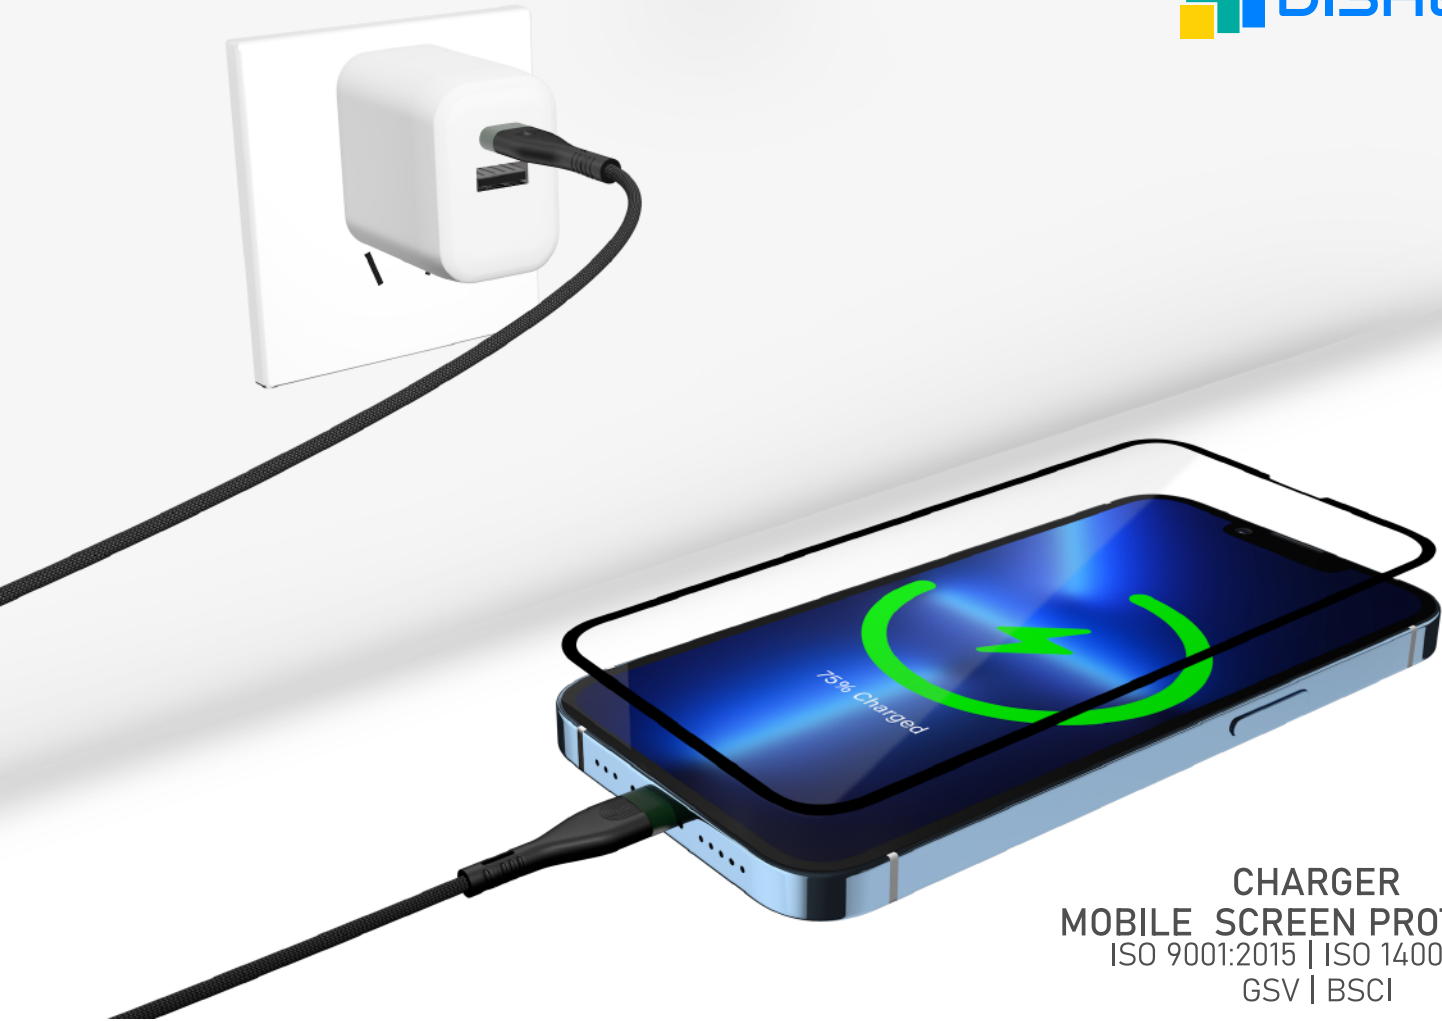

CHARGER
MOBILE SCREEN PROTECTOR
ISO 9001:2015 | ISO 14001:2015
GSV | BSCI

ABOUT US

In 2016, Dongguanshi Disheng Technology Electronic Co.,Ltd. was officially established, it's a high-tech enterprise integrating R&D, Production and Sales of various mobile accessories. Disheng has successfully passed the ISO9001:2015, ISO14001:2015, BSCI, and GSV certifications. To ensure product quality, the products have passed many international certifications such as ETL, RoHS, REACH, etc.

Disheng will closely focus on the business philosophy of "Quality First, Customer Satisfaction, Sustainable Development", stand in the new development stage of China's manufacturing industry with a more vigorous attitude, hand in hand with winning spirit, we boldly embrace the future.



Insert components



Repair solder



PCBA testing



Assembly



Aging test



Finished product testing

Charger >

DSW-17-30W




Product Series Characteristics


- ◆ OUTPUT POWER : 30W
- ◆ INPUT : 100V-240V~50/60Hz 1A
- ◆ OCP,SCP,OVP,UVP-Auto Restart

Output Specifications

OUT	U.(V) / I.(A)		
	5V/3A	9V/3A	12V/2.5A
TYPE-C	15V/2A	20V/1.5A	PPS:3.6-11V/2.72A 3.6-16V/1.87A
	Apple2.4A / Samsung-5V-2A / QC2.0&QC3.0 Samsung-AFC / Huawei-FCP / PD2.0&PD3.0 / PPS		

Input Plug

Type	US	EU	UK
Diagram			


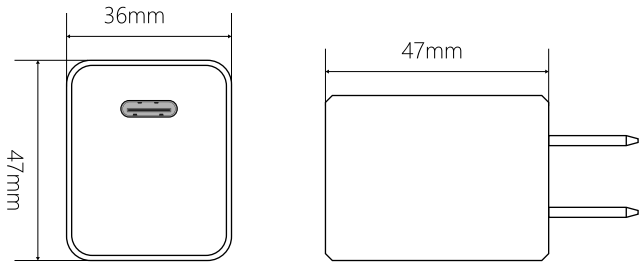


47mm×36mm×30mm≈48g

Power options: 20W 25W 30W



DSW-18-30W

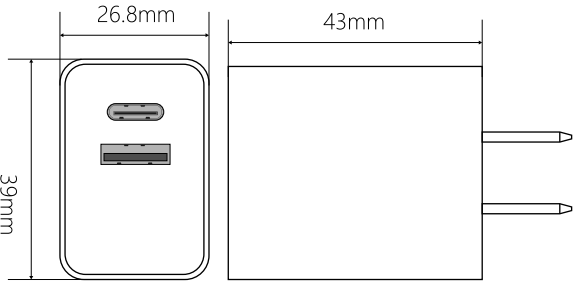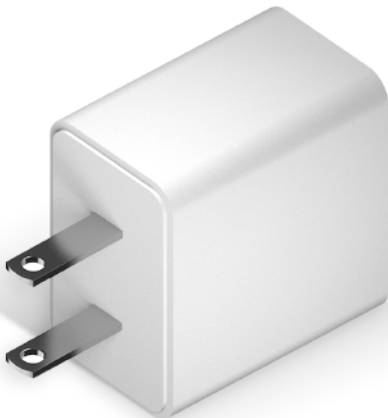

26.8mm×39mm×43mm≈52g

Power options: 20W 25W 30W

Product Series Characteristics

- ◆ OUTPUT POWER : 30W
- ◆ INPUT : 100V-240V~50/60Hz 1A
- ◆ OCP,SCP,OVP,UVP-Auto Restart



Output Specifications


OUT	U.(V) / I.(A)				
USB-A	5V/3A	9V3/A	12V/2.5A	20V/1.5A	
TYPE-C	5V/3A	9V/3A	12V/2.5A	15V/2A	20V/1.5A
	PPS:3.6V-11V/2.72A 3.6V-16V/1.875A				
USB-A+TYPE-C OUTPUT:5V/3A(MAX)					
Apple2.4A / Samsung-5V-2A / QC2.0 / QC3.0 / QC4.0+ Samsung-AFC / Huawei-FCP / PD2.0&PD3.0 / PPS					

Input Plug

Type	US	AUS	EU	UK
Diagram				



DSW-19-20W

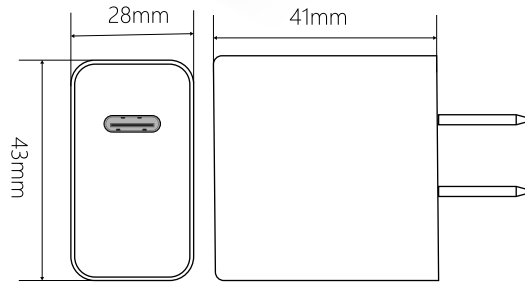

43mm×41mm×28mm≈47g

Product Series Characteristics

- ◆ OUTPUT POWER : 20W
- ◆ INPUT : 100V-240V~50/60Hz 1A
- ◆ OCP,SCP,OVP,UVI-Auto Restart

Output Specifications


OUT	U.(V) / I.(A)		
TYPE-C	5V/3A	9V/2.22A	12V/1.67A
Apple2.4A / Samsung-5V-2A / QC2.0&QC3.0 Samsung-AFC / Huawei-FCP / PD2.0&PD3.0			

Input Plug

Type	US	EU
Diagram		



DSW-20-20W

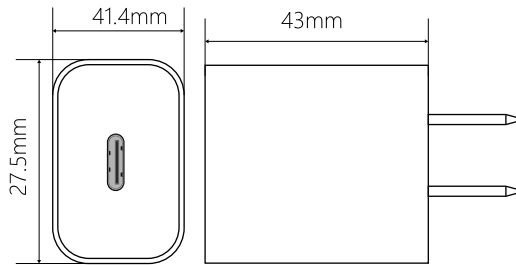

27.5mm×43mm×41.4mm≈48g

Product Series Characteristics

- ◆ OUTPUT POWER : 20W
- ◆ INPUT : 100V-240V~50/60Hz 1A
- ◆ OCP,SCP,OVP,UVF-Auto Restart

Output Specifications


OUT	U.(V) / I.(A)		
TYPE-C	5V/3A	9V/2.22A	12V/1.65A
Apple2.4A / Samsung-5V-2A / QC2.0&QC3.0 Samsung-AFC / Huawei-FCP / PD2.0&PD3.0			

Input Plug

Type	US	EU
Diagram		



DSW-21-30W

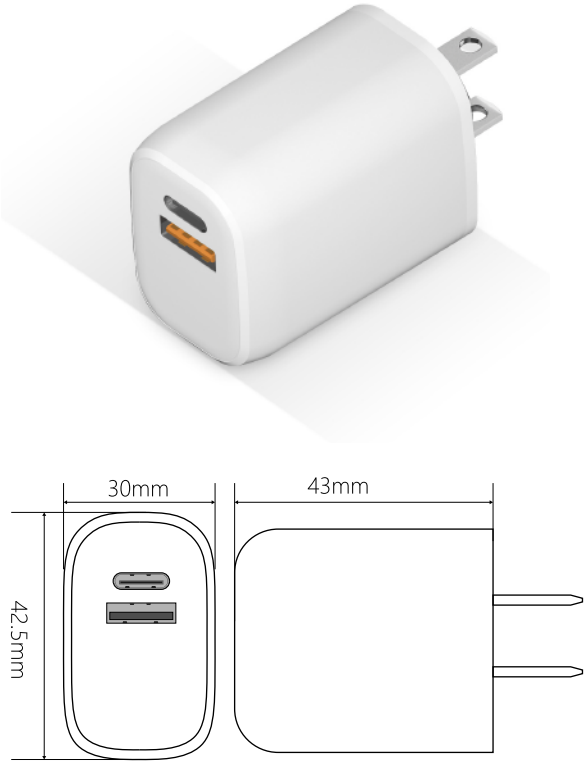

30mm×42.5mm×43mm≈53g

Power options: 20W 25W 30W

Product Series Characteristics

- ◆ OUTPUT POWER : 30W
- ◆ INPUT : 100V-240V~50/60Hz 1A
- ◆ OCP,SCP,OVP,UVP-Auto Restart

GaN

Output Specifications


OUT	U.(V) / I.(A)				
USB-A	5V/3A	9V3A	12V/2.5A	20V/1.5A	
TYPE-C	5V/3A	9V3A	12V/2.5A	15V/2A	20V/1.5A
	PPS:3.6V-11V/2.72A 3.6V-16V/1.875A				
USB-A+TYPE-C OUTPUT:5V/3A(MAX)					
Apple2.4A / Samsung-5V-2A / QC2.0 / QC3.0 / QC4.0+ Samsung-AFC / Huawei-FCP / PD2.0&PD3.0 / PPS					

Input Plug

Type	US	AUS	EU	UK
Diagram				



DSW-26-20W

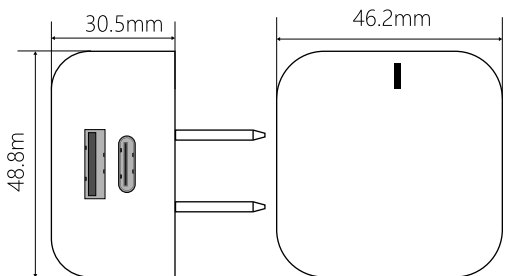

48.8mm×46.2mm×30.5mm≈55g

Product Series Characteristics

- ◆ OUTPUT POWER : 20W
- ◆ INPUT : 100V-240V~50/60Hz 1A
- ◆ OCP,SCP,OVP,UVP-Auto Restart

Output Specifications



OUT	U.(V) / I.(A)		
USB-A	5V/3A	9V/2.22A	12V/1.67A
TYPE-C	5V/3A	9V/2.22A	12V/1.67A
USB-A+TYPE-C OUTPUT:5V/3A(MAX)			
Apple2.4A / Samsung-5V-2A / QC2.0&QC3.0 Samsung-AFC / Huawei-FCP / PD2.0&PD3.0			

Input Plug

Type	US	AUS	EU	UK
Diagram				



DSW-33-65W

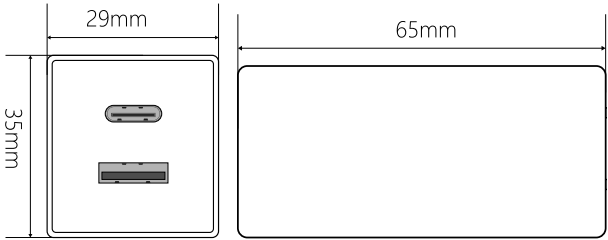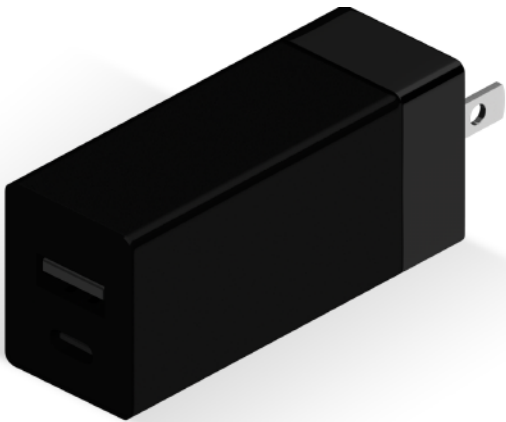

65mm×35mm×29mm≈112g

Product Series Characteristics

- ◆ OUTPUT POWER : 65W
- ◆ INPUT : 100V-240V 50/60Hz 1.5A
- ◆ OCP,SCP,OVP,UVP-Auto Restart

GaN

Output Specifications


OUT	U.(V) / I.(A)				
USB-A	5V/3A		9V/3A	12V/3A	20V/3A
TYPE-C	5V/3A	9V/3A	12V/3A	15V/3A	20V/3.25A
	PPS 3.3V-11V3A 3.3V-21V2.85A 65WMAX				
USB-A+TYPE-C OUTPUT:5V/4A(MAX)					
Apple2.4A/Samsung-5V-2A/QC2.0/QC3.0/QC4.0+ Samsung-AFC/Huawei-FCP/PD2.0&PD3.0/PPS					

Input Plug

Type	US	AUS	EU	UK
Diagram				



DSW-35-35W

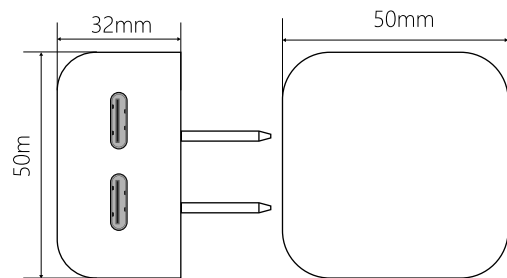

32mm×50mm×50mm≈95g

Product Series Characteristics

GaN


- ◆ OUTPUT POWER : 35W
- ◆ INPUT : 100V-240V 50/60Hz 1A
- ◆ OCP,SCP,OVP,UVP-Auto Restart

Output Specifications

OUT	U.(V) / I.(A)		
TYPE-C1	5V/3A	9V/3A	12V/2.91A
TYPE-C2	15V/2.33A	20V/1.75A	PPS 3.6V-11V/3A 35WMAX
TYPE-C1+TYPE-C2 OUTPUT: 17.5W+17.5W			
Apple2.4A / Samsung-5V-2A / QC2.0 and QC3.0 Samsung-AFC / Huawei-FCP / PD2.0 and PD3.0			

Input Plug

Type	US	AUS	EU	UK
Diagram				

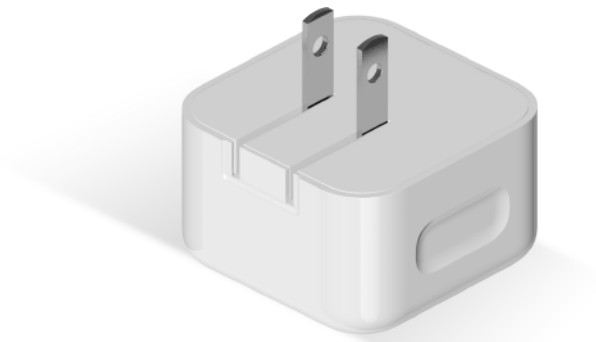

DSW-36-100W



Product Series Characteristics


- ◆ OUTPUT POWER : 100W
- ◆ INPUT : 100V-240V 50/60Hz 2A
- ◆ OCP,SCP,OVP,UVF-Auto Restart

Output Specifications

OUT	U.(V) / I.(A)				
USB-A	5V/3A		9V/3A		12V/2.5A
TYPE-C	5V/3A	9V/3A	12V/3A	15V/3A	20V/5A
	PPS 3.3V-11V/3A		3.3V-21V/2.85A	65WMAX	
C1+C2 65W+30W/30W+65W/USB1+USB2 5V/3A C1/C2+USB1/USB2 65W+30W/C1+C2+USB1/USB2 60W+20W+18W C1+C2+ (USB1+USB2) 60W+20W+15W USB1/USB2 5V/3A 9V/3A 12V/2.5A					
Apple2.4A/Samsung-5V-2A/QC2.0/QC3.0/QC4.0+ Samsung-AFC/Huawei-FCP/PD2.0&PD3.0/PPS					

Input Plug


Type	US	AUS	EU	UK
Diagram				

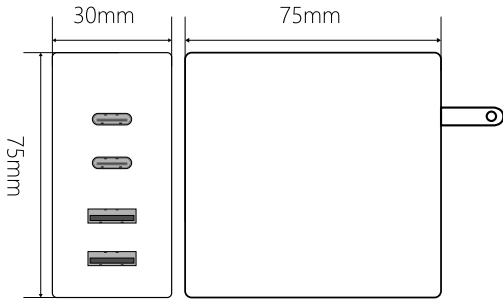

30mm×75mm×75mm≈200g



DSW-37-45W

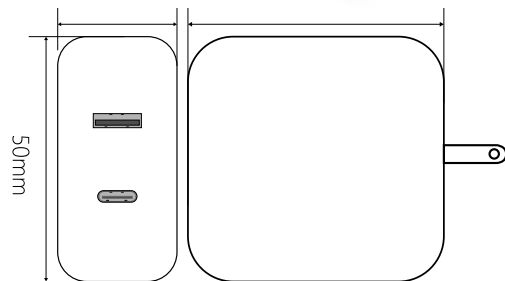

30mm×50mm×50mm≈105g

Product Series Characteristics

- ◆ OUTPUT POWER : 45W
- ◆ INPUT : 100V-240V 50/60Hz 1A
- ◆ OCP,SCP,OVP,UVP-Auto Restart


GaN

Output Specifications

OUT	U.(V) / I.(A)				
USB-A	5V/3A		9V/2A		12V/1.5A
TYPE-C	5V3A	9V/3A	12V/3A	15V/3A	20V/2.25A
	PPS 3.6V-20V/2.25A 45WMAX				
TYPE-C+USB-A:27W+18W					
Apple2.4A / Samsung-5V-2A / QC2.0 / QC3.0 / QC4.0+ Samsung-AFC / Huawei-FCP / PD2.0&PD3.0 / PPS					

Input Plug

Type	US	AUS	EU	UK
Diagram				

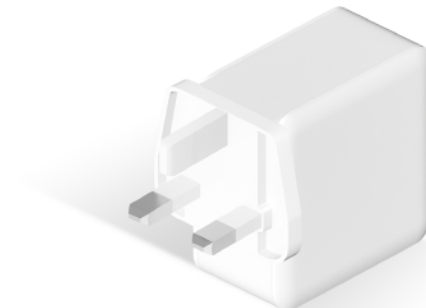

DSW-38-30W



| Product Series Characteristics

- ◆ OUTPUT POWER : 30W
- ◆ INPUT : 100V-240V 50/60Hz 1A
- ◆ OCP,SCP,OVP,UVF-Auto Restart


GaN

| Output Specifications

OUT	U.(V) / I.(A)			
TYPE-C1	5V/3A	9V/3A	12V/2.5A	15V/2A
TYPE-C2	20V/1.5A	PPS:3.6V-11V/2.72A 3.6V-16V/1.875A(30W MAX)		
TYPE-C1+TYPE-C2 OUTPUT: 5V4A(MAX)				
Apple2.4A / Samsung-5V-2A / QC2.0/QC3.0/QC4.0+ Samsung-AFC / Huawei-FCP / PD2.0 and PD3.0 / PPS				

| Input Plug

Type	US	AUS	EU	UK
Diagram				

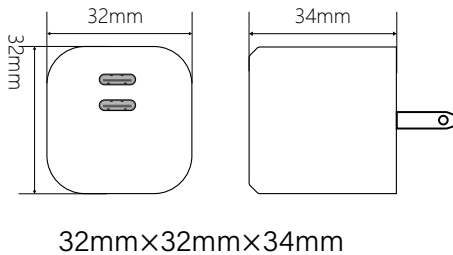

DSW-39-30W



Product Series Characteristics

- ◆ OUTPUT POWER : 30W
- ◆ INPUT : 100V-240V 50/60Hz 1A
- ◆ OCP,SCP,OVP,UVP-Auto Restart


GaN

Output Specifications



OUT	U.(V) / I.(A)			
TYPE-C	5V/3A	9V/3A	12V/2.5A	15V/2A
	20V/1.5A	PPS:3.6V-11V/2.72A 3.6V-16V/1.875A(30W MAX)		
Apple2.4A / Samsung-5V-2A / QC2.0/QC3.0/QC4.0+ Samsung-AFC / Huawei-FCP / PD2.0 and PD3.0 / PPS				

Input Plug

Type	US	AUS	EU	UK
Diagram				

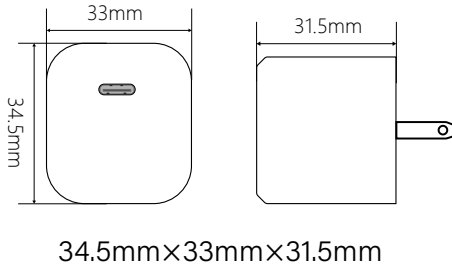

DSW-40-30W

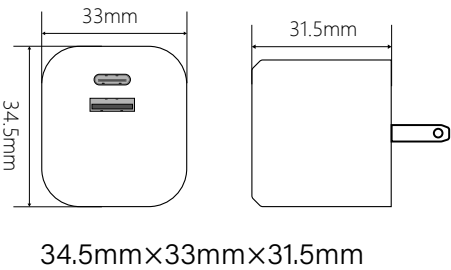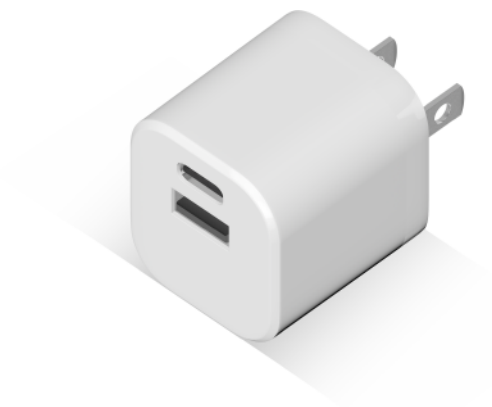

Product Series Characteristics

- ◆ OUTPUT POWER : 30W
- ◆ INPUT : 100V-240V 50/60Hz 1A
- ◆ OCP,SCP,OVP,UVF-Auto Restart



Output Specifications

OUT	U.(V) / I.(A)				
USB-A	5V/3A		9V/3A	12V/2.5A	15V/2A
TYPE-C	5V/3A	9V/3A	12V/2.5A	15V/2A	20V/1.5A
	PPS:3.6V-11V/2.72A 3.6V-16V/1.875A(30W MAX)				
USB-A+TYPE-C OUTPUT: 5V4A(MAX)					
Apple2.4A / Samsung-5V-2A / QC2.0/QC3.0/QC4.0+ Samsung-AFC / Huawei-FCP / PD2.0 and PD3.0 / PPS					

Input Plug

Type	US	AUS	EU	UK
Diagram				


DSC-06-20W

I Product Series Characteristics

- ◆ OUTPUT POWER : 20W
- ◆ INPUT : DC 12-24V
- ◆ OCP,SCP,OVP,UVP-Auto Restart

I Output Specifications


OUT	U.(V) / I.(A)		
USB-A	5V/3A	9V/2.22A	12V/1.67A
TYPE-C	5V/3A	9V/2.22A	12V/1.67A
USB+TYPE-C OUTPUT:5V/3A(MAX)			
Apple2.4A / Samsung-5V-2A / QC2.0&QC3.0 / Huawei-SCP Samsung-AFC / Huawei-FCP / MTK-PE+2.0 / PD2.0&PD3.0			

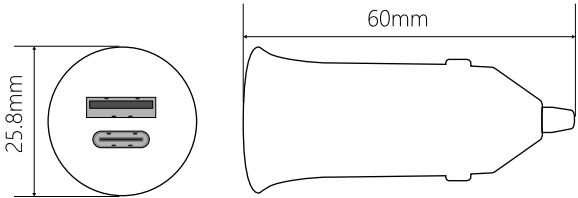

25mm (d) × 55.3mm (h) ≈16g



DSC-07-20W

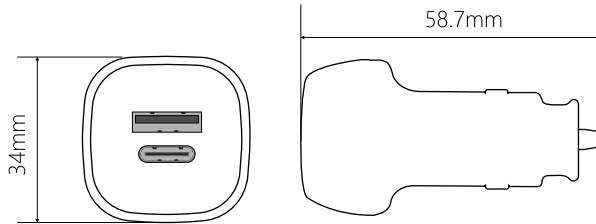

25mm (d) × 42.5mm (h) ≈ 21g

I Product Series Characteristics

- ◆ OUTPUT POWER : 20W
- ◆ INPUT : DC 12-24V
- ◆ OCP,SCP,OVP,UVP-Auto Restart

I Output Specifications

OUT	U.(V) / I.(A)		
USB-A	5V/3A	9V/2.22A	12V/1.67A
TYPE-C	5V/3A	9V/2.22A	12V/1.67A
USB+TYPE-C OUTPUT:5V/3A(MAX)			
Apple2.4A / Samsung-5V-2A / QC2.0&QC3.0 / Huawei-SCP Samsung-AFC / Huawei-FCP / MTK-PE+2.0 / PD2.0&PD3.0			



DSC-08 -30W




Product Series Characteristics

- ◆ OUTPUT POWER : 30W
- ◆ INPUT : DC 12V-24V
- ◆ OCP,SCP,OVP,UVP-Auto Restart

Output Specifications

OUT	U.(V) / I.(A)		
USB-A	5V/3A	9V/2.22A	12V/2.5A
TYPE-C	5V/3A	9V/2.22A	12V/2.5A
USB+TYPE-C OUTPUT:5V/3A(MAX)			
Apple2.4A / Samsung-5V-2A / QC2.0&QC3.0 / Huawei-SCP Samsung-AFC / Huawei-FCP / MTK-PE+2.0 / PD2.0&PD3.0			

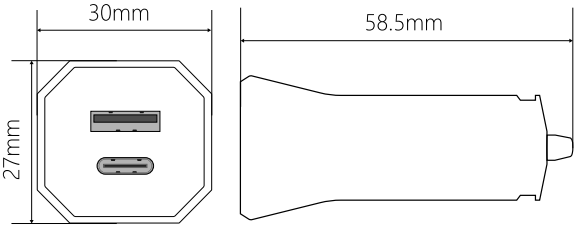

30mm×58.5mm×27mm≈18g



DSC-09-40W


| Product Series Characteristics

- ◆ OUTPUT POWER : 40W
- ◆ INPUT : DC 12V-24V
- ◆ OCP,SCP,OVP,UVP-Auto Restart



| Output Specifications

OUT	U.(V) / I.(A)		
TYPE-C	5V/3A	9V/2.22A	12V/1.67A
TYPE C1+TYPE C2 OUTPUT:20W+20W			
Apple2,4A / Samsung-5V-2A / QC2,0&QC3,0 / Huawei-SCP Samsung-AFC / Huawei-FCP / MTK-PE+2,0 / PD2,0&PD3,0			

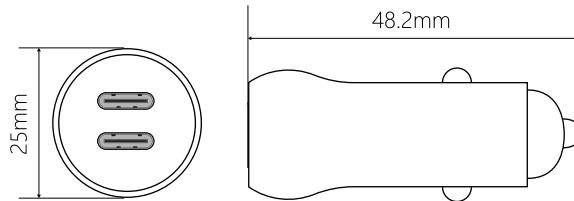

25.2mm (d) × 48.2mm (h) ≈ 27g





ISO9001:2015



ISO14001:2015



GSV



BSCI



Screen Protector >

HISTORY DISHENG

2016

Established Factory
: Screen protector & IT
accessories products.

2018

Increase capacity of screen protector to 500,000 pieces/month.

2019

Expand factory to
4,800 m2 & Certified
ISO standard

2020

Develop R&D team.
Manufacture 3D
products , 2X & 3X
strength products

2021


Set up Sale & Marketing team

GLOBAL MANUFACTURING STANDARD

DESIGN & MANUFACTURER



ISO9001:2015

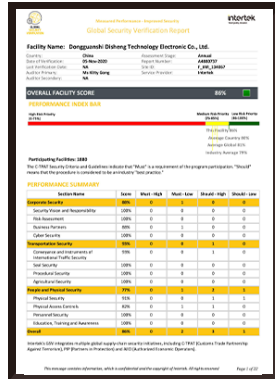

ISO14001:2015



GSV




BSCI



1

Oil Coating

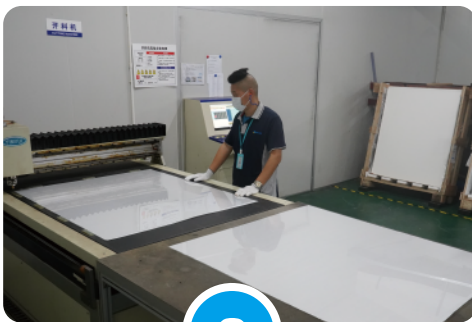

2

Glass cutting



3

Precision CNC



4

Polishing



5

Tempering Oven



6

3D Hot Forming Machine



7

Silk-screen Printing



8

Full inspection



9

Plasma Coating



10

Slitting Machine




11

AB glue Laminating



12

Ultrasonic Cleaning

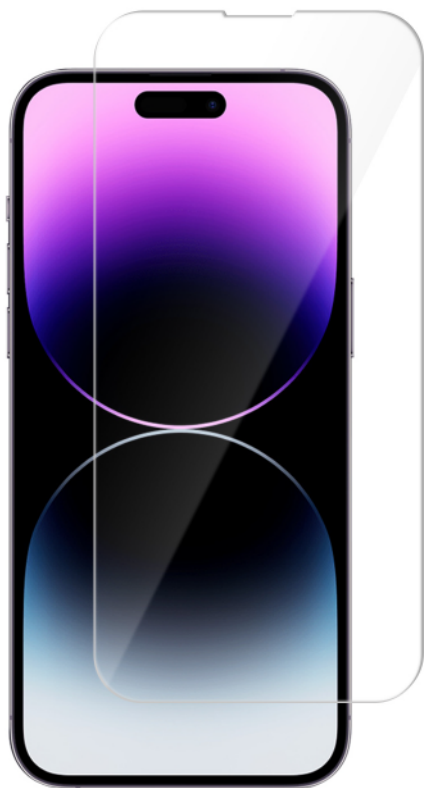


Extreme Ultra Clear

Product Features

- Ultra Clear 92% transparency to maintain a high definition display clarity
- Extreme strength and reinforced edges (pass drop test at 180 cm with 128 g steel ball certified by SGS)

Specifications

Main Function	2.5D Ultra Clear - Extreme Strength
Glass Material	AGC/NSG/SCHOTT/CORNING/CSG
Glass Thickness	0.15mm/0.2mm/0.25mm/0.33mm/0.4mm
AB Glue	Japan/Korea/China Clear AB glue
AB Thickness	0.28mm
Anti-fingerprint	AF Plasma / Electroplating
Transparence	≥ 92%





Anti-Glare Full Coverage Mobile Screen Protector

Product Features

- Anti-reflection and anti-glare functions to reduce light reflection and improve visibility (Ra roughness between 0.10-0.13 μm)
- 2X Stronger for drop protection and reinforced edges (pass ball drop test at 150 cm with 64 g steel ball certified by SGS)

Specifications

Main Function	Anti-Glare Full Coverage - Double Strength
Glass Material	AGC/CSG
Glass Thickness	0.33mm
AB Glue	Japan/Korea/China Clear AB glue
AB Thickness	0.28mm
Anti-fingerprint	AF Plasma / Electroplating
Transparence	$\geq 87\%$

2X



Break Proof



Anti Fingerprint



Anti Scratch



Smooth
Touch



3D Blue Light Cut Mobile Screen Protector

Product Features

- Ultra Clear 92% transparency to maintain a high definition display clarity
- Extreme strength and reinforced edges (pass drop test at 180 cm with 128g steel ball certified by SGS)

Specifications

Main Function	3D Full Coverage - Extreme Strength
Glass Material	AGC/NSG/SCHOTT/CORNING/CSG
Glass Thickness	0.33mm
AB Glue	Japan/Korea/China Clear AB glue
AB Thickness	0.28mm
Anti-fingerprint	AF Plasma / Electroplating
Transparence	≥90%



3D
Curved Edge



Break Proof



Anti Fingerprint



Anti Scratch



Smooth
Touch



High Definition

Invisible Logo / Edge Screen Mobile Screen Protector

Product Features

- Unlimited your imagination by adding invisible logo and screen logo or character on mobile screen protector

Specifications

Main Function	2.5D Full Coverage - Extreme Strength
Glass Material	AGC/NSG/SCHOTT/CORNING/CSG
Glass Thickness	0.15mm/0.2mm/0.25mm/0.33mm/0.4mm
AB Glue	Japan/Korea/China Clear AB glue
AB Thickness	0.28mm
Anti-fingerprint	AF Plasma / Electroplating
Transparence	≥92%

BLC 2X 3X Antireflection 5X



2.5D
Curved Edge



Break Proof



Anti Fingerprint




Anti Scratch




Smooth
Touch



High Definition

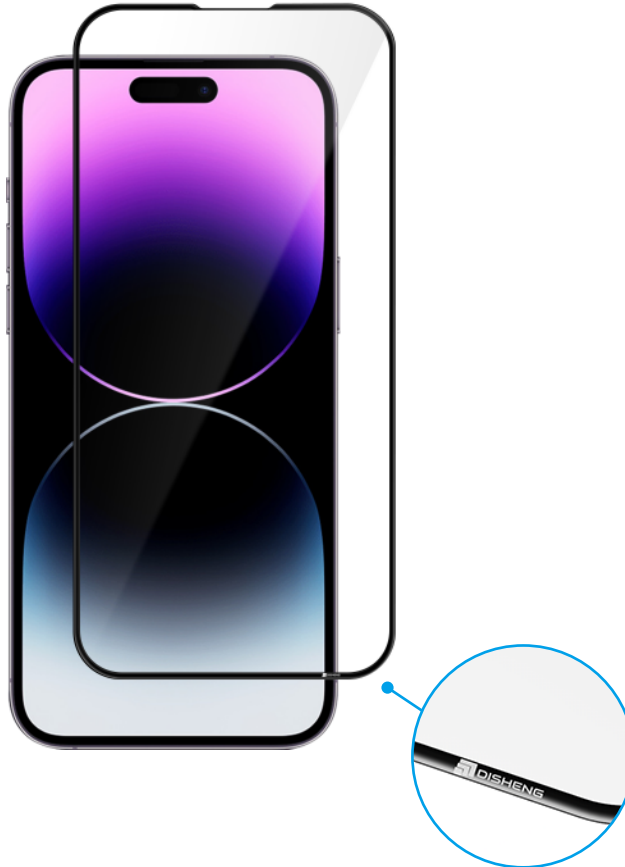

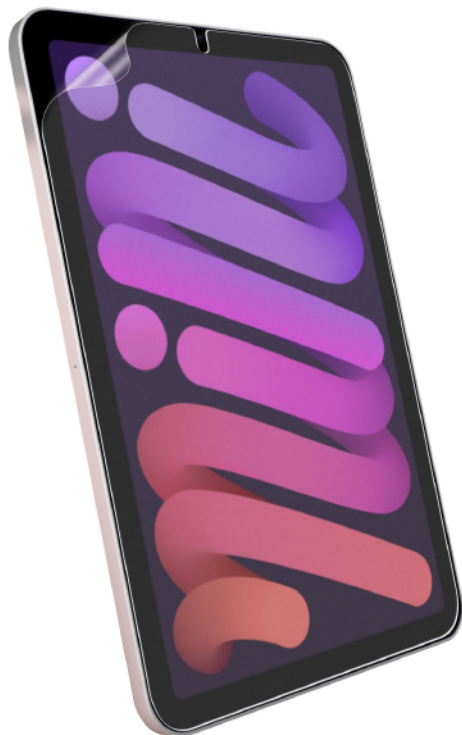

Paper Feel Screen Protector For Tablet and iPad

Product Features

- Draw and write like on paper stemming from ideal amount of fiction on surface
- Ra roughness 0.173 μm

Paper Feel Structures

PET (Release Layer)	0.080mm $\pm$ 0.05
AG PET	0.135 mm $\pm$ 0.05
Silicone	0.040mm $\pm$ 0.02
PET (Release Layer)	0.075mm $\pm$ 0.03



Authentic
Drawing Feel



Anti Fingerprint



Smooth
Touch



Full Silk Screen with Privacy Mobile Screen Protector

Product Features

- Full coverage for ultimate protection
- Two-way privacy filters
- Maximum scratch prevention, silky smooth feeling

Specifications

Main Function	2.5D Full Coverage Privacy - Extreme Strength
Glass Material	AGC/NSG/SCHOTT/CORNING/CSG
Glass Thickness	0.15mm/0.2mm/0.25mm/0.33mm/0.4mm
AB Glue	Japan/Korea/China Clear AB glue
AB Thickness	0.28mm
Anti-fingerprint	AF Plasma / Electroplating
Transparency	≥56%

BLC
AG
HD
2X
3X
Automated
5X



2.5D
Curved Edge



Break Proof



Anti Fingerprint



Anti Scratch



Smooth
Touch



High Definition



Lens Protectors

Acrylic Lens Protector

- Full cover lens glass for ultimate protection
- Bubble-free installation

Eagle Lens Protector

- Strong camera lens protection with aluminum alloy material
- Color match to iPhone 13 /14



Break Proof



Anti Fingerprint



Anti Scratch



High Definition



TPH **Screen Protector**

Product Features

- Suitable for curved edges display mobile : Samsung/ Huawei/ Xiaomi
- Available for adding-on features: Privacy/ Anti Glare/ Blue Light Cut

TPH Structures

PET (Release Layer)	0.050mm $\pm$ 0.01
TPH	0.125mm $\pm$ 0.02
PET (Release Layer)	0.120mm $\pm$ 0.02
PET (Release Layer)	0.188mm $\pm$ 0.02



3D
Curved Edge



Anti Fingerprint



Smooth
Touch



High Definition



Tablet with Anti-Bacterial Screen Protector

Product Features

- Ultra Clear with more than 92% transparency to maintain a high definition display clarity
- Inbuilt anti-bacterial coating

Specifications

Main Function	2.5D Ultra Clear
Glass Material	AGC/NSG/SCHOTT/CORNING/CSG
Glass Thickness	0.25mm/0.33mm
AB Glue	Japan/Korea/China Clear AB glue
AB Thickness	0.28mm
Anti-fingerprint	AF Plasma / Electroplating
Transparency	≥ 92%



2.5D
Curved Edge



Break Proof



Anti Fingerprint



Anti Scratch



Smooth
Touch



High Definition

Accessories



Cleaning Kits



Alignment Frame



Squeegee



Package

DONGGUANSHI DISHENG TECHNOLOGY ELECTRONIC CO.,LTD

WEBSITE: WWW.DISHENGTECH.COM

TEL: +86-0769-82636909

EMAIL: JITTIMA@DISHENGTECH.COM,CN

ADDRESS: ROOM 201, BUILDING 3, NO.525,
LIAOBU JINXING ROAD, LIAOBU TOWN, DONGGUAN CITY, GUANGDONG PROVINCE, CHINA