




SHENZHEN TOPLOUD ELECTRONIC CO.,Ltd.
Your Professional Electro-Acoustic & Charger Partner

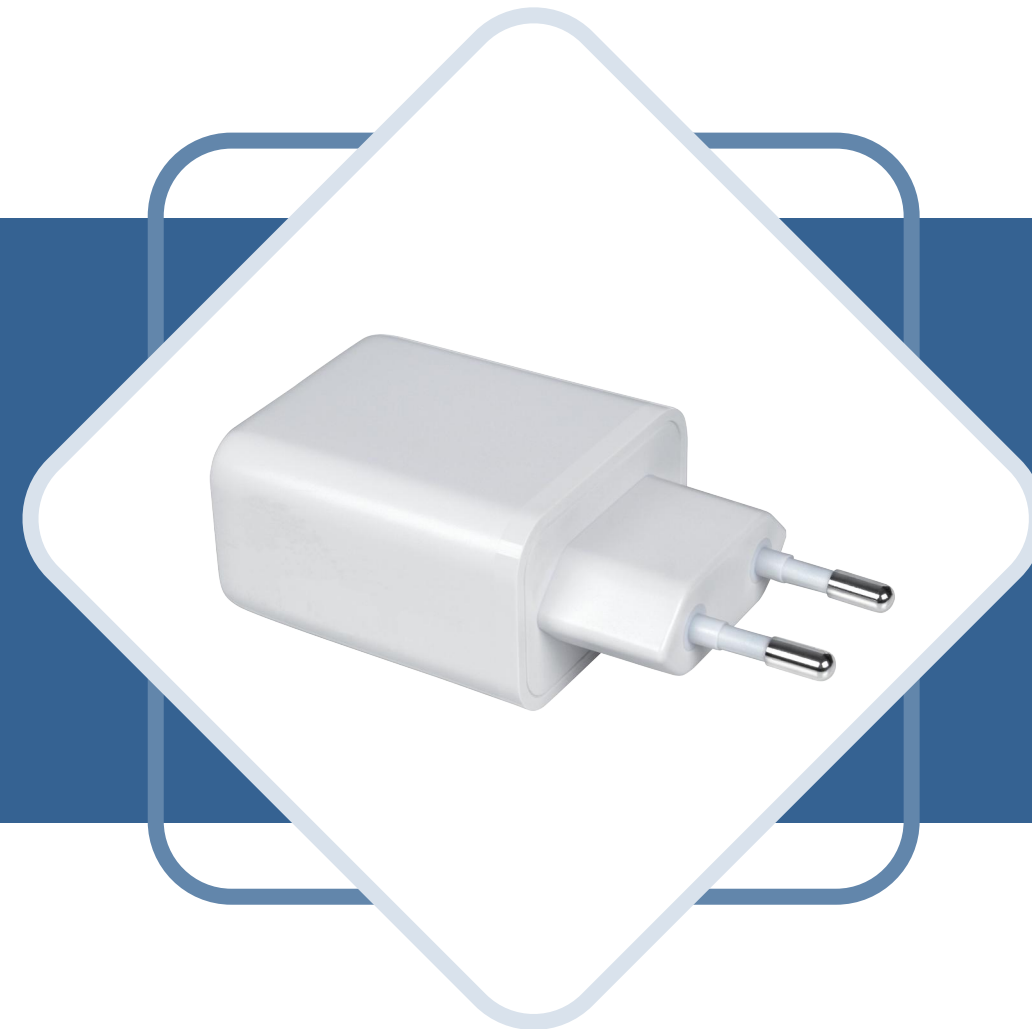


SHENZHEN TOPLOUD ELECTRONIC CO.,Ltd.

ADD: 3-4 floors D Building,Baiyang Industrial,No.44 Keng Wei Road,
Shiyan street,Baoan district,Shenzhen city,Guangdong,China

Sam Tel: +86 133 1298 5631

Email: sam@toploud.com

Web: <http://www.globalsources.com/toploud.co>



PRODUCT CERTIFICATES



COMPANY PROFILE

- Established in Shenzhen since 2009
- Focus on Wall chargers, Car chargers, TWS earbuds, Bluetooth headphones, Wired earphones, and Wired headphones.
- BSCI, ISO 9001 certified factory
- Apple MFi factory authorized manufacturer
- 100 workers, 3000 square meters factory area, 5 production lines, 12 injection molding machines and well equipped laboratory
- Main customers are retailers and brand owners in Europe and USA



SHENZHEN TOPLOUD ELECTRONIC CO.,Ltd.
Your Professional Electro-Acoustic & Charger Partner



TC048 A



Specification 1:

- Input: 100V-240V~50/60Hz 0.15A
- Output:5.0V-1.0A(5W Max)
- Color Options:**White/Black**

Specification 2:

- Input: 100V-240V~50/60Hz 0.3A
- Output:5.0V-2.1A(10W Max)
- Color Options:**White/Black**

Specification 3:

- Input: 100V-240V~50/60Hz 0.35A
- Output:5.0V-2.4A(12W Max)
- Color Options:**White/Black**

Specification 4:

- Input: 100V-240V~50/60Hz 0.45A
- Output:5.0V-3.4A(17W Max)
- Color Options:**White/Black**

Specification 5:

- Input: 100V-240V~50/60Hz 0.45A
- Output:5.0V-3.0A,9.0V-1.67A(15W Max)
- Color Options:**White/Black**

© CE SAA UKCA RoHS REACH

Specification 6:

- Input: 100V-240V~50/60Hz 0.55A
- Output:5.0V-3.0A,9.0V-2.0A,12.0V-1.5A(18W Max)
- Color Options:**White/Black**

© CE SAA UKCA RoHS REACH

TC048 C



- Color Options:**White/Black**
- © CE SAA UKCA RoHS REACH

Specification 1:

- Input: 100V-240V~50/60Hz 0.65A
- Output:5.0V-3.0A,9.0V-2.22A,12.0V-1.67A(20W Max)
- PPS1:3.3V-5.90V 3.0A
- PPS2:3.3V-11.0V 1.8A

Specification 3:

- Input: 100V-240V~50/60Hz 1.0A
- Output:5.0V-3.0A,9.0V-3.0A,12.0V-2.50A,15.0V-2.0A,20.0V-1.50A(30W Max)
- PPS1:3.3V-11.0V 3.0A
- PPS2:3.3V-16.0V 2.0A

Specification 4:

- Input: 100V-240V~50/60Hz 1.0A
- Output:5.0V-3.0A,9.0V-3.0A,12.0V-2.75A,15.0V-2.20A,20.0V-1.65A(33W Max)
- PPS1:3.3V-11.0V 3.0A
- PPS2:3.3V-11.0V 2.05A

Specification 2:

- Input: 100V-240V~50/60Hz 0.75A
- Output:5.0V-3.0A,9.0V-2.77A,12.0V-2.08A(25W Max)
- PPS1:3.3V-5.90V 3.0A
- PPS2:3.3V-11.0V 2.25A

Specification 5:

- Input: 100V-240V~50/60Hz 1.0A
- Output:5.0V-3.0A,9.0V-3.0A,12.0V-3.0A,15.0V-2.4A,20.0V-1.8A(36W Max)
- PPS1:3.3V-11.0V 3.0A
- PPS2:3.3V-16.0V 2.25A

TC048 A+A

12W Wall Charger

- Input: 100V-240V~50/60Hz 0.35A
- Output(USB-A): 5.0V-2.4A(12W Max)
- Color Options: **White/Black**

© CE SAA UKCA RoHS REACH



17W Wall Charger

- Input: 100V-240V~50/60Hz 0.45A
- Output(USB-A): 5.0V-3.4A(17W Max)
- Color Options: **White/Black**

© CE SAA UKCA RoHS REACH



TC048 C+C

20W Wall Charger

- Input: 100V-240V~50/60Hz 0.65A
- Output:
USB-C1/C2 5.0V-3.0A,9.0V-2.22A,
12.0V-1.67A(20W Max)

PPS1:3.3V-5.90V 3.0A
PPS2:3.3V-11.0V 1.8A

- Total Output:
USB-C1 +USB-C2 / 5.0V-3.0A

• Color Options: **White/Black**

© CE SAA UKCA RoHS REACH



33W Wall Charger

- Input: 100V-240V~50/60Hz 1.0A
- Output:
USB-C1/C2 5.0V-3.0A,9.0V-3.0A,12.0V-2.50A,
15.0V-2.0A,20.0V-1.50A(33W Max)

PPS:3.3V-11.0V 3.0A

- Total Output:
USB-C1 +USB-C2 / 5.0V-3.0A

• Color Options: **White/Black**

© CE SAA UKCA RoHS REACH



GaN

20W Wall Charger

- Input: 100V-240V~50/60Hz 0.65A
- Output:
 - USB-C 5.0V-3.0A,9.0V-2.22A,
12.0V-1.67A(20W Max)
 - USB-A 5.0V-3.0A,9.0V-2.0A,
12.0V-1.50A(QC18W)
 - PPS1:3.3V-5.90V 3.0A
 - PPS2:3.3V-11.0V 1.8A
- Total Output: USB-C+USB-A / 5.0V-3.0A
- Color Options:**White/Black**

25W Wall Charger

- Input: 100V-240V~50/60Hz 0.75A
- Output:
 - USB-C 5.0V-3.0A,9.0V-2.77A,
12.0V-2.08A(25W Max)
 - USB-A 5.0V-3.0A,9.0V-2.0A,
12.0V-1.50A(QC18W)
 - PPS1:3.3V-5.90V 3.0A
 - PPS2:3.3V-11.0V 2.25A
- Total Output: USB-C+USB-A / 5.0V-3.0A
- Color Options:**White/Black**

30W Wall Charger

- Input: 100V-240V~50/60Hz 1.0A
- Output:
 - USB-C 5.0V-3.0A,9.0V-3.0A,12.0V-2.50A,
15.0V-2.0A,20.0V-1.50A(30W Max)
 - USB-A 5.0V-3.0A,9.0V-2.0A,
12.0V-1.50A(QC18W)
 - PPS1:3.3V-11.0V 2.75A
 - PPS2:3.3V-16.0V 1.85A
- Total Output: USB-C+USB-A / 5.0V-3.0A
- Color Options:**White/Black**

33W Wall Charger

- Input: 100V-240V~50/60Hz 1.0A
- Output:
 - USB-C 5.0V-3.0A,9.0V-3.0A,12.0V-2.75A,
15.0V-2.20A,20.0V-1.65A(33W Max)
 - USB-A 5.0V-3.0A,9.0V-2.0A,
12.0V-1.50A(QC18W)
 - PPS1:3.3V-11.0V 3.0A
 - PPS2:3.3V-11.0V 2.05A
- Total Output: USB-C+USB-A / 5.0V-3.0A
- Color Options:**White/Black**

TC048
A+C

TC048 A+C



GaN

36W Wall Charger

- Input: 100V-240V~50/60Hz 1.0A
- Output:
 - USB-C 5.0V-3.0A,9.0V-3.0A,12.0V-3.0A,
15.0V-2.4A,20.0V-1.8A(36W Max)
 - USB-A 5.0V-3.0A,9.0V-2.0A,12.0V-1.50A(QC18W)
 - PPS1:3.3V-11.0V 3.0A
 - PPS2:3.3V-16.0V 2.25A
- Total Output: USB-C+USB-A / 5.0V-3.0A
- Color Options:**White/Black**

© CE SAA UKCA RoHS REACH



CHN



US



UK



EU



AU



40W/45W Wall Charger:TC080

40W Wall Charger(TC080 C):

- Input: 100V-240V~50/60Hz 1.5A
- Output:
 - USB-C 5.0V-3.0A,9.0V-3.0A,
(AVS)9.0V-15.0V 2.67A° [3.0A° DPS]
(AVS)15.0V-20.0V 2.0A° [3.0A° DPS]
 - PPS:5.0V-21.0V 3.0A
- Color Options:**White/Black**

45W Wall Charger(TC080 C+C):

- Input: 100V-240V~50/60Hz 1.3A
- Output:
 - USB-C1/C2 5.0V-3.0A,9.0V-3.0A,12.0V-3.0A,
15.0V-3.0A,20.0V-2.25A(45W Max)
 - PPS1:3.3V-11.0V 4.05A
 - PPS2:3.3V-21.0V 2.25A
- Total Output:
 - USB-C1 5.0V-3.0A,9.0V-2.77A,12.0V-2.08A,
15.0V-1.67A,20.0V-1.25A(25W)
 - USB-C2 5.0V-3.0A,9.0V-2.22A,12.0V-1.67A
15.0V-1.33A,20.0V-1.0A(20W)



GaN



CHN



US



UK



EU



AU



- Color Options:**White/Black**

© CE SAA UKCA RoHS REACH

GaN

45W Wall Charger(TC080 C):

- Input: 100V-240V~50/60Hz 1.3A
- Output:
 - USB-C 5.0V-3.0A,9.0V-3.0A,12.0V-3.0A,
15.0V-3.0A,20.0V-2.25A(45W Max)
 - PPS1:3.3V-11.0V 3.0A
 - PPS2:3.3V-21.0V 2.2A
- Color Options:**White/Black**

45W Wall Charger(TC080 A+C):

- Input: 100V-240V~50/60Hz 1.3A
- Output:
 - USB-C 5.0V-3.0A,9.0V-3.0A,12.0V-3.0A,
15.0V-3.0A,20.0V-2.25A(45W Max)
 - USB-A 5.0V-3.0A,9.0V-2.0A,
12.0V-1.5A(QC18W)
 - PPS1:3.3V-11.0V 3.0A
 - PPS2:3.3V-21.0V 2.15A
- Total Output: USB-C +USB-A / 5.0V-3.0A



65W TC081

65W Wall Charger(TC081 C):

- Input: 100V-240V~50/60Hz 1.5A
- Output:
 - USB-C 5.0V-3.0A,9.0V-3.0A,12.0V-3.0A, 15.0V-3.0A,20.0V-3.25A(65W Max)
 - PPS1:3.3V-11.0V 5.0A
 - PPS2:3.3V-21.0V 3.0A
- Color Options:**White/Black**
- © CE SAA UKCA RoHS REACH



65W Wall Charger(TC081 A+C):

- Input: 100V-240V~50/60Hz 1.5A
- Output:
 - USB-C 5.0V-3.0A,9.0V-3.0A,12.0V-3.0A, 15.0V-3.0A,20.0V-3.25A(65W Max)
 - USB-A 5.0V-3.0A,9.0V-2.0A,12.0V-1.5A(QC3.0 18W)
 - PPS1:3.3V-11.0V 5.0A
 - PPS2:3.3V-21.0V 3.0A
- Total Output:
 - USB-C 5.0V-3.0A,9.0V-3.0A,12.0V-3.0A, 15.0V-3.0A,20.0V-2.25A(45W Max)
 - USB-A 5.0V-3.0A,9.0V-2.0A,12.0V-1.5A(QC3.0 18W)
- Color Options:**White/Black**
- © CE SAA UKCA RoHS REACH



GaN



65W Wall Charger(TC081 A+C+C):

- Input: 100V-240V~50/60Hz 1.5A
- Output:
 - USB-C1/C2 5.0V-3.0A,9.0V-3.0A,12.0V-3.0A, 15.0V-3.0A,20.0V-3.25A(65W Max)
 - USB-A 5.0V-3.0A,9.0V-2.0A,12.0V-1.5A(QC3.0 18W)
 - PPS1:3.3V-11.0V 5.0A
 - PPS2:3.3V-21.0V 3.0A
- Total Output:
 - USB-C1+USB-C2 Output:45W+20W Max
 - USB-C1+USB-A Output:PD45W+QC18W
 - USB-C2+USB-A Output:5.0V-3.0A
 - USB-C1+USB-C2+USB-A Output:45W+15W Max
- Color Options:**White/Black**
- © CE SAA UKCA RoHS REACH



GaN

