

Shenzhen Huikeyuan Co.,Ltd

深圳匯科源電子科技有限公司

Cathedy GmbH(德國)



240W GaN USB-C
Power Adapter



All In One Laptop Charger



GaN 2IN1 USB-C Power Adapter



GaN-USB-C Power Adapter



USB TYPE-C PD Power Adapter



USB TYPE-C PD Power Adapter



Vehicle Charger



USB TYPE-C PD DC Adapter



12V-24V DC Adapter



24W-48W AC DC Adapter



36W-90W AC DC Adapter



Medical Power Supply




100W-400W AC DC Adapter

POWER SUPPLY MANUFACTURER

PROFESSIONAL OEM/ODM



5 years Warranty ➡ 5 Jahre Garantie ➡ 5 años Garantía ➡ 5年质保 ➡ 5年品質保証

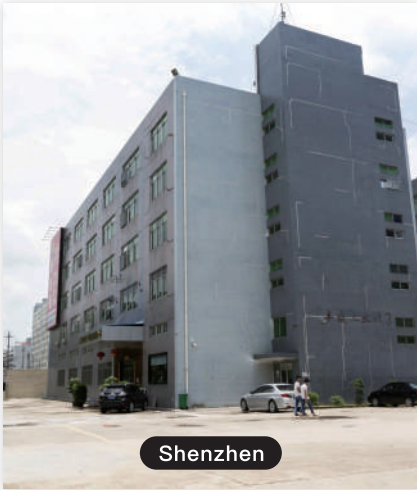

Shenzhen



Huizhou



Germany

Company Overview

HKY Power Limited was founded in 2013, which is a national high-tech enterprise specializing in the research and development, production, and sales of intelligent power adapters.

The company has production bases in the city of Shenzhen and Huizhou, as well as a branch in Hamburg, Germany.

Our product covers the application of various industries such as medical equipment, communication POE system, AI servers, video conferencing equipment, financial POS devices, fitness equipment, AI laptops, industrial computers, drones, handheld game consoles and smart homes, etc. We offer unconventional power solutions on the basis of your needs.

The safety standards of our products are UL/ETL/FCC/CB/TUVGS/CE/UKCA/KCC/KCC/PSE/SAA/RCM/CCC etc.

Products have passed the ISO9001: 2015 quality management system and the European EcoVadis.

Win-win cooperation is the goal for the company and our customer partners. HKY-the most innovative power solution for you.

公司简介

深圳市汇科源电子科技有限公司成立于2013年，是一家专业从事智能电源适配器研发、生产、销售的国家级高新技术企业。公司在深圳和惠州设有生产基地，并在德国汉堡设有分公司。

我们的产品涵盖医疗设备、通信POE系统、AI服务器、视频会议设备、金融POS设备、健身设备、AI笔记本电脑、工业电脑、无人机、手持游戏机、智能家居等各个行业的应用。我们根据您的需要提供非常规的解决方案。

我们的产品有 UL/ETL/FCC/CB/TUVGS/CE/UKCA/KCC/KCC/PSE/SAA/RCM/CCC 等安全标准, 并且已通过ISO9001: 2015质量管理体系和欧洲EcoVadis认证, 产品提供了长达五年质保的服务, 提供最灵活的MOQ方式以及多种付款模式。

合作共赢是公司与客户合作的目标, HKY为您提供最佳的电源解决方案。

GaN-Medical AC-DC PSU

Model #	Picture	Specifications	Power	Certifications
D45C-60601-PD45W		Type: GaN-Desktop-C14 Dimension: L107mm*W45.5mm*H30.2mm Input: 100V-240V 50/60Hz Output: 5-20V PD45W Cypress PD 3.0	45W	IEC/EN 60601 ROHS
D65A-60601-PD65W		Type: GaN-Desktop-C14 Dimension: L115mm*W51mm* H30mm Input: 100V-240V 50/60Hz Output: 5-20V PD65W Cypress PD 3.0	65W	IEC/EN 60601 ROHS
A100C14-60601-PD100W		Type: GaN-Desktop-C14 Dimension: L145.9mm*W59.2mm*H28.5mm Input: 100V-240V 50/60Hz Output: 5-20V PD100W Cypress PD 3.0	100W	IEC/EN 60601 ROHS
A100C14-60601-PD140W		Type: GaN-Desktop-C14 Dimension: L145.9mm*W59.2mm*H28.5mm Input: 100V-240V 50/60Hz Output: 5-28V PD140W Cypress PD 3.1	140W	IEC/EN 60601 ROHS
A100C14-60601-PD240W		Type: GaN-Desktop-C14 Dimension: L145.9mm*W59.2mm*H28.5mm Input: 100V-240V 50/60Hz Output: 5-48V PD240W Cypress PD 3.1	240W	IEC/EN 60601 ROHS
C65-65W USB-C		Input DC: 12V-24V DC 8A Max (9-32V) Dimension: L91.2mm*W38*L28mm Output: 5V-20V PD65W Cypress PD 3.0	65W	IEC/EN 60601 ROHS
C100-100W USB-C		Input DC: 12V-24V DC 12A Max (9-32V) Dimension: L91.2mm*W38*L28mm Output: 5V-20V PD100W Cypress PD 3.0	100W	IEC/EN 60601 ROHS
C140-140W USB-C		Input DC: 12V-24V DC 12A Max (9-32V) Dimension: L91.2mm*W38*L28mm Output: 5V-28V PD140W Cypress PD 3.1	140W	IEC/EN 60601 ROHS
C65-XXXXX YYYY		Input DC: 12V-24V DC 8A Max (9-32V) Dimension: L91.2mm*W38*L28mm Output: 19V3.42A-24V2.71A (Customizable parameters)	65W	IEC/EN 60601 ROHS
C100-XXXXX YYYY		Input DC: 12V-24V DC 12A Max (9-32V) Dimension: L91.2mm*W38*L28mm Output: 19V4.74A-20V3.75A (Customizable parameters)	100W	IEC/EN 60601 ROHS



GaN USB-C PD POWER ADAPTER

Q16-GaN-PD45W

5-20V PD3.0 45W

Input: 100-240VAC, 50Hz/60Hz, 1.1A Max Output: 5-20V 45W 3A MAX

Scope/
Applied to the field of IT
and AV equipment

Protection/
OCP,SCP,OVP

Efficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)

Size/
L50*W50*H28mm

The specification shall be applied to the field of
IT and AV Medical equipment field



Q36-GaN-PD65W

5-20V PD3.0 65W

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max Output: 5-20V 65W 3.25A MAX

Scope/
Applied to the field of IT
and AV equipment

Protection/
OCP,SCP,OVP

Efficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)

Size/
L77*W40.5*H30mm

The specification shall be applied to the field of
IT and AV Medical equipment field



D40-GaN-PD45W

5-20V PD3.0 45W

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max Output: 5-20V 45W 3A MAX

Scope/
Applied to the field of IT
and AV equipment

Protection/
OCP,SCP,OVP

Efficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)

Size/
L92.5*W36.3*H26mm

The specification shall be applied to the field of
IT and AV Medical equipment field



C8

D40-GaN-PD45W

5-20V PD3.0 45W

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max Output: 5-20V 45W 3A MAX

Scope/
Applied to the field of IT
and AV equipment

Protection/
OCP,SCP,OVP

Efficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)

Size/
L92.5*W36.3*H26mm

The specification shall be applied to the field of
IT and AV Medical equipment field



C6

D40-GaN-PD65W

5-20V PD3.0 65W

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max Output: 5-20V 65W 3.25A MAX

Scope/
Applied to the field of IT
and AV equipment

Protection/
OCP,SCP,OVP

Efficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)

Size/
L92.5*W36.3*H26mm

The specification shall be applied to the field of
IT and AV Medical equipment field



C8

NEW

GaN USB-C PD POWER ADAPTER

D40-GaN-PD65W (5-20V PD3.0 65W)

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max Output: 5--20V 65W 3.25A MAX

Scope/
Applied to the field of IT
and AV equipmentProtection/
OCP,SCP,
OVPEfficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)Size/
L92.5*W36.3*
H26mm

The specification shall be applied to the field of IT and AV Medical equipment field



C6

A100-GaN-PD130W (5-20V PD3.1 130W)

Input: 100-240VAC, 50Hz/60Hz, 2A Max Output: 5-20V 130W 6.5A MAX

Scope/
Applied to the field of IT
and AV equipmentProtection/
OCP,SCP,
OVPEfficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)Size/
L145.9*W59.2*
H28.5mm

The specification shall be applied to the field of IT and AV Medical equipment field



C6

A100-GaN-PD140W (5-28V PD3.1 140W)

Input: 100-240VAC, 50Hz/60Hz, 2A Max Output: 5-28V 140W 5A MAX

Scope/
Applied to the field of IT
and AV equipmentProtection/
OCP,SCP,
OVPEfficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)Size/
L145.9*W59.2*
H28.5mm

The specification shall be applied to the field of IT and AV Medical equipment field



C14

A180C-GaN-PD240W (5-48V PD3.1 240W)

Input: 100-240VAC, 50Hz/60Hz, 2A Max Output: 5-48V 240W 5A MAX

Scope/
Applied to the field of IT
and AV equipmentProtection/
OCP,SCP,
OVPEfficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)Size/
L152*W69*
H31mm

The specification shall be applied to the field of IT and AV Medical equipment field



C14

A180-GaN-PD240W (5-48V PD3.1 240W)

Input: 100-240VAC, 50Hz/60Hz, 2A Max Output: 5-48V 240W 5A MAX

Scope/
Applied to the field of IT
and AV equipmentProtection/
OCP,SCP,
OVPEfficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)Size/
L152*W69*
H31mm

The specification shall be applied to the field of IT and AV Medical equipment field



C14

GaN RT-5 PD100W 5-20V PD100W

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max Output: 5-20V 100W (5V/9V/12V/15V/20V)

Scope/
Applied to the field of IT
and AV equipmentProtection/
OCP,SCP,
OVPEfficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)Size/
L76.6*W54*
H30.1mm

The specification shall be applied to the field of IT and AV Medical equipment field



GaN RT15-5 PD140W 5-48V PD140W

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max Output: 5-48V 140W 5A MAX

Scope/
Applied to the field of IT
and AV equipmentProtection/
OCP,SCP,
OVPEfficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)Size/
L93*W57.7*
H30.1mm

The specification shall be applied to the field of IT and AV Medical equipment field



Q36MU-TYPE-C 5-20V PD3.0 45W

Input: 100-240VAC, 50Hz/60Hz, 1.1A Max Output: 5-20V 45W (5V/9V/12V/15V/20V)

Scope/
Applied to the field of IT
and AV equipment

Protection/
OCP,SCP,OVP

Size/
L77*W40.7*H30.0mm

No Load Power
Consumption<0.075W
(Output Voltage: 5V)

Efficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)



Q36MB-TYPE-C 5-20V PD3.0 45W

Input: 100-240VAC, 50Hz/60Hz, 1.1A Max Output: 5-20V 45W (5V/9V/12V/15V/20V)

Scope/
Applied to the field of IT
and AV equipment

Protection/
OCP,SCP,OVP

Size/
L77*W40.7*H30.0mm

No Load Power
Consumption<0.075W
(Output Voltage: 5V)

Efficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)



Q36MV-TYPE-C 5-20V PD3.0 45W

Input: 100-240VAC, 50Hz/60Hz, 1.1A Max Output: 5-20V 45W (5V/9V/12V/15V/20V)

Scope/
Applied to the field of IT
and AV equipment

Protection/
OCP,SCP,OVP

Size/
L77*W40.7*H30.0mm

No Load Power
Consumption<0.075W
(Output Voltage: 5V)

Efficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)



Q36MS-TYPE-C 5-20V PD3.0 45W

Input: 100-240VAC, 50Hz/60Hz, 1.1A Max Output: 5-20V 45W (5V/9V/12V/15V/20V)

Scope/
Applied to the field of IT
and AV equipment

Protection/
OCP,SCP,OVP

Size/
L77*W40.7*H30.0mm

No Load Power
Consumption<0.075W
(Output Voltage: 5V)

Efficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)



Q45D5-TYPE-C 5-20V PD3.0 45W

Input: 100-240VAC, 50Hz/60Hz, 1.1A Max Output: 5-20V 45W (5V/9V/12V/15V/20V)

Scope/
Applied to the field of IT
and AV equipment

Protection/
OCP,SCP,OVP

Size/
L61.3*W61.3*H30.1mm

No Load Power
Consumption<0.075W
(Output Voltage: 5V)

Efficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)



Q45D6-TYPE-C 5-20V PD3.0 45W

Input: 100-240VAC, 50Hz/60Hz, 1.1A Max Output: 5-20V 45W (5V/9V/12V/15V/20V)

Scope/
Applied to the field of IT
and AV equipment

Protection/
OCP,SCP,OVP

Size/
L61.3*W61.3*H30.1mm

No Load Power
Consumption<0.075W
(Output Voltage: 5V)

Efficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)



A70-TYPE-C 5-20V PD65W

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max Output: 5-20V 65W (5V/9V/12V/15V/20V)

Scope/
Applied to the field of IT
and AV equipmentProtection/
OCP,SCP,OVPSize/
L112.1*W52*H27.9mmNo Load Power
Consumption<0.15W
(Output Voltage: 5V)Efficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)**Q65M5-TYPE-C** 5-20V PD65W

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max Output: 5-20V 65W (5V/9V/12V/15V/20V)

Scope/
Applied to the field of IT
and AV equipmentProtection/
OCP,SCP,OVPSize/
L69.4*W69.4*H30.1mmNo Load Power
Consumption<0.15W
(Output Voltage: 5V)Efficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)**Q65M6-TYPE-C** 5-20V PD65W

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max Output: 5-20V 65W (5V/9V/12V/15V/20V)

Scope/
Applied to the field of IT
and AV equipmentProtection/
OCP,SCP,OVPSize/
L69.4*W69.4*H30.1mmNo Load Power
Consumption<0.15W
(Output Voltage: 5V)Efficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)**A100-1-TYPE-C** 5-20V PD3.0 100W

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max Output: 5-20V 100W (5V/9V/12V/15V/20V)

Scope/
Applied to the field of IT
and AV equipmentProtection/
OCP,SCP,OVPSize/
L145.89*W59.19*H28.5mmNo Load Power
Consumption<0.15W
(Output Voltage: 5V)Efficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)**A100-1-TYPE-C** 5-20V PD3.0 100W

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max Output: 5-20V 100W (5V/9V/12V/15V/20V)

Scope/
Applied to the field of IT
and AV equipmentProtection/
OCP,SCP,OVPSize/
L145.89*W59.19*H28.5mmNo Load Power
Consumption<0.15W
(Output Voltage: 5V)Efficiency/ Meet CEC, Energy Star 3.0
(CoC V5-Level VI)

C65-65W USB-C 65W USB-C Vehicle Charger

Input: 12V-24V DC 12A Max (9-32V) Output: 5V-20V 65W Max
Power: 65W Max in Total

Compatible with Macbook and
other laptop/tablets/smartphone

**C100-100W USB-C** 100W USB-C Vehicle Charger

Input: 12V-24V DC 12A Max (9-32V) Output: 5V3A/9V3A/12V3A/15V3A/20V5A
Power: 100W Max in Total

Compatible with Macbook and
other laptop/tablets/smartphone

**C118-118W USB-C** 118W USB-C PD3.0 Vehicle Adapter


Input DC: 12V-24V DC 12A Max (9-32V) Output DC: 5V3A/9V3A/12V3A/15V3A/20V5A
Output QC 3.0 DC: 5V3A/9V2A/12V1.5A

Compatible with Macbook Pro/Macbook Air
and other laptop/tablets/smartphone

**C140-140W USB-C** 140W USB-C PD3.1 DC Vehicle Charger

Input: 12V-24V DC 12A Max (9-32V)
Output: 5V3A/9V3A/12V3A/15V3A/20V5A/28V5A

Compatible with Macbook Pro/Macbook Air
and other laptop/tablets/smartphone



C100C-100W USB-C

2 IN 1 Universal 100W USB-C PD3.0 Vehicle Charger

Input: 12V-24V DC 12A Max (9-32V) Output: 5V3A/9V3A/12V3A/15V3A/20V5A
Power: 100W Max in Total

Compatible with Macbook and
other laptop/tablets/smartphone



C140C-100W USB-C

2 IN 1 Universal 140W USB-C PD3.1 Vehicle Charger

Input: 12V-24V DC 12A Max (9-32V) Output: 5V3A/9V3A/12V3A/15V3A/20V5A/28V5A

Compatible with Macbook and
other laptop/tablets/smartphone



C145C-145W USB-C

2 IN 1 Universal 145W USB-C Vehicle Charger
140W USB-C PD3.1 DC Vehicle Charger

Input: 12V-24V DC 15A Max (9-32V) Output C: 5V3A,9V3A,12V3A,15V3A,20V5A, 28V5A
Output C: 5V3A,9V3A,12V3A,15V3A,20V5A, 28V5A Output C+C: 100W+45W

Compatible with Macbook and
other laptop/tablets/smartphone



C150-1-TYPE-C 156.0W Max

Input: 12V-24V DC 14A Max
C1 Output PD3.1/3.0 DC: 5V3A/9V3A/12V3A/15V3A/20V5A/28V5A (140W)
C2 Output PD: 5V3A/9V2.22A/12V1.67A (20W) A1 A2 Output DC: 5V3A/9V2A/12V1.5A (18W)


Compatible with Macbook and
other laptop/tablets/smartphone



Global Travel Switching Power Supply

Customized

Providing Power Supply from
5V to 72V Max. 240W

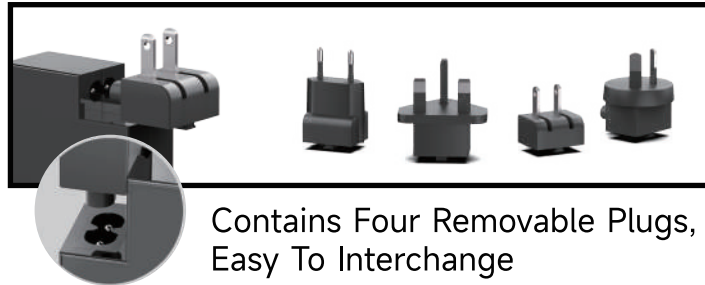

Contains Four Removable Plugs,
Easy To Interchange

Type	Model	Power	Output	AC	Certificates
Global travel Switching Power Supply	Q45D9	40W	12V3.33A	C8	UL, CE, FCC, CB, UKCA, RoHS
Global travel Switching Power Supply	Q45D9	45W	15V3A	C8	UL, CE, FCC, CB, UKCA, RoHS
Global travel Switching Power Supply	Q45D9	45W	19V2.37A	C8	UL, CE, FCC, CB, UKCA, RoHS
Global travel Switching Power Supply	Q45D9	45W	20V2.25A	C8	UL, CE, FCC, CB, UKCA, RoHS
Global travel Switching Power Supply	Q45D9	48W	24V2A	C8	UL, CE, FCC, CB, UKCA, RoHS
Global travel Switching Power Supply	Q65C1-2	60W	12V5A	C8	CE, CB, UKCA, FCC, RoHS
Global travel Switching Power Supply	Q65C1-2	60W	15V4A	C8	CE, CB, UKCA, FCC, RoHS
Global travel Switching Power Supply	Q65C1-2	65W	19V3.42A	C8	CE, CB, UKCA, FCC, RoHS
Global travel Switching Power Supply	Q65C1-2	65W	19.5V3.33A	C8	CE, CB, UKCA, FCC, RoHS
Global travel Switching Power Supply	Q65C1-2	65W	20V3.25A	C8	CE, CB, UKCA, FCC, RoHS
Global travel Switching Power Supply	Q65C1-2	65W	24V2.37A	C8	CE, CB, UKCA, FCC, RoHS
Global travel Switching Power Supply	RT100-GaN	72W	12V6A	C8	FCC, CE, UKCA, SAA, RoHS
Global travel Switching Power Supply	RT100-GaN	90W	15V6A	C8	FCC, CE, UKCA, SAA, RoHS
Global travel Switching Power Supply	RT100-GaN	90W	19V4.74A	C8	FCC, CE, UKCA, SAA, RoHS
Global travel Switching Power Supply	RT100-GaN	100W	19V5.2A	C8	FCC, CE, UKCA, SAA, RoHS
Global travel Switching Power Supply	RT100-GaN	90W	19.5V4.62A	C8	FCC, CE, UKCA, SAA, RoHS
Global travel Switching Power Supply	RT100-GaN	100W	20V5A	C8	FCC, CE, UKCA, SAA, RoHS
Global travel Switching Power Supply	RT100-GaN	90W	24V3.75A	C8	FCC, CE, UKCA, SAA, RoHS
Global travel Switching Power Supply	RT100-GaN	100W	24V4.16A	C8	FCC, CE, UKCA, SAA, RoHS
Global travel Switching Power Supply	RT15-GAN	84W	12V7A	C8	CE, FCC, UKCA
Global travel Switching Power Supply	RT15-GAN	120W	19V6.32A	C8	CE, FCC, UKCA
Global travel Switching Power Supply	RT15-GAN	120W	24V5A	C8	CE, FCC, UKCA
Global travel Switching Power Supply	RT15-GAN	144W	48V3A	C8	CE, FCC, UKCA

Wall Type Switching Power Supply

Customized

Providing Power Supply from
5V to 72V Max. 240W



Type	Model	Power	Output	AC	Certificates
Wall Type	Q36H	15W	5V3A	US/UK/EU/JP/KR/AU	CE FCC UKCA RoHS CCC
Wall Type	Q36H	18W	9V2A	US/UK/EU/JP/KR/AU	CE FCC UKCA RoHS CCC
Wall Type	Q36H	27W	9V3A	US/UK/EU/JP/KR/AU	CE FCC UKCA RoHS CCC
Wall Type	Q36H	24W	12V2A	US/UK/EU/JP/KR/AU	CE FCC UKCA RoHS CCC
Wall Type	Q36H	30W	12V2.5A	US/UK/EU/JP/KR/AU	CE FCC UKCA RoHS CCC
Wall Type	Q36H	30W	15V2A	US/UK/EU/JP/KR/AU	CE FCC UKCA RoHS CCC
Wall Type	Q36H	24W	24V1A	US/UK/EU/JP/KR/AU	CE FCC UKCA RoHS CCC
Wall Type	Q36H	30W	24V1.25A	US/UK/EU/JP/KR/AU	CE FCC UKCA RoHS CCC
Wall Type	Q36H	30W	30V1A	US/UK/EU/JP/KR/AU	CE FCC UKCA RoHS CCC
Wall Type	Q36H	30W	48V0.75A	US/UK/EU/JP/KR/AU	CE FCC UKCA RoHS CCC

Type	Model	Power	Output	AC	Certificates
Wall Type	Q36C	20W	5V4A	US/UK/EU/JP/KR/AU	       
Wall Type	Q36C	36W	9V4A	US/UK/EU/JP/KR/AU	       
Wall Type	Q36C	36W	12V3A	US/UK/EU/JP/KR/AU	       
Wall Type	Q36C	40W	12V3.33A	US/UK/EU/JP/KR/AU	       
Wall Type	Q36C	36W	15V2.4A	US/UK/EU/JP/KR/AU	       
Wall Type	Q36C	45W	15V3A	US/UK/EU/JP/KR/AU	       
Wall Type	Q36C	45W	18V2.5A	US/UK/EU/JP/KR/AU	       
Wall Type	Q36C	42W	19V2.1A	US/UK/EU/JP/KR/AU	       
Wall Type	Q36C	45W	19V2.37A	US/UK/EU/JP/KR/AU	       
Wall Type	Q36C	48W	19V2.53A	US/UK/EU/JP/KR/AU	       
Wall Type	Q36C	36W	24V1.5A	US/UK/EU/JP/KR/AU	       
Wall Type	Q36C	48W	24V2A	US/UK/EU/JP/KR/AU	       
Wall Type	Q36C	45W	30V1.5A	US/UK/EU/JP/KR/AU	       
Wall Type	Q36C	48W	48V1A	US/UK/EU/JP/KR/AU	       
Wall Type	Q70A	60W	12V5A	US/UKEU	    
Wall Type	Q70A	65W	14V4.5A	US/UKEU	    
Wall Type	Q70A	60W	15V4A	US/UKEU	    
Wall Type	Q70A	65W	18V3.5A	US/UKEU	    
Wall Type	Q70A	65W	19V3.42A	US/UKEU	    
Wall Type	Q70A	65W	19.5V3.33A	US/UKEU	    
Wall Type	Q70A	65W	20V3.25A	US/UKEU	    
Wall Type	Q70A	65W	24V2.71A	US/UKEU	    
Wall Type	Q70A	60W	30V2A	US/UKEU	    
Wall Type	Q70A	65W	48V1.35A	US/UKEU	    
Wall Type	Q70A	65W	52V1.2A	US/UKEU	    

Desktop Switching Power Supply

Customized

Providing Power Supply from
5V to 72V Max. 240W

C6 C8 C14 

Type	Model	Power	Output	AC	Certificates
Desktop Type	A45A-2	28W	8V3.5A	C8	     
Desktop Type	A45A-2	36W	9V4A	C8	     
Desktop Type	A45A-2	48W	12V4A	C8	     
Desktop Type	A45A-2	50W	12V4.16A	C8	     
Desktop Type	A45A-2	42W	14V3A	C8	     
Desktop Type	A45A-2	45W	15V3A	C8	     
Desktop Type	A45A-2	45W	18V2.5A	C8	     
Desktop Type	A45A-2	42W	19V2.1A	C8	     
Desktop Type	A45A-2	45W	19V2.37A	C8	     
Desktop Type	A45A-2	48W	19V2.53A	C8	     
Desktop Type	A45A-2	45W	20V2.25A	C8	     
Desktop Type	A45A-2	48W	24V2A	C8	     
Desktop Type	A45A-2	48W	48V1A	C8	     
Desktop Type	A45A-2	48W	54V0.88A	C8	     
Desktop Type	A12-2	45W	9V5A	C8	      
Desktop Type	A12-2	60W	12V5A	C8	      
Desktop Type	A12-2	65W	14V4.5A	C8	      
Desktop Type	A12-2	60W	15V4A	C8	      
Desktop Type	A12-2	65W	15V4.3A	C8	      
Desktop Type	A12-2	65W	16V4.06A	C8	      
Desktop Type	A12-2	60W	18V3.5A	C8	      
Desktop Type	A12-2	65W	19V3.42A	C8	      
Desktop Type	A12-2	65W	19.5V3.33A	C8	      
Desktop Type	A12-2	65W	20V3.25A	C8	      
Desktop Type	A12-2	65W	24V2.71A	C8	      
Desktop Type	A12-2	65W	48V1.35A	C8	      
Desktop Type	A12-2	65W	52V1.2A	C8	      

Type	Model	Power	Output	AC	Certificates
Desktop Type	A90	84W	12V7A	C14	   
Desktop Type	A159A2	84W	14V6A	C8	    
Desktop Type	A159A2	90W	15V6A	C8	    
Desktop Type	A159A2	90W	16V5.5A	C8	    
Desktop Type	A159A	90W	19V4.74A	C6	      
Desktop Type	A159A	90W	19.5V4.62A	C6	      
Desktop Type	A159A	90W	24V3.75A	C6	      
Desktop Type	A159A2	90W	24V3.75A	C8	    
Desktop Type	A159A	90W	48V1.88A	C6	    
Desktop Type	A159A	90W	54V1.66A	C6	    
Desktop Type	A100	90W	18V5A	C6	       
Desktop Type	A100	95W	19V5A	C6	       
Desktop Type	A100	100W	20V5A	C6	       
Desktop Type	A100	100W	24V4.16A	C6	       
Desktop Type	A100-1	120W	12V10A	C14	   
Desktop Type	A100-1	120W	15V8A	C14	   
Desktop Type	A100-1	120W	19V6.32A	C14	   
Desktop Type	A100-1	120W	24V5A	C14	   
Desktop Type	A100-1	135W	19V7.1A	C14	   
Desktop Type	A100-1	150W	19V7.9A	C14	   
Desktop Type	A100-1	150W	24V6.25A	C14	   
Desktop Type	A160	150W	12V12.5A	C14	       
Desktop Type	A160	150W	15V10A	C14	       
Desktop Type	A160	180W	18V10A	C14	       
Desktop Type	A190	180W	19.5V9.23A	C14	       
Desktop Type	A190	180W	19V9.5A	C14	       
Desktop Type	A190	180W	20V9A	C14	       
Desktop Type	A190	180W	24V7.5A	C14	       
Desktop Type	A240	180W	12V15A	C14	    
Desktop Type	A240	230W	19.5V11.8A	C14	    
Desktop Type	A240	240W	19.5V12.3A	C14	    
Desktop Type	A240	230W	20V11.5A	C14	    
Desktop Type	A240	240W	20V12A	C14	    
Desktop Type	A240	200W	24V8.5A	C14	    
Desktop Type	A240	240W	24V10A	C14	    

I 12-24V DC ADAPTER

MODEL	POWER	INPUT DC
C65-12V3A	36W	9-32V DC Adapter
C65-12V5A	60W	
C65-15V4A	60W	
C65-16V4A	65W	
C65-19V3.42A	65W	
C65-20V3.25A	65W	
C65-24V2.7A	65W	
C100-12V7A-8.33A	100W	
C100-15V6.66A	100W	
C100-16V6.2A	100W	
C100-19V4.74A-5.2A	100W	
C100-24V3.75A-4.16A	100W	
C120-12V10A	120W	
C120-15.6V7.05A	120W	
C120-19V6.32A	120W	
C120-20V6A	120W	
C120-24V5A	120W	
C150-12V12.5A	150W	
C150-19.5V7.7A	150W	
C150-19V7.9A	150W	
C150-20V7.5A	150W	
C150-24V6.25A	150W	





QA (GaN 45W Power Supply)

Input: 100-240VAC, 50Hz/60Hz, 1.1A Max

Output: 5V/9V/12V/15V--3A 20V2.25A PD45W



Small Size

Compatible with Macbook and other laptop/tablets/smartphone



QA1 (GaN 45W Power Supply)

Input: 100-240VAC, 50Hz/60Hz, 1.1A Max

C1 Output: 5V/9V/12V/15V--3A 20V2.25A PD45W

A1 Output: 5V2.4A

C1+A1 Output: 45W PD+5V2.4A 12.0W



Small Size

Compatible with Macbook and other laptop/tablets/smartphone



QA2 (GaN 45W Power Supply)

Input: 100-240VAC, 50Hz/60Hz, 1.1A Max

C1 Output: 5V/9V/12V/15V--3A 20V2.25A PD45W

C2 Output: 5V2.4A

C1+C2 Output: 45W PD+5V2.4A 12.0W



Small Size

Compatible with Macbook and other laptop/tablets/smartphone



QA4 (GaN 45W Power Supply)

Input: 100-240VAC, 50Hz/60Hz, 1.1A Max

Output: 5V/9V/12V/15V--3A 20V2.25A PD45W



Small Size

Compatible with Macbook and other laptop/tablets/smartphone



QA5 (GaN 45W Power Supply)

Input: 100-240VAC, 50Hz/60Hz, 1.1A Max

C1 Output: 5V/9V/12V/15V--3A 20V2.25A PD45W

A1 Output: 5V2.4A

C1+A1 Output: 45W PD+5V2.4A 12.0W



Small Size

Compatible with Macbook and other laptop/tablets/smartphone



QA6 (GaN 45W Power Supply)

Input: 100-240VAC, 50Hz/60Hz, 1.1A Max

C1 Output: 5V/9V/12V/15V--3A 20V2.25A PD45W

C2 Output: 5V2.4A

C1+C2 Output: 45W PD+5V2.4A 12.0W



Small Size

Compatible with Macbook and other laptop/tablets/smartphone



**QC** GaN 65W Power Supply

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max

Output: 5V/9V/12V/15V--3A 20V3.25A PD65W



Small Size

Compatible with Macbook and other laptop/tablets/smartphone

**QC1** GaN 65W Power SupplyInput: 100-240VAC, 50Hz/60Hz, 1.5A Max
A1 Output: 5V2.4A 12.0W MAXC1 Output: 5V/9V/12V/15V--3A 20V3.25A PD65W
C1+A1 Output: 65W PD+5V2.4A

Small Size

Compatible with Macbook and other laptop/tablets/smartphone

**QC2** GaN 65W Power SupplyInput: 100-240VAC, 50Hz/60Hz, 1.5A Max
C2 Output: 5-12V QC18W MAXC1 Output: 5V/9V/12V/15V--3A 20V3.25A PD65W
C1+C2 Output: 65W PD+5V2.4A

Small Size

Compatible with Macbook and other laptop/tablets/smartphone

**QC4** GaN 65W Power SupplyInput: 100-240VAC, 50Hz/60Hz, 1.5A Max
Output: 5V/9V/12V/15V--3A 20V3.25A PD65W

Small Size

Compatible with Macbook and other laptop/tablets/smartphone

**QC5** GaN 65W Power SupplyInput: 100-240VAC, 50Hz/60Hz, 1.5A Max
C1 Output: 5V/9V/12V/15V--3A 20V3.25A PD65W
A1 Output: 5V2.4A 12.0W MAX
C1+A1 Output: 65W PD+5V2.4A

Small Size

Compatible with Macbook and other laptop/tablets/smartphone

**QC6** GaN 65W Power SupplyInput: 100-240VAC, 50Hz/60Hz, 1.5A Max
C1 Output: 5V/9V/12V/15V--3A 20V3.25A PD65W
C2 Output: 5-12V QC18W MAX
C1+C2 Output: 65W PD+5V2.4A

Small Size

Compatible with Macbook and other laptop/tablets/smartphone






RT100-1-100W

GaN 100W USB-C Power Supply

Input: 100V-240VAC 50/60Hz 1.5A Max

Output PD3.0 DC: 5V3A/9V3A/12V3A/15V3A/20V5A (100W)

Size/ L76.6*W54*H30.1mm

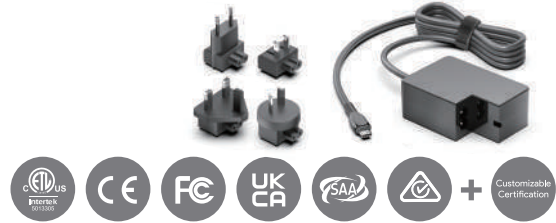

RT100-2-100W


GaN 100W USB-C Power Supply

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max

C1 Output PD3.0 DC: 5V3A/9V3A/12V3A/15V3A/20V5A (100W)

C2 Output PD3.0 DC: 5V3A/9V3A/12V3A/15V3A/20V5A (100W)

A1 Output QC2.0/3.0: 5V3A/9V1.5A/12V1.25A (15W)

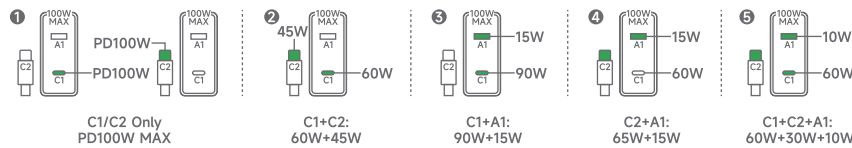

RT100-3-100W


GaN 100W USB-C Power Supply

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max

C1 Output PD3.0 DC: 5V3A/9V3A/12V3A/15V3A/20V5A (100W)

C2 Output PD3.0 DC: 5V3A/9V3A/12V3A/15V3A/20V5A (100W)

A1 Output QC2.0/3.0: 5V3A/9V1.5A/12V1.25A (15W)

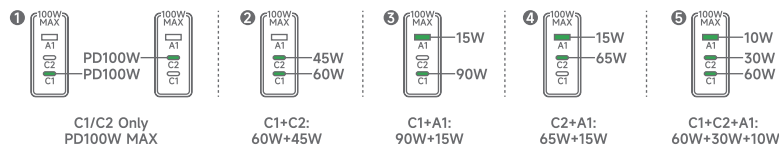


RT100-4-100W

GaN 100W USB-C Power Supply

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max

C1 Output PD3.0 DC: 5V3A/9V3A/12V3A/15V3A/20V5A (100W)

A1 Output QC2.0/3.0: 5V3A/9V1.5A/12V1.25A (15W)

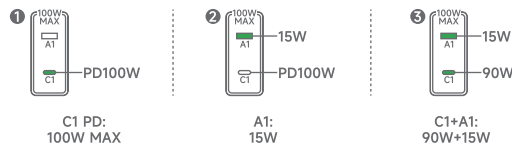

RT100-5-100W

GaN 100W USB-C Power Supply

Input: 100-240VAC, 50Hz/60Hz, 1.5A Max

Output PD3.0 DC: 5V3A/9V3A/12V3A/15V3A/20V5A (100W)

Size/ L76.6*W54*H30.1mm





Picture	Model	Power	Certificates	Specifications
	QA15 TYPE-C (US)	140W		GaN 140W USB-C Power Supply Input: 100V-240VAC 50/60Hz 2A Max Output PD3.1DC: 5V3A, 9V3A, 12V3A, 15V3A, 20V5A, 28V5A (140W)
	QA15 TYPE-C (US1)	140W		
	QA15 TYPE-C (EU)	140W		
	QA15 TYPE-C (UK)	140W		
	QA15 TYPE-C (AU)	140W		
	QA15 TYPE-C (KR+EU)	140W		
	QA15 TYPE-C	140W		



Picture	Model	Power	Certificates	Specifications
	QA15-1-US TYPE-C	140W		GaN 140W USB-C Power Supply Input: 100V-240VAC 50/60Hz 2A Max C1/C2 Output PD3.1DC: 5V3A, 9V3A, 12V3A, 15V3A, 20V5A, 28V5A (140W) 30mm 60mm 68mm C1: PD140W Max C2: PD140W Max C1+C2: 100W+45W
	QA15-1-US1 TYPE-C	140W		
	QA15-1-EU TYPE-C	140W		
	QA15-1-UK TYPE-C	140W		
	QA15-1-AU TYPE-C	140W		
	QA15-1-NK TYPE-C	140W		
	QA15-1-TYPE-C	140W		



Picture	Model	Power	Certificates	Specifications
	QA15-2-US TYPE-C	140W		GaN 140W USB-C Power Supply Input: 100V-240VAC 50/60Hz 2A Max C1/C2 Output PD3.1DC: 5-15V3A, 20-28V5A (140W) C1/C2 Output PD3.0 DC: 5V--15V3A, 20V5A (100W) A1 Output QC2.0/3.0: 5V3A, 9V2A, 12V1.5A (18W)
	QA15-2-US1 TYPE-C	140W		
	QA15-2-EU TYPE-C	140W		
	QA15-2-UK TYPE-C	140W		
	QA15-2-AU TYPE-C	140W		
	QA15-2-NK TYPE-C	140W		
	QA15-1- TYPE-C	140W		

QA TYPE-C

输入: 100V-240VAC 50/60Hz 1.1A 输出: 5V-20V 3A 2.25A
 功率: PD45W 芯片协议: 国产芯片 PD3.0
 CCC认证标准: GB 17625.1-2012; GB 4943.1-2022; GB/T 9254.1-2021

**QA1 TYPE-C**

输入: 100V-240VAC 50/60Hz 1.1A 输出: USB-C Port Output 5V/9V/12V/15V-3A 20V2.25A
 输出: USB-A Port Output 5V2.4A 同时负载: USB-C 30W PD+USB-A 12W QC Max
 芯片协议: 国产芯片 PD3.0 CCC认证标准: GB 17625.1-2012; GB 4943.1-2022; GB/T 9254.1-2021

**QA2 TYPE-C**

输入: 100V-240VAC 50/60Hz 1.1A Max 输出: USB-C Port Output 5V/9V/12V/15V-3A 20V2.25A
 输出: USB-C Port Output 5V2.4A 同时负载: 30W PD+12W QC Max
 芯片协议: 国产芯片 PD3.0 CCC认证标准: GB 17625.1-2012; GB 4943.1-2022; GB/T 9254.1-2021

**Q36AC-TYPE-C**

输入: 100V-240VAC 50/60Hz 1.1A Max 输出: 5-20V45W (5V/9V/12V/15V/20V)
 尺寸: L77*W40*H30mm 芯片协议: 国产芯片 PD3.0
 CCC认证标准: GB 17625.1-2022(A 类); GB 4943.1-2022; GB/T 9254.1-2021

**Q45D5-TYPE-C (45W PD3.0 环球旅充)**

输入: 100V-240VAC 50/60Hz 1.1A Max 输出: 5--20V 45W
 可替换AC 插头规格: 国标, 美规, 欧规, 英规, 澳规 尺寸: 60mm*60mm*30mm
 芯片协议: 赛普拉斯 PD3.0 CCC认证标准: GB 17625.1-2022(A 类); GB 4943.1-2022; GB/T 9254.1-2021

**Q65M6-TYPE-C (65W PD3.0 环球旅充)**

输入: 100V-240VAC 50/60Hz 1.5A Max 输出: 5--20V 65W
 可替换AC 插头规格: 国标, 美规, 欧规, 英规, 澳规 尺寸: 68mm*68mm*30mm 芯片协议: 赛普拉斯 PD3.0
 CCC认证标准: GB 17625.1-2022(Class A); GB 4943.1-2022; GB/T 9254.1-2021

**Q65M11-TYPE-C (固定墙插 65W PD3.0 快充)**

输入: 100V-240VAC 50/60Hz 1.5A Max 输出: 5--20V 65W 插头规格: 国标可折叠插头
 尺寸: 68mm*68mm*30mm 芯片协议: 国产芯片 PD3.0
 CCC认证标准: GB 17625.1-2022(Class A); GB 4943.1-2022; GB/T 9254.1-2021

**Q66BC6-TYPE-C (方形桌面65W PD3.0 电源适配器)**

输入: 100V-240VAC 50/60Hz 1.5A Max 输出: 5--20V 65W AC座: 梅花尾
 尺寸: 67mm*67mm*30mm 芯片协议: 国产芯片 PD3.0
 CCC认证标准: GB 17625.1-2022(Class A); GB 4943.1-2022; GB/T 9254.1-2021

**A100-1 TYPE-C (PD 100W电源适配器)**

输入: 100V-240VAC 50/60Hz 1.5A Max 输出: 5--20V 100W AC座: 梅花尾
 尺寸: 145.89mm*59.19mm*28.5mm 芯片协议: 赛普拉斯 PD3.0
 CCC认证标准: GB 17625.1-2012; GB 4943.1-2022; GB/T 9254.1-2021





Hamburg, Germany

Cathedy GmbH

OFFICE ADDRESS/ **Gutenbergring 54, 22848 Norderstedt, Germany**

+49 40 3085 0991 (Sales) +49 40 3085 0990 (Logistics)

www.hkypower.eu



Shenzhen, China

Shenzhen Huikeyuan Co.,Ltd

FACTORY ADDRESS/ **Potouxia Community, Guanlan Town, Longhua New District, Shenzhen, 518000, CN**

OFFICE ADDRESS/ **Room1503, Tower A, XingHe World, Bantian Street, Longgang District, Shenzhen 518129, CN**

+86 755 8521 9212

www.hkypowersupply.com

