

**EXCELLENT
QUALITY**

**CONTINUOUS
INNOVATION**

**WIN-WIN
STRATEGY**

POWER SYSTEM
东莞市源心电子科技有限公司
Power System Electronic Technology Co., Ltd.

诚信 团结 敬业 创新

Made for

 **iPhone | iPad | iPod | Apple Watch | MagSafe**





Power System Electronic Technology Co., Ltd. 东莞市源心电子科技有限公司

Power System Electronic Technology Co., Ltd. is located in the Serene Songshan Lake area of Dongguan city, Guangdong Province. We specialize in designing and manufacturing consumer electronic products: Power Stations, Power Banks, Wireless Chargers, Wall Chargers, Car Chargers, Watch Chargers, Cables and Car Amplifiers since 2008.

Our CEO Elwin Zheng has around 20 years' experience in R&D background. With 30+ R&D team members, we have strong ability on developing innovation products. We offer both ODM and OEM projects for customers.

Our factory is operating under ISO9001 & ISO14001 management systems, and we are certified factory for BSCI MFi and UL. The products can pass Qi2, MFi, CCC, UL, CE, CB, PSE, ETL, FCC and ROHS certifications etc.

Excellent Quality, Continuous Innovation, Win-Win Strategy are our company's policy. With our dedication to conscientious innovation and commitment to ethical manufacturing, Power System can always break the development bottleneck and improve our production procedures. We have laid the foundation in this industry by our excellent quality. We believe No quality No sales.

Welcome to visit our factory!


Main Machines



PCB SMT Process(lead free)

Reflow Soldering

Wave soldering Machine

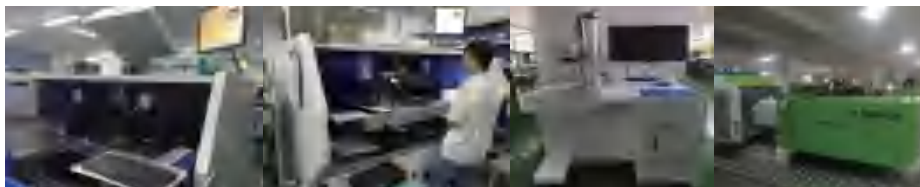

Auto Pick and Insertion for DIP Components

Laser Engraving Machine

Plastic Injection Machine

Power Banks





Magnetic Wireless Power Bank with Qi2/MagSafe Module


Specifications

- Model No.: PS-725Q(Qi2 Module)
- USB-C1/C2 Input: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C1/C2 Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- Magnetic Wireless Output: 5W/7.5W/15W
- (USB-C1+USB-C2)/(USB-C1/USB-C2+Wireless) Output: 15W
- Total Output: 15W
- Capacity: 10,000 mAh/3.85V/38.5Wh (Li-Polymer Battery)
- Material: PC + Silicone
- Size: L114*W70*H23mm
- When USB-C1 is recharging, USB-C2 output is 15W or wireless Output is 5W, and total output is 15W Max.

Specifications

- Model No.: PS-725M(MagSafe Module)
- USB-C1 Input: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C1 Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- USB-C2 Output: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Magnetic Wireless Output: 5W/7.5W/10W/15W
- (USB-C1+USB-C2)/(USB-C1/USB-C2+Wireless) Output: 15W
- Total Output: 15W
- Capacity: 10,000 mAh/3.85V/38.5Wh (Li-Polymer Battery)
- Material: PC + Silicone
- Size: L114*W70*H23mm
- When USB-C1 is recharging, USB-C2 output is 15W or wireless Output is 5W, and total output is 15W Max.



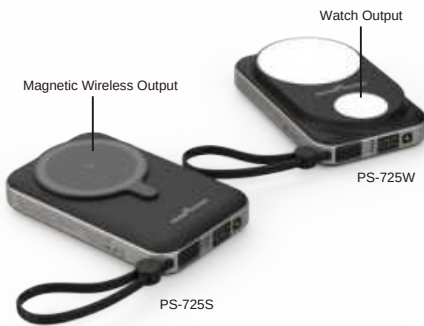

Magnetic Wireless Power Bank

Specifications

- Model No.: PS-725S
- USB-C1/C2 Input: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C1/C2 Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- Magnetic Wireless Output: 5W/7.5W/10W/15W
- (USB-C1+USB-C2)/(USB-C1/USB-C2+Wireless) Output: 15W
- Total Output: 15W
- Capacity: 10,000 mAh/3.85V/38.5Wh
- Material: PC + Silicone
- Size: L114*W70*H20mm

Specifications

- Model No.: PS-725W
- USB-C1 Input: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C1 Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- USB-C2 Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Magnetic Wireless Output: 5W/7.5W/10W/15W
- Watch Output: 2.5W
- (USB-C1+USB-C2)/(USB-C1/USB-C2+Wireless) Output: 15W
- Total Output: 15W
- Capacity: 10,000 mAh/3.85V/38.5Wh
- Material: ABS
- Size: L114*W70*H23mm





Mini Portable Power Bank

Specifications

- Model No.: PS-765
- USB-C Input: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- USB-A Output: SCP 22.5W Max, QC 3.0 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Total Output: 15W, 5V $\approx$ 3A
- Capacity: 5000mAh/3.7V/18.5Wh
- Material: ABS and Aluminium
- Size: L107*W26.5*H26.5mm



5,000mAh Mini Power Bank

Specifications

- Model No.: PS-815
- Capacity: 5,000mAh/3.7V/18.5Wh
- USB-C Input: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- USB-C Cable Output: 15W, 5V $\approx$ 3A
- Total Output: 15W Max, 5V $\approx$ 3A
- Material: PC+Aluminium
- Size: L86*W36*H26.5mm



10,000mAh Portable Power Bank

Specifications

- Capacity: 10,000mAh/3.7V/37Wh
- Version 1(PD 20W Output):
- Model No.: PS-816-20
- USB-C Input: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- USB-A Output: SCP 22.5W Max, QC 3.0 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Total Output: 5V $\approx$ 3A, 15W Max
- Version 2(PD 30W Output):
- Model No.: PS-816-30
- USB-C Input/Output: PD 30W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 2.5A, 15V $\approx$ 2A, 20V $\approx$ 1.5A
- USB-A Output: QC 3.0 30W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 2.5A, 15V $\approx$ 2A, 20V $\approx$ 1.5A
- Total Output: 5V $\approx$ 3A, 15W Max
- Material: PC+Aluminium
- Size: L104*W50*H24mm







3 in 1 Magnetic Wireless PD 60W Power Bank with US/UK/EU/AC Plugs

Specifications

- Model No.: PS-831
- AC Input: 100-240V~50/60Hz 1.5A Max
- USB-C Input: PD 30W Max, 5V ≡ 3A, 9V ≡ 3A, 12V ≡ 2.5A, 15V ≡ 2A, 20V ≡ 1.5A
- USB-C Output: PD 60W Max, 5V ≡ 3A, 9V ≡ 3A, 12V ≡ 3A, 15V ≡ 3A, 20V ≡ 3A
- USB-A Output: QC 18W, 5V ≡ 3A, 9V ≡ 2A, 12V ≡ 1.5A
- Magnetic Wireless Output: 5W/7.5W/10W/15W
- Total Output: 60W
- Capacity: 9600mAh/3.6V/34.56Wh
- Material: PC
- Size: L90*W88*H33mm

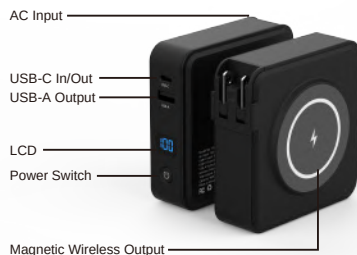

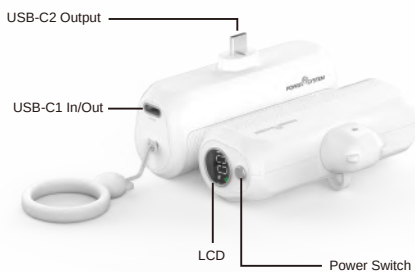

Mini Portable Power Bank

Specifications

- Model No.: PS-750
- USB-C1 Input: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C1/C2 Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- Total Output: 15W, 5V $\approx$ 3A
- Capacity: 5,000 mAh/3.7V/18.5Wh
- Material: PC + ABS
- Size: L82*W33.5*H27mm

- Model No.: PS-750L
- USB-C Input: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- Lightning Output: 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Total Output: 15W, 5V $\approx$ 3A
- Capacity: 5,000mAh/3.7V/18.5Wh
- Material: PC+ABS
- Size: L82*W33.5*H27mm







Charging Station for Mini Portable Power Bank

Specifications

- Model No.: PS-750D
- USB-C1 Input: PD 30W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 2.5A, 15V $\approx$ 2A
- USB-C2 Output: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C3/C4/C5 Output: 5V $\approx$ 2A
- USB-A Output: QC 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Total Output: 5V $\approx$ 3A
- Material: PC + ABS
- Size: L120*W55*H50mm

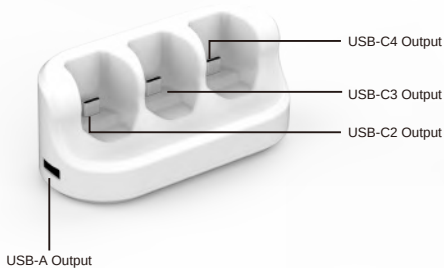




Power Bank with MagSafe

Specifications

- Model No.: PS-582M
- USB-C Input: PD 18W, 5V ▯ 3A, 9V ▯ 2A, 12V ▯ 1.5A
- USB-C Output: PD 20W, 5V ▯ 3A, 9V ▯ 2.22A, 12V ▯ 1.66A
- Wireless Output: When doing pass-through, output is 5W Max.
- When using as a power bank, output is 15W.
- Capacity: 4,000 mAh
- Total Output: 17W(the wireless output is 5W)
- Material: PC
- Size: L100*W70*H15.5mm





Magnetic Wireless Charging Stand with Power Bank

Specifications

Wireless

- Model No.: PS-325U/PS-325Q
- USB-C1 Input: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- Wireless1 Output: 5W/7.5W/10W/15W (PS-325U)
5W/7.5W/15W (PS-325Q)
- Wireless2 Output: 5W
- USB-C2 Output: 5V $\approx$ 1A Max
- Total Output: 18W Max
- Material: PC
- Size: L90*W90*H23.3mm

Power Bank

- Model No.: PS-325A
- USB-C3 Input/Output: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Material: PC
- Capacity: 5,500mAh
- Size: L90*W90*H14mm
- Plus PS-307/613 for Apple Watch Charging



96W Power Bank

Specifications

- Model No.: PS-436
- USB-C1 Input/Output: PD 60W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 3A
- USB-C2 Output: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-A Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- 3 Ports Total Power: 96W Max
- Capacity: 94.72Wh/25,600mAh
- Material: Aluminum and ABS
- Size: L175*W81.8*H25.4mm
- Charging Time: 2 hours
- Discharge Time: 50 minutes (at full power)
- Can charge iPhone 14 6.5 times, MacBook Air 13' 1.8 times.



Magnetic Wireless Power Bank

Specifications

- Model No.: PS-742
- USB-C Input: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- USB-A Output: QC 3.0 22.5W, 4.5V $\approx$ 5A, 5V $\approx$ 4.5A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Magnetic Wireless Output: 5W/7.5W/10W/15W
- (USB-C+USB-A)/(USB-C+Wireless)/(USB-A+Wireless) Output: 15W Max
- Total Output: 15W Max
- Color: Black/White/Blue/Green
- Capacity: 10,000mAh/3.7V/37Wh
- Material: PC + Silicone
- Size: L108.8*W69.2*H16.4mm



PD 20W Power Bank (10,000mAh)

Specifications

- Model No.: PS-594
- USB-C Input: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.66A
- USB-A1/A2 Output: QC 3.0, 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C+USB-A1/A2 Output: 17W, 5V $\approx$ 3.4A
- Total Output: 17W Max
- Capacity: 3.7V/10,000mAh/37Wh
- Material: PC
- Size: L140*W69.5*H16mm



PD 40W Power Bank (20,000mAh)

Specifications

- Model No.: PS-595
- USB-C1 Input/Output: PD20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.66A
- USB-C2 Input/Output: PD20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.66A
- USB-A1/A2 Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C1+C2 Output: PD20W+PD20W
- USB-A1+A2 Output: 18W+18W(QC3.0)
- (USB-C1+A2)/(USB-C2+A1) Output: PD20W+18W(QC3.0)
- (USB-C1+A1)/(USB-C2+A2) Output: 5V $\approx$ 3.4A, 17W Max
- The 4 Ports Total Output: 17W+17W=34W Max
- Material: PC
- Capacity: 3.7V/20,000mAh/74Wh
- Size: L142*W69*H28mm





10,000mAh Portable Power Bank

Specifications

- Model No.: PS-795A
- Capacity: 10,000mAh/3.7V/37Wh
- USB-C Input: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- USB-A Output: QC 3.0 22.5W, 4.5V $\approx$ 5A, 5V $\approx$ 4.5A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Total Output: 5V $\approx$ 3A
- Material: PC
- Size: L112*W70*H15.8mm

20,000mAh Portable Power Bank

Specifications

- Model No.: PS-795B
- Capacity: 20,000mAh/3.7V/74Wh
- USB-C Input: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- USB-A Output: QC 3.0 22.5W, 4.5V $\approx$ 5A, 5V $\approx$ 4.5A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Lightning Input: 5V $\approx$ 2A, 9V $\approx$ 2A
- Total Output: 5V $\approx$ 3A
- Material: PC
- Size: L114*W73*H27.5mm



10,000mAh Portable Power Bank

Specifications

- Model No.: PS-796A
- Capacity: 10,000mAh/3.7V/37Wh
- USB-C Input: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- USB-A Output: QC 3.0 22.5W, 4.5V $\approx$ 5A, 5V $\approx$ 4.5A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Total Output: 5V $\approx$ 3A
- Material: PC
- Size: L142*W69*H15.6mm



20,000mAh Portable Power Bank

Specifications

- Model No.: PS-796B
- Capacity: 20,000mAh/3.7V/74Wh
- USB-C Input: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- USB-A Output: QC 3.0 22.5W, 4.5V $\approx$ 5A, 5V $\approx$ 4.5A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Lightning Input: 5V $\approx$ 2A, 9V $\approx$ 2A
- Total Output: 5V $\approx$ 3A
- Material: PC
- Size: L143.5*W69.5*H28mm



AC Chargers and Outlets







Outlet Extender with Wireless Charging, USB Ports and Night Light

Specifications

- Model No.: PS-656
- AC Input: 100-120V~60Hz
- AC Output*2: 100-120V/15A Max, 1500W
- Wireless Output: 5W/7.5W/10W/15W
- USB-C Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- USB-A Output: QC3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C + USB-A Output: 15W Max
- Total DC Output: 32W Max
- Night light: 2W Max
- Material: Fireproof PC
- Size: L142*W90*H54.7mm
- Use Only Indoors and in Dry Locations.




PS-656JP/PS-656EU

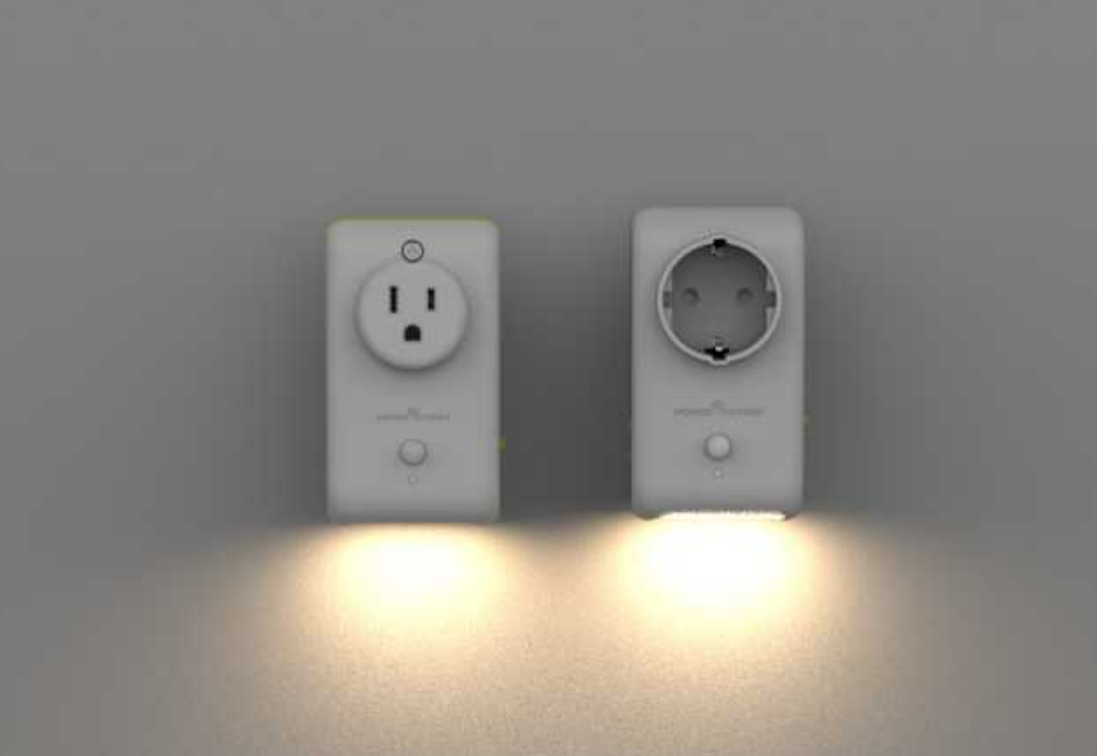

Outlet Extender with USB Ports and Nightlight

Specifications

- Model No.: PS-827EU/PS-827US
- AC Input: 100-240V~50/60Hz
- AC Output: 200-240V/16A Max, 3680W (PS-827EU)
100-120V/15A Max, 1500W (PS-827US)
- USB-C Output: PD 20W, 5V ≈ 3A, 9V ≈ 2.22A, 12V ≈ 1.67A
- USB-A Output: QC 3.0 18W, 5V ≈ 2.4A, 9V ≈ 2A, 12V ≈ 1.5A
- USB-C + USB-A Output: 5V ≈ 3A
- Night light: 2W Max
- Total Output: 20W Max
- Material: Fireproof PC
- Size: L108*W60*H52.8mm(PS-827US)
L108*W60*H78mm(PS-827EU)

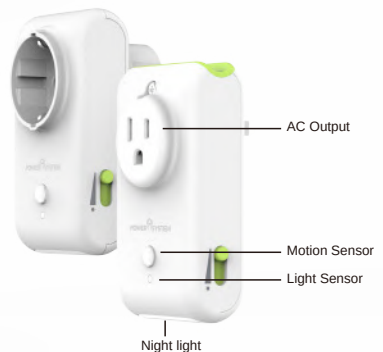



GaN PD 100W Wall Charger

Specifications

- Model: PS-615
- Input: 100-240V~50/60Hz, 2.5A Max
- USB-C1/C2 Output: PD 100W Max, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 5A
- USB-C3 Output: PD 20W Max, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- USB-A Output: 22.5W Max, 4.5V $\approx$ 5A, 5V $\approx$ 4.5A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C3+USB-A Output: 20W Max, 5V $\approx$ 4A
- USB-C1+USB-C2 Output: 65W+30W, 95W Max
- Total Output: 45W+30W+20W, 95W Max
- Material: PC + ABS
- Size: L70*W70*H32mm



GaN PD 140W Wall Charger


Specifications

- Model: PS-738
- Input: 100-240V~50/60Hz
- USB-C1/C2 Output: PD 140W Max, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 5A, 28V $\approx$ 5A
- USB-A Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C1+USB-C2 Output: PD 65W+PD 65W
- USB-C1/C2+USB-A Output: PD 100W+18W
- Total Output: PD 65W+PD 45W+18W Max
- Material: PC + ABS
- Size: L70*W70*H32mm





Model: PS-720U

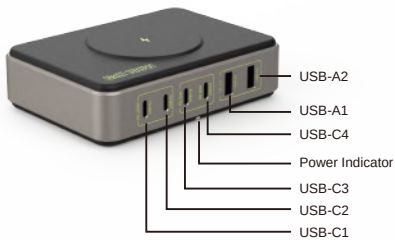

GaN 100W Charging Station with Wireless Charging

Specifications

- Model: PS-720Q/PS-720U/PS-720S
- Input: 100-240V~50/60Hz, 2.5A Max
- USB-C1/C2 Output: PD 100W Max, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 5A
- USB-C3/C4 Output: PD 30W Max, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 1.5A, 15V $\approx$ 2A, 20V $\approx$ 1.5A
- USB-A1/A2 Output: QC 3.0 30W Max, 4.5V $\approx$ 5A, 5V $\approx$ 4.5A, 9V $\approx$ 3A, 12V $\approx$ 2.5A, 20V $\approx$ 1.5A
- Wireless Output: 5W/7.5W/10W/15W(PS-720U/PS-720S)
5W/7.5W/15W(PS-720Q)
- Total Output: 100W Max
- Material: PC
- Size: L123*W88*H32mm(PS-720U)
L123*W88*H39mm(PS-720Q/PS-720S)



Model: PS-720Q
(Built-in Qi2 Module)



Model: PS-720S






GaN PD100W Charging Station with 2*AC Outlets and Wireless Charging

Specifications

- Model No.: PS-718A
- AC Input: 100-120V-50/60Hz, 1.5A Max
- AC Output*2: 110V-120V/15A Max, 1875W Max
- USB-C1/C2 Output: PD 100W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 5A
- USB-C3 Output: PD20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- USB-A Output: 22.5W Max, 4.5V $\approx$ 5A, 5V $\approx$ 4.5A, 9V $\approx$ 2.5A, 12V $\approx$ 1.5A
- Wireless Output: 5W/7.5W/10W/15W
- Total DC Output: 100W Max
- Material: ABS+PC
- Size: L100*W70*H33mm



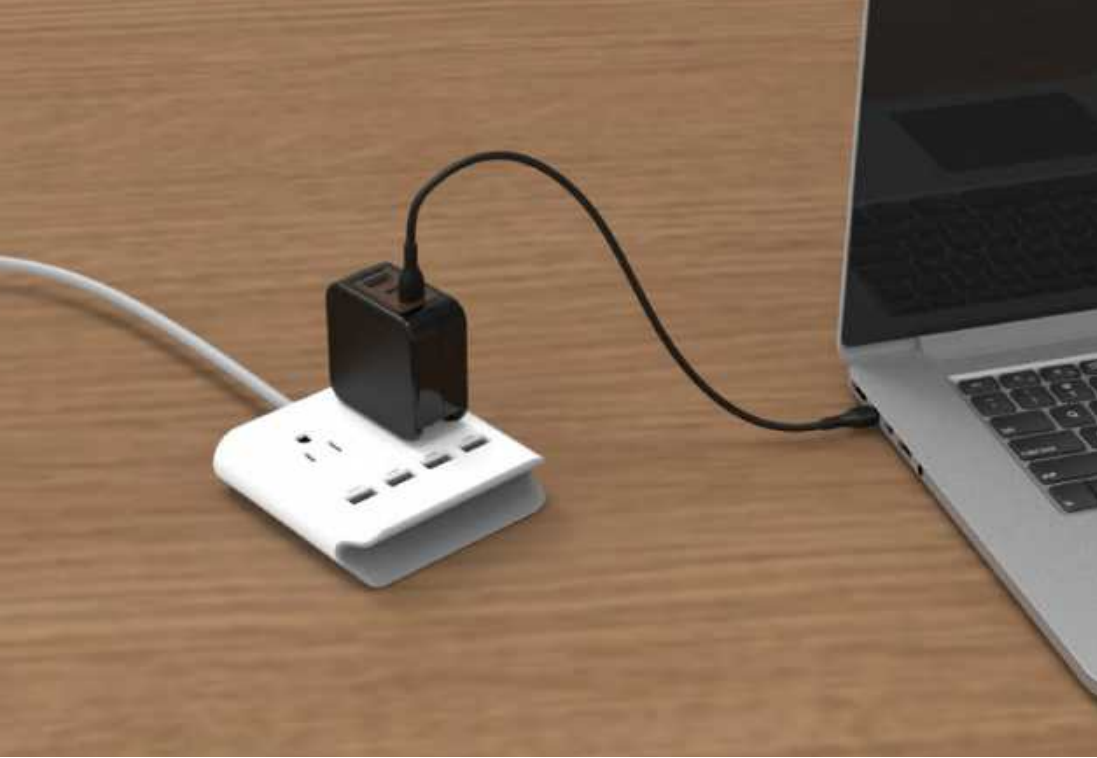

Magnetic Mounting Power Strip 2 AC Outlets + 4 USB Ports

Specifications

- Model No.: PS-237
- Input: 100-240V~, 50/60Hz 1.5A Max
- USB-A Output: 5V $\approx$ 5.4A Max

Output AC sockets x2
Hard plastic body
6ft cord with 3 pin OEM AC wall plug (PVC jacket cable)
Magnetic Mounting Bracket

4 x AC Outlet Magnetic Mounting Power Strip

Specifications

- Model No.: PS-840
- AC Input: 100-120V~60Hz
- AC Output: 1250W Max (125V $\approx$ 10A)
- AC Suppression Joule Rating: 1440 Joules
- Power Socket: 4*AC Output
- Power Cord Length: 6ft
- Material: PC + ABS
- Size: L160*W95*H35mm





Magnetic Mounting Power Strip

Specifications

- Model No.: PS-423AU
- Input: 250V~50Hz
- USB-C1 Output: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C2 Output: 15W, 5V $\approx$ 3A
- USB-A1/A2 Output: 5V $\approx$ 2.4A
- Total Output: 33W Max
- AC Output: 250V, 10A Max, 2500W Max
- Material: PC + ABS
- Size: L160*W95*H35mm



Magnetic Mounting Power Strip

Specifications

- Model No.: PS-423
- USB-C1 Output: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C2 Output: 5V $\approx$ 3A
- USB-A1/2 Output: 5V $\approx$ 2.4A
- USB Total Output: 33W Max
- AC Plug: US type

Output AC sockets x2
Hard plastic body
6ft cord with 3 pin OEM AC wall plug (PVC jacket cable)
Magnetic Mounting Bracket






Mini PD 20W Wall Charger

Specifications

- Model No.: PS-042-20
- Input: AC 100-240V~50/60Hz, 0.4A Max
- USB-C Output: PD 20W, 5V = 3A, 9V = 2.22A, 12V = 1.66A
- Material: PC
- Size: L35*W35*H35mm



Mini GaN PD 30W Wall Charger

Specifications

- Model No.: PS-042-30
- Input: 100-240V~50/60Hz, 0.4A Max
- USB-C Output: PD 30W, 5V = 3A, 9V = 2.22A, 12V = 2.5A, 15V = 2A, 20V = 1.5A
- Material: PC
- Size: L35*W35*H35mm(US Version)
L35*W35*H76mm(EU Version)
L42*W42*H55.6mm(AU Version)




Mini GaN PD 40W Wall Charger

Specifications

- Model No.: PS-042-40
- Input: 100-240V~50/60Hz, 0.7A Max
- USB-C Output: PD 40W, 5V = 3A, 9V = 3A, 12V = 3A, 15V = 2.67A, 20V = 2A
- Material: PC
- Size: L35*W35*H35mm(US Version)
L35*W35*H76mm(EU Version)
L42*W42*H55.6mm(AU Version)





PD65W GaN Wall Charger (Dual USB-C Ports+USB-A Port)

Specifications

- Mode No.: PS-574
- Input: 100-240VAC, 50/60Hz, 1.5A Max
- USB-C1/C2 Output: PD 65W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 3.25A
- USB-C1+USB-C2 Output: PD 30W+PD 30W Max
- USB-C1+USB-A Output: PD 45W+18W Max
- USB-C2+USB-A Output: 18W Max
- USB-A Output: QC 3.0, 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Total Output: PD 63W Max
- Material: ABS + PC
- Size: L58*W58*H30mm

PD65W GaN Wall Charger (USB-C Port+USB-A Port)

Specifications

- Mode No.: PS-536C
- Input: 100-240VAC, 50/60Hz, 1.5A Max
- USB-C Output: PD 65W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 3.25A
- USB-A Output: 5V $\approx$ 2.4A
- USB-C+USB-A: PD 53W + 12W
- Material: ABS + PC
- Size: L58*W58*H30mm





GaN 45W Multifunctional Portable Charger

Specifications

- Model: PS-571
- Input: 100-240V~50/60Hz 1.5A Max
- USB-C Output: PD45W, 5V $\approx$ 2.4A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 2.25A
- USB-A Output: 5V-0.8A, USB 3.0 data transmission
- USB-C + USB-A Output: 45W Max
- HDMI: 4K@60Hz
- Material: ABS + PC
- Size: L58*W58*H30mm
- While working with Switch and charged by USB-C port, the HDMI port can be connected with the display screen and the USB-A port can be connected with the gamepad to enjoy better gaming experience.





GaN PD 65W Wall Charger

Specifications

- Model No.: PS-058U
- Input: 100-240VAC, 50/60Hz, 1.5A Max
- USB-C1/C2 Output: PD 65W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 3.25A
- USB-A1/A2 Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C1+USB-C2 Output: 30W+30W
- USB-C1+USB-C2+USB-A1/USB-A2 Output: 30W+5V $\approx$ 4.8A
- USB-A1+USB-A2 Output: 18W+18W
- (USB-C1+USB-A1)/(USB-C2+USB-A2) Output: 5V $\approx$ 4.8A
- (USB-C1+USB-A2)/(USB-C2+USB-A1) Output: 30W+18W
- Total Output: 48W Max
- Material: ABS
- Size: L60.8*W50*H38.8mm



GaN PD 30W Wall Charger

Specifications

- Model No.: PS-139U
- USB-C Output: PD 30W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 2.5A, 15V $\approx$ 2A
- USB-A Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C+USB-A Output: 5V $\approx$ 4A
- Material: ABS
- Size: L58*W58*H36mm



GaN PD 30W Charger

Specifications

- Model No.: PS-139UK
- USB-C Output: PD 30W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 2.5A, 15V $\approx$ 2A
- USB-A Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C+USB-A Output: 5V $\approx$ 4A
- Material: ABS
- Size: L58*W58*H36mm





GaN PD40W Wall Charger USB-C Port + USB-A Port

Specifications

- Model No.: PS-728
- Input: 100-240V~50/60Hz, 1.5A Max
- USB-C Output: PD 40W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 2.5A, 20V $\approx$ 2A
- USB-A Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Total Output: 30W+10W
- Material: ABS
- Size: L37*W37*H47mm

PD 20W Dual USB Multi-national Adaptor

Specifications


- Model No.: PS-551
- Input: 100-240V~50/60Hz, 1.5A Max
- USB-C Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.66A
- USB-A Output: 5V $\approx$ 2.4A
- Total Output: 20W
- AC plug: EU/US/UK Available
- Material: ABS
- Dimension: L42.3*W27*H79mm



PD 32W Dual USB Multi-national Adaptor

Specifications

- Model No.: PS-552
- Input: 100-240V~50/60Hz, 1.5A Max
- USB-C Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.66A
- USB-A Output: 5V $\approx$ 2.4A
- Total Output: 32W
- AC plug: EU/US/UK Available
- Material: ABS
- Dimension: L45*W27*H92mm



PD 20W Wall Charger

Specifications

- Model No.: PS-768
- Input: AC 100-240V~50/60Hz, 0.4A Max
- USB-C Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.66A
- Material: PC
- Size: L41.5*W25*H62.5mm

PD 30W Wall Charger

Specifications

- Model No.: PS-768A
- Input: 100-240V~50/60Hz, 0.4A Max
- USB-C Output: PD 30W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 2.5A, 15V $\approx$ 2A, 20V $\approx$ 1.5A
- Material: PC
- Size: L41.5*W25*H62.5mm



AC Plug Type: US/UK/EU/AU



PS-800UK/PS-801UK
(PD 20W / PD 30W)



PS-804UK/PS-805UK
(PD 20W / PD 30W)

Mini PD 20W/30W Wall Charger

Specifications

- Model No.: PS-800/PS-804(PD 20W), PS-801/PS-805(PD 30W)
- Input: AC 100-240V~50/60Hz, 0.4A Max
- USB-C Output:
 - Version 1: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
 - Version 2: PD 30W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 2.5A, 15V $\approx$ 2A, 20V $\approx$ 1.5A
- Material: PC + ABS
- Size: L43.2*W35.6*H35.6mm(PS-800UK/PS-801UK)
L41*W39*H39mm(PS-804UK/PS-805UK)

Mini PD 20W/30W Wall Charger with USB-A and USB-C Ports

Specifications

- Model No.: PS-803/PS-807(PD 20W), PS-802/PS-806(PD 30W)
- Input: AC 100-240V~50/60Hz, 0.4A Max
- Version 1(PD 20W+QC 18W):
 - USB-C Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
 - USB-A Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Total Output: 20W Max
- Version 2(PD 30W+QC 18W):
 - USB-C Output: PD 30W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 2.5A, 15V $\approx$ 2A, 20V $\approx$ 1.5A
 - USB-A Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Total Output: 5V $\approx$ 3.4A
- Material: PC + ABS
- Size: L59.2*W35.6*H35.6mm(PS-802EU/PS-803EU)
L58.5*W39*H39mm(PS-806EU/PS-807EU)

AC Plug Type: US/UK/EU/AU



PS-802EU/PS-803EU
(PD 30W / PD 20W)



PS-806EU/PS-807EU
(PD 30W / PD 20W)

AC Plug Type: US/UK/EU/AU



PS-813EU

GaN PD 45W Wall Charger with USB-A and USB-C Ports

Specifications

- Model No.: PS-813
- Input: AC 100-240V~50/60Hz, 1.5A Max
- USB-C Output: PD 45W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A,
15V $\approx$ 3A, 20V $\approx$ 2.25A
- USB-A Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Material: PC + ABS
- Total Output: 5V 3.4A
- Size: L65*W46.3*H31.8mm(PS-813EU)

GaN PD 65W Wall Charger with Dual USB-C Ports

Specifications

- Model No.: PS-812
- Input: AC 100-240V~50/60Hz, 1.5A Max
- USB-C1/C2 Output: PD 65W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A,
15V $\approx$ 3A, 20V $\approx$ 3.25A
- USB-C1 + USB-C2 Output: 45W + 20W
- Material: PC + ABS
- Size: L70.7*W39*H39mm(PS-812EU)

AC Plug Type: US/UK/EU/AU





PS-812EU

PD 20W Wall Charger with Lightning/USB-C Cable

Specifications

- Model No.: PS-569/570
- Input: AC 100-240V~50/60Hz, 0.3A
- Output: PD 20W, 5V = 3A, 9V = 2.22A, 12V = 1.66A
- Cable Length: 1.5M
- Material: PC
- Size: L35*W35*H35mm

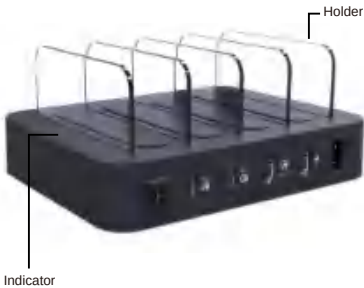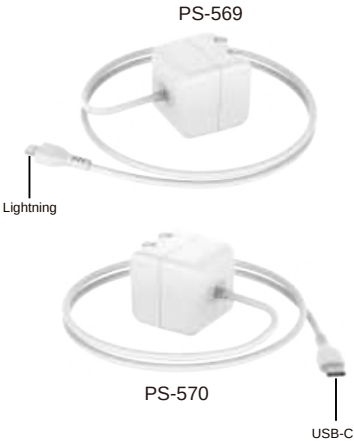

4 USB Ports Charging Station


Specifications

- Model No.: PS-538
- Input: AC100-240V/50-60HZ
- QC3.0 Output: 3.6~6.5V = 3A, 6.5~9V = 2A, 9V~12V = 1.5A(Max 18W)
- USB-C1 Output: 5V = 3A, 9V = 3A, 12V = 3A, 15(14.5)V = 3A, 20V = 2.25A(Max 45W)
- USB-C1 Output: 5V = 3A, 9V = 2A, 12V = 1.5A(Max 18W)
- USB-A Output: 5V = 2.4A Max
- Material: ABS or PC
- Size: L160*W124*H75mm

6 USB Ports Charging Station with 2 AC Outlets

Specifications

- Model No.: PS-631
- AC Input: 100-240V 50/60Hz
- AC Output: 125V 60Hz, 10A
- USB-C1/C2 Output: PD 20W, 5V = 3A, 9V = 2.22A, 12V = 1.67A
- USB-A1/A2/A3/A4 Output: 12W, 5V = 2.4A
- USB-A Total Output: 30W, 5V = 6A(with Smart IC)
- USB Total Output: 70W Max
- Power Cable Length: 1.5M
- Product Size: 185*130*115mm

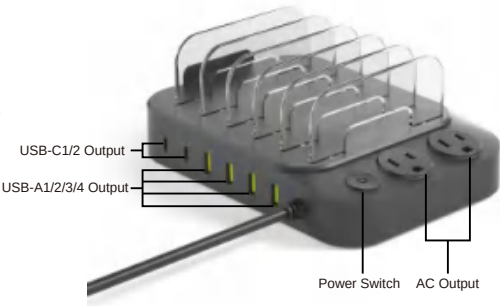

Wireless Chargers






Apple Watch Fast Charger with Original Module

Specifications

- Model No.: PS-613S
- Input: 5V $\approx$ 1A
- Output: 5V $\approx$ 1A
- Material: PC or ABS
- Size: L53*W39*H13.2mm
- Up to 33% Faster Charging for Apple Watch Series 9/8/7, Apple Watch Ultra2/Ultra/SE.
- We use the new magnetic fast charging module in this charger, so you can fast charge from 0 to 80% in about 45 minutes.

Made for
APPLE WATCH






Apple Watch Power Bank

Specifications

- Model No.: PS-776
- USB-C Input: 5V $\approx$ 1A
- Output: 5V $\approx$ 1A
- Capacity: 1,200 mAh/3.7V/4.44Wh
- Material: ABS
- Size: L65*W39*H17mm

Made for
 WATCH





Wireless Charging Station with MagSafe

Specifications

- Model No.: PS-524/PS-524U/PS-524Q
- USB-C Input: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- USB-C Output: 5V $\approx$ 1A
- Magnetic Wireless Output: 15W Max
- Wireless Output: 5W
- Material: ABS + PC
- Size: L100*W60*H155mm(PS-524)
L115*W77*H162mm(PS-524U)
- Smart, Simple, Special
- Plus PS-613S for Apple Watch charging




(PS-524)



(PS-524Q)



PS-613S

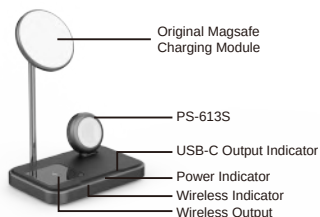

Original MagSafe
Charging Module


PS-613S

USB-C Output Indicator

Power Indicator

Wireless Indicator

Wireless Output

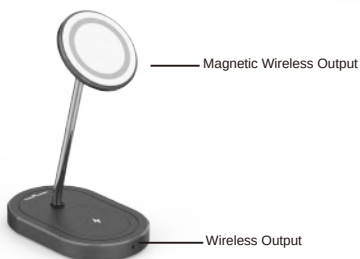

Magnetic Wireless Output

Wireless Output

Magnetic Wireless Charging Station

Specifications


- Model No.: PS-577
- USB-C Input: 18W
- USB-C Output: 5V $\approx$ 1A
- Magnetic Wireless Output: 7.5W
- Wireless Output: 5W
- Material: ABS + PC
- Size: L100*W60*H155mm
- Smart, Simple, Special
- Plus PS-307 for Apple Watch charging




Qi2 Magnetic Wireless Charger

Specifications

- Model No.: PS-835
- USB-C Input: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- Wireless Output: 5W/7.5W/15W
- Material: PC
- Size: D62.8*H12.3mm

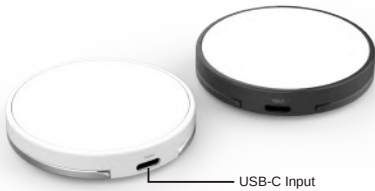

USB-C Input



Magnetic Wireless Output



15W Magnetic Wireless Car mount charger

Specifications

- Model No.: PS-798B
- USB-C Input: PD 20W, 5V ≈ 2A, 9V ≈ 2A, 12V ≈ 1.67A
- Wireless Output: 5W/7.5W/10W/15W
- Material: PC+ABS
- Size: 65*90mm



5-Coil Dual Fast Wireless Charger

Specifications

- Model: PS-417C
- USB-C Input: 9V ≈ 3A, 5V ≈ 3A
- Wireless1/2 Output: 5W/7.5W/10W/15W
- Total Output: 18W Max
- Material: ABS+PU
- Color: Black,White
- Size: 170*80*12.4mm

Wireless Fast Charger

Specifications

- Model No.: PS-707A
- Input: 5V ≈ 2A, 9V ≈ 2A, 12V ≈ 2A, 24W Max
- Wireless Output1: 5W/7.5W/10W/15W
- Wireless Output2: 3W Max
- Material: Aluminum + PC + ABS
- Size: L60*W60*H6.8mm



Car Chargers and Cables





42W Car Charger

Specifications

- Model No.: PS-517
- Input: 12-24V DC
- USB-C Output: PD 30W, 5V = 3A, 9V = 3A, 12V = 2.5A, 15V = 2A, 20V = 1.5A
- USB-A Output: 5V = 2.4A
- Total Output: 42W Max
- Material: PC + ABS
- Size: L70*W43*H26.8mm

60W Car Charger

Specifications

- Model No.: PS-518
- Input: 12-24V DC
- USB-C Output: PD 60W, 5V = 3A, 9V = 3A, 12V = 3A, 15V = 2A, 20V = 3A
- USB-A Output: 5V = 2.4A
- Total Output: 60W Max
- Material: PC + ABS
- Size: L70*W43*H26.8mm

83W Car Charger

Specifications

- Model No.: PS-518A
- Input: 12-24V DC
- USB-C Output: PD 65W, 5V = 3A, 9V = 3A, 12V = 3A, 15V = 2A, 20V = 3.25A
- USB-A Output: QC 3.0, 5V = 3A, 9V = 2A, 12V = 1.5A
- Total Output: 83W Max
- Material: PC + ABS
- Size: L70*W43*H26.8mm

45W Car Charger

Specifications

- Model No.: PS-324
- Input: 12-24V
- USB-C Output: PD 45W, 5V = 3A, 9V = 3A, 12V = 3A, 15V = 3A, 20V = 2.25A
- USB-A Output: 5V = 2.4A
- Total Output: 45W Max
- Material: PC + ABS
- Size: L70*W43*H26.8mm





95W Car Charger

Specifications

- Model No.: PS-622
- Input: DC12-24V
- USB-C1 Output: PD65W Max, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 2.5A, 15V $\approx$ 3A, 20V $\approx$ 3.25A
- USB-C2 Output: PD 30W Max, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 2.5A
- USB-A Output: QC 3.0 30W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 2.5A
- USB-C1+USB-C2 Output: 65W + 30W
- USB-C1+USB-A Output: 65W + 30W
- USB-A+USB-C2 Output: 30W Max
- Total Output: 95W Max
- Material: PC
- Size: L35*W35*H78mm

54W Car Charger [3 USB-A Ports]

Specifications

- Model No.: PS-585
- Input: 12-24V DC
- USB-A1/A2/A3 Output: QC3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Total Output: 54W
- Material: PC+ABS
- Size: L70*W43*H26.8mm



USB-A1/A2/A3 Output

3 USB-A Ports Car Charger

Specifications

- Model No.: PS-578
- Input: DC 12-24V
- USB-A1/A2/A3 Output: 12W, 5V $\approx$ 2.4A
- Total Output: 24W, 5V $\approx$ 4.8A
- Size: L35*W25*H65.5mm





Mini PD 30W Car Charger

Specifications

- Model No.: PS-780A
- Input: DC 12-24V
- USB-C Output: PD 30W, 5V $\approx$ 2.4A, 9V $\approx$ 3A, 12V $\approx$ 2.5A, 15V $\approx$ 2A, 20V $\approx$ 1.5A
- USB-A Output: QC 3.0 30W Max, 4.5V $\approx$ 5A, 5V $\approx$ 4.5A, 9V $\approx$ 3A, 12V $\approx$ 2.5A
- Total Output: 5V $\approx$ 4.8A Max
- Material: PC+ABS
- Size: D24.23*H48.61mm

Mini PD 20W Car Charger

Specifications

- Model No.: PS-780
- Input: 12-24V DC
- USB-C Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- Material: PC+ABS
- Size: D24.23*H48.61mm



Total 48W Car Charger


Specifications

- Model No.: PS-586
- Input: 12-24V DC
- USB-A1 Output: 5V $\approx$ 2.4A
- USB-A1 Output: QC3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Total Output: 48W
- Material: Aluminum+ABS
- Size: L99*W59*H31mm

300W Multifunctional Car Power Inverter

Specifications


- Model No.: PS-690
- Input Voltage: DC 12V
- AC1/2 Output: 110V~60Hz, 300W
- AC1+AC2 Output: 300W Max
- USB A1/A2/A3/A4 Output: 5V ≈ 2.4A
- USB-A1+USB-A2+USB-A3+USB-A4 Total Output: 5V ≈ 6A
- USB-A5 Output: QC 3.0 27W Max, 5V ≈ 3A, 9V ≈ 3A
- USB-C Output: PD 27W, 5V ≈ 3A, 9V ≈ 3A
- USB Total Output: 57W Max
- CLA1/2 Output: 40W
- Total Output: 300W Max
- Cable Length: 65CM
- Material: ABS
- Size: 12.8×3.8×17.5CM
- Weight: ≈400g

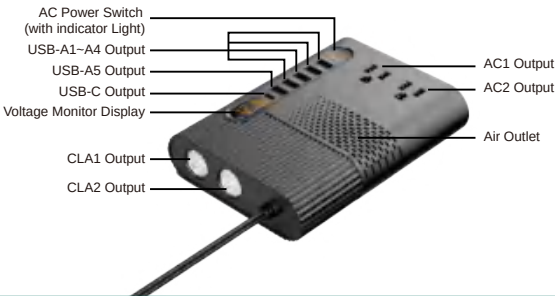

Power Inverter 3 AC Outlets+1 USB Port +1 Car Cigarette Socket

Specifications

- Model No.: PS-179
- Input Voltage: DC11-14V
- USB Output: 5V ≈ 1A
- Total Output: 150W Max
- Total Output Voltage: 100V±15%
- Material: PC
- Dimension: L270*W78*H40mm

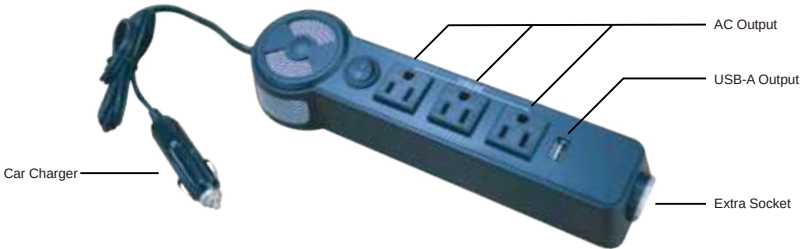



90 Degree USB-C to USB-C Fast Charging Cable (Single)

Specifications

- Model No.: PS-735A
- Current: 3A(Max)
- Charging Power: 60W(Max)
- Material: Silicone / Nylon Braided
- Length: 1M

90 Degree USB-C to USB-C Fast Charging Cable (Double)

Specifications

- Model No.: PS-735B
- Current: 3A(Max)
- Charging Power: 60W(Max)
- Material: Silicone / Nylon Braided
- Length: 1M



Coiled USB-C to USB-C Fast Charging Cable

Specifications

- Model No.: PS-703A
- Current: 3A(Max)
- Charging Power: 60W(Max)
- Material: TPE
- Length: 2M

PD 100W Charging Cable

Specifications

- Model No.: PS-670
- Current: 5A(Max)
- Charging Power: 100W(Max)
- Material: PVC
- Length: 1M
- Colors: Black, White
- PD 100W 5A high current with E-marker chip

USB-C

PD 240W USB-C Cable

Specifications

- Model No.: PS-819
- Current: 5A(Max)
- Charging Power: 240W(Max)
- Material: PVC
- Length: 1M
- Colors: Black, White

USB2.0 AM to Lightning Cable, C89, MFi Certified

Specifications

- Model No: PS-472
- Length: 250mm, 1M
- Material: Aluminum+PVC+Nylon Braided
- Current: 2.4A(Max)
- Function: Data & Charge sync
- Charging Power: 12W(Max)
- Colors: Black, White

Made for


iPhone | iPad | iPod

USB-C to Lightning Cable, C94, MFi Certified

Specifications

- Model No: PS-473
- Length: 250mm, 1M
- Material: Aluminum+PVC+Nylon Braided
- Current: 3A(Max)
- Function: Data & Charge sync
- Charging Power: 36W(Max)
- Colors: Black, White

Made for
iPhone | iPad | iPod



4K@60Hz PD 100W Fast Charging Cable

Specifications

- Model No: 543A
- Current: 5A(Max)
- Charging power: 100W(Max)
- Material: Aluminum+PVC
- length: 1M
- Color: Gray/Black
- PD 100W 5A high current with E-marker chip
- 4K Ultra HD, audio and video synchronization

USB2.0 AM to USB-C Cable

Specifications

- Model No: PS-457
- Length: 1M
- Material: PVC
- Current: 2.4A
- Certificate: USB-IF
- Colors: OEM



USB-C to USB-C Charging Cable

Specifications

- Model No: PS-459
- Length: 1M
- Material: PVC
- Current: 3A
- Certificate: USB-IF
- Colors: OEM

Power Station & Outdoor Accessories



Fully Recharged in about **1.5** Hours


Automatic Power Switching

Recharging Mode and Bypass Mode Options

1500W Fast-Recharging Power Station with Bi-directional Smart Inverter

Specifications

- Model No.: PS-651/PS1500
- Capacity: LiFePO4 Battery, 1228.8Wh (51.2V/24Ah)
- Anderson Input: 12-48V $\approx$ 15A Max, 400W Max
- AC Input (Recharging): 100-120V-60Hz, 1000W Max
- AC Input (Bypass Mode): 100-120V-60Hz, 1500W Max
- AC Rated Output (Inverter Mode):
 - Pure sine wave 100-120V-15A Max/60Hz, 1500W (3000W Surge)
 - AC Rated Output (Bypass Mode): Pure sine wave 100-120V-15A Max/60Hz, 1500W Max
- USB-C Output 1: PD 100W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 5A
- USB-C Output 2, 3: PD 60W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 3A
- USB-A Output 1, 2: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- CLA Port Rated Output: 12V $\approx$ 10A, 120W Max
- LED: 2W
- Operating Temperature: -20°C-60°C
- Recharging Temperature: 0°C-45°C
- Material: High Impact PC
- Size: L420*W240*H285mm

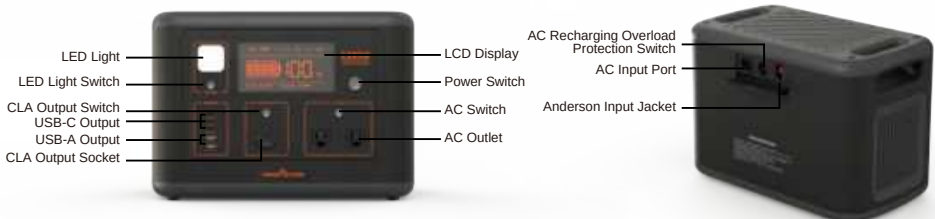



500W Portable Power Station

Specifications

- Model: PS-468US
- Capacity: 460.8Wh (12.8V/36Ah)
- AC Output: 500W(Surge 800W), 100-120V/60Hz
- Anderson Input: 18-23V $\approx$ 5A, 100W Max
- DC Input: MPPT 10-22V, 120W Max
- DC Output: 12V $\approx$ 10A, 120W Max
- USB-C1 Input/Output: PD 60W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 3A
- USB-C2 Output: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-A Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- CLA Port Rated Output: 11.2-14.4V $\approx$ 10A Max
- LED Light: NC/1W
- Operating Temperature: -10-45°C
- Recharging Temperature: 0-40°C
- Material: PC+Aluminum
- Size: L300*W165*H165mm






1000W Portable Power Station

Specifications

- Model: PS-639
- Capacity: Version1: Li-ion Battery, 1110Wh(22.2V/50Ah)
Version2: LiFePO4 Battery, 1120Wh(22.4V/50Ah)
- AC Output: 1000W(Surge 2000W), 110V/60Hz US Version(230V/50Hz EU Version)
- DC Input: 26V/4.5A, 120W Max
- Anderson Input: 18V~30V/7.8A, 200W Max
- DC1/DC2 Output: 12V/10A, 120W Max
- CLA Port Rated Output: 12V $\approx$ 10A, 120W Max
- DC Total Output: 12V/10A, 120W Max
- USB-C Output: PD 60W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 3A
- USB-A1/A2 Output: 12W, 5V $\approx$ 2.4A
- USB-A3 Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Operating Temperature: -10-60°C
- Recharging Temperature: 0-45°C
- Material: PC+Aluminum
- Size: Version1: Li-ion Battery, L320*W230*H260mm
Version2: LiFePO4 Battery, L320*W230*H280mm

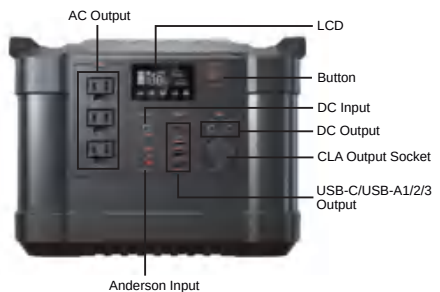



PS-609



PS-610U



PS-788

Waterproof Power Bank

Specifications

- Model No.: PS-609
- USB-C Input: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A
- USB-C Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- USB-A Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Total Output: 5V $\approx$ 3A
- Capacity: 10,000 mAh/3.7V/37Wh
- IP rating: IP67
- Material: ABS or PC + Silicone
- Size: L140*W73*H17mm

Waterproof Power Bank

Specifications

- Model No.: PS-610U
- USB-C1 Input/Output: PD 60W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 3A
- USB-C2 Output: PD 20W, 5V $\approx$ 3A, 9V $\approx$ 2.22A, 12V $\approx$ 1.67A
- USB-A Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Total Output: 98W
- Capacity: 20,000 mAh/3.7V/74Wh
- IP rating: IP67
- Material: ABS or PC + Silicone
- Size: L180*W82*H30mm



PS-788

Waterproof Power Bank with Solar Panel

Specifications

- Model No.: PS-788
- USB-C1 Input/Output: PD 30W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 2.5A, 15V $\approx$ 2A, 20V $\approx$ 1.5A
- USB-C2 Output: PD 30W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 2.5A, 15V $\approx$ 2A, 20V $\approx$ 1.5A
- USB-A Output: QC 3.0 30W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 2.5A, 15V $\approx$ 2A, 20V $\approx$ 1.5A
- USB-C1/C2+USB-A Output: 5V $\approx$ 3A
- USB-C1+USB-C2 Output: 5V $\approx$ 3A
- USB-C1+USB-C2+USB-A Output: 5V $\approx$ 3A
- Solar Panel: 1W
- Capacity: Version1: 18,000 mAh/3.7V/66.6Wh
Version2: 20,000 mAh/3.7V/74Wh
- IP rating: IP67
- Material: ABS or PC + Silicone
- Size: L180*W82*H30mm



Waterproof Power Bank with Colorful Lightings & Solar Panel

Specifications

1.Power Bank

- Model No.: PS-713
- USB-C Input/Output: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-A Output: 5V $\approx$ 2.4A
- Solar Input: 0.8W
- Battery: 10,050 mAh/3.7V/37.18Wh
- IP Rating: IP67
- Material: ABS and Silicone
- Size: L90*W90*H37mm

2.Night Light

- 7 changeable colors: Yellow, Red, Blue, Green, Orange, Purple, White
- Adjustable brightness.



Waterproof Power Bank with Magnetic wireless Charging

Specifications

1.Power Bank

- Model No.: PS-713S/PS-713C
- USB-C Input/Output: PD 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-A Output: 5V $\approx$ 2.4A
- USB-A +C Output: 5V $\approx$ 3A
- Magnetic Wireless Output: 5W/7.5W/10W/15W
- Battery: 6,000 mAh/3.7V/22.2Wh
- IP Rating: IP67
- Material: ABS and Silicone
- Size: L85*W85*H34mm

2.Night Light

- Adjusting Brightness, SOS mode and color temperature adjustable. (PS-713S)
- 7 changeable colors: Yellow, Red, Blue, Green, Orange, Purple, White. (PS-713C)





300W Power Station

Specifications



- Model No.: PS-733-EU/KR
- Capacity: Li-ion Battery 148Wh(40,000mAh/3.7V)
- AC Output: Version 1: PS-733-EU/KR-P, Pure sine wave
220-240V, 300W (600W Surge)
Version 2: PS-733-EU/KR-M2, Modified square wave 220-240V, 200W
Version 3: PS-733-EU/KR-M3, Modified square wave 220-240V, 300W
- USB-C1 Input/Output: PD 100W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 5A
- USB-C2 Output: PD 30W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 2.5A, 15V $\approx$ 2A, 20V $\approx$ 1.5A
- USB-A Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C2+USB-A Output: 5V 3A, 15W Max
- Wireless Output: 5W/7.5W/10W/15W
- LED Light: 2W
- Material: ABS + Aluminium
- Size: L218*W70*H70mm



- Model No.: PS-733-US
- Capacity: Li-ion Battery 148Wh(40,000mAh/3.7V)
- AC Output: Version 1: PS-733-US-P, Pure sine wave
100-120V, 300W (600W Surge)
Version 2: PS-733-US-M2, Modified square wave 100-120V, 200W
Version 3: PS-733-US-M3, Modified square wave 100-120V, 300W
- USB-C1 Input/Output: PD 100W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 5A
- USB-C2 Output: PD 30W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 2.5A, 15V $\approx$ 2A, 20V $\approx$ 1.5A
- USB-A Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C2+USB-A Output: 5V 3A, 15W Max
- Wireless Output: 5W/7.5W/10W/15W
- LED Light: 2W
- Material: ABS + Aluminium
- Size: L218*W70*H70mm



AC 100W Power Bank

Specifications

- Model No.: PS-330
- USB-C Input: PD 30W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 2.5A, 15V $\approx$ 2A, 20V $\approx$ 1.5A
- USB-C Output: PD 60W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 3A
- USB-A1/A2 Output: 5V $\approx$ 2.4A
- USB-A Total Output: 5V $\approx$ 3.4A
- Wireless Output: 5W/7.5W/10W
- AC Output: 110V, 100W Max.
- AC Output Version: US/EU/JP/CN/AU
- Capacity: 20,800mAh/3.7V/76.96Wh Li-ion Cell
- Size: L150*W66*H66mm
- Material: PC and Aluminum



AC 150W Power Bank

Specifications

- Model No.: PS-330 Pro
- USB-C Input/Output: PD 60W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 3A
- USB-A1/A2 Output: 5V $\approx$ 2.4A
- USB-A Total Output: 5V $\approx$ 3.4A
- Wireless Output: 5W/7.5W/10W
- AC Output: 230V, 150W Max.
- AC Output Version: US/EU/JP/CN/AU
- Capacity: 25,600mAh/3.7V/94.72Wh Li-ion Cell
- Size: L150*W66*H66mm
- Material: PC and Aluminum






Portable Bluetooth Speaker Built-in Power Bank

Specifications

- Model No.: PS-839
- USB-C Input: PD 30W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 2.5A, 15V $\approx$ 2A, 20V $\approx$ 1.5A
- USB-C Output: PD 60W, 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A, 20V $\approx$ 3A
- USB-A1/A2 Output: 5V $\approx$ 2.4A
- USB-A Total Output: 5V $\approx$ 3.4A
- Wireless Output: 5W/7.5W/10W/15W
- Capacity: Li-ion Battery, 3.7V/15,600 mAh/57.72Wh
- Speaker: 40HM, 5W
- Support AUX, Bluetooth Speaker, Emergency Radio and Microphone Function
- Material: ABS + Aluminium
- Size: L150*W70*H70mm

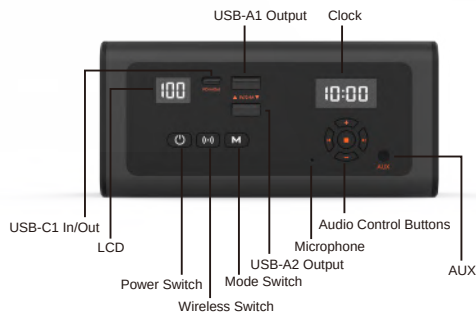



Outdoor Camping Light

Specifications

- Model No.: PS-732A
- USB-C Input: 5V $\approx$ 1A
- USB-A Output: 5V $\approx$ 2.4A
- Capacity: 3,200 mAh/3.6V/11.8Wh
- Material: TPU + PC
- Size: L98*W98*H94mm





Jump Starter with Air Compressor

Specifications

- Model No.: PS-671
- USB-C Input: 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-C Output: 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- USB-A Output: 5V $\approx$ 2.4A
- Battery Capacity: 10400mAh
- Inflation Pressure Range: 0.2–8bar / 3–120psi
- Start Car Voltage: 12V
- Start Car Current: 600A
- Peak Current: 1200A Max
- Material: PC + Silicone
- Size: L195*W110*H48mm



Jumper Cable Connection Port

Portable Car Jump Starter

Specifications

- Model No.: PS-838
- USB-C Input: QC 2.0 18W, 5V $\approx$ 2.1A, 9V $\approx$ 2A
- USB-A Output: QC 3.0 18W, 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A
- Start the engines: up to 6L Gas or 3L Diesel Engine
- Starting current: 400A
- Peak current: 800A
- Capacity: 12000 mAh/3.7V/44.44Wh
- Material: PC and ABS
- Size: L165*W87*H35mm





14W Solar Panel

Specifications

- Model: PS-704
- USB-C Output: 12W, 5V $\approx$ 2.4A
- Folds: 2PCS 7W/Fold
- Cells: Monocrystalline solar cell
- Controller with one USB-C output port
- Material: ETFE Film + Waterproof Oxford Cloth
- Folded Size: L280*W180*H15mm
- Unfolded Size: L280*W505*H5mm



- Model: PS-704A
- USB-C Output: 12W, 5V $\approx$ 2.4A
- USB-A Output: 12W, 5V $\approx$ 2.4A
- USB Total Output: 12W, 5V $\approx$ 2.4A
- Folds: 2PCS 7W/Fold
- Cells: Monocrystalline solar cell
- Controller with USB-A and USB-C output port
- Material: ETFE Film + Waterproof Oxford Cloth
- Folded Size: L280*W180*H15mm
- Unfolded Size: L280*W505*H5mm

- Model: PS-704B
- USB-A1/A2 Output: 12W, 5V $\approx$ 2.4A
- USB-A Total Output: 12W, 5V $\approx$ 2.4A
- Folds: 2PCS 7W/Fold
- Cells: Monocrystalline solar cell
- Controller with two USB-A output port
- Material: ETFE Film + Waterproof Oxford Cloth
- Folded Size: L280*W180*H15mm
- Unfolded Size: L280*W505*H5mm



10W Solar Panel

Specifications

- Model No.: PS-669A
- USB-A Output: 5V $\approx$ 1.5A
- Folds: 4PCS 50W/Fold
- Material: ETFE Film + Waterproof Oxford Cloth
- Folding Size: L185*W115*H25mm
- Unfold Size: L500*W185*H3mm

28W Solar Panel

Specifications

- Model: PS-705
- USB-A Output: 4.5V $\approx$ 2A, 5V $\approx$ 2A, 9V $\approx$ 2A, 12V $\approx$ 2A
- USB-C Output: 5V $\approx$ 2A, 9V $\approx$ 2A, 12V $\approx$ 2A
- DC Output: 12V $\approx$ 2A
- Total Output: 24W
- Folds: 4PCS 7W/Fold
- Cells: Monocrystalline solar cell
- Controller with one USB-A output port
- Material: ETFE Film + Waterproof Oxford Cloth
- Folding Size: L280*W180*H25mm
- Unfold Size: L280*W920*H5mm





200W Solar Panel

Specifications

- Model: PS-667
- Output: 200W 21V $\approx$ 9.52A
- Folds: 4PCS 50W/Fold
- Cells: Monocrystalline solar cell >22.6%
- Output cable lead: 2M AWG14 cable lead with MC4 connector and 30A Anderson connector
- Handle: customized color, without magnet
- Item weight: 7.5KGS
- Material: ETFE Film + Waterproof Oxford Cloth
- Folded Size: L616*W536*H65mm
- Unfolded Size: L2349*W536*H15mm



100W Solar Panel

Specifications

- Model: PS-699
- Output: 100W 19.8V $\approx$ 6.1A
- Folds: 2PCS 50W/Fold
- Cells: Monocrystalline solar cell
- Output cable lead: 2M AWG14 cable lead with MC4 connector and 30A Anderson connector
- Handle: with custom handle
- Item weight: 4.2KGS
- Material: ETFE Film + Waterproof Oxford Cloth
- Folded Size: L604*W536*H38mm
- Unfolded Size: L1228*W536*H14mm



14W foldable solar charger

Specifications

- Model No.: PS-828
- Max Power: 14W, 13.2V $\approx$ 1.06A Voc: 15.84V Isc: 1.16A
- Cells: SunPower solar cell
- Encapsulation: ETFE lamination + Integrated lamination
- Unfold size: 683*156*3mm
- Folding size: 160*156*25mm
- Type-C port: PD3.0 5V $\approx$ 2.3A, 9V $\approx$ 1.2A, 12V $\approx$ 1A(MAX)
- Itemweight: 380g
- Folds qty: 4 folds
- Color: Grey



17.5W foldable solar charger

Specifications

- Model No.: PS-828A
- Max Power: 17.5W, 16.5V $\approx$ 1.06A Voc: 19.8V Isc: 1.16A
- Cells: SunPower solar cell
- Encapsulation: ETFE lamination +Integrated lamination
- Unfold size: 858*156*3mm
- Folding size: 160*156*30mm
- Type-C port: PD3.0 5V $\approx$ 2.8A, 9V $\approx$ 1.7A, 12V $\approx$ 1.4A(MAX)
- Itemweight: 475g
- Folds qty: 5 folds
- Color: Grey



21W foldable solar charger

Specifications

- Model No.: PS-828B
- Max Power: 21W, 19.8V $\approx$ 1.06A Voc: 23.76V Isc: 1.16A
- Cells: SunPower solar cell
- Encapsulation: ETFE lamination +Integrated lamination
- Unfold size: 1037*156*3mm
- Folding size: 160*156*35mm
- Type-C port: PD3.0 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.6A (MAX)
- Itemweight: 625g
- Folds qty: 6 folds
- Color: Grey



36W foldable solar charger

Specifications

- Model No.: PS-829
- Max Power: 36W, 13.2V $\approx$ 2.72A Voc: 15.84V Isc: 2.99A
- Cells: SunPower solar cell
- Encapsulation: ETFE lamination + Integrated lamination
- Unfold size: 846*280*3mm
- Folding size: 198*280*25mm
- Type-C port: PD3.0 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A(MAX)
- Itemweight: 0.87kg
- Folds qty: 4 folds
- Color: Grey



45W foldable solar charger

Specifications

- Model No.: PS-829A
- Max Power: 45W, 16.5V $\approx$ 2.72A Voc: 19.8V Isc: 2.99A
- Cells: SunPower solar cell
- Encapsulation: ETFE lamination + Integrated lamination
- Unfold size: 1042*280*3mm
- Folding size: 198*280*30mm
- Type-C port: PD3.0 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A(MAX)
- Itemweight: 1.2kg
- Folds qty: 5 folds
- Color: Grey



54W foldable solar charger

Specifications

- Model No.: PS-829B
- Max Power: 54W, 19.8V $\approx$ 2.72A Voc: 23.76V Isc: 2.99A
- Cells: SunPower solar cell
- Encapsulation: ETFE lamination + Integrated lamination
- Unfold size: 1282*280*3mm
- Folding size: 198*280*35mm
- Type-C port: PD3.0 5V $\approx$ 3A, 9V $\approx$ 3A, 12V $\approx$ 3A, 15V $\approx$ 3A(MAX)
- Itemweight: 1.3kg
- Folds qty: 6 folds
- Color: Grey





Professional OEM and ODM Manufacturer

Please use WeChat to scan the QR code below:



Watch the company video.



Visit the company's official website.

Add: No. 1 Shangbian Road, Puxin Industrial District, Shipai Town,
Dongguan City, Guangdong, 523320, China
Tel: 0769-8127 3668 ext: 816
Email: info@power-stem.com
Website: www.power-stem.com