

PORTABLE TRIPOD WORKLIGHT



- The tripod can be rotated from multiple angles, which is convenient for adjusting the product and can be in multi-angle lighting.
- There are metal pegs on the bottom of the legs, which can be used for photography, tent, etc.
- High-end constant current circuit design, constant brightness and good user experience.



Item No.	6926		
Light source	SMD		
Lumen	500lm	1500lm	5000lm
CRI	80		
Color temperature	Cool - Warm		
Battery	7.3V 4000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - Mid - High - OFF		
Operating time	5h(Low) - 2.5h(Mid) - 1h(High)		
Charging time	4h		
Charging Port	Quick Coupling		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	1920x160x122 (Expand Status) 890x160x122(Storage Status)		
Weight(g)	4500		



Item No.	6958		
Light source	SMD		
Lumen	1800lm	5000lm	10000lm
CRI	80		
Color temperature	Cool - Warm		
Battery	14.6V 4000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - Mid - High - OFF		
Operating time	8h(Low) - 3h(Mid) - 1.5h(High)		
Charging time	3h		
Charging Port	Quick Coupling		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	148x215x2000 (Expand Status) 148x215x850(Storage Status)		
Weight(g)	5555		

Item No.	6956		
Light source	SMD		
Lumen	1500lm	5000lm	10000lm
CRI	80		
Color temperature	Cool - Warm		
Battery	14.6V 4000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - Mid - High - OFF		
Operating time	5h(Low) - 2.5h(Mid) - 1h(High)		
Charging time	4h		
Charging Port	Quick Coupling		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	2200x150x150 (Expand Status) 647x150x150(Storage Status)		
Weight(g)	5490		



Item No.	6957-1 / 6957-3		
Light source	SMD		
Lumen 6957-1	1500lm	3000lm	7000lm
Lumen 6957-3	1200lm	2500lm	4500lm
CRI	80		
Color temperature	6957-1 6000-7500K	6957-3 Cool - Warm	
Battery	7.3V 4000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - Mid - High - OFF		
Operating time	6957-1 7h(Low) - 3.5h(Mid) - 1.5h(High)		
Operating time	6957-3 9h(Low) - 4.5h(Mid) - 2h(High)		
Charging time	6h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	800x100x95 (including tripod) 210x100x95 (Lamp cap), Highest 1700		
Weight(g)	1955		



- The product features three wings offering no dead angle lighting.
- After opening the bracket, it can be raised to a height of 1.4m for illumination.
- After removing the bracket, the hook and magnet at the bottom of the head can help to be hung or placed to the metal surface.



Item No.	6931-G		
Light source	SMD		
Lumen	700lm	1200lm	2000lm
CRI	80		
Color temperature	Cool - Warm		
Battery	3.7V 4000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - Mid - High - OFF		
Operating time	8.5h(Low) - 3.5h(Mid) - 2h(High)		
Charging time	5h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	665x80x80 (Including tripod) 210x80x80 (Lamp cap), Highest 1400		
Weight(g)	1759		



Item No.	6954		
Light source	SMD + Seoul M4		
Lumen (Flash Light)	100lm	150lm	300lm
Lumen (SMD)	120lm	250lm	500lm
CRI	80		
Color temperature	6000 - 7000K(SMD)		
Battery	3.7V 2000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - Mid - High - OFF(Seoul M4 / SMD)		
Operating time	Flash Light 9h(Low) - 2h(Mid) - 1.5h(High) SMD 9h(Low) - 5h(Mid) - 2.5h(High)		
Charging time	4h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	240x36x36 (Including tripod) 102x36x36 (Lamp), Highest 700		
Weight(g)	240		



Item No.	6955		
Light source	SMD + COB		
Lumen (SMD)	120lm	400lm	500lm
CRI	70		
Color temperature	5500 - 7500K		
Battery	3.7V 3000mAh		
Charging indicator	Red - Green		
Switch function	Low - High - COB - OFF		
Operating time	16h(Low) - 4h(High) - 7.5h(COB)		
Charging time	3.5h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	500x500x1155 (Expand Status) 65x65x310(Storage Status)		
Weight(g)	526		



Item No.	6938		
Light source	SMD		
Lumen (Flash Light)	300lm	120lm	
Lumen (SMD)	1200lm	500lm	
CRI	80		
Color temperature	6000 - 7000K		
Battery	3.7V 2600mAh		
Charging indicator	Red - Green		
Switch function	High - Low (Flash Light) High - Low - Strobe (SMD)		
Operating time	Flash Light 6h(High) - 20h(Low) SMD 2h(High) - 4h(Low)		
Charging time	5h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	705x66x72 (Including tripod) 160x66x72 (Lamp), Highest 2100		
Weight(g)	1295		



WATERPROOF DROP TEST COOL+WARM HEAT SINK MAGNET PORTABLE

Item No.	6959 / 6959-C		
Light source	SMD		
Lumen	1200lm	2500lm	4500lm
CRI	80		
Color temperature	Cool - Warm		
Battery	7.3V 4000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - Mid - High - OFF		
Operating time	7.5h(Low) - 4h(Mid) - 1.5h(High)		
Charging time	5h		
Charging Port	Quick Coupling		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	1700x135x110 (Expand Status) 815x135x110(Storage Status)		
Weight(g)	2510		



Item No.	6961 (Only Lamp)						
Light source	SMD						
	Whole Lamp		Single Chip Lamp		Detachable Work Light		
	Low Light	High Light	Low Light	High Light	Low Light(SMD2835)	High Light(SMD2835)	SMD2016
Lumen	1350lm	3200lm	900lm	2400lm	250lm	500lm	30lm
CRI	80		80		80		65
Color temperature	Cool - Warm						
Battery	3.7V 8000mAh + 3.7V 1000mAh						
Charging indicator	4 Power Indicators						
Switch function	(Whole Lamp) High - Low - High - Loop				(SMD2835) Low - High - SMD2016 - OFF		
Operating time	10h	3h	15h	3.5h	5.5h	1.5h	11h
Charging time	8h						
Charging Port	USB - C						
IP/ IK rating	IP54 / IK07						
Dimension(mm)	327 x 286 x 343.5 (Head Lamp)						
Weight(g)	1250						

08

lamp cap



Item No.	6962-B						
Light source	SMD + Jingrui XG2						
	Main light			Auxiliary light			
	Low Light	Mid Light	High Light	Low Light(SMD2835)	High Light(SMD2835)	Low Light(XG2)	High Light(XG2)
Lumen	800lm	1800lm	4500lm	150lm	500lm	30lm	100lm
CRI	80			80		70	
Color temperature	6500K						
Battery	7.3V 4000mAh + 3.7V 1200mAh						
Charging indicator	4 Power Indicators						
Switch function	(Main light) ON - OFF	(Brightness adjustment)	Low - Mid - High - OFF	(Auxiliary light) Low - High - XG2 Low - XG2 High - OFF			
Operating time	4.5h	2h	1.3h	5h	1.5h	26h	9h
Charging time	6h						
Charging Port	USB - C						
IP/ IK rating	IP54 / IK07						
Dimension(mm)	Main light 96 x 96 x 212			Auxiliary light 168 x 58 x 18			
Weight(g)							

UNDERHOOD LIGHT

Item No.	6856	
Light source	SMD	
Lumen	1200lm	350lm
CRI	-	
Color temperature	-	
Battery	7.4V 750mAh + 7.4V 5200mAh	
Charging indicator	4 Power Indicators	
Switch function	High - Low - OFF	
Operating time	3h(High) - 8h(Low) / 2.5h(High) - 8h(Low)	
Charging time	5h	
Charging Port	DC	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	77x135x1300(2060)	
Weight(g)	1720	



UNDERHOOD LIGHT



Item No.	6610	
Light source	SMD	
Lumen	400lm	1200lm
CRI	80	
Color temperature	5500 - 6500K	
Battery	7.4V 5200mAh	
Charging indicator	4 Power Indicators	
Switch function	Low - High	
Operating time	10h(Low) - 3h(High)	
Charging time	4.5h	
Charging Port	DC	
IP/ IK rating	IPX0 / IK07	
Dimension(mm)	110x165x1215(2200)	
Weight(g)	1580	



UNDERHOOD LIGHT

Item No.	6856-A	
Light source	COB	
Lumen	1000lm	350lm
CRI	70	
Color temperature	6000-7500K	
Battery	7.4V 3200mAh	
Charging indicator	4 Power Indicators	
Switch function	High - OFF - Low - OFF	
Operating time	1.5h(High) - 4.5h(Low)	
Charging time	2h	
Charging Port	DC	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	130x80x1300(19000)	
Weight(g)	1600	



UNDERHOOD LIGHT

Item No.	6678	
Light source	SMD	
Lumen	400lm	1000lm
CRI	80	
Color temperature	5500 - 6500K	
Battery	3.65v 4000mAh	
Charging indicator	4 Power Indicators	
Switch function	Low - High	
Operating time	6h(Low) - 2h(High)	
Charging time	4.5h	
Charging Port	USB-C	
IP/ IK rating	IPX0 / IK07	
Dimension(mm)	130x77x1214(1870)	
Weight(g)	1080	



LIGHT & SPEAKER

- Provide high definition stereo sound with impressive volume.
- Equipped with advanced technology and compatible with all Bluetooth devices.



Item No.	6925					6915				
Light source	COB					COB				
Lumen	1100lm	880lm	650lm	450lm	270lm	2000lm	1600lm	1200lm	800lm	400lm
CRI	80					80				
Color temperature	6000 - 6500K					6000 - 6500K				
Battery	7.4V 2000mAh					7.3V 4000mAh				
Charging indicator	4 Power Indicators					4 Power Indicators				
Switch function	1000lm	800lm	600lm	400lm	200lm	2000lm	1600lm	1200lm	800lm	400lm
Operating time	2h	3h	3.7h	6.5h	12h	1.5h	2h	3h	4.5h	10h
Charging time	4h					3.5h				
Charging Port	Micro USB / USB - C					DC				
IP/ IK rating	IPX4 / IK07					IPX4 / IK07				
Dimension(mm)	187x122x50.5					212.4x138.5x65				
Weight(g)	690					1014				



Item No.	6920	6603	6651
Light source	SMD+COB	SMD+COB	SMD+COB
Lumen	250lm(Low) - 500lm(High) - 90lm(Top)	150lm(Low) - 500lm(High) - 160lm(Top)	230lm(Low) - 500lm(High) - 130lm(Top)
CRI	80	80	80
Color temperature	5000 - 7000K	5000 - 7000K	5000 - 7500K
Battery	3.7V 2000mAh	3.7V 3000mAh	3.7V 2000mAh
Charging indicator	Red -Green	4 Power Indicators	Red -Green
Switch function	Low - High - Top - OFF	Low - High - Top - OFF	Low - High - Top - OFF
Operating time	4h(Low) - 2.5h(High) - 5h(Top)	14h(Low) - 3h(High) - 6h(Top)	5h(Low) - 2.5h(High) - 4h(Top)
Charging time	4h	4.5h	4h
Charging Port	Micro USB / USB - C	Micro USB / USB - C	Micro USB
IP/ IK rating	IPX4 / IK07	IPX4 / IK07	IPX3 / IK07
Dimension(mm)	162x55x21	164x66x27	162x55x21
Weight(g)	190	320	204

Item No.	6917
Light source	SMD (Warm+White+Red)
Lumen	300lm(Warm) - 300lm(White) - 20lm(Red)
CRI	80 (Warm + White)
Color temperature	White(6000-6500K) - Warm(2700-3200K) - Red(800-1300K)
Battery	3.7V 4400mAh
Charging indicator	4 Power Indicators
Switch function	Warm - White - Red - Red Strobe - OFF
Operating time	3h(Warm) - 3h(White) - 8h(Red)
Charging time	4.5h
Charging Port	Micro USB / USB - C
IP/ IK rating	IPX4 / IK07
Dimension(mm)	89.5x85x83.5
Weight(g)	329



COB WORKLIGHT

- The stand can be 180 degrees rotated, which is convenient for multi-angle lighting.
- There is a positioning hole inside the stand, which can be used for photography, tents, etc.



WATERPROOF



DROP TEST



POWER BANK



Item No.	6916-B						
Light source	COB						
Lumen	3500lm	3000lm	2500lm	2000lm	1500lm	1000lm	500lm
CRI	80						
Color temperature	5700 - 6200K						
Battery	14.6V 4000mAh						
Charging indicator	5 Power Indicators						
Switch function	20% - 40% - 60% - 80% - 100%						
Operating time	2h	2.3h	2.7h	3.4h	4.5h	6.5h	12h
Charging time	3.5h						
Charging Port	DC						
IP/ IK rating	IPX4 / IK07						
Dimension(mm)	211x211x64						
Weight(g)	1457.5						



180°swivel Stand



Can Be Mounted

Item No.	6913				
Light source	COB				
Lumen	1100lm	900lm	680lm	450lm	220lm
CRI	80				
Color temperature	6000 - 6500K				
Battery	3.7V 6600mAh				
Charging indicator	4 Power Indicators				
Switch function	100% - 80% - 60% - 40% - 20%				
Operating time	3h	3.5h	4h	5h	10h
Charging time	5h				
Charging Port	Micro USB / USB - C				
IP/ IK rating	IPX4 / IK07				
Dimension(mm)	170x170x47.5				
Weight(g)	732				



Item No.	6869	
Light source	COB	
Lumen	350lm	1100lm
CRI	80	
Color temperature	6000 - 6500K	
Battery	3.7V 4400mAh	
Charging indicator	4 Power Indicators	
Switch function	Low - High - OFF	
Operating time	6h	3h
Charging time	6h	
Charging Port	Micro USB / USB - C	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	200x185x45	
Weight(g)	740	

Item No.	6908-A	
Light source	COB	
Lumen	350lm	1100lm
CRI	80	
Color temperature	6000 - 6500K	
Battery	3.7V 4400mAh	
Charging indicator	4 Power Indicators	
Switch function	Low - High - OFF	
Operating time	6h	3h
Charging time	6h	
Charging Port	Micro USB / USB - C	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	189.5x164.5x45.5	
Weight(g)	700	



MULTI-FUNCTION WORKLIGHT

- There is a stand that can rotate 360 degrees, making it easy to adjust the product for multi-angle lighting.
- There is a hook on the stand, which can be used for photography, tents, etc.



WATERPROOF



DROP TEST



FLOOD LIGHT



SPOT LIGHT

Item No.	6936		
Light source	COB		
Lumen	600lm	1200lm	2000lm
CRI	80		
Color temperature	6000 - 7000K		
Battery	3.7V 4000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - Mid - High - Red - OFF		
Operating time	(Low) 9h - (Mid) 5h - (High) 2h		
Charging time	5h		
Charging Port	USB-C		
IP/ IK rating	IPX6 / IK07		
Dimension(mm)	180x155x59		
Weight(g)	710		



It can be folded into various needs for various spaces.



Item No.	6930			
Light source	COB(White+ Warm + Red)			
Lumen	300lm	600lm	900lm	1500lm
CRI	80			
Color temperature	White - Warm			
Battery	3.65V 8000mAh			
Charging indicator	4 Power Indicators			
Switch function	20% - 40% - 60% - 100%			
Operating time	12h(20%) - 8h(40%) - 5h(60%) - 3h(100%)			
Charging time	6h			
Charging Port	USB-C			
IP/ IK rating	IPX4 / IK07			
Dimension(mm)	128x99.5x46			
Weight(g)	482.5			



Item No.	6927		
Light source	COB + SMD		
Lumen	120lm(SMD-Low)	350lm(SMD-High)	550lm(COB)
CRI	70		
Color temperature	5500 - 7500K		
Battery	3.7V 2000mAh		
Charging indicator	Red - Green		
Switch function	Low - High - COB - OFF		
Operating time	9.5h(SMD-Low) - 5h(SMD-High) - 4.5h(COB)		
Charging time	3.5h		
Charging Port	Micro USB / USB - C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	72x76x49.5		
Weight(g)	170		



Item No.	6928		
Light source	COB + SMD		
Lumen	150lm(SMD-Low)	500lm(SMD-High)	800lm(COB)
CRI	65		
Color temperature	6000 - 7000K		
Battery	3.7V 4000mAh		
Charging indicator	Red - Green		
Switch function	Low - High - COB - OFF		
Operating time	9h(SMD-Low) - 5h(SMD-High) - 3h(COB)		
Charging time	4h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	93x89x60		
Weight(g)	305		



WATERPROOF



DROP TEST



FLOOD LIGHT



SPOT LIGHT

Item No.	7899		
Light source	COB + CREE		
Lumen	650lm(CREE)	1000lm(COB-White)	
CRI	80		
Color temperature	White - Warm		
Battery	3.7V 4000mAh		
Charging indicator	4 Power Indicators		
Switch function	LED - COB - Red - OFF		
Operating time	3h(LED) - 1.5h(COB) - 35h(Red)		
Charging time	3h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	99 x 85 x 44.5		
Weight(g)	235		

MULTI 3-in-1 WORKLIGHT

- FLASHLIGHT
- FOLDING WORKLIGHT
- FLEXIBLE WORKLIGHT

Item No.	7524
Battery	3.7V 2200mAh
Switch function	Low - High - OFF
Charging indicator	Red - Green
Charging time	4h
Charging Port	Micro USB / USB - C
IP/ IK rating	IPX4 / IK07
Dimension(mm)	33.5x25x142
Weight(g)	178



- 1-TORCH BODY
- 2-TORCH LIGHT
- 3-FLEXIBLE LIGHT
- 4-WORKLIGHT



Item No.	7526-2
Light source	CREE XPG
Modes	Low - High - OFF
Lumen	140lm(Low) - 280lm(High)
Operating time	5h(Low) - 2.5h(High)
Dimension(mm)	35x35x70
Weight(g)	68



Item No.	7526-6
Light source	CREE XPG
Modes	Low - High - OFF
Lumen	100lm(Low) - 190lm(High)
Operating time	8h(Low) - 5.5h(High)
Dimension(mm)	8x20x415
Weight(g)	100




Item No.	7526-14
Light source	COB
Modes	Low - High - OFF
Lumen	180lm(Low) - 380lm(High)
Operating time	4h(Low) - 1.5h(High)
Dimension(mm)	35x35x229.5
Weight(g)	86





BASE CHARGING WORKLIGHT

- Adopting aluminum heat sink, with good heat dissipation effect, ensuring efficient and efficient operation of COB.
- Designed with multiple light sources and suitable for different lighting environments.
- Using a charging stand for charging, simply placing it in the charging stand for charging, saving time and effort.

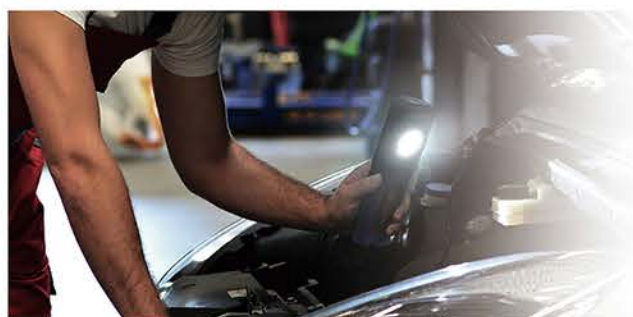

Item No.	6692		
Light source	SMD + COB		
Lumen	200lm(Low)	600lm(High)	200lm(SMD)
CRI	70		
Color temperature	5500 - 7500K		
Battery	3.7V 4000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - High - SMD - OFF		
Operating time	9h(Low) - 3h(High) - 9h(SMD)		
Charging time	4.5h		
Charging Port	USB-C		
IP/ IK rating	IPX6 / IK07		
Dimension(mm)	186x53.5x36		
Weight(g)	245		



Item No.	6740
Light source	SMD + COB
Lumen	100lm - 300lm - 100lm(SMD)
CRI	70
Color temperature	5500 - 7500K
Battery	4.2V 5000F
Charging indicator	4Power Indicators
Switch function	Low - High - SMD - OFF
Operating time	8h(Low) - 4h(High) - 5h(SMD)
Charging time	1h(20W Adapter)
Charging Port	USB-C
IP/ IK rating	IPX6 / IK07
Dimension(mm)	186x53.7x32
Weight(g)	228



Item No.	6742
Light source	SMD + COB
Lumen	120lm - 400lm - 200lm(SMD)
CRI	70
Color temperature	5500 - 7500K
Battery	3.7V 2200mAh
Charging indicator	4Power Indicators
Switch function	Low - High - SMD - OFF
Operating time	9h(Low) - 3h(High) - 5h(SMD)
Charging time	2.5h
Charging Port	USB-C
IP/ IK rating	IPX6 / IK07
Dimension(mm)	166x47.5x30
Weight(g)	196.6



Item No.	6740-A
Light source	SMD + COB
Lumen	200lm - 600lm - 200lm(SMD)
CRI	70
Color temperature	5500 - 7500K
Battery	3.65V 4000mAh
Charging indicator	4Power Indicators
Switch function	Low - High - SMD - OFF
Operating time	12h(Low) - 3h(High) - 9h(SMD)
Charging time	3h
Charging Port	USB-C
IP/ IK rating	IPX6 / IK07
Dimension(mm)	186x53.7x32
Weight(g)	245



Item No.	6743
Light source	SMD + COB
Lumen	50lm - 200lm - 50lm(SMD)
CRI	70
Color temperature	5500 - 7500K
Battery	3.7V 750mAh
Charging indicator	4Power Indicators
Switch function	Low - High - SMD - OFF
Operating time	8h(Low) - 2h(High) - 4h(SMD)
Charging time	2.5h
Charging Port	USB-C
IP/ IK rating	IPX6 / IK07
Dimension(mm)	155.6x35.2x22.2
Weight(g)	94.6

######

HANDHELD WORKLIGHT

- There is a stand that can rotate in different angles, making it easy to adjust the lightings.
- Applied with hook & magnet for easy carrying and placement.
- The whole lamp is designed to use TPR material, which feels good on hand.
- USB waterproof cover uses innovative sliding design.



Item No.	6846	6847	6848
Light source	SMD+COB	SMD+COB	SMD+COB
Lumen	120lm(Low) - 420lm(High) - 45lm(Top)	70lm(Low) - 240lm(High) - 45lm(Top)	30lm(Low) - 110lm(High) - 45lm(Top)
CRI	70	70	70
Color temperature	6000 - 7000K	6000 - 7000K	6000 - 7000K
Battery	3.7V 4400mAh	3.7V 2200mAh	3.7V 1000mAh
Charging indicator	4 Power Indicators	4 Power Indicators	4 Power Indicators
Switch function	Low - High - Top - OFF	Low - High - Top - OFF	Low - High - Top - OFF
Operating time	10h(Low) - 3h(High) - 25h(Top)	10h(Low) - 3h(High) - 13h(Top)	8h(Low) - 2.5h(High) - 4.5h(Top)
Charging time	4.5h	3.5h	2h
Charging Port	Micro USB / USB - C	Micro USB / USB - C	Micro USB / USB - C
IP/ IK rating	IPX4 / IK07	IPX4 / IK07	IPX4 / IK07
Dimension(mm)	60x32x190	52x32x163	48x30x116
Weight(g)	300	200	105

Item No.	6851		
Light source	SMD + COB		
Lumen	30lm(Low)	110lm(High)	60lm(SMD)
CRI	70		
Color temperature	6000 - 7000K		
Battery	3.7V 750mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - High - SMD - OFF		
Operating time	6.5h(Low) - 2h(High) - 3.5h(SMD)		
Charging time	2h		
Charging Port	Micro USB / USB - C		
IP/ IK rating	IPX0 / IK07		
Dimension(mm)	152x30x21		
Weight(g)	70		



Item No.	6799		
Light source	SMD + COB		
Lumen	210lm(Low)	800lm(High)	55lm(SMD)
CRI	70		
Color temperature	6000 - 7000K		
Battery	3.6V 6000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - High - SMD - OFF		
Operating time	12h(Low) - 3.5h(High) - 30h(SMD)		
Charging time	5h		
Charging Port	Micro USB / USB - C		
IP/ IK rating	IPX0 / IK07		
Dimension(mm)	307.5x66x39		
Weight(g)	534		

Item No.	6814		
Light source	SMD + COB		
Lumen	120lm(Low)	420lm(High)	45lm(SMD)
CRI	70		
Color temperature	6000 - 7000K		
Battery	3.7V 4400mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - High - SMD - OFF		
Operating time	10h(Low) - 3h(High) - 25h(SMD)		
Charging time	4.5h		
Charging Port	Micro USB / USB - C		
IP/ IK rating	IPX0 / IK07		
Dimension(mm)	217x57x29		
Weight(g)	284		



RETRACTABLE WORKLIGHT



CONTRACTION STATE



Item No.	6639	
Light source	SMD + COB	
Lumen	160lm(SMD)	500lm(COB)
CRI	70	
Color temperature	5000 - 7000K	
Battery	3.7V 1500mAh	
Charging indicator	Red - Green	
Switch function	SMD - OFF	COB - OFF
Operating time	4h(SMD) / 2h(COB)	
Charging time	3h	
Charging Port	Micro USB	
IP/ IK rating	IPX0 / IK07	
Dimension(mm)	45.2x29.5x108.2(142)	
Weight(g)	175	



Item No.	6635			
Light source	COB + SMD			
Lumen	800lm(High)	400lm(Mid)	150lm(Low)	150lm(SMD)
CRI	70			
Color temperature	5000 - 7000K			
Battery	3.7V 4000mAh			
Charging indicator	4 Power Indicators			
Switch function	High - Mid - Low - SMD - OFF			
Operating time	2h(High) - 7h(Mid) - 12h(Low) - 8.5h(SMD)			
Charging time	5h			
Charging Port	USB-C			
IP/ IK rating	IPX3 / IK07			
Dimension(mm)	146.5x56x27			
Weight(g)	201			

Item No.	6634		
Light source	COB + SMD		
Lumen	160lm(Low)	500lm(High)	150lm(SMD)
CRI	70		
Color temperature	5000 - 7000K		
Battery	3.7V 2000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - High - SMD - OFF		
Operating time	10h(Low) - 3h(High) - 6h(SMD)		
Charging time	3.5h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	119x58x28.8		
Weight(g)	140		



WIRELESS CHARGING WORKLIGHT(Charging Base)

6636

Charger adapter 5v-1a

(suitable for most mobile phones and wireless charging devices on the market).

Charging interface type-C

Switching switch:

the product will be charged automatically after being put on, and it will be cut off automatically after filling.

Low power alarm function:

(charging error, product position not in the right position)

Dimension: 164.5x80x14 mm

Weight: 101.5g



MULTI FUNCTIONAL
WORKLIGHT

- The light strip can rotate 180 degrees and be folded up for easy storage and portability.
- The bottom is equipped with a pull-out clamp function, which can be fixed to different thicknesses of plates, and the maximum stretching size can reach 45MM.
- The magnet at the bottom can be attached to the engine hood, tool rack, etc., and the hook can be hung.



Item No.	6620			
Light source	COB SMD			
Lumen	400lm(White)	10lm(Red)	50lm(Top)	160lm(SMD)
CRI	80	-	70	80
Color temperature	5500 - 7500K			
Battery	3.7V 2600mAh			
Charging indicator	4 Power Indicators			
Switch function	(COB)White - Red - Top - OFF SMD - OFF			
Operating time	3.5h(White) - 20h(Red) - 40h(Top) - 10h(SMD)			
Charging time	4h			
Charging Port	USB-C			
IP/ IK rating	IPX0 / IK07			
Dimension(mm)	158x31x45			
Weight(g)	180			



Item No.	6624				6741				6672			
Light source	COB SMD				COB SMD				COB SMD			
Lumen	240lm(White)	12lm(Red)	50lm(Top)	160lm(SMD)	400lm(White)	200lm(Warm)	60lm(Top)	160lm(SMD)	800lm(White)	10lm(Red)	50lm(Top)	150lm(SMD)
CRI	80	-	70	80	80	90	80	70	80	-	70	80
Color temperature	5500 - 7500K				5500 - 7500K 2500 - 3500K				5500 - 7500K			
Battery	3.7V 1200mAh				3.7V 2600mAh				3.65V 4000mAh			
Charging indicator	4 Power Indicators				4 Power Indicators				4 Power Indicators			
Switch function	(COB)White-Red-Top-OFF SMD-OFF				(COB)White-Warm-Top-OFF SMD-OFF				(COB)White-Red-Top-OFF SMD-OFF			
Operating time	3h(White)-12h(Red)-20h(Top)-4.5h(SMD)				5h(White)-6h(Warm)-35h(Top)-10h(SMD)				3h(White)-20h(Red)-35h(Top)-18h(SMD)			
Charging time	2h				4h				5h			
Charging Port	USB-C				USB-C				USB-C			
IP/ IK rating	IPX0 / IK07				IPX0 / IK07				IPX0 / IK07			
Dimension(mm)	130x27x41				158x31x45				183x39x54			
Weight(g)	119				180				290			

Item No.	6667		
Light source	COB SMD		
Lumen	70lm	200lm	40lm(SMD)
CRI	80	80	70
Color temperature	5500 - 7500K		
Battery	3.7V 650mAh		
Charging indicator	Red - Green		
Switch function	Low(COB) - High(COB) - SMD - OFF		
Operating time	9h(Low) - 2.5h(High) - 7h(SMD)		
Charging time	2h		
Charging Port	USB-C		
IP/ IK rating	IPX0 / IK07		
Dimension(mm)	166x40x21		
Weight(g)	78		



MULTI FUNCTIONAL WORKLIGHT



Item No.	6769		
Light source	SMD + COB		
Lumen	450lm(White)		30lm(SMD)
CRI	80		
Color temperature	5500 - 7500K		
Battery	3.7V 2200mAh		
Charging indicator	Power Indicators		
Switch function	White Light - Red Light - SMD - OFF		
Operating time	3.5h (White) - 18h (Red) - 10h (SMD)		
Charging time	3.5h		
Charging Port	USB-C		
IP/ IK rating	IPX0 / IK07		
Dimension(mm)	251.5 x 45 x 28		
Weight(g)	135.5		



Item No.	6767					
Light source	CREE XTE + COB					
	COB High	COB Low	COB Red	COB Red Strobe	COB Turbo	CREE XTE
Lumen	800lm	240lm			1200lm	160lm
CRI	70					
Color temperature	5500 - 7500K					
Battery	3.7V 1200mAh					
Charging indicator	Power Indicators					
Switch function	High - Low - Red - Red Strobe - CREE XTE - OFF					
Operating time	1.5h	3.5h	20h	40h	30s	7h
Charging time	3h					
Charging Port	USB-C					
IP/ IK rating	IPX4 / IK07					
Dimension(mm)	97.5 x 37 x 22.5					
Weight(g)	87					



Item No.	6780		
Light source	SMD + COB		
Lumen	1000lm(White)	800lm(Warm)	80lm(COB)
CRI	80		
Color temperature	5500 - 7500K		
Battery	3.7V 4000mAh		
Charging indicator	Power Indicators		
Switch function	White Light - Red Light - SMD - OFF		
Operating time	4h (White) - 3h (Warm) - 15h (SMD)		
Charging time	5.5h		
Charging Port	USB-C		
IP/ IK rating	IPX0 / IK07		
Dimension(mm)	290 x 50.5 x 32		
Weight(g)	324		



Item No.	6771						
Light source	SMD			COB			
	Low	High	Turbo	Low	High	Red	Turbo
Lumen	200lm	600lm	750lm	120lm	350lm	200lm	500lm
CRI	70			90			
Color temperature	5500 - 7500K			4000 - 5000K			
Battery	3.7V 1500mAh						
Charging indicator	Power Indicators						
Switch function	(SMD)Low - High - OFF (COB)Low - High - Red - OFF						
Operating time	4.5h	1.5h	30s	4.5h	1.5h	15h	30s
Charging time	2.5h						
Charging Port	USB-C						
IP/ IK rating	IPX4 / IK07						
Dimension(mm)	140x32x22						
Weight(g)	105						



HANDHELD WORKLIGHT



DROP TEST



FLOOD LIGHT



SPOT LIGHT



MAGNET



180°
SWIVEL

Item No.	6776		
Light source	COB + SMD		
Lumen	200lm(COB Low)	600lm(COB High)	200lm(SMD)
CRI	80	80	70
Color temperature	5500 - 7500K		6000 - 6500K
Battery	3.7V 4000mAh		
Charging indicator	4 Power Indicators		
Switch function	(COB)Low - High - SMD - OFF		
Operating time	12h(COB Low) - 3h(COB High) - 9h(SMD)		
Charging time	3h		
Charging Port	USB-C		
IP/ IK rating	IPX6 / IK07		
Dimension(mm)	205x56x34		
Weight(g)	289		

Item No.	6777		
Light source	COB + SMD		
Lumen	120lm(COB Low)	400lm(COB High)	200lm(SMD)
CRI	80	80	70
Color temperature	5500 - 7500K		6000 - 6500K
Battery	3.7V 2200mAh		
Charging indicator	4 Power Indicators		
Switch function	(COB)Low - High - SMD - OFF		
Operating time	9h(COB Low) - 3h(COB High) - 5h(SMD)		
Charging time	2.5h		
Charging Port	USB-C		
IP/ IK rating	IPX6 / IK07		
Dimension(mm)	182x49.5x30		
Weight(g)	217.5		

Item No.	6765		
Light source	COB + SMD		
	COB High	COB Low	SMD
Lumen	500lm	250lm	150lm
CRI	80		70
Color temperature	5500 - 7500K		
Battery	3.7V 2600mAh		
Charging indicator	4 Power Indicators		
Switch function	COB Low - COB High - SMD - OFF		
Operating time	4h	15h	15h
Charging time	2h		
Charging Port	USB-C		
IP/ IK rating	IPX6 / IK07		
Dimension(mm)	166 x 37.5 x 29		
Weight(g)	197		



Spot Light



Swivel Stand

Item No.	6782			
Light source	COB + 2016LED			
	COB Low	COB High	LED	COB Turbo
Lumen	150lm	500lm	50lm	700lm
CRI	68			
Color temperature	5500 - 6500K			
Battery	3.7V 600mAh			
Charging indicator	Red - Green			
Switch function	COB Low - COB High - LED - OFF			
Operating time	3.5h	1h	4.5h	30s
Charging time	2 - 2.5h			
Charging Port	USB-C			
IP/ IK rating				
Dimension(mm)	106.5 x 26 x 14.4			
Weight(g)	42.5			



Magnet Base



Top Spot Light



DROP TEST



FLOOD LIGHT



SPOT LIGHT



MAGNET



DROP TEST



FLOOD LIGHT



SPOT LIGHT



MAGNET

DISTANCE SENSING SLIM LIGHT

Item No.	6685			
Light source	COB + SMD			
Lumen	1200lm	600lm	80lm	100lm
CRI	65			
Color temperature	5500 - 7500K			
Battery	3.7V 2000mAh			
Charging indicator	Red - Green			
Switch function	High - Mid - Low - SMD - OFF			
Operating time	1.5h(High) - 5.5h(Mid) - 10h(Low) - 12h(SMD)			
Charging time	3h			
Charging Port	USB-C			
IP/ IK rating	IPX7 / IK07			
Dimension(mm)	115x46x26			
Weight(g)	147			

ODS

Obstacle Detection System

Due to proximity sensor, the worklight turn off automatically when an obstacle (paper, box, bag, textile, tools, wall, ground, etc.) is monitored at close range from light source. Avoid potential safety risk.



WATERPROOF



DROP TEST



FLOOD LIGHT



SPOT LIGHT



MAGNET

Item No.	6784		
Light source	SMD		
Lumen	200lm	60lm	70lm(SMD)
CRI	70lm		
Color temperature	5500 - 7500K		
Battery	3.7V 800mAh		
Charging indicator	Red - Green		
Switch function	High - Low - SMD - OFF		
Operating time	3h(Low) - 5h(High) - 5h(SMD)		
Charging time	3h		
Charging Port	Micro USB / USB - C		
IP/ IK rating	IPX0 / IK07		
Dimension(mm)	100.5x17.5x26		
Weight(g)	43.5		



Item No.	6795	
Light source	CREE XPG	
Lumen	60lm	200lm
CRI	-	
Color temperature	-	
Battery	3.7V 1800mAh	
Charging indicator	Red - Green	
Switch function	Low - High - OFF	
Operating time	10h(Low) - 3h(High)	
Charging time	3.5h	
Charging Port	Micro USB / USB - C	
IP/ IK rating	IPX3 / IK07	
Dimension(mm)	106x48x36.5	
Weight(g)	113	



SLIM LIGHT

Item No.	6685-A			
Light source	COB + SMD			
Lumen	1200lm	600lm	80lm	100lm
CRI	65			
Color temperature	5500 - 7500K			
Battery	3.7V 2000mAh			
Charging indicator	Red - Green			
Switch function	High - Mid - Low - SMD - OFF			
Operating time	1.5h(High) - 5.5h(Mid) - 10h(Low) - 12h(SMD)			
Charging time	3h			
Charging Port	USB-C			
IP/ IK rating	IPX7 / IK07			
Dimension(mm)	115x46x26			
Weight(g)	147			

Item No.	6698		
Light source	COB + SMD		
Lumen	100lm	500lm	100lm(SMD)
CRI	70		
Color temperature	5000 - 7000K		
Battery	3.7V 1200mAh		
Charging indicator	Red - Green		
Switch function	Low - High - SMD - OFF		
Operating time	5h(Low) - 1.5h(High) - 8h(SMD)		
Charging time	3h		
Charging Port	USB - C		
IP/ IK rating	IPX5 / IK07		
Dimension(mm)	97x29x20.6		
Weight(g)	98		

HANDHELD STICK LIGHT

- Long & thin design, making it easy to carry and apply.
- Hook & rear magnet are suitable for various environments.
- Sturdy & durable Aluminum alloy housing.



Item No.	6606		6616	
Light source	COB		COB	
Lumen	360lm	180lm	250lm	120lm
CRI	-		-	
Color temperature	-		-	
Battery	3.7V 1800mAh		3.7V 780mAh	
Charging indicator	Red - Green		Red - Green	
Switch function	High - Low - Strobe - OFF		High - Low - Strobe - OFF	
Operating time	3.5h(High) - 8h(Low)		1.5h(High) - 3h(Low)	
Charging time	4h		4h	
Charging Port	Micro USB / USB - C		Micro USB / USB - C	
IP/ IK rating	IPX4 / IK07		IPX4 / IK07	
Dimension(mm)	249x32.5x10.5		195x26x10.5	
Weight(g)	120		71	

MULTIFUNCTIONAL HANDHELD WORKLIGHT

- Cylindrical design allows various lighting placements.
- Dual lights sources, it can be used as handheld lighting or flashlight.
- The rear magnets can be used in multiple scenarios such as engine hood and shelves.



Item No.	6665			6675		
Light source	SMD + Seoul M4			SMD + Seoul M4		
Lumen	1000lm (White)	50lm (Red)	400lm (M4)	1200lm (White)	50lm (Red)	400lm (M4)
CRI	-			-		
Color temperature	-			-		
Battery	3.7V 2600mAh			3.7V 4400mAh		
Charging indicator	Red - Green			Red - Green		
Switch function	White - Red - M4 - OFF			White - Red - M4 - OFF		
Operating time	2h(White) - 8h(Red) - 3.3h(M4)			3.5h(White) - 15h(Red) - 7h(M4)		
Charging time	4h			6h		
Charging Port	USB-C			USB-C		
IP/ IK rating	IPX4 / IK07			IPX4 / IK07		
Dimension(mm)	41x41x286			41x41x486		
Weight(g)	245			450		

RECHARGEABLE WORKLIGHT

- Multi-function, it can be used as flashlight, warning light, power-bank, etc.
- Applied with a power indicator, timely reminding users to charge and maintain.
- The battery is detachable for easy replacement.



Item No.	6677			
Light source	LUXEON V2 + COB			
Lumen	200(LED-Low)	600(LED-High)	400(COB-Low)	1000(COB-High)
CRI	LUXEON V2 70		COB 80	
Color temperature	6000 - 7000K			
Battery	3.65V 8000mAh			
Charging indicator	4 Power Indicators			
Switch function	Low - High - OFF (LUXEON V2)		Low - High - Red - OFF (COB)	
Operating time	25h(LED-Low)	4.5h(LED-High)	15h(COB-Low)	8h(COB-High)
Charging time	6h			
Charging Port	USB-C			
IP/ IK rating	IPX4 / IK07			
Dimension(mm)	213x132x106			
Weight(g)	708			

NECK WORKLIGHT

- Using high performance LEDs.
- Applied with dual lights sources and two buttons which can be controled seperately.
- Applied with hoses which can adjust the direction 360 degrees seperately.
- It can be placed around the neck for usage.
- The magnets & hole on the base are suitable for various occasions.



Magnet Base



LED Lens



Adjustable Metal Hose

Switch

Charging Port

Indicator

Magnet

Tripod Connection Hole



Can Be Mounted



Arbitrary Distortion

Item No.	6633	
Light source	OSRAM	
Lumen	150lm	300lm
CRI	70	
Color temperature	6000 - 7000K	
Battery	3.7V 2000mAh	
Charging indicator	Red - Green	
Switch function	(Single / Dual) ON - OFF (Dual Switch Separate Control)	
Operating time	10h(Single) - 5h(Dual)	
Charging time	4h	
Charging Port	USB-C	
IP/ IK rating	IPX0 / IK07	
Dimension(mm)	185x145x45	
Weight(g)	223	



Battery compartment

Switch



Adjustable Metal Hose



Magnet

Indicator

Item No.	6763		
Light source	SMD		
Lumen	300lm(High)	45lm(Low)	500lm(Dual)
CRI	65		
Color temperature	5500 - 7500K		
Battery	3.7V 2200mAh		
Charging indicator	4 Power Indicators		
Switch function	High - Mid - Low - Strobe - SOS - OFF		
Operating time	3h(High) - 8h(Low) - 1h(Dual)		
Charging time	4h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	270 x 250 x 40		
Weight(g)	241.5		



FOLDABLE WORKLIGHT

- The light strip can rotate 360 degrees and be folded up for easy storage and portability.
- Internal and external dual light source design, suitable for multiple environmental needs.
- The magnet at the bottom can be attached to the engine hood, tool rack, etc.



360° rotation, multi angle lighting.



Item No.	7549		
Light source	COB + SMD		
Lumen	1200lm(White)	300lm(Warm)	100lm(SMD)
CRI	80	90	70
Color temperature	5500 - 6500K	3000 - 4000K	5500 - 6500K
Battery	3.65V 5000mAh		
Charging indicator	Red - Green		
Switch function	White - Warm - SMD		
Operating time	5h(White) - 9h(Warm) - 28h(SMD)		
Charging time	3.5h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	38x34.5x340.5		
Weight(g)	298.4		



Item No.	7711	
Light source	OSRAM	
Lumen	300lm	100lm
CRI	65	
Color temperature	6000 - 7000K	
Battery	3 x AA	
Charging indicator	-	
Switch function	High - Low - OFF	
Operating time	10h(High) - 24h(Low)	
Charging time	-	
Charging Port	-	
IP/ IK rating	IPX4 / IK06	
Dimension(mm)	45x45x625	
Weight(g)	344	



Item No.	7647-A	
Light source	CREE XPG	
Lumen	125lm	230lm
CRI	-	
Color temperature	-	
Battery	3.7V 2200mAh	
Charging indicator	Red - Green	
Switch function	Low - High - OFF	
Operating time	8h(Low) - 4.5h(High)	
Charging time	4h	
Charging Port	Micro USB / USB - C	
IP/ IK rating	IPX3 / IK07	
Dimension(mm)	30x30x650	
Weight(g)	265	

Item No.	7543-1	
Light source	COB	
Lumen	175lm	350lm
CRI	-	
Color temperature	-	
Battery	3.7V 2200mAh	
Charging indicator	Red - Green	
Switch function	Low - High - OFF	
Operating time	4h(Low) - 2h(High)	
Charging time	4h	
Charging Port	Micro USB / USB - C	
IP/ IK rating	IPX0 / IK07	
Dimension(mm)	35x35x337	
Weight(g)	225	



360° rotation, Multi angle lighting.

MULTI-FUNCTION WORKLIGHT



Item No.	6756			
Light source	SMD + COB			
Lumen (COB)	200lm(COB)	800lm(COB)	50lm(SMD)	300lm(SMD)
CRI	80			
Color temperature	6000 - 7000K			
Battery	3.7V 2600mAh			
Charging indicator	4 Power Indicators			
Switch function	Low - High(COB) - Low - High(SMD) - OFF			
Operating time	COB 10h(Low) - 2.5h(High) SMD 20h(Low) - 4h(High)			
Charging time	4h			
Charging Port	USB-C			
IP/ IK rating	IPX4 / IK07			
Dimension(mm)	140x55x34			
Weight(g)	195.5			



Item No.	6697	6697-A	6697-B
Light source	Jingrui XG2	HL2X	HL2X
Lumen	5lm(Low)- 50lm(Mid)- 150lm(High)- 400(Turbo)	10lm(Low)- 70lm(Mid)- 210lm(High)- 500(Turbo)	10lm(Low)- 70lm(Mid)- 210lm(High)- 500(Turbo)
CRI	65	70	70
Color temperature	6000 - 7000K	6000 - 7000K	6000 - 7000K
Battery	3.7V 300mAh	3.7V 400mAh	3.7V 500mAh
Charging indicator	Red - Green	Red - Green	Red - Green
Switch function	Low - Mid - High - OFF	Low - Mid - High - OFF	Low - Mid - High - OFF
Operating time	8h(Low)- 2h(Mid)- 0.6h(High)- 30s(Turbo)	14h(Low)- 3.5h(Mid)- 1h(High)- 30s(Turbo)	14h(Low)- 4h(Mid)- 1.5h(High)- 30s(Turbo)
Charging time	2.5h	3.5h	4h
Charging Port	USB-C	USB-C	USB-C
IP/ IK rating	IPX3 / IK07	IPX3 / IK07	IPX3 / IK07
Dimension(mm)	60x27.5x15	70x27.5x15	75x27.5x15
Weight(g)	34	39	43

SMALL PLASTIC WORKLIGHT



Item No.	6652		
Light source	COB + SMD		
Lumen	170lm	500lm	150lm
CRI	70		
Color temperature	COB 5000 - 6500K SMD 6000 - 7000K		
Battery	3.7V 2000mAh		
Charging indicator	4 Power Indicators		
Switch function	Low - High - SMD - OFF		
Operating time	10h(Low) - 3h(High) - 8h(SMD)		
Charging time	3h		
Charging Port	USB-C		
IP/ IK rating	IPX4 / IK07		
Dimension(mm)	101x53x25		
Weight(g)	99.5		



Item No.	6680
Light source	SMD
Lumen	50lm(Low) - 150lm(High)
CRI	80
Color temperature	-
Battery	3.7V 200mAh
Charging indicator	Red - Green
Switch function	Low - High - Red - OFF
Operating time	4h(Low) - 2h(High)
Charging time	1h
Charging Port	USB-C
IP/ IK rating	IPX5 / IK07
Dimension(mm)	28x10x57
Weight(g)	22

Item No.	7756
Light source	Samsung
Lumen	10lm(Low) - 100lm(High)
CRI	70
Color temperature	5500 - 6500K
Battery	3.7V 100mAh
Charging indicator	Red - Green
Switch function	Low - High - OFF
Operating time	3h(Low) - 0.2h(High)
Charging time	0.5h
Charging Port	USB-C / Micro USB
IP/ IK rating	IPX0 / IK07
Dimension(mm)	28.4x28.4x32.1
Weight(g)	28

DUAL POWER HEADLAMP



NON-SLIP DESIGN



55°
SWIVEL



Fluorescence Localization



Sensor Mode



Dry And Lithium Batteries Are Interchangeable And Universal.

3.7V 1000mAh Lithium Battery 3xAAA Battery

Item No.	6578
Light source	COB + SMD
CRI	65
Color temperature	5000 - 8000K
Charging indicator	Red - Green
Switch function	High - Low - COB - All ON - OFF
Charging Port	Micro USB / USB - C
IP / IK Rating	IPX4 / IK07
Dimension(mm)	68x39x40
Weight(g)	112.5

3xAAA Battery Parameters

Lumen	400lm(High)	120lm(Low)	200lm(COB)	470lm(ALL)
Battery	3 x AAA			
Operating time	2h(High)	10h(Low)	4h(COB)	1.2h(ALL)
Charging time	-			

Lithium Battery Parameters

Lumen	400lm(High)	120lm(Low)	200lm(COB)	500lm(ALL)
Battery	3.7V 1000mAh			
Operating time	2h(HIGH)	10h(LOW)	4h(COB)	1.2h(ALL)
Charging time	2.5h			

Item No.	6566			
Light source	COB + SMD			
Lumen	300lm(High)	90lm(Low)	180lm(COB)	400lm(ALL)
CRI	65			
Color temperature	6000 - 7000K			
Battery	3 x AAA			
Charging indicator	-			
Switch function	High - Low - COB - All ON - OFF			
Operating time	2h(High)	12h(Low)	4.5h(COB)	1.2h(ALL)
Charging time	-			
Charging Port	-			
IP/ IK rating	IPX4 / IK07			
Dimension(mm)	64x39x40			
Weight(g)	52			



Item No.	6567			
Light source	COB + SMD			
Lumen	300lm(High)	90lm(Low)	250lm(COB)	480lm(ALL)
CRI	65			
Color temperature	6000 - 7000K			
Battery	3.7V 1400mAh			
Charging indicator	Red - Green			
Switch function	High - Low - COB - All ON - OFF			
Operating time	3h(COB-H)	10h(COB-L)	3.5h(SMD)	1.2h(ALL)
Charging time	2.5h			
Charging Port	Micro USB / USB - C			
IP/ IK rating	IPX4 / IK07			
Dimension(mm)	67x37x40			
Weight(g)	97.7			

Item No.	6569			
Light source	COB + SMD			
Lumen	600lm(High)	250lm(Low)	250lm(COB)	800lm(ALL)
CRI	65			
Color temperature	5000 - 7000K			
Battery	3.7V 2200mAh			
Charging indicator	Red - Green			
Switch function	High - Low - COB - All ON - OFF			
Operating time	3h(High)	8h(Low)	5h(SMD)	2.5h(ALL)
Charging time	4h			
Charging Port	Micro USB / USB - C			
IP/ IK rating	IPX4 / IK07			
Dimension(mm)	82x41x53.5			
Weight(g)	72(Without Strap)			



PORTABLE HEADLAMP

- The product has high beam, Low beam and red light warning functions.
- Portable headlamps, lightweight and compact.



6656



6657

Item No.	6656			6657		
Light source	SMD + COB			SMD + COB		
Lumen	80lm(Low)	250lm(High)	130lm(COB)	90lm(Low)	250lm(High)	130lm(COB)
CRI	70			70		
Color temperature	5000 - 7000K			5000 - 7500K		
Battery	3 x AAA			3.7V 1500mAh		
Charging indicator	-			Red - Green		
Switch function	Low - High - COB - COB(Red) - OFF			Low - High - COB - COB(Red) - OFF		
Operating time	12h(Low) - 3.5h(High) - 2.5h(COB)			13h(Low) - 3.5h(High) - 2.5h(COB)		
Charging time	-			2.5h		
Charging Port	-			USB-C		
IP/ IK rating	IPX4 / IK07			IPX4 / IK07		
Dimension(mm)	62x31x18(Front) 82x43.8x19(Back)			62x31x18(Front) 82x42x19(Back)		
Weight(g)	59			92		

Item No.	6543	
Light source	COB	
Lumen	150lm	50lm
CRI	70	
Color temperature	5500 - 6500K	
Battery	3.7V 2200mAh	
Charging indicator	Red - Green	
Switch function	High - Low - Strobe - OFF	
Operating time	4h(High) - 12h(Low)	
Charging time	4h	
Charging Port	Micro USB / USB - C	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	80x48x38	
Weight(g)	60	




Item No.	6544	
Light source	COB	
Lumen	150lm	50lm
CRI	70	
Color temperature	5500 - 6500K	
Battery	3.7V 2200mAh	
Charging indicator	Red - Green	
Switch function	High - Low - Strobe - OFF	
Operating time	4h(High) - 12h(Low)	
Charging time	4h	
Charging Port	Micro USB / USB - C	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	80x48x38	
Weight(g)	60	

Item No.	6543-3AAA	
Light source	COB	
Lumen	150lm	50lm
CRI	70	
Color temperature	5500 - 6500K	
Battery	3 x AAA	
Charging indicator	-	
Switch function	High - Low - Strobe - OFF	
Operating time	5h(High) - 18h(Low)	
Charging time	-	
Charging Port	-	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	61x45x31	
Weight(g)	50	





55°
SWIVEL

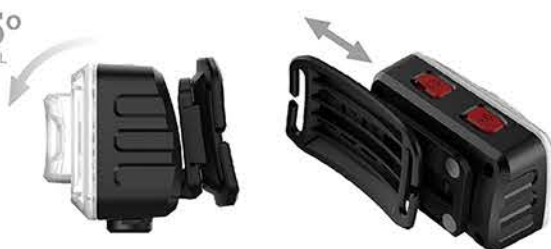

Tripod Connection Hole

Charging Port

Item No.	6716						
Light source	SMD3535 + 2835						
	3535	2835 Warm	2835 Warm White	2835 Cool White	Red	Blue	Green
Lumen	300lm	150lm	150lm	150lm			
CRI							
Color temperature	5500-7500K	3500-4500K	5000-5500K	6000-7000K			
Battery	3.7V 2200mAh						
Charging indicator							
Switch function	3535 - Warm - Warm White - Cool White - ALL - White - Red - Blue - Green - OFF						
Operating time	3h	5h	5h	5h	24h	24h	24h
Charging time	3.5h						
Charging Port	USB - C						
IP/ IK rating	IPX4 / IK07						
Dimension(mm)	78x52x34						
Weight(g)	119						



WATERPROOF



DROP TEST



SENSOR MODE



HEAT SINK



PORTABLE



Flood Light (Red / Blue / Green)

Sensor Switch

Switch



Item No.	6707 / 6707-A					
Light source	SMD + COB					
	SMD 3535	SMD 3535	COB Low	COB High	COB Red	COB + SMD
Lumen	60lm	160lm	100lm	300lm		450lm
CRI	SMD70 - COB80					
Color temperature	5500 - 7500K					
Battery	3.7V 550mAh					
Charging indicator	4 Power Indicators					
Switch function	(SMD) Low - High - (COB) Low - High - Red - ALL - OFF					
Operating time	4h	1.5h	4h	1.5h	4h	1h
Charging time	2h					
Charging Port	USB - C					
IP/ IK rating	IPX4 / IK07					
Dimension(mm)	66x33x30					
Weight(g)	50					

6707
Elastic headband



6707-A
Headrope style headband



55°
SWIVEL



Headband Clip



Weight 50g

Lightweight, compact and compact design, easy to wear for extended periods of time

SLIM HEADLAMP

- Applied with a clip, it can be bound with the cap or handlight band.
- Multi light sourcings, red light, white light in low/high beam.
- Applied with a battery indicator and sensing function.



Item No.	6681			
Light source	SMD + Jingrui XG2			
Lumen	40lm(Low)	200lm(High)	3lm(Red)	150lm(XG2)
CRI	80			
Color temperature	5500 - 7500K			
Battery	3.7V 500mAh			
Charging indicator	Red - Green			
Switch function	Low - High - Red - XG2 - OFF			
Operating time	12h(Low) - 2h(High) - 20h(Red) - 2h(XG2)			
Charging time	1.5h			
Charging Port	USB-C			
IP/ IK rating	IPX4 / IK07			
Dimension(mm)	52x49x25			
Weight(g)	36			

ONLY **39G**

COMPACT, PORTABLE
(Including headband and battery)



Item No.	6570					
Light source	SMD + COB					
Lumen	SMD			COB		
	5lm	45lm	120lm	5lm	60lm	140lm
CRI	80					
Color temperature	6000 - 7000K					
Battery	3.7V 500mAh					
Charging indicator	Red - Green					
Switch function	Low - Mid - High - OFF(SMD)			Low-Mid-High-Red-Red Strobe-Off		
Operating time	15h(Low)-2.5h(Mid)-1.5h(High)			15h(Low)-2h(Mid)-1h(High)		
Charging time	2h					
Charging Port	Micro USB / USB - C					
IP/ IK rating	IPX4 / IK07					
Dimension(mm)	62x31x21					
Weight(g)	39					



Item No.	6552-B					
Light source	CREE XPG + COB					
Lumen	85lm(Low) - 250lm(High) (CREE XPG/COB)					
CRI	80					
Color temperature	6000 - 6500K					
Battery	3 x AAA					
Charging indicator	-					
Switch function	Low - High - Strobe - OFF (CREE XPG/COB)					
Operating time	10h(Low) - 3h(High)					
Charging time	-					
Charging Port	-					
IP/ IK rating	IPX4 / IK07					
Dimension(mm)	66x46x38					
Weight(g)	64					



Elastic headband

Item No.	6599	
Light source	SMD	
Lumen	20(Low) - 180(High)	
CRI	80	
Color temperature	5500 - 7000K	
Battery	2 x AAA	
Charging indicator	-	
Switch function	Low - High - OFF	
Operating time	7h(Low) - 1h(High)	
Charging time	-	
Charging Port	-	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	61x35x37	
Weight(g)	45	



Item No.	7729	
Light source	CREE XPG	
Lumen	350lm(High) - 120lm(Low)	
CRI	-	
Color temperature	-	
Battery	3.7V 700mAh	
Charging indicator	Red - Green	
Switch function	High - Low - Strobe - OFF	
Operating time	1.5h(High) - 4h(Low)	
Charging time	2.5h	
Charging Port	Magnetic Charging	
IP/ IK rating	IPX3 / IK07	
Dimension(mm)	80x20x26	
Weight(g)	90	

INDUSTRIAL HEADLAMP



Item No.	6597
Light source	SMD + COB
Lumen	200lm(Low) - 500lm(High) SMD/COB 800lm(All)
CRI	70
Color temperature	5500 - 7500K
Battery	3.7V 2000mAh
Charging indicator	Red - Green
Switch function	Low- High(SMD)- Low- High- Red(COB)- All- OFF
Operating time	(Low) 8h - (High) 3h - (All) 2h
Charging time	3h
Charging Port	USB-C
IP/ IK rating	IPX6 / IK07
Dimension(mm)	81.5x43x45
Weight(g)	105



FOCUS HEADLAMP



Item No.	6587
Light source	SMD
Lumen	10lm(Low) 150lm(Mid) 450lm(High)
CRI	70
Color temperature	5500 - 7500K
Battery	3.7V 2000mAh
Charging indicator	Red - Green
Switch function	Low - Mid - High(White) - Red - Red Strobe - OFF
Operating time	80h(Low)-10h(Mid)-3h(High)-10h(Red)-20h(Red Strobe)
Charging time	4h
Charging Port	USB-C
IP/ IK rating	IPX4 / IK07
Dimension(mm)	48x78x48
Weight(g)	107




PORTABLE HEADLAMP

- The product has high beam, Low beam and red light warning functions.
- Portable headlights, lightweight and compact.



Item No.	6703
Light source	SMD + COB
Lumen	500lm(High) 200lm(Low) 500lm(COB) 1000lm(All) 50lm(Red)
CRI	70 70 80 70
Color temperature	5000 - 7000K 5000 - 7000K 5500 - 6500K 5000 - 7000K
Battery	3.7V 2600mAh
Charging indicator	4Power Indicators
Switch function	High(SMD) - Low(SMD) - COB - All - Red - OFF
Operating time	5h(High) - 8h(Low) - 4.5h(COB) - 3.5h(All) - 3h(Red)
Charging time	4h
Charging Port	USB-C
IP/ IK rating	IPX4 / IK07
Dimension(mm)	27x29x58(Front) 31.5x32x93(Back)
Weight(g)	138.5

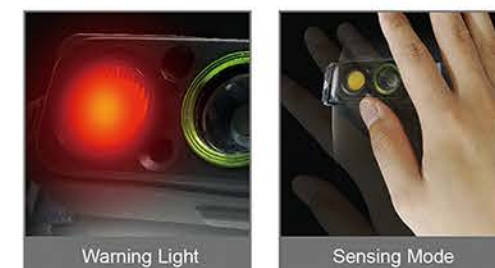



6708

Item No.	6708 / 6708-1			
Light source	SMD + Jingrui XG2			
Lumen	40lm(Low)	200lm(High)	3lm(Red)	150lm(XG2)
CRI	80			
Color temperature	5500 - 7500K			
Battery	3.7V 2200mAh			
Charging indicator	Red - Green			
Switch function	Low - High - Red - XG2 - OFF			
Operating time	12h(Low) - 2h(High) - 20h(Red) - 2h(XG2)			
Charging time	1.5h			
Charging Port	USB-C			
IP/ IK rating	IPX4 / IK07			
Dimension(mm)	52x49x25			
Weight(g)	36			



Battery compartment rotary lock

POWER SWITCH / SENSOR SWITCH

Double click on the switch to enter sensor mode

6708-1



Wave the hand to control the Sensor switch



Sensor receiver

Battery Compartment

BATTERY COMPARTMENT



180°
SWIVEL



BATTERY COMPARTMENT



Spot Light

Flood Light



Double click to enter the sensor mode

Wave the hand to control the Sensor switch

6713



6713-1



Item No.	6713 / 6713-1			
Light source	COB + Jingrui XG2			
	COB(Low)	COB(High)	COB(Turbo)	Jingrui XG2
Lumen	150lm	300lm	500lm	150lm
CRI	80			70
Color temperature	5500 - 7500K			
Battery	3.7V 2200mAh			
Charging indicator	4Power Indicators			
Switch function	(COB)Low - High - XG2 - OFF			
Operating time	15h	4h	30s	7h
Charging time	4h			
Charging Port	USB-C			
IP/ IK rating	IPX4 / IK07			
Dimension(mm)	85x45x44			
Weight(g)	119.5			

PORTABLE HEADLAMP

- The product has high beam, Low beam and red light warning functions.
- Portable headlamps, lightweight and compact.



65°
SWIVEL



6714-A



6714



Headband back panel



Headrope backboard

Item No.	6714 / 6714-A				
Light source	COB				
	COB(Low)	COB(Mid)	COB(High)	COB(Red)	COB(Strobe)
Lumen	20lm	100lm	300lm	8lm	
CRI	80				
Color temperature	5500 - 7500K				
Battery	3.7V 600mAh				
Charging indicator	4Power Indicators				
Switch function	Low - Mid - High - Red - Red Strobe - OFF				
Operating time	18h	4h	1.5h	6h	12h
Charging time	2.5h				
Charging Port	USB-C				
IP/ IK rating	IPX4 / IK07				
Dimension(mm)	66.1x33.2x32				
Weight(g)	53				



PORTABLE HEADLAMP



Laser

Charging Port

Indicator

BATTERY COMPARTMENT

90°
SWIVEL



Item No.	E58-2				
Light source	Laser				
	High	Mid	Low	Strobe	SOS
Lumen	450lm	200lm	45lm		
CRI	70				
Color temperature	7500 - 9000K				
Battery	3.7V 2200mAh				
Charging indicator	4Power Indicators				
Switch function	High - Mid - Low - Strobe - SOS - OFF				
Operating time	2h	5h	20h	2h	2h
Charging time	4h				
Charging Port	USB-C				
IP/ IK rating	IPX4 / IK07				
Dimension(mm)	21x22x5.7				
Weight(g)	186				



Item No.	6715			
Light source	SMD			
	SMD3535(Low)	SMD3535(High)	SMD3535(Turbo)	SMD2835
Lumen	150lm	500lm	1000lm	25lm
CRI	70			
Color temperature	6000 - 7000K			
Battery	3.7V 2600mAh			
Charging indicator	4 Power Indicators			
Switch function	3535 Low - High - Turbo			
Operating time	6h	4h	30s	8h
Charging time	4h			
Charging Port	USB-C			
IP/ IK rating	IPX6 / IK07			
Dimension(mm)	86.6 x 46.5 x 42.6			
Weight(g)	138			




ALUMINUM ALLOY PENLIGHT

- Dual lights design, spotlight & floodlight.
- The clip with magnet is suitable for various occasions.
- Rotating clip allows usage in different angles for lighting.



Item No.	7795		
Light source	COB + SMD		
Lumen	90lm(SMD)	100lm(COB-Low)	250lm(COB-High)
CRI	70		
Color temperature	5500 - 6500K		
Battery	3.7V 500mAh		
Charging indicator	Red - Green		
Switch function	SMD - COB Low - High - OFF		
Operating time	5h(Top) - 5h(COB-Low) - 1.5h(COB-High)		
Charging time	2.5h		
Charging Port	USB-C		
IP/ IK rating	IPX2 / IK07		
Dimension(mm)	15.8x20x135		
Weight(g)	45.4		

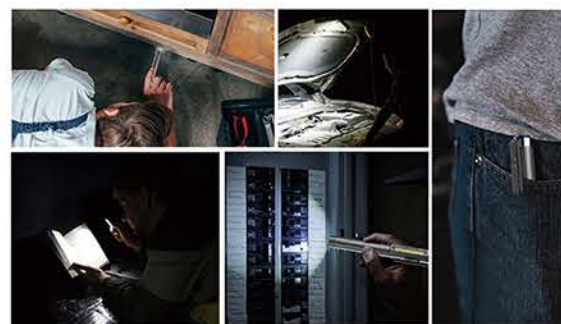

ALUMINUM ALLOY PENLIGHT

- Dual lights design, spotlight & floodlight.

-Applied with a pen clip, it can be clipped to the pocket or something else.



Item No.	7669	
Light source	OSRAM	
Lumen	120lm	25lm
CRI	-	
Color temperature	-	
Battery	3.7V 500mAh	
Charging indicator	Red - Green	
Switch function	High - Low - OFF	
Operating time	2.5h(High) - 15h(Low)	
Charging time	1.5h	
Charging Port	Micro USB / USB - C	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	15.2x18x151	
Weight(g)	57	



MINI PENLIGHT

- It has the function of a flashlight, the pen holder can rotate freely, and the pen holder with a magnetic suction can adsorb and fix the work light for multiple purposes.

- Adopting high light efficiency COB and LED lighting.

- Adopting a multi light source design, red light plus white light, low beam plus high beam, suitable for different lighting environments.



Item No.	6695			
Light source	COB + SMD			
Lumen	100lm(Low)	250lm(High)	500lm(Turbo)	100lm(Top)
CRI	70			
Color temperature	5500-7500K			
Battery	3.7V 350mAh			
Charging indicator	Red - Green			
Switch function	SMD - Low - High - Red - OFF			
Operating time	5h(SMD) - 5h(Low) - 1.5h(High) - OFF 30S(Turbo)			
Charging time	3h			
Charging Port	USB-C			
IP/ IK rating	IPX2 / IK07			
Dimension(mm)	111x24x25			
Weight(g)	43			



Item No.	6695-A			
Light source	COB + SMD			
Lumen	100lm(Low)	250lm(High)	500lm(Turbo)	100lm(Top)
CRI	70			
Color temperature	5500-7500K			
Battery	3.7V 350mAh			
Charging indicator	Red - Green			
Switch function	SMD - Low - High - Red - OFF			
Operating time	5h(SMD) - 5h(Low) - 1.5h(High) - OFF 30S(Turbo)			
Charging time	3h			
Charging Port	USB-C			
IP/ IK rating	IPX2 / IK07			
Dimension(mm)	111x24x25			
Weight(g)	43			



Item No.	6618		
Light source	COB + SMD		
Lumen	100lm(Top)	40lm(Low)	150lm(High)
CRI	-		
Color temperature	-		
Battery	2 x AAA		
Charging indicator	-		
Switch function	SMD - Low - High - OFF		
Operating time	5h(Top) - 8h(Low) - 0.5h(High)		
Charging time	-		
Charging Port	-		
IP/ IK rating	IPX0 / IK07		
Dimension(mm)	15.5x15.5x166		
Weight(g)	79		



Item No.	7736	
Light source	CREE XPG	
Lumen	150lm	30lm
CRI	-	
Color temperature	-	
Battery	2 x AAA	
Charging indicator	-	
Switch function	High - Low - OFF	
Operating time	2h(High) - 6h(Low)	
Charging time	-	
Charging Port	-	
IP/ IK rating	IPX7 / IK07	
Dimension(mm)	14.5x14x138.5	
Weight(g)	51.2	



Item No.	7643-1	
Light source	Osram P8	
Lumen	130lm	40lm
CRI	65	
Color temperature	6500 - 7500K	
Battery	2 x AAA	
Charging indicator	-	
Switch function	High - Low - Strobe - OFF	
Operating time	5h(High) - 10h(Low)	
Charging time	-	
Charging Port	-	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	16x15.5x140.5	
Weight(g)	28	



SUPER BRIGHT FLASHLIGHT

 **8000** Lumens

 **7.4v 5000mAh**

Item No.	7737	
Light source	COB	
Lumen	1000lm	8000lm
CRI	70	
Color temperature	6000 - 7000K	
Battery	7.4V 5000mAh	
Charging indicator	Red - Green	
Switch function	Low - High - OFF	
Operating time	3h(Low) - 1.5h(High)	
Charging time	9h	
Charging Port	Micro USB / USB - C	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	Ø64xØ32.5x276	
Weight(g)	700	

 **12000** Lumens(Turbo)

 **7.4v 5000mAh**

Item No.	7799			
Light source	COB			
Lumen	12000lm	7000lm	3000lm	300lm
CRI	70			
Color temperature	6000 - 7000K			
Battery	7.4V 5000mAh			
Charging indicator	Red - Green			
Switch function	High - Mid - Low - OFF			
Operating time	30S(Turbo) - 2h(High) - 3h(Mid) - 12h(Low)			
Charging time	6h			
Charging Port	USB-C			
IP/ IK rating	IPX7 / IK07			
Dimension(mm)	Ø67.8xØ42x295.2			
Weight(g)	905.5			

2 x ZOOM

Twist to adjust light beam from flood light, to spot light



CAN BE MOUNTED



2 x ZOOM

Twist to adjust light beam from flood light to spot light.

REMOTE FOCUS SYSTEM FLASHLIGHT

 **3000**
Lumens(Turbo)

 **3.7v 4000mAh**

Switch / Indicator



6 x ZOOM

Twist to adjust light beam from flood light, to spot light.



Item No.	7797			
Light source	SMD			
Lumen	3000lm	1800lm	800lm	80lm
CRI	70			
Color temperature	6000 - 7000K			
Battery	3.7V 4000mAh			
Charging indicator	Red - Green			
Switch function	High - Mid - Low - OFF			
Operating time	30S(Turbo) - 2h(High) - 4h(Mid) - 20h(Low)			
Charging time	3h			
Charging Port	USB-C			
IP/ IK rating	IPX7 / IK07			
Dimension(mm)	Ø45.6xØ33.5x187			
Weight(g)	325.5			

LASER LED FLASHLIGHT

 **250**
Lumens

 **3.7v 4000mAh**

Switch / Indicator



Item No.	7784
Light source	Laser
Lumen	250lm
CRI	60
Color temperature	6000 - 7000K
Battery	3.7V 4000mAh
Charging indicator	Red - Green
Switch function	ON - OFF
Operating time	2.5h
Charging time	4h
Charging Port	USB-C
IP/ IK rating	IPX4 / IK07
Dimension(mm)	45.7x36x187.1
Weight(g)	310

REMOTE
LIGHTING

1200m



ALUMINUM ALLOY MATERIAL FLASHLIGHT



500
Lumens



3.7v 4000mAh

Item No.	7785		
Light source	Samsung		
Lumen	500lm	250lm	125lm
CRI	70		
Color temperature	6000 - 7000K		
Battery	3.7V 4000mAh		
Charging indicator	Red - Green		
Switch function	High - Mid - Low - OFF		
Operating time	3.5h(High) - 7h(Mid) - 14h(Low)		
Charging time	4h		
Charging Port	USB-C		
IP/ IK rating	IPX7 / IK07		
Dimension(mm)	59x36x200		
Weight(g)	342		



3 x ZOOM

Simply zoom-in & zoom-out the light to achieve different beams.

WIRELESS RECHARGE



Item No.	7670	7732
Light source	CREE XML U3	Osram P8
Lumen	750lm(High) - 300lm(Mid) - 150lm(Low)	600lm(High) - 280lm(Mid) - 60lm(Low)
CRI	-	-
Color temperature	-	-
Battery	3.7V 4000mAh	3.7V 2600mAh
Charging indicator	Red - Green	Red - Green
Switch function	High - Mid - Low - Strobe - SOS - OFF	High - Mid - Low - OFF
Operating time	3h(High) - 6h(Mid) - 12h(Low)	1.5h(High) - 3.5h(Mid) - 15h(Low)
Charging time	5h / 12h(Wireless)	4h
Charging Port	Micro USB / USB - C	USB - C / Magnetic Charging
IP/ IK rating	IPX4 / IK07	IPX3 / IK07
Dimension(mm)	42x32x172 / 86.3x78.5x43.4(+Base)	31x31x135
Weight(g)	291	200



800
Lumens



3.7v 4000mAh

Item No.	7786		
Light source	Samsung		
Lumen	800lm	400lm	160lm
CRI	70		
Color temperature	6000 - 7000		
Battery	3.7V 4000mAh		
Charging indicator	Red - Green		
Switch function	Low - Mid - High - OFF		
Operating time	9.5h(Low) - 6h(Mid) - 5.5h (High)		
Charging time	5h		
Charging Port	USB-C		
IP/ IK rating	IPX7 / IK07		
Dimension(mm)	59x59x200		
Weight(g)	342		



Item No.	7735	7739	7730
Light source	SMD	SMD	CREE XML T6
Lumen	1000lm(High) - 300lm(Low)	1000lm(High)-450lm(Mid)-80lm(Low)-6lm(Lowest)	750lm(High) - 350lm(Mid) - 200lm(Low)
CRI	70	70	-
Color temperature	5500 - 6500K	6000 - 7500K	-
Battery	3.7V 2600mAh	3.7V 2600mAh	3.7V 2200mAh
Charging indicator	Red - Green	Red - Green	Red - Green
Switch function	High - Low - OFF	High - Mid - Low - Lowest - OFF	High-OFF-Mid-OFF-Low-OFF-Strobe-OFF
Operating time	2h(High) - 4h(Low)	1h(High) - 3h(Mid) - 10h(Low) - 60h(Lowest)	3h(High) - 6h(Mid) - 9h(Low)
Charging time	3.5h	6h	4.5h
Charging Port	USB-C	USB-C	Micro USB
IP/ IK rating	IPX4 / IK07	IPX4 / IK07	IPX4 / IK07
Dimension(mm)	23x31x115	32x25x105	32x44x155
Weight(g)	127	122	239



Item No.	7688	7459-3AAA
Light source	CREE XPG + Red LED + UV LED + COB	CREE XPG
Lumen	300lm(XPG) - 350lm(COB)	250lm(High) - 75lm(Low)
CRI	65	-
Color temperature	6000 - 7500K	-
Battery	3.7V 2600mAh	3 x AAA
Charging indicator	Red - Green	-
Switch function	XPG-Red-UV-OFF/COB White-Red- Red Strobe-OFF	High - Low - Strobe - OFF
Operating time	3h(XPG) - 2h(COB)	1.5h(High) - 4h(Low)
Charging time	4h	-
Charging Port	Micro USB / USB - C	-
IP/ IK rating	IPX4 / IK07	IPX4 / IK07
Dimension(mm)	40x30.5x161.5	35x35x128
Weight(g)	292	101



Item No.	7459-3D	7685	7687
Light source	CREE XML T6	CREE XPG	CREE XPG
Lumen	500lm(High) - 120lm(Low)	180lm(High) - 50lm(Low)	250lm(High) - 35lm(Low)
CRI	-	-	65
Color temperature	-	-	6000 - 7500K
Battery	3 x D	2 x AA	3 x AAA
Charging indicator	-	-	-
Switch function	High - Low - Strobe - OFF	High - Low - Strobe - OFF	High - Low - Strobe - OFF
Operating time	5h(High) - 12h(Low)	1.5h(High) - 3h(Low)	2.5h(High) - 15h(Low)
Charging time	-	-	-
Charging Port	-	-	-
IP/ IK rating	IPX4 / IK07	IPX4 / IK07	IPX4 / IK07
Dimension(mm)	56.5x56.5x318	20x28x161.5	36x29x123.4
Weight(g)	422	108	109.5

Item No.	7822
Light source	Samsung
	U-ion Battery Low U-ion Battery Mid U-ion Battery High Dry Battery Low Dry Battery Mid Dry Battery High
Lumen	80lm 320lm 600lm 50lm 200lm 350lm
CRI	70
Color temperature	4000K
Battery	3.65V 4000mAh
Charging indicator	-
Switch function	Low - Mid - High - OFF
Operating time	25h 7h 1.5h 45h 10h 4h
Charging time	4h
Charging Port	USB-C
IP/ IK rating	IPX4 / IK07
Dimension(mm)	72x40x245.5
Weight(g)	402



DUAL POWER

21700
Lithium Battery



2x Type Dry Battery

• 1ST OFF

• 2ND GEAR

MANUAL MODE
slide to 2nd gear, Press and hold the red switch, turn it on, release the red switch, turn it off.

• 3RD GEAR

CONSTANT LIGHT MODE
Press the red switch to adjust brightness, Low light - Mid light - High Light.

Double click on the red switch to explode.



Highlight Spotlight



330m
Remote Lighting



3rd Gear

2nd Gear

1st OFF

Item No.	7823	
Light source	Laser	
	SMD	Laser
Lumen	800lm	300lm
CRI	70	
Color temperature	6500K	8500K
Battery	3.7V 2200mAh	
Charging indicator	-	
Switch function	SMD - Laser - OFF	
Operating time	2h	1.5h
Charging time	4h	
Charging Port	USB-C	
IP/ IK rating	IPX4 / IK07	
Dimension(mm)	45x24.4x172	
Weight(g)	170	



1ST OFF

2ND GEAR

MANUAL MODE

slide to 2nd gear, Press and hold the red switch, turn it on, release the red switch, turn it off.

3RD GEAR


CONSTANT LIGHT MODE

Press the red switch to adjust brightness, Low light - Mid light - High Light.

Double click on the red switch to explode.

3rd Gear —
2nd Gear —
1st OFF —

410m
Remote Lighting



DUAL POWER FLASHLIGHT

7817



7818



Item No.	7817			7818		
Light source	LED			LED		
	High	Mid	Low	High	Mid	Low
Lumen	5000lm	2500lm	500lm	2500lm	1250lm	250lm
CRI	670			70		
Color temperature	4500K			4500K		
Battery	18650 2600mAh			26650 5000mAh		
Charging indicator	-			-		
Switch function	High - Mid - Low - Strobe - OFF			High - Mid - Low - Strobe - OFF		
Operating time	1h	2h	8h	1.25h	2h	8h
Charging time	5h			6h		
Charging Port	USB-C			USB-C		
IP/ IK rating	IPX4 / IK07			IPX4 / IK07		
Dimension(mm)	ø 54x280			ø 54x230		
Weight(g)	570			535		

Rotate to adjust focus





7740

Item No.	7819			7740
Light source	SMD			SMD
Lumen	200lm(Low)	500lm(High)	1000lm(Turbo)	350lm(High) - 100lm(Low)
CRI	70			70
Color temperature	5500 - 7500K			5500 - 7000K
Battery	3.7V 2200mAh			3.7V 750mAh
Charging indicator	Green Indicator			Red - Green
Switch function	Low - High - OFF			High - Low - OFF
Operating time	6.5h	4h		1h(High) - 4h(Low)
Charging time	4h			4h
Charging Port	USB-C			Magnetic Charging
IP/ IK rating	IPX6 / IK07			IPX4 / IK07
Dimension(mm)	ø 29 x 131.5			ø 21 x 120
Weight(g)	91			186(Including battery)



WATERPROOF



DROP TEST



7819



Lamp head rotation steps



Compact



Pen Clip



Magnet



Portable

FACULA FLASHLIGHT




Brightness Adjustment

Super Bright COB

Switch / Indicator

Charging Port

Aluminum Alloy Material

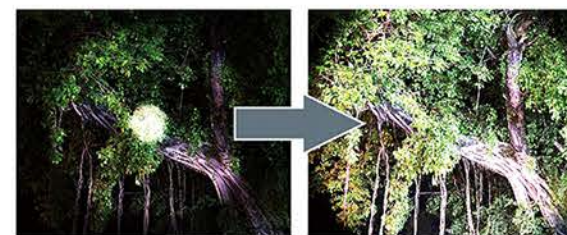

20x ZOOM

Rotate the lamp head and adjust the focal length.
To create a lighter, lighter beam.




Item No.	7821			
Light source	SMD			
Lumen	1000lm(Turbo)	600lm(High)	300lm(Mid)	30lm(Low)
CRI	65			
Color temperature	7000 - 10000K			
Battery	3.7V 4000mAh			
Charging indicator	Red - Green			
Switch function	High - Mid - Low - OFF			
Operating time	30s	3h	6h	60h
Charging time	3 - 3.5h			
Charging Port	USB-C			
IP/ IK rating	IPX7 / IK07			
Dimension(mm)	ø 53 x ø 31 x 192.6			
Weight(g)	91			

VERSATILE

An integrated wider beam allows for close-range lighting.



Item No.	7824			
Light source	SMD			
Lumen	1000lm(Turbo)	700lm(High)	400lm(Mid)	100lm(Low)
CRI	65			
Color temperature	7000 - 10000K			
Battery	3.7V 8000mAh			
Charging indicator	Red - Green			
Switch function	High - Mid - Low - OFF			
Operating time	30s	3h	7h	24h
Charging time	5.5 - 6h			
Charging Port	USB-C			
IP/ IK rating	IPX7 / IK07			
Dimension(mm)	Ø 67.8 x Ø 42 x 295.2			
Weight(g)	885.7			

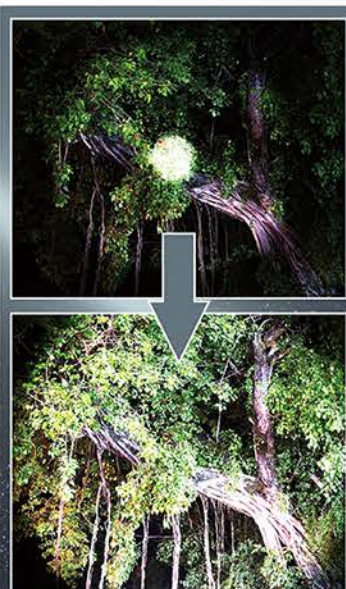

Remote Lighting

20x ZOOM

Rotate the lamp head and adjust the focal length.
To create a lighter, lighter beam.



VERSATILE

An integrated wider beam allows for
close-range lighting.



Item No.	7816				
Light source	SFT40				
CRI	65				
Color temperature	6500 - 7000K				
Charging indicator	Red - Green				
Switch function	Low - Mid - High - OFF				
Charging Port	USB-C				
IP/ IK rating	IP67 / IK07				

Battery	18650 3.7V 2600mAh				
	100%	50%	25%	10%	0.5%
Lumen	1100lm	600lm	300lm	130lm	20lm
Operating time	30s	2h	5h	10h	48h
Dimension(mm)	Ø 41 x Ø 27 x 117				
Weight(g)	140				

Battery	18350 3.7V 900mAh				
	100%	50%	25%	10%	0.5%
Lumen	1000lm	500lm	250lm	120lm	20lm
Operating time	30s	1h	2h	5h	24h
Dimension(mm)	Ø 41 x Ø 27 x 90.5				
Weight(g)	117				



18650 3.7V/2600mAh



18350 3.7V / 900mAh




1100
Lumens



3.7v 4000mAh

**REMOTE
LIGHTING
600m**

Item No.	7820				
Light source	SFT40				
	100%	50%	25%	10%	0.5%
Lumen	1100lm	650lm	350lm	80lm	5lm
CRI	65				
Color temperature	8000 - 9000K				
Battery	3.7V 4000mAh				
Charging indicator	Red - Green				
Switch function	Low - Mid - High - OFF				
Operating time	30s	7h	12h	30h	100h
Charging time	2.5h				
Charging Port	USB-C				
IP/ IK rating	IP67 / IK07				
Dimension(mm)	Ø 42.5 x Ø 30 x 154.5				
Weight(g)	218				




RETRO OUTDOOR CAMPING LAMP

6693

COB
LUMENS
90

TOP LED
LUMENS
200

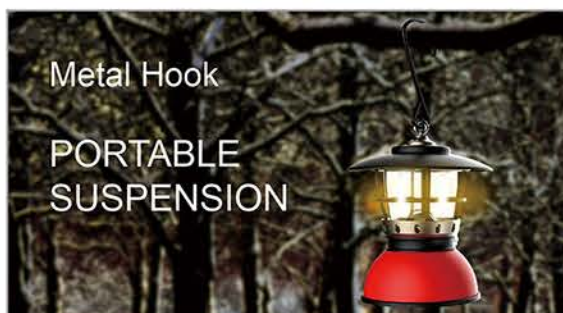

Battery: 3 x AAA
Brightness: LED 30-250Lm COB 10-100Lm
Endurance: LED - 1.5Hrs COB - 3Hrs

Illuminant	COB+LED
Switch Mode	COB Low-High-Off LED Low-High-Off
Dimension(mm)	Ø97 X 133
Weight(g)	255



Stepless Dimming



Portable Suspension



Water Proof

RETRO OUTDOOR CAMPING LAMP

6686

COB
LUMENS
200

TOP LED
LUMENS
500



Battery: 3.7V 4000mAh
Brightness: COB 10-200Lm LED 25-500Lm
Run Time: COB 65-3.5Hrs LED 35-2Hrs
Charger: 5V1A (Type-C)

Illuminant	COB+LED
Switch Mode	COB Low-High-Off LED Low-High-Off
Charging Time	3.5hrs
Dimension(mm)	Ø145.5 X 236.5
Weight(g)	910



Stepless Dimming



Portable Suspension



Type-C Charging



Power Bank



Water Proof



4000mAh Lithium Battery

MULTI-FUNCTION CAMPING LAMP



Light Selection

Rotate the silver accessories and select the appropriate light.



Can be Mounted

Item No.	6744
Light source	COB + SMD
Lumen	55lm(Low) - 170lm(High) (COB) 150lm(Low) - 500lm(High) (SMD) 80lm(Low) - 240lm(High) (SMD)
CRI	70
Color temperature	3000 - 3500K 6500 - 7500K
Battery	3.7V 2000mAh
Charging indicator	4 Power Indicators
Switch function	Low - High - Breathe - OFF(COB) Low - High - OFF(SMD)
Operating time	22h(Low) - 6h(High) / 9h(Low) - 2.5h(High) / 12h(Low) - 3.5h(High)
Charging time	3h
Charging Port	USB - C
IP/ IK rating	IPX4 / IK07
Dimension(mm)	53x53x134.5
Weight(g)	189.3



DUAL DISTANCE BEAM BIKELIGHT

Item No.	6647
Light source	SMD + COB
Lumen	180lm(Low) - 500lm(High) / 500lm(COB) / 800lm(Both)
CRI	65
Color temperature	5500 - 7500K
Battery	3.7V 2000mAh
Charging indicator	Red - Green
Switch function	Low - High - OFF (SMD) COB - Strobe - Red - Red Strobe - OFF (COB)
Operating time	5.5h(Low) - 2.5h(High) - 2.5h(COB) - 1h(Both)
Charging time	4h
Charging Port	USB - C
IP/ IK rating	IPX4 / IK07
Dimension(mm)	48x88x92
Weight(g)	109.5



Item No.	6653
Light source	SMD + COB
Lumen	150lm(Low) - 350lm(High) / 280lm(COB) / 400lm(Both)
CRI	80
Color temperature	5000 - 8000K
Battery	3 x AAA / 3.7V 1000mAh
Charging indicator	-
Switch function	Low - High - OFF (SMD) High-Strobe-Red-Red Strobe-OFF (COB)
Operating time	8h(Low) - 3.5h(High) - 2.5h(COB) - 1h(Both)
Charging time	-
Charging Port	-
IP/ IK rating	IPX4 / IK07
Dimension(mm)	43x30x88
Weight(g)	83

5000
Lumens(Turbo)
3.7v2600mAh



10000
Lumens(Turbo)
7.4v2600mAh



20000
Lumens(Turbo)
11.1v2600mAh



3000
Lumens(Turbo)
3.7v4000mAh



Item No.	7801				7802				7803				7797			
Light source	COB				COB				COB				COB			
Lumen	Turbo	High	Mid	Low	Turbo	High	Mid	Low	Turbo	High	Mid	Low	Turbo	High	Mid	Low
	5000lm	3000lm	1500lm	500lm	10000lm	5000lm	3000lm	700lm	20000lm	8000lm	5000lm	500lm	3000lm	1800lm	800lm	80lm
CRI	70				70				70				70			
Color temperature	6000 - 7000K				6000 - 7000K				6000 - 7000K				6000 - 7000K			
Battery	3.7V 2600mAh				7.4V 2600mAh				11.1V 2600mAh				3.7V 4000mAh			
Charging indicator	Red - Green				Red - Green				Red - Green				Red - Green			
Switch function	High - Mid - Low - OFF				High - Mid - Low - OFF				High - Mid - Low - OFF				High - Mid - Low - OFF			
Operating time	30S	1.5h	2h	4h	30S	1.5h	2h	4h	30S	1h	2h	8h	30S	2h	4h	20h
Charging time	5h				5h				6h				3h			
Charging Port	USB-C				USB-C				USB-C				USB-C			
IP/ IK rating	IPX7 / IK07				IPX7 / IK07				IPX7 / IK07				IPX7 / IK07			
Dimension(mm)	Ø49xØ32.5x177				Ø55.6xØ33x242.5				Ø72.5xØ56x177				Ø45.6xØ33.5x187			
Weight(g)	313				450				830				325.5			



1000
Lumens(Turbo)
3.7v8000mAh



1000
Lumens(Turbo)
3.7v2600mAh



1000
Lumens(Turbo)
3.7v5200mAh

Item No.	7804	7801-A	7802-A
Light source	SMD	SMD	SMD
Lumen	1000lm(Turbo)-650lm(High)-350lm(Mid)-100lm(Low)	1000lm(Turbo)-600lm(High)-300lm(Mid)-100lm(Low)	1000lm(Turbo)-600lm(High)-300lm(Mid)-100lm(Low)
CRI	60	70	70
Color temperature	5000 - 6500K	6000 - 7000K	6000 - 7000K
Battery	3.7V 8000mAh	3.7V 2600mAh	3.7V 5200mAh
Charging indicator	Red - Green	Red - Green	Red - Green
Switch function	High - Mid - Low - OFF	High - Mid - Low - OFF	High - Mid - Low - OFF
Operating time	30S(Turbo) - 2.5h(High) - 7h(Mid) - 24h(Low)	30S(Turbo) - 1.5h(High) - 3h(Mid) - 8h(Low)	30S(Turbo) - 2h(High) - 4h(Mid) - 12h(Low)
Charging time	6h	5h	6h
Charging Port	USB-C	USB-C	USB-C
IP/ IK rating	IPX7 / IK07	IPX7 / IK07	IPX7 / IK07
Dimension(mm)	Ø67.8xØ42x295.2	Ø55xØ32.5x184	Ø55xØ33x245
Weight(g)	246.5	324	407

8301



8302



6968



6718



6718

