
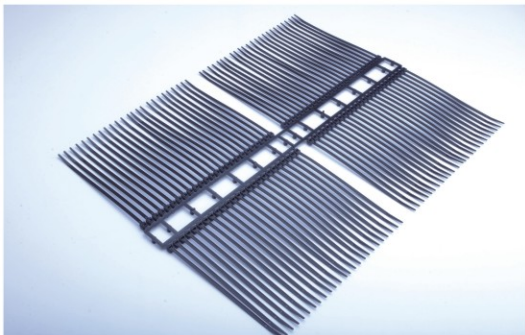


自锁式尼龙扎带

- ◆材质：采用UL认可之尼龙 66料制成，防火等级94V-2，耐酸、耐蚀、绝缘性良好，不易老化、承受力强。另有耐高温、低温耐候型材料。
- ◆操作温度：-25℃ to 85℃。
- ◆颜色：标准颜色为本色(白色)，另有抗紫外线之黑色，特殊颜色欢迎订做。

Self-locking Nylon Cable Ties

- ◆Material: Nylon 66, 94V-2 certificated by UL. Acid & erosion control, insulate well and not apt to age.Heat-resistant,weather-resistant are available.
- ◆Operating temperature: -25℃ to 85℃.
- ◆Color: Natural(or white, standard color), UV black and other colors are available as requested.



- * W=White & Natural (白色) ○ B=Black (黑色) ●
BR=Brown (棕色) ● RD=Red (红色) ●
OR=Orange (橘色) ● YL=Yellow (黄色) ●
GN=Green (绿色) ● BL=Blue (蓝色) ●
PP=Purple (紫色) ● GY=Gray (灰色) ●

编号 Item NO.	L(长)		W(宽) (mm)	最大捆扎范围 Max.Bundle Dia.E (mm)	拉力 Min.loop Tensile Strength	
	InSB	mm			LBS	KGS
SBS-3 x 80	3 3/8"	80	2.5	16	18	8
SBS-3 x 100	4"	100	2.5	22	18	8
SBS-3 x 120	4 3/4"	120	2.5	28	18	8
SBS-3 x 140	5 1/2"	140	2.5	33	18	8
SBS-3 x 150	6"	150	2.5	35	18	8
SBS-3 x 160	6 1/4"	160	2.5	40	18	8
SBS-3 x 200	8"	200	2.5	53	18	8
SBS-3 x 250	10"	250	2.8	65	18	8
SBS-3 x 300	11 5/8"	300	2.8	80	18	8
SBS-4 x 120	4 3/4"	120	3.6	30	40	18
SBS-4 x 140	5 1/2"	140	3.6	33	40	18
SBS-4 x 150	6"	150	3.6	35	40	18
SBS-4 x 180	7"	180	3.6	44	40	18
SBS-4 x 200	8"	200	3.6	53	40	18
SBS-4 x 250	10"	250	3.6	65	40	18
SBS-4 x 280	11"	280	3.6	70	40	18
SBS-4 x 300	11 5/8"	300	3.6	80	40	18
SBS-4 x 370	14 1/2"	370	3.6	102	40	18
SBS-4 x 400	15 3/4"	400	3.6	105	40	18
SBS-5 x 150	6"	150	4.6	35	50	22
SBS-5 x 180	7"	180	4.6	46	50	22

编号 Item NO.	L(长)		W(宽) (mm)	最大捆扎范围 Max.Bundle Dia.E (mm)	拉力 Min.loop Tensile Strength	
	InSB	mm			LBS	KGS
SBS-5 x 200	8"	200	4.8	53	50	22
SBS-5 x 250	10"	250	4.8	65	50	22
SBS-5 x 280	11"	280	4.8	70	50	22
SBS-5 x 300	11 8/5"	300	4.8	82	50	22
SBS-5 x 350	13 3/4"	350	4.8	90	50	22
SBS-5 x 370	14 9/16"	370	4.8	98	50	22
SBS-5 x 380	15"	380	4.8	105	50	22
SBS-5 x 400	15 3/4"	400	4.8	108	50	22
SBS-5 x 430	17"	430	4.8	115	50	22
SBS-5 x 450	17 3/4"	450	4.8	130	50	22
SBS-5 x 500	19 11/16"	500	4.8	150	50	22
SBS-7 x 150	6"	150	6.8	33	85	38
SBS-7 x 180	7"	180	6.8	42	85	38
SBS-7 x 200	8"	200	6.8	50	85	38
SBS-7 x 250	10"	250	6.8	65	85	38
SBS-8 x 200	8"	200	7.6	50	120	55
SBS-8 x 250	10"	250	7.6	63	120	55
SBS-8 x 300	11 5/8"	300	7.6	80	120	55
SBS-8 x 350	13 3/4"	350	7.6	90	120	55
SBS-8 x 370	14 1/4"	370	7.6	98	120	55
SBS-8 x 380	15"	380	7.6	100	120	55
SBS-8 x 400	15 3/4"	400	7.6	105	120	55
SBS-8 x 450	17 3/4"	450	7.6	125	120	55
SBS-8 x 500	19 11/16"	500	7.6	145	120	55
SBS-8 x 550	21 1/16"	550	7.6	160	120	55
SBS-8 x 600	23 5/8"	600	7.6	170	120	55
SBS-9 x 400	15 3/4"	400	9.0	108	175	80
SBS-9 x 500	19 11/16"	500	9.0	150	175	80
SBS-9 x 550	21 1/16"	550	9.0	160	175	80
SBS-9 x 600	23 5/8"	600	9.0	170	175	80
SBS-9 x 650	25 9/16"	650	9.0	190	175	80
SBS-9 x 750	27 1/2"	700	9.0	205	175	80
SBS-9 x 760	30"	760	9.0	225	175	80
SBS-9 x 900	35 7/16"	900	9.0	255	175	80
SBS-9 x 1000	39 3/8"	1000	9.0	285	175	80
SBS-9 x 1100	43 3/16"	1100	9.0	300	175	80
SBS-9 x 1200	47 1/4"	1200	9.0	330	175	80
SBS-12 x 300	11 5/8"	300	12.0	80	250	114
SBS-12 x 540	21 1/4"	540	12.0	155	250	114
SBS-12 x 600	25 5/8"	600	12.0	170	250	114
SBS-12 x 650	25 9/16"	650	12.0	190	250	114