

# HeadWay Electronics (HK) Limited- Trustable Mobile Accessories Supplier

Since 2015, **HeadWay Electronics** is a reliable and professional supplier of mobile accessories- **Charging & Connectivity**. We have our own professional R&D team and have strong capability of designing. We' ve been staying with cutting-edge accessories that elevate your mobile experience and keep you connected anytime, anywhere. Our major products are as following:

- \* Power Adapter & Chargers: GaN AC-DC Adapter, Car Chargers & Wireless Chargers,
- \* Power Banks: Classic Power Bank, Wireless Charging Power Bank,
- \* Cables & Connectivity: Charging Cables & USB-C Hubs;

Located in Dongguan city, our factory covers 1500sqm workshop including assemble lines, DIP processing lines & Testing Room. All our products are complying with EU/US/JP/KR standards, and have CE/ROHS/KC/UL/BSMI/PSE etc. certificates.

Reliable quality, on-time delivery, and cost-performance are the main reasons for our success up to now. These launches reflect our commitment to innovation, quality, and convenience to meet evolving customer needs.

Innovative, Creative, make charging SIMPLE. We will continue to grow and innovate with new products and designs. We hope you'll come along for the ride.

"Highly stable quality & Reasonable price" is always our goal.

" One step ahead" is our motto to think more for the customers. ODM/OEM are welcomed

## Charging & Connectivity Series\_2026 Q1



HeadWay Electronics (HK) Limited

E-mail: [stephen@headway-av.com](mailto:stephen@headway-av.com)

Tel/Wechat: +86-13510282787

Whatsapp: +852-6739 0528

---

# 140W Multi-ports GaN AC-DC Adapter • **NEWLY LAUNCHED**


## AD1400T



Output Port	C1	C2	C3	A1	Total Output Power
C1	140W(5V-15V/3A;20V,28V/5A) PPS:5V-28V/5A	/	/	/	140W
C2	/	140W(5V-15V/3A;20V,28V/5A) PPS:5V-28V/5A	/	/	140W
C3	/	/	40W(5V/3A,9V/3A,12V/3A,15/2.65A, ,20V/2A) PPS:5V-11V/3.6A	/	40W
A1	/	/	/	33W(5V/3A,9V/3A,10V/2.25A,11 V/3A,12V/1.5A	33W
C1+C2	70W (5V-15V/3A;20V/3.5A) PPS:5V-20V/3A	70W (5V-15V/3A;20V/3.5A) PPS:5V-20V/3A	/	/	70W+70W
C1+C3	100W (5V-15V/3A;20V/5A) PPS:5V-20V/5A	/	40W(5V/3A,9V/3A,12V/3A,15/2.65A, ,20V/2A) PPS:5V-11V/3.6A	/	100W+40W
C2+C3	/	100W (5V-15V/3A;20V/5A) PPS:5V-20V/5A	40W(5V/3A,9V/3A,12V/3A,15/2.65A, ,20V/2A) PPS:5V-11V/3.6A	/	100W+40W
C1+A1	100W (5V-15V/3A;20V/5A) PPS:5V-20V/5A	/	/	33W(5V/3A,9V/3A,10V/2.25A,11 V/3A,12V/1.5A	100W+33W
C2+A1	/	100W (5V-15V/3A;20V/5A) PPS:5V-20V/5A	/	33W(5V/3A,9V/3A,10V/2.25A,11 V/3A,12V/1.5A	100W+33W
C3+A1	/	/	5V/2.4A	5V/2.4A	12W+12W
C1+C2+C3	65W (5V-15V/3A;20V/3.25A) PPS:5V-20V/3A	45W (5V-15V/3A;20V/2.25A) PPS:5V-11V/3A PPS:5V- 20V/2.25A	30W (5V- 9V/3A,12V/2.5A,15V/2A,20V/1.5A ) PPS:5V-10V/3A	/	65W+45W+30W
C1+C2+A1	65W (5V-15V/3A;20V/3.25A) PPS:5V-20V/3A	45W (5V-15V/3A;20V/2.25A) PPS:5V-11V/3A PPS:5V- 20V/2.25A	/	30W (5V-9V/3A,12V/2.5A)	65W+45W+30W
C1+C3+A1	100W (5V-15V/3A;20V/5A) PPS:5V-20V/5A	/	Shared 24W(5V/4.8A)		100W+24W
C2+C3+A1	/	100W (5V-15V/3A;20V/5A) PPS:5V-20V/5A	Shared 24W(5V/4.8A)		65W+45W+24W
C1+C2+C3+A1	65W (5V-15V/3A;20V/3.25A) PPS:5V-20V/3A	45W (5V-15V/3A;20V/2.25A) PPS:5V-11V/3A PPS:5V- 20V/2.25A	Shared 24W(5V/4.8A)		65W+45W+24W

# AC-DC GaN Adapter with Retractable Cable • **NEWLY LAUNCHED**

## AD6521RC

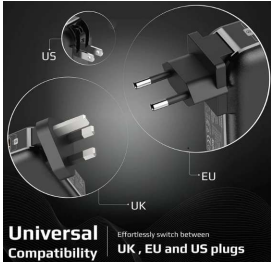

Materials		PC + ABS, V0 Fireproof
Input	AC Input	AC 100~240V, 50/60Hz, 1.6A
Output Power	USB-C Cable	Max 65W(5V=3A,9V=3A,12V=3A,15V=3A,20V=3.25A)
	USB-C Port	Max 65W((5V=3A,9V=3A,12V=3A,15V=3A,20V=3.25A))
Total Output (C Cable + C Port)		45W + 12W
Retractable Cable Length		70CM
Unit Size		48*79*30mm
Package Contents		Main Unit*1, User Manual*1

## AD6531RC



Materials		PC + ABS, V0 Fireproof
Input	AC Input	AC 100~240V, 50/60Hz, 1.6A
Single Port/Cable Output Power	USB-C Cable	Max 65W(5V=3A,9V=3A,12V=3A,15V=3A,20V=3.25A)
	USB-C Port	Max 65W(5V=3A,9V=3A,12V=3A,15V=3A,20V=3.25A))
	USB-A Port	Max 30W((5V=3A,9V=3A,12V=2.5A,20V=1.5A)
2-Port/ Total Output Power		Type-C Cable + Type-C Port: 45W+20W Type-C Cable/Port + USB-A Port: 45W+18W Type-C Cable + (C Port + USB-A Port): 45W + 15W
Retractable Cable Length		<b>100CM</b>
Unit Size		58*62*38mm
Package Contents		Main Unit*1, User Manual*1

# Ultra Slim GaN AC/DC Adapter Series • MOST POPULAR

Unit Picture



<b>Product DESC</b>	Cubic 30W AC-DC Adapter	Cubic 30W AC-DC Adapter, A+C	GaN 65W AC-DC Adapter, Single Port	GaN 65W AC-DC Adapter, C+C	GaN 65W AC-DC Adapter, 1A1C	GaN 65W AC-DC Adapter, 1A2C	
<b>Model No.</b>	AD3001C	AD3001AC	AD6501C	AD6501CC	AD6501AC	AD6501AA	
<b>AC Plug Type</b>	US/EU/UK/KC	US/EU/UK/KC	US/EU/UK/KC	US/EU/UK/KC	US/EU/UK/KC	US/EU/UK/KC	
<b>AC Input</b>	100V~240V 50-60Hz/0.8A	100V~240V 50-60Hz/0.8A	100V~240V 50-60Hz/1.6A	100V~240V 50-60Hz/1.6A	100V~240V 50-60Hz/1.6A	100V~240V 50-60Hz/1.6A	
<b>Output</b>	<b>C1</b>	Max 30W (5V=3A,9V=3A,12V=2.5A,15V=2A,20V=1.5A)	Max 30W (5V=3A,9V=3A,12V=2.5A,15V=2A,20V=1.5A)	Max 65W (5V=3A,9V=3A,12V=3A,15V=3A,20V=3.25A)	Max 65W (5V=3A,9V=3A,12V=3A,15V=3A,20V=3.25A)	Max 65W (5V=3A,9V=3A,12V=3A,15V=3A,20V=3.25A)	Max 65W (5V=3A,9V=3A,12V=3A,15V=3A,20V=3.25A)
	<b>A(If have)</b>	N/A	Max 18W (5V=3A,9V=3A,12V=1.5A)	N/A	N/A	Max 18W (5V=3A,9V=3A,12V=1.5A)	18W(5V=3A,9V=3A,12V=1.5A)
	<b>C2</b>	N/A	N/A	N/A	Max 65W (5V=3A,9V=3A,12V=3A,15V=3A,20V=3.25A)	N/A	Max 65W (5V=3A,9V=3A,12V=3A,15V=3A,20V=3.25A)
	<b>C1+(C2+A)</b>	Max 30W	15W (5V/3A)	Max 65W	45W+12W	45W+12W	45W+12W
<b>Unit Weigh</b>							
<b>Unit Dimension</b>	35*46*35mm(US Plug)	35*46*35mm(US Plug)	47*81*42mm(EU Plug)	47*81*42mm(EU Plug)	47*81*42mm(EU Plug)	47*81*42mm(EU Plug)	


# Ultra Slim GaN AC-DC Adapter Series • MOST POPULAR

Unit Picture



<b>Product DESC</b>		25W Ultra Slim AC-DC Adapter	30W Ultra Slim AC-DC Adapter	Ultra Slim GaN 45W AC-DC Adapter	Ultra Slim GaN 65W AC-DC Adapter, C+C
<b>Model No.</b>		AD2502AC(CC)	AD3002AC(CC)	AD6502C	AD6502CC
<b>AC Plug Type</b>		EU	EU	US/JP	US/JP
<b>AC Input</b>		100V~240V 50-60Hz/0.8A	100V~240V 50-60Hz/0.8A	100V~240V 50-60Hz/1.6A	100V~240V 50-60Hz/1.6A
<b>Output</b>	<b>C1</b>	Max 25W	Max 30W	Max 45W	Max 65W
	<b>USB-A</b>	Max 18W	Max 18W	Max 18W	Max 18W
	<b>C2</b>	N/A	N/A	N/A	65W
	<b>C1+A</b>	15W(5V/3A)	15W(5V/3A)	30W+12W	45W+12W
<b>Unit Dimension</b>		36*81*15mm	36*81*15mm	47*85*14.5mm	47*85*14.5mm

# Power Every Day—— Power Bank Series

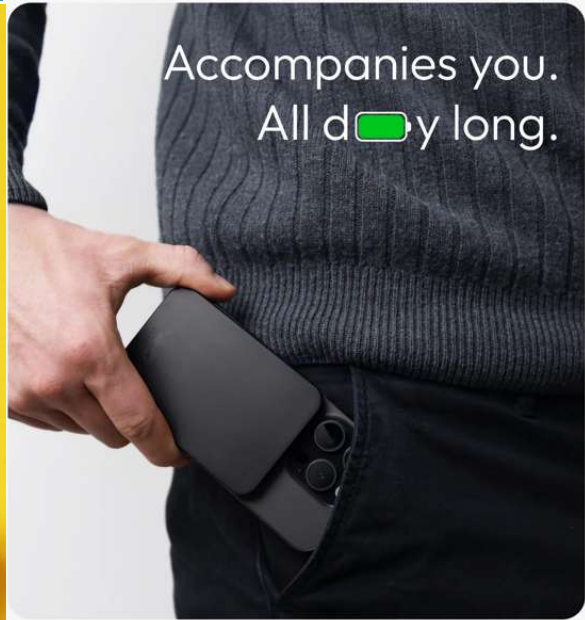

- Classic Power Bank
- Magsafe Power Bank
- Multi-function Power Bank AC Charger

# Multi-function Power Bank with AC Charger Series • **NEWLY LAUNCHED**

## MPB5K35RC



Materials	PC + ABS	
Battery	Type	Li-polymer battery, semi-solid state
	Capacity	5000mAh, 3.85V (19.25Wh)
Input	AC Input	AC100~240V, 1.2A Max
	DC Input	Type-C Cable & Port: Max 18W (5V=3A, 9V=2A, 12V=1.5A)
Output Power	AC Mode	Type-C Cable/Port: Max 35W (5V=3A,9V=3A,12V=2.9A,15V=2.33A,20V=1.75A,)
	DC(Power Bank) Mode	Type-C Cable/Port: Max 20W (5V=3A,9V=2.22A,12V=1.67A)
Total Output	5V=3A	
Retractable Cable Length	70CM	
Unit Size(L*W*H)	54*96*32mm	
Package Contents	Main Unit*1, User Manual*1	



## MPB5K30C



Materials	PC + ABS	
Battery	Type	Li-ion battery,21700
	Capacity	5000mAh, 3.6V (18Wh)
Input	AC Input	AC100~240V, 1.2A Max
	DC Input	Type-C Cable & Port: Max 18W (5V=3A, 9V=2A, 12V=1.5A)
Output Power	AC Mode	Type-C Cable/Port: Max 35W (5V=3A,9V=3A,12V=2.5A,15V=2A,20V=1.5A,)
	DC(Power Bank) Mode	Type-C Cable/Port: Max 20W (5V=3A,9V=2.22A,12V=1.67A)
Total Output	5V=3A	
Cable Length	30CM	
Unit Size(L*W*H)	76*38*38mm	
Package Contents	Main Unit*1, User Manual*1	

# MagSafe Power Bank\_5000mAh/10000mAh • Semi-solid battery optional

**Unit Picture**

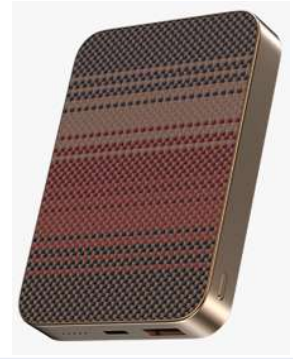

Product Desc	Ultra Compact Mag Power Bank, 5000mAh	Slim Mag Power Bank,5000mAh	Ultra Compact Mag Power Bank, 10000mAh	Aramid fiber Mag Power Bank, 5000mAh	Aramid fiber Mag Power Bank, 10000mAh
Model No.	MW5K90(S)	MW5K98(S)	MW10K15(S)	MW5K10AF(S)	MW10K16AF(S)
Rated Battery Capacity	3.87V/5000mAh (19.35Wh)	3.85V, 5000mAh(19.25Wh)	3.85V, 10000mAh(38.5Wh)	3.85V, 5000mAh(19.25Wh)	3.85V, 10000mAh(38.5Wh)
Battery Type	Li-polymer (Semi-solid optional)	Li-polymer (Semi-solid optional)	Li-polymer (Semi-solid optional)	Li-polymer (Semi-solid optional)	Li-polymer (Semi-solid optional)
Input(Type-c port)	Max 20W(5V/3A,9V/2.22A)	Max 20W(5V/3A,9V/2.22A)	Max 20W(5V/3A,9V/2.22A)	Max 20W(5V/2A,9V/2.22A)	Max 20W(5V/2A,9V/2.22A)
Output Power	Type-C port: 20W((5V/2A,9V/2.22A)	Type-C port: 20W(5V/2A,9V/2.22A)	Type-C port: 20W(5V/2A,9V/2.22A)	Type-C port: 20W(5V/2A,9V/2.22A)	Type-C port: 20W(5V/2A,9V/2.22A)
	Wireless Chrging:15W Max	Wireless Chrging:15W Max	Wireless Chrging:15W Max	Wireless Chrging:15W Max	Wireless Chrging:15W Max
Total Output	5V--3A	5V--3A	5V--3A	5V--3A	5V--3A
Unit Dimension	67*102*8.6mm	67*102*9.8mm	67*102*15mm	67*102*10mm	67*102*15mm

# Multi-function Wireless Charging Power Bank • Most Popular

## PW5K20W



Materials		PC + ABS
Battery	Type	Li-ion battery
	Capacity	5000mAh, 3.6V (18Wh)
Input	AC Input	N/A
	DC Input	Type-C Port: Max 18W (5V=3A, 9V=2A, 12V=1.5A)
Output Power	Type-C Port	Max 20W (5V=3A, 9V=2.22A, 12V=1.67A)
	Type-C Connector	Max 20W (5V=3A, 9V=2.22A, 12V=1.67A)
	Wireless Charging	Apple Watch: 2.5W
Total Output		5V=3A
Unit Size(L*W*H)		76*38*38mm
Package Contents		Main Unit*1, User Manual*1

## MW10K20CL



Materials		PC + ABS + Aluminum,
Battery	Type	Li-polymer battery
	Capacity	10000mAh, 3.7V (37Wh)
Input	AC Input	N/A
	DC Input	Type-C Cable/Port: Max 18W (5V=3A, 9V=2A, 12V=1.5A)
Output Power	Type-C Cable/ Port	Max 20W (5V=3A, 9V=2.22A, 12V=1.67A)
	Lightning Cable	10W (5V=2.0A)
	USB-A Port	Max 22.5W (5V=3A,9V=2.22A, 10V=2.25A,12V=1.67A)
	Wireless Charging	Max 15W (Smartphone & TWS) 5W/7.5W/10W/15W), Apple Watch: 2.5W
Total Output		5V=3A
Unit Size(L*W*H)		70*140*22mm
Package Contents		Main Unit*1, User Manual*1

# Classic Power Banks - 10K/20K/30K • Most Popular

## **PB-10K20RC**



Materials	PC + ABS,	
Battery	Type	Li-polymer battery
	Capacity	10000mAh, 3.7V (37Wh)
Input	AC Input	N/A
	DC Input	Type-C Cable & Port: Max 18W (5V=3A, 9V=2A, 12V=1.5A)
Output Power	Type-C Cable	Max 22.5W (5V=3A, 9V=2.22A, 10V=2.25A, 12V=1.67A)
	Type-C Port	Max 20W (5V=3A, 9V=2.22A, 12V=1.67A)
	USB-A Port	Max 22.5W (5V=3A, 9V=2.22A, 10V=2.25A, 12V=1.67A)
Total Output	5V=3A	
Retractable Length	60CM	
Unit Size(L*W*H)	65*115*24mm	
Package Contents	Main Unit*1, User Manual*1	

## **PB-E10K20/E20K20/E30K20**



Materials	PC + ABS,	
Battery	Type	Li-polymer battery
	Capacity	10K:37Wh / 20K: 74Wh / 30K: 111Wh
Input	AC Input	N/A
	DC Input	Type-C Cable & Port: Max 18W (5V=3A, 9V=2A, 12V=1.5A)
Output Power	Type-C Cable/ Port	Max 20W (5V=3A, 9V=2.22A, 12V=1.67A)
	Lightning Cable	10W(5V=2A)
	USB-A Port	Max 22.5W (5V=3A, 9V=2.22A, 10V=2.25A, 12V=1.67A)
Total Output	5V=3A	
Unit Size(L*W*H)	68*145*33mm	
Package Contents	Main Unit*1, User Manual*1	

Classic Power Bank Built-in Charging Cable\_ 10K/20K/30K • **Most Popular**

**PB-E20K22LC-PU**



Materials	PC + ABS + PU,	
Battery	Type	Li-polymer battery
	Capacity	20000mAh, 3.7V (74Wh)
Input	AC Input	N/A
	DC Input	Type-C Cable & Port: Max 18W (5V=3A, 9V=2A, 12V=1.5A)
Output Power	Type-C Cable/ Port	Max 20W (5V=3A, 9V=2.22A, 12V=1.67A)
	Lightning Cable	Max 20W (5V=3A, 9V=2.22A, 12V=1.67A)
	USB-A Port	Max 22.5W (5V=3A,9V=2.22A, 10V=2.25A,12V=1.67A)
Total Output	5V=3A	
Unit Size(L*W*H)	68*145*33mm	
Package Contents	Main Unit*1, User Manual*1	

**PB-E10K22BC/E20K22BC/E30K22BC**



Materials	PC + ABS,	
Battery	Type	Li-polymer battery
	Capacity	10K:37Wh / 20K: 74Wh / 30K: 111Wh
Input	AC Input	N/A
	DC Input	Type-C Cable & Port: Max 18W (5V=3A, 9V=2A, 12V=1.5A)
Output Power	Type-C Cable/ Port	Max 20W (5V=3A, 9V=2.22A, 12V=1.67A)
	Lightning Cable	10W(5V=2A)
	USB-A Port	Max 22.5W (5V=3A,9V=2.22A, 10V=2.25A,12V=1.67A)
Total Output	5V=3A	
Unit Size(L*W*H)	67.5*149.5*18.0mm/ 68.0*150.0*30.0mm/68.0*150.0*42.0mm	
Package Contents	Main Unit*1, User Manual*1	

# Peltier TEC-Cooler Wireless Charger Series

Unit Picture



• 25W Optional

<b>Product DESC</b>	In-Vehicle Peltier Cooler 15W Wireless Charger	In-Vehicle Peltier Cooler 15W Wireless Charger	Peltier Cooler 15W Wireless Charger	Peltier Cooler 15W Wireless Charger	Peltier Cooler 15W Wireless Charger
<b>Model No.</b>	MPC50	MPC52	MPC68	MPC66	MPC66-C
<b>Input(Type-c port)</b>	DC 5V/3A, 9V/3A	DC 5V/3A, 9V/3A	DC 5V/3A, 9V/3A	DC 5V/3A, 9V/3A	DC 5V/3A, 9V/3A
<b>Wireless Charging Output</b>	Max 15W(5W/7.5W/10W/15W)	Max 15W(5W/7.5W/10W/15W)	Max 15W(5W/7.5W/10W/15W)	Max 15W(5W/7.5W/10W/15W)	Max 15W(5W/7.5W/10W/15W)
<b>Cooler Power</b>	6.5W	6.5W	6.5W	6.5W	6.5W
<b>Other Features</b>	RGB Light	RGB Light	RGB Light	RGB Light	RGB Light
<b>Unit Color</b>	Black/Others	Black/Others	Black/Others	Black/Others	Black/Others
<b>Unit Weight</b>					
<b>Unit Dimension(LxW)</b>	∅58mm	∅58mm	60*62mm	∅58mm	∅58mm

# In-Car USB Charger

UNIT PICTURE					UNIT PICTURE				
MODEL NO	CC-P2018	CC-P2038	CC-P2045	CC-P2065	MODEL NO	CC-P662A2C	CC-P852A2C	CC-P102A2C	CC-P102A3C
INPUT	DC 12V~24V	DC 12V~24V	DC 12V~24V	DC 12V~24V	INPUT	DC 12V~24V	DC 12V~24V	DC 12V~24V	DC 12V~24V
OUTPUT POWER	MAX 18W	MAX 38W	MAX 45W	MAX 65W	OUTPUT POWER	66W (MAX)	85W (MAX)	101W (MAX)	101W (MAX)
USB-C	PD 18W (12V/1.5A)	PD 20W (12/1.67A)	PD 45W (20V/2.25A)	PD 65W (20V/3.25A)	USB-C1	PD 33W (20V/1.65A)	PD 65W (20V/3.25A)	PD 65W (20V/3.25A)	PD 65W (20V/3.25A)
	PPS: 3V-5.9V/3A; PPS: 3.3V-11V/1.65A	PPS: 3V-5.9V/3A; PPS: 3.3V-11V/1.65A	PPS:3.3-11V/3A PPS:3.3-21V/2.15A	PPS:3.3-11V/3A PPS:3.3-21V/2.85A		PPS:3.3-11V=3A; PPS: 3.3-16V=2A	PPS 3.3-11V=3A; PPS 3.3-21V=2.85A	PPS 3.3-11V=3A; PPS 3.3-21V=2.85A	PPS 3.3-11V=3A; PPS 3.3-21V=2.85A
USB-A	QC3.0 18W	QC3.0 18W	QC3.0 18W	QC3.0 18W	USB-A1	QC3.0 18W	QC3.0 18W	QC3.0 18W	QC3.0 18W
USB-A + USB-C	15W (5V=3A MAX)	18W+20W(MAX X 38W)	24W(5V=4.8A MAX)	24W(5V=4.8A MAX)	C1+A1	15W (5V=3A MAX)	15W (5V=3A MAX)	15W (5V=3A MAX)	15W (5V=3A MAX)
	Unit Dimension	24*58*28mm	24*58*28mm	24*58*28mm	Unit Dimension	45*66*30mm	45*66*30mm	45*66*30mm	45*66*30mm
USB-A	QC3.0 18W	QC3.0 18W	QC3.0 18W	QC3.0 18W	USB-C2	PD 33W(20V/1.65A)	PD 20W(12/1.67A)	PD 36W(20V/1.8A)	PD 36W(20V/1.8A)
					Power Indicator	Colorful aperture	Colorful aperture	Colorful aperture	Colorful aperture
					USB-A2(or C3)	QC3.0 18W	QC3.0 18W	QC3.0 18W	C3: PD18W
					C2 + A2	15W (5V=3A MAX)	15W (5V=3A MAX)	15W (5V=3A MAX)	15W (5V=3A MAX)

# In-Car Cigarette Adapter USB Charger

Unit Picture



MODEL NO	CCA-049C	CCA-049	CCA-048	CCA-046LC
INPUT	DC 12V~24V	DC 12V~24V	DC 12~24V	DC 12~24V
OUTPUT POWER	100W (MAX)	100W (MAX)	100W(MAX)	100W(MAX)
Cigarette Output	2-Way, 60W/outlet	2-Way, 60W/outlet	2-Way, 60W/outlet	2-Way, 60W/outlet
USB-A	QC3.0 18W	QC3.0 18W	2*USB-A: 5V/2.4A	QC3.0 18W
USB-C	PD 20W	PD 20W	PD20W	PD25W
A + C	15W (5V=3A MAX)	15W (5V=3A MAX)	15W (5V=3A MAX)	15W (5V=3A MAX)
Display/Indicator	Blue LED Indicator	Blue LED Indicator	Blue LED Indicator	Red LCD Display

# Connectivity & Charging for Smartphone & IT devices



- High Speed Data Transfer Cable- USB 4 & USB 5
- USB2.0 Charging & Sync Cable
- USB-C Hubs & Converter



## TYPE-C HUBS & ADAPTERS



- MODEL NO.: C0301
- 3-IN-1 TYPE-C HUB
- 1\*USB-C PD2.0
- 1\*USB-A 3.0
- 1\*HDMI 4K@30Hz



- MODEL NO.: C0401
- 1\*USB-C PD3.0
- 1\*USB-A 2.0
- 2\*HDMI 4K@60Hz



- MODEL NO.: C0402
- 4-IN-1 TYPE-C HUB
- 1\*HDMI
- 1\*USB-C PD3.0
- 2\*USB-A



- MODEL NO.: C0403U
- 4-IN-2 DUAL CONNECTOR ADAPTER
- 1\*GIGABITE ETHERNET LAN
- 3\*USB-A



- MODEL NO.: C0502
- 5-IN-1 TYPE-C ADAPTER
- 1\*USB-C PD3.0
- 1\*USB-C DATA TRANSFER
- 3\*USB-A



- MODEL NO.: C0508
- WIRELESS CHARGING 5-IN-1 HUB
- 1\*HDMI 4K@30Hz
- 1\*USB-C PD3.0
- 3\*USB-A
- WIRELESS CHARGING OUTPUT POWER: 10W(MAX)



- MODEL NO.: C0701
- 7-IN-1 TYPE-C HUB
- 1\*HDMI 4K@30Hz
- 1\*USB-C PD3.0
- 3\*USB-A
- 1\*SD2.0/TF CARD READER



- MODEL NO.: C0901
- 9-IN-1 TYPE-C HUB
- 1\*HDMI 4K@30Hz
- 1\*USB-C PD3.0
- 1\*USB-C DATA TRANSFER
- 3\*USB-A
- 1\*SD2.0/TF CARD READER
- 1\*3.5MM AUDIO JACK

## Braided Cable High Speed Data Transfer



**40Gbps**

Compatible with thunderbolt 4/3  
**240W Super Fast Charging**

<b>240W</b> Rapid charging	<b>E-Marker</b> Chip
<b>8K</b> Video Output	<b>USB</b> One is All USB4 Compatible with Thunderbolt 4/3
<b>10-bit</b> Color Depth	

**E-Marker 3.0 Chip**

- ✓ Safer
- ✓ More Stable
- ✓ Protected Battery
- ✓ Faster

**E-Marker 3.0**



**240W Fast Charging for All Samsung-Series**

**Samsung Galaxy S24**  
40mins Charging 83%

**Unlock Stunning 8K/6K/4K Clarity**



**MagTie/Retractable Cable Series \_ C2L/C2C 60W/100W/240W**

