

报告编号(Report ID): MSIAIYEG6676017U5

# UN38.3 测试报告

## UN38.3 Test Report

样品名称及型号

锂离子笔记本电池组 型号: HS04

Sample Name &

Lithium-ion Laptop Battery Model: HS04

Model

(14.6V 2200mAh 32Wh)

委托单位

东莞市三墨材料有限公司/深圳市三泰能源有限公司

Applicant

Dongguan SanmoMaterials Co., LTD / Samtek Power Limited

生产单位

东莞市菲讯科技有限公司

Manufacturer

DONGGUAN FEIXUN TECHNOLOGY CO.,LIMITED

P O N Y 谱尼测试  
Pony Testing International Group  
[www.ponytest.com](http://www.ponytest.com)



No.: MSIAIYEG6676017U5  
Code: eccmyjbmnw

## I、样品描述 Sample Description

样品名称 Sample name	锂离子笔记本电池组 Lithium-ion Laptop Battery	样品型号 Sample model	HS04
委托单位 Applicant	东莞市三墨材料有限公司/深圳市三泰能源有限公司 Dongguan SanmoMaterials Co., LTD / Samtek Power Limited		
生产商 Manufacturer	名称 Name	东莞市菲讯科技有限公司 DONGGUAN FEIXUN TECHNOLOGY CO.,LIMITED	
	地址 Address	广东省东莞市寮步镇芦溪二路 38 号 6 栋 1001 室 Rm 1001, Building 6th, No.38 Luxi 2nd Road, LiaoBu, DongGuan, GuangDong.	
	电话 Tel.	+86-15918383535	
	邮箱 E-mail	info.samtekipower.com	
	网址 Website	www.samtekipower.com	
标称电压 Nominal voltage	14.6V	额定容量 Rated capacity	2200mAh
充电电流 Charge current	1000mA	最大连续充电电流 Maximum continuous charge current	2000mA
充电限制电压 Limited charge voltage	16.6V	充电截止电流 End charge current	100mA
放电终止电压 Discharge Cut-off voltage	11.6V	最大放电电流 Maximum discharge current	2000mA
放电电流 Discharge current	400mA	质量 Mass	211.37g
电池芯生产厂家 Manufacturer of cell	Samtek Power Limited		
电池芯型号 Cell model	18650/2200	电池芯个数 Cell number	4PCS
电池芯标称电压 Cell nominal voltage	3.7V	电池芯额定容量 Cell rated capacity	2200mAh
委托日期 Entrust date	2024-11-30	完成日期 Finished date	2024-12-17

## II、测试标准 Test Standard

《试验和标准手册》 第八修订版第III部分 38.3 章节

Manual of Tests and Criteria (ST/SG/AC.10/11/Rev.8 Part III sub-section 38.3)

III、测试项目及结论 Test Item & Conclusion

测试项目 Item	测试样品编号 Sample Number	结论 Conclusion
T.1 高度模拟 Altitude simulation	N1~N4 C1~C4	通过 PASS
T.2 温度试验 Thermal test		通过 PASS
T.3 振动 Vibration		通过 PASS
T.4 冲击 Shock		通过 PASS
T.5 外部短路 External short circuit		通过 PASS
T.6 撞击 Impact	N9~N13 C9~C13	通过 PASS
T.7 过度充电 Overcharge	N5~N8 C5~C8	通过 PASS
T.8 强制放电 Forced discharge	N14~N23 C14~C23	通过 PASS

经测试, 该样品符合《试验和标准手册》第八修订版第III部分 38.3 章节要求。  
The Samples has passed the test items of Manual of Tests and Criteria (ST/SG/AC.10/11/Rev.8), Part III sub-section 38.3.

说明 Notes

- N1~N8 为第一个充放电周期完全充电状态的电池组  
Batteries at first cycle in fully charged states
- N9~N13 为第一个充放电周期 50% 设计额定容量状态的电池芯  
Cells at first cycle at 50% of the design rated capacity
- N14~N23 为第一个充放电周期完全放电状态的电池芯  
Cells at first cycle in fully discharged states
- C1~C8 为 25 个充放电周期后完全充电状态的电池组  
Batteries after 25 cycles ending in fully charged states
- C9~C13 为 25 个充放电周期 50% 设计额定容量状态的电池芯  
Cells after 25 cycles at 50% of the design rated capacity
- C14~C23 为 25 个充放电周期后完全放电状态的电池芯  
Cells after 25 cycles ending in fully discharged states

主检 周物勃 审核 夏兆虹 批准 郑春标  
Tested by: 周物勃 Checker by: 夏兆虹 Approver by: 郑春标

签发日期 Issue date 2024-12-17

## IV、样品照片 Photo of The Sample

样品编号/Sample No.: G6676017U5



仅对原报告照片中的样品负责

Authenticate the photo on original report only

## V、测试方法 Test Method

Tests T.1 to T.5 shall be conducted in sequence on the same cell or battery. Tests T.6 and T.8 shall be conducted using not otherwise tested cells or batteries. Test T.7 may be conducted using undamaged batteries previously used in tests T.1 to T.5 for purposes of testing on cycled batteries.

小型电池或电池组必须按顺序进行试验 T.1 至 T.5。试验 T.6 和 T.8 应使用未另外试验过的电池或电池组。试验 T.7 可以使用原先在试验 T.1 至 T.5 中使用过的未损坏电池组进行, 以便测试经过充放电的电池组。

In order to quantify the mass loss, the following procedure is provided:

质量损失依照下式计算:

Mass loss 质量损失 (%) =  $(M_1 - M_2) / M_1 \times 100$

Where  $M_1$  is the mass before the test and  $M_2$  is the mass after the test. When mass loss does not exceed the values in Table below, it shall be considered as “no mass loss”.

式中  $M_1$  是试验前的质量,  $M_2$  是试验后的质量。如质量损失不超过下表所列数值, 即视为“无质量损失”。

Mass M of cell or battery 电池或电池组质量 M	Mass loss limit 质量损失限值
$M < 1g$	0.5%
$1g \leq M \leq 75g$	0.2%
$M > 75g$	0.1%

### T.1 Altitude simulation 高度模拟

Test cells and batteries shall be stored at a pressure of 11.6kPa or less for at least six hours at ambient temperature ( $20^\circ\text{C} \pm 5^\circ\text{C}$ ).

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

试验电池和电池组应在压力等于或低于 11.6 千帕和环境温度 ( $20^\circ\text{C} \pm 5^\circ\text{C}$ ) 下存放至少 6 小时。

要求电池和电池组无渗漏、无排气、无解体、无破裂和无起火, 并且每个试验电池或电池组在试验后的开路电压不小于其在进行这一试验前电压的 90%。有关电压的要求不适用于完全放电状态的试验电池和电池组。

### T.2 Thermal test 温度试验

Test cells and batteries are to be stored for at least six hours at a test temperature equal to  $72^\circ\text{C} \pm 2^\circ\text{C}$ , followed by storage for at least six hours at a test temperature equal to  $-40^\circ\text{C} \pm 2^\circ\text{C}$ . The maximum time interval between test temperature extremes is 30 minutes. This procedure is to be repeated until 10 total cycles are complete, after which all test cells and batteries are to be stored for 24 hours at ambient temperature ( $20^\circ\text{C} \pm 5^\circ\text{C}$ ). For large cells and batteries the duration of exposure to the test temperature extremes should be at least 12 hours.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage

immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

试验电池和电池组应先在试验温度等于  $72^{\circ}\text{C}\pm 2^{\circ}\text{C}$  的条件下存放至少 6 小时, 接着再在试验温度等于  $-40^{\circ}\text{C}\pm 2^{\circ}\text{C}$  的条件下存放至少 6 小时。两个极端试验温度之间的最大时间间隔为 30 分钟。此程序重复进行, 共完成 10 次, 接着将所有试验电池和电池组在环境温度 ( $20^{\circ}\text{C}\pm 5^{\circ}\text{C}$ ) 下存放 24 小时。对于大型电池和电池组, 暴露于极端试验温度的时间至少应为 12 小时。

要求电池和电池组无渗漏、无排气、无解体、无破裂和无起火, 并且每个试验电池或电池组在试验后的开路电压不小于其在进行这一试验前电压的 90%。有关电压的要求不适用于完全放电状态的试验电池和电池组。

### T.3 Vibration 振动

Cells and batteries are firmly secured to the platform of the vibration machine without distorting the cells in such a manner as to faithfully transmit the vibration. The vibration shall be a sinusoidal waveform with a logarithmic sweep between 7Hz and 200Hz and back to 7Hz traversed in 15 minutes. This cycle shall be repeated 12 times for a total of 3 hours for each of three mutually perpendicular mounting positions of the cell. One of the directions of vibration must be perpendicular to the terminal face.

The logarithmic frequency sweep shall differ for cells and batteries with a gross mass of not more than 12kg (cells and small batteries), and for batteries with a gross mass of more than 12kg (large batteries).

For cells and small batteries: from 7Hz a peak acceleration of  $1g_n$  is maintained until 18Hz is reached. The amplitude is then maintained at 0.8mm (1.6mm total excursion) and the frequency increased until a peak acceleration of  $8g_n$  occurs (approximately 50Hz). A peak acceleration of  $8g_n$  is then maintained until the frequency is increased to 200Hz.

For large batteries: from 7Hz to a peak acceleration of  $1g_n$  is maintained until 18Hz is reached. The amplitude is then maintained at 0.8mm (1.6mm total excursion) and the frequency increased until a peak acceleration of  $2g_n$  occurs (approximately 25Hz). A peak acceleration of  $2g_n$  is then maintained until the frequency is increased to 200Hz.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire during the test and after the test and if the open circuit voltage of each test cell or battery directly after testing in its third perpendicular mounting position is not less than 90 % of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

电池和电池组紧固于振动机平台, 但不得造成电池变形, 并能准确可靠地传播振动。振动应是正弦波形, 对数扫描频率在 7 赫兹和 200 赫兹之间, 再回到 7 赫兹, 跨度为 15 分钟。这一振动过程须对三个互相垂直的电池安装方位的每一方向重复进行 12 次, 总共为时 3 小时。其中一个振动方向必须与端面垂直。

作对数式频率扫描, 对总质量不足 12 千克的电池和电池组 (电池和小型电池组), 和对 12 千克及更大的电池组 (大型电池组) 有所不同。

对电池和小型电池组: 从 7 赫兹开始, 保持  $1g_n$  的最大加速度, 直到频率达到 18 赫兹。然后将振幅保持在 0.8 毫米 (总偏移 1.6 毫米), 并增加频率直到最大加速度达到  $8g_n$  (频率约为 50 赫兹)。将最大加速度保持在  $8g_n$  直到频率增加到 200 赫兹。

对大型电池组: 从 7 赫兹开始, 保持  $1g_n$  的最大加速度, 直到频率达到 18 赫兹。然后将振幅保持在 0.8 毫米 (总偏移 1.6 毫米), 并增加频率直到最大加速度达到  $2g_n$  (频率约为 25 赫兹)。将最大加速度保持在  $2g_n$  直到频率增加到 200 赫兹。

要求电池和电池组试验中和试验后无渗漏、无排气、无解体、无破裂和无起火, 并且每个试验电池或电池组在第三个垂直安装方位上的试验后测得的开路电压不小于在进行这一试验前电压的 90%。有关电压的要求不适用于完全放电状态的试验电池和电池组。

#### T.4 Shock 冲击

Test cells and batteries shall be secured to the testing machine by means of a rigid mount which will support all mounting surfaces of each test battery.

Each cell shall be subjected to a half-sine shock of peak acceleration of  $150g_n$  and pulse duration of 6 milliseconds. Alternatively, large cells may be subjected to a half-sine shock of peak acceleration of  $50g_n$  and pulse duration of 11 milliseconds.

Each battery shall be subjected to a half-sine shock of peak acceleration depending on the mass of the battery. The pulse duration shall be 6 milliseconds for small batteries and 11 milliseconds for large batteries. The formulas below are provided to calculate the appropriate minimum peak accelerations.

试验电池和电池组用坚硬支架紧固在试验装置上, 支架支撑着每个试验电池组的所有安装面。

每个小型电池必须经受峰值加速度  $150g_n$  和脉冲持续时间 6 毫秒的半正弦波冲击。针对大型电池必须经受最大加速度  $50g_n$  和脉冲持续时间 11 毫秒的半正弦波冲击。

每个电池须经受的正弦波冲击的最低限度最大加速度依照下式计算。对于小型电池组的脉冲持续时间应为 6 毫秒, 对于大型电池组的脉冲持续时间应为 11 毫秒。

Battery 电池组	Minimum peak acceleration 最小峰值加速度	Pulse duration 脉冲持续时间
Small batteries 小型电池组	$150g_n$ or result of formula $150g_n$ 或公式计算结果 Acceleration 加速度 ( $g_n$ ) = $\sqrt{\left(\frac{100850}{\text{mass} / \text{质量}^*}\right)}$ Whichever is smaller 中的较小值	6ms
Large batteries 大型电池组	$50g_n$ or result of formula $50g_n$ 或公式计算结果 Acceleration 加速度 ( $g_n$ ) = $\sqrt{\left(\frac{30000}{\text{mass} / \text{质量}^*}\right)}$ Whichever is smaller 中的较小值	11ms

\* Mass is expressed in kilograms / 质量单位用千克计算

Each cell or battery shall be subjected to three shocks in the positive direction and to three shocks in the negative direction in each of three mutually perpendicular mounting positions of the cell or battery for a total of 18 shocks.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

每个电池或电池组须在三个互相垂直的安装方位的正方向经受三次冲击,接着在反方向经受三次冲击,总共经受 18 次冲击。

要求电池和电池组无渗漏、无排气、无解体、无破裂和无起火,并且每个试验电池或电池组在试验后的开路电压不小于其在进行这一试验前电压的 90%。有关电压的要求不适用于完全放电状态的试验电池和电池组。

#### T.5 External short circuit 外部短路

The cell or battery to be tested shall be heated for a period of time necessary to reach a homogeneous stabilized temperature of  $57^{\circ}\text{C} \pm 4^{\circ}\text{C}$ , measured on the external case. This period of time depends on the size and design of the cell or battery and should be assessed and documented. If this assessment is not feasible, the exposure time shall be at least 6 hours for small cells and small batteries, and 12 hours for large cells and large batteries. Then the cell or battery at  $57^{\circ}\text{C} \pm 4^{\circ}\text{C}$  shall be subjected to one short circuit condition with a total external resistance of less than 0.1 ohm. This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to  $57^{\circ}\text{C} \pm 4^{\circ}\text{C}$ , or in the case of the large batteries, has decreased by half of the maximum temperature increase observed during the test and remains below that value. The short circuit and cooling down phases shall be conducted at least at ambient temperature.

Cells and batteries meet this requirement if their external temperature does not exceed  $170^{\circ}\text{C}$  and there is no disassembly, no rupture and no fire during the test and within six hours after the test.

待测试的电池或电池组应加热一段必要时间,以从外壳测量的温度达到均匀稳定的  $57^{\circ}\text{C} \pm 4^{\circ}\text{C}$  的温度,应对加热持续时间进行评估和记录;如果这种评估不可行,对于小型电池和小型电池组至少在  $57 \pm 4^{\circ}\text{C}$  的环境下存放 6 小时,对于大型电池和大型电池组至少在  $57^{\circ}\text{C} \pm 4^{\circ}\text{C}$  的环境下存放 12 小时。然后,电池或电池组在  $57^{\circ}\text{C} \pm 4^{\circ}\text{C}$  的环境中,应接受一个外部总电阻小于 0.1 欧姆的短路条件。这一短路条件应在电池或电池组外壳温度回到  $57^{\circ}\text{C} \pm 4^{\circ}\text{C}$  后继续至少 1 小时,或对于大型电池组其外壳温度降幅达试验中观察到最高温升幅的二分之一,并保持低于该值。进行短路和降温阶段试验的温度至少相当于环境温度。

要求电池和电池组外壳温度不超过  $170^{\circ}\text{C}$ ,并且在试验过程中及试验后 6 小时内无解体、无破裂、无起火。

#### T.6 Impact 撞击

Impact (applicable to cylindrical cells not less than 18 mm in diameter)

The test sample cell or component cell is to be placed on a flat smooth surface. A  $15.8 \pm 0.1\text{mm}$  diameter, at least 6 cm long, or the longest dimension of the cell, whichever is greater, Type 316 stainless steel bar is to be

placed across the centre of the sample. A  $9.1\text{kg} \pm 0.1\text{kg}$  mass is to be dropped from a height of  $61 \pm 2.5\text{cm}$  at the intersection of the bar and sample in a controlled manner using a near frictionless, vertical sliding track or channel with minimal drag on the falling mass. The vertical track or channel used to guide the falling mass shall be oriented 90 degrees from the horizontal supporting surface.

The test sample is to be impacted with its longitudinal axis parallel to the flat surface and perpendicular to the longitudinal axis of the  $15.8\text{mm} \pm 0.1\text{mm}$  diameter curved surface lying across the centre of the test sample. Each sample is to be subjected to only a single impact.

Cells and component cells meet this requirement if their external temperature does not exceed  $170\text{ }^\circ\text{C}$  and there is no disassembly and no fire during the test and within six hours after this test.

撞击 (适用于直径不小于 18 毫米的圆柱形电池)

试样电池或元件电池放在平坦光滑的表面上, 一根 316 型不锈钢棒横放在试样中心, 钢棒直径 15.8 毫米  $\pm 0.1$  毫米, 长度至少 6 厘米, 或电池最长端的尺度, 取二者之长者。将一块 9.1 千克  $\pm 0.1$  千克的重锤从 61 厘米  $\pm 2.5$  厘米高处跌落到钢棒和试样交叉处, 使用一个几乎没有摩擦的、对落体重锤阻力最小的垂直轨道或管道加以控制。垂直轨道或管道用于引导落锤沿与水平支撑表面呈 90 度落下。

接受撞击的试样, 纵轴应与平坦表面平行并与横放在试样中心的直径  $15.8 \pm 0.1$  毫米弯曲表面的纵轴垂直。每一试样只经受一次撞击。

要求电池和电池组外壳温度不超过  $170\text{ }^\circ\text{C}$ , 并且在试验过程中及试验后 6 小时内无解体、无起火。

#### T.7 Overcharge 过度充电

The charge current shall be twice the manufacturer's recommended maximum continuous charge current. The minimum voltage of the test shall be as follows:

(a) When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 22V.

(b) When the manufacturer's recommended charge voltage is more than 18V, the minimum voltage of the test shall be 1.2 times the maximum charge voltage.

Tests are to be conducted at ambient temperature; the duration of the test shall be 24 hours.

Rechargeable batteries meet this requirement if there is no disassembly and no fire during the test and within seven days after the test.

充电电流必须是制造商建议的最大持续充电电流的两倍。试验的最小电压如下:

(a) 制造商建议的充电电压不大于 18 伏时, 试验的最小电压应是电池组最大充电电压的两倍或 22 伏两者中的较小者;

(b) 制造商建议的充电电压大于 18 伏时, 试验的最小电压应为最大充电电压的 1.2 倍。

试验应在环境温度下进行, 进行试验的时间应为 24 小时。

要求充电电池组在试验过程中和试验后 7 天内无解体, 无起火。

#### T.8 Forced discharge 强制放电

Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12V D.C. power supply at an initial current equal to the maximum discharge current specified by the manufacturer.

The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell. Each cell shall be forced discharged for a time interval (in hours) equal to its rated capacity divided by the initial test current (in ampere).


Primary or rechargeable cells meet this requirement if there is no disassembly and no fire during the test and within seven days after the test.

每个电池应在环境温度下与 12 伏直流电电源串联在起始电流等于制造商给定的最大放电电流的条件下强制放电。

将适当大小和额定值的电阻负荷与试验电池串联, 计算得出给定的放电电流。对每个电池进行强制放电, 放电时间 (小时) 应等于其额定容量除以初始试验电流 (安培)。

要求原电池或充电电池在试验过程中和试验后 7 天内无解体, 无起火。

VI、测试程序 Test Procedure

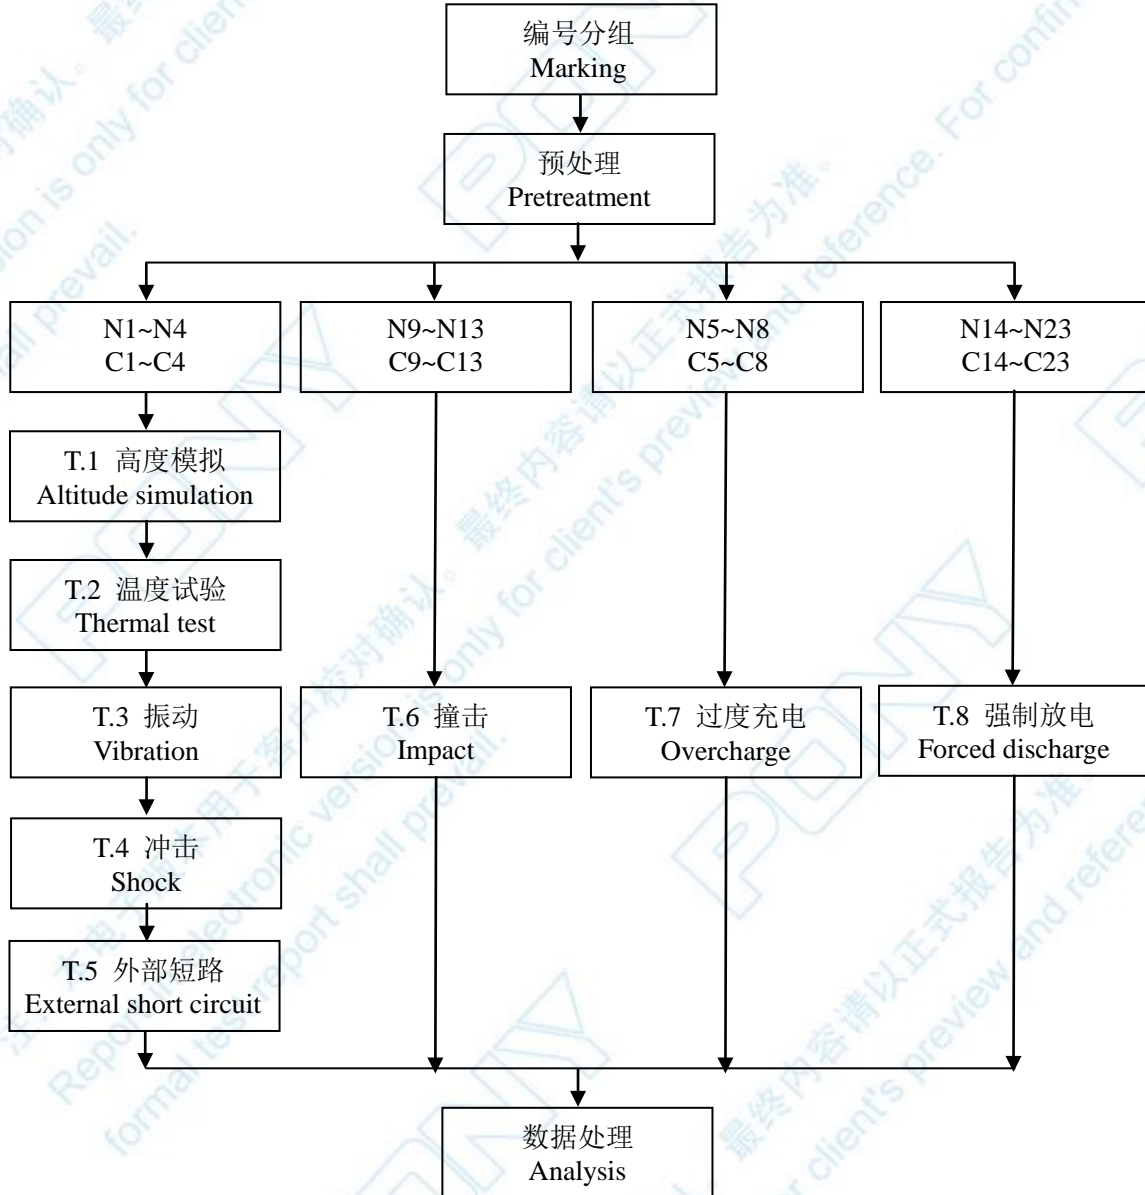

## VII、测试设备 Test Apparatus

IE-0121	高精度电池测试系统	High precision battery test system
IE-0513	高精度电池测试仪	High precision battery test instrument
IE-0434	真空干燥箱	Vacuum drying oven
IE-0090	万用表	Multimeter
IE-0824	高原空盒气压表	Tableland air pressure gauge
IE-0259	电子天平	Electronic balance
IE-0128	电动振动试验系统	Electric vibration test system
IE-0664	气动垂直冲击试验台	Pneumatic vertical impact testing platform
IE-0281	温控短路试验机	Temperature controlled short circuit testing machine
IE-0185	数字温度表(电热偶)	The digital thermometer (TC)
IE-0568	多功能数字式毫欧计	Multi-function digital milliohm meter
IE-0833	电池重物冲击试验机	Battery heavy shock testing machine
IE-0511	可编程直流电源	Programmable DC power source
IE-1413	防爆高低温快速温变试验箱	Explosion-proof high and low temperature rapid temperature change test chamber

### Ⅷ、测试数据 Test Data

#### T.1 高度模拟 Altitude simulation

编号 No.	测试前 Pre-test		测试后 After test		质量亏损 Mass loss (%)	电压亏损 Voltage loss (%)	有无泄露, 排气, 解体, 破裂和起火 Whether leakage, venting, disassembly, rupture, fire (Yes/No)
	质量 Mass (g)	电压 Voltage (V)	质量 Mass (g)	电压 Voltage (V)			
N1	211.374	16.08	211.354	16.07	0.009	0.062	无 (No)
N2	211.094	16.05	211.081	16.05	0.006	0.000	无 (No)
N3	211.534	15.94	211.514	15.93	0.009	0.063	无 (No)
N4	211.444	15.92	211.427	15.92	0.008	0.000	无 (No)
C1	211.567	15.91	211.547	15.91	0.009	0.000	无 (No)
C2	211.655	16.09	211.640	16.08	0.007	0.062	无 (No)
C3	211.445	15.98	211.434	15.97	0.005	0.063	无 (No)
C4	211.141	16.06	211.129	16.05	0.006	0.062	无 (No)

#### T.2 温度试验 Thermal test

编号 No.	测试前 Pre-test		测试后 After test		质量亏损 Mass loss (%)	电压亏损 Voltage loss (%)	有无泄露, 排气, 解体, 破裂和起火 Whether leakage, venting, disassembly, rupture, fire (Yes/No)
	质量 Mass (g)	电压 Voltage (V)	质量 Mass (g)	电压 Voltage (V)			
N1	211.354	16.07	211.297	15.89	0.027	1.120	无 (No)
N2	211.081	16.05	211.015	15.92	0.031	0.810	无 (No)
N3	211.514	15.93	211.450	15.81	0.030	0.753	无 (No)
N4	211.427	15.92	211.368	15.74	0.028	1.131	无 (No)
C1	211.547	15.91	211.486	15.75	0.029	1.006	无 (No)
C2	211.640	16.08	211.574	15.93	0.031	0.933	无 (No)
C3	211.434	15.97	211.373	15.80	0.029	1.064	无 (No)
C4	211.129	16.05	211.070	15.93	0.028	0.748	无 (No)

T.3 振动 Vibration

编号 No.	测试前 Pre-test		测试后 After test		质量亏损 Mass loss (%)	电压亏损 Voltage loss (%)	有无泄露, 排气, 解体, 破裂和起火 Whether leakage, venting, disassembly, rupture, fire (Yes/No)
	质量 Mass (g)	电压 Voltage (V)	质量 Mass (g)	电压 Voltage (V)			
N1	211.297	15.89	211.291	15.88	0.003	0.063	无 (No)
N2	211.015	15.92	211.011	15.92	0.002	0.000	无 (No)
N3	211.450	15.81	211.445	15.81	0.002	0.000	无 (No)
N4	211.368	15.74	211.361	15.73	0.003	0.064	无 (No)
C1	211.486	15.75	211.480	15.74	0.003	0.063	无 (No)
C2	211.574	15.93	211.571	15.93	0.001	0.000	无 (No)
C3	211.373	15.80	211.370	15.79	0.001	0.063	无 (No)
C4	211.070	15.93	211.066	15.93	0.002	0.000	无 (No)

T.4 冲击 Shock

编号 No.	测试前 Pre-test		测试后 After test		质量亏损 Mass loss (%)	电压亏损 Voltage loss (%)	有无泄露, 排气, 解体, 破裂和起火 Whether leakage, venting, disassembly, rupture, fire (Yes/No)
	质量 Mass (g)	电压 Voltage (V)	质量 Mass (g)	电压 Voltage (V)			
N1	211.291	15.88	211.291	15.88	0.000	0.000	无 (No)
N2	211.011	15.92	211.011	15.92	0.000	0.000	无 (No)
N3	211.445	15.81	211.443	15.81	0.001	0.000	无 (No)
N4	211.361	15.73	211.361	15.73	0.000	0.000	无 (No)
C1	211.480	15.74	211.477	15.74	0.001	0.000	无 (No)
C2	211.571	15.93	211.571	15.93	0.000	0.000	无 (No)
C3	211.370	15.79	211.370	15.79	0.000	0.000	无 (No)
C4	211.066	15.93	211.066	15.92	0.000	0.063	无 (No)

### T.5 外部短路 External short circuit

编号 No.	最高温度 Peak temperature (°C)	有无解体, 破裂, 起火 Whether disassembly, rupture, fire (Yes/No)
N1	57.6	无 (No)
N2	57.8	无 (No)
N3	57.2	无 (No)
N4	57.5	无 (No)
C1	57.9	无 (No)
C2	57.6	无 (No)
C3	57.4	无 (No)
C4	57.7	无 (No)

### T.6 撞击 Impact

编号 No.	测试前电压 Pre-test Voltage (V)	最高温度 Peak temperature (°C)	有无解体, 起火 Whether disassembly, fire (Yes/No)
N9	3.816	128.2	无 (No)
N10	3.817	125.7	无 (No)
N11	3.815	123.6	无 (No)
N12	3.811	127.8	无 (No)
N13	3.818	124.5	无 (No)
C9	3.814	126.6	无 (No)
C10	3.816	128.8	无 (No)
C11	3.813	122.4	无 (No)
C12	3.817	127.3	无 (No)
C13	3.812	126.1	无 (No)

### T.7 过度充电 Overcharge

编号 No.	测试前电压 Pre-test Voltage (V)	有无解体, 起火 Whether disassembly, fire (Yes/No)
N5	16.08	无 (No)
N6	15.94	无 (No)
N7	16.03	无 (No)
N8	15.98	无 (No)
C5	16.09	无 (No)
C6	16.03	无 (No)
C7	16.06	无 (No)
C8	15.92	无 (No)

### T.8 强制放电 Forced discharge

编号 No.	测试前电压 Pre-test Voltage (V)	有无解体, 起火 Whether disassembly, fire (Yes/No)
N14	3.187	无 (No)
N15	3.191	无 (No)
N16	3.184	无 (No)
N17	3.196	无 (No)
N18	3.193	无 (No)
N19	3.201	无 (No)
N20	3.192	无 (No)
N21	3.198	无 (No)
N22	3.189	无 (No)
N23	3.197	无 (No)
C14	3.195	无 (No)
C15	3.199	无 (No)
C16	3.192	无 (No)
C17	3.188	无 (No)
C18	3.194	无 (No)
C19	3.198	无 (No)
C20	3.206	无 (No)
C21	3.201	无 (No)
C22	3.196	无 (No)
C23	3.193	无 (No)

\*\*\*报告结束 End of report\*\*\*