Surface mounted

Concealed

明装型

暗装型

EUROB®



TRACK SOCKET

EUROB®

Company Name: Shanghai Ouben Intelligent Technology Co., Ltd.
Address:No. 2830, Dachuan Road, Huinan Town, Pudong New Area, Shanghai
Customer Service Tell: 400-000-1215
Manufacturer: Zhejiang Ouben Intelligent Technology Co., Ltd.
Address: No. 2435, Yongqiang Road, Shacheng Street, Longwan District, Wenzhou City, Zhejiang Province

有种安心叫家的日常


一个固定的居所，就足以成为一个家了吗?

真正让家成为家的，是那些渺小到被我们忽视的日常，
平淡却安心的日子，琐碎却温暖的生活。
这些点点滴滴的感受，让家有了真真切切的实感。
家是一个安全，柔软，舒适的地方，是生活的重要组成部分。
它像一个茧，拥抱和围绕着你和你的家人。
在这样的家中，您和家人可以享受和分享生活中的一切。
互相给予无条件支持，共同成长。
做一个更好的自己，与家人过上更好的生活。

There is a peace of mind called the daily home

Is a permanent residence enough to be a home?

What really makes a house to home is the routine which we usually ignore it.
These small things make the home has a real feelings.

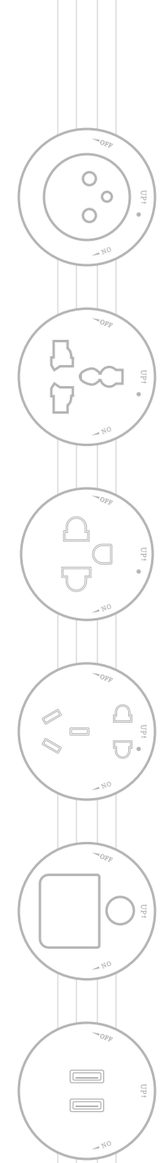

Q1 Concealed

艺术灵感
与科技自然交织

自由搭配，生活更简单一点

Artistic inspiration
Intertwined with technology

Free collocation, life is simpler

轨道名称 Track name	Q1 暗装轨道(右侧接线) Q1 concealed track(Right side wiring)
轨道颜色 Track color	白色、黑色、灰色 White, Black, Grey
安装方式 Installation mode	暗装 Concealed installation
工艺材质 Process material	聚碳酸酯+铜镀镍 Polycarbonate + Copper Nickel Plating
额定功率 Rated power	8000W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	直径80mm / 厚度19mm 长度0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m可定制 Diameter 80mm / Thickness 19mm Length 0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m can be customized



Grey/Concealed instation　　灰色 暗装式


Q1 Concealed

颜值至上

诠释家的时尚感，演绎“美一面”

Minimalism is an attiude
Beauty is the improvement of details

When artistic inspiration and technology are naturally intertwined,
the home becomes uinque

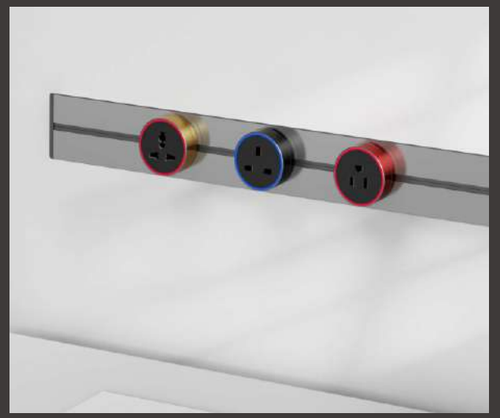





Q1 Surface

轨道插座
凭实力撩动你

插座不够，随时可增加

Rail socket
Stimulate you with strength

Not enough sockets, can be added at any time

轨道名称 Track name	Q1 明装轨道(右侧接线) Q1 Surface mounted track(Right side wiring)
轨道颜色 Track color	白色、黑色、灰色 White, Black, Grey
安装方式 Installation mode	明装 Surface mounted
工艺材质 Process material	聚碳酸酯+铜镀镍 Polycarbonate + Copper Nickel Plating
额定功率 Rated power	8000W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	直径80mm / 厚度19mm 长度0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m可定制 Diameter 80mm / Thickness 19mm Length 0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m can be customized



Grey/Surface mounted　　灰色 明装式

Q1 Surface


全方位接线

轨道单边接线端可实现360°全方位覆盖接线

All-round wiring

The single-side terminal of the track
can realize 360° all-round coverage of wiring



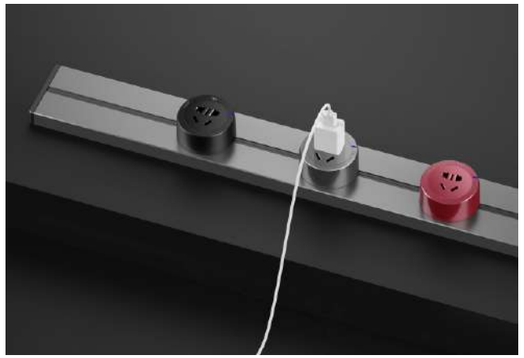



Q2 Concealed

防水防电
安全每一面

家电再多，有“TA”就够了

Waterproof and electricity proof
Safety on every side

No matter how many household appliances
"TA" is enough

轨道名称 Track name	Q2 暗装轨道(左右接线) Q2 concealed track(Left and right wiring)
轨道颜色 Track color	白色、黑色、灰色 White, Black, Grey
安装方式 Installation mode	暗装 Concealed installation
工艺材质 Process material	铝合金磨砂 Aluminum alloy frosting
额定功率 Rated power	8000W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	直径80mm / 厚度19mm 长度0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m可定制 Diameter 80mm / Thickness 19mm Length 0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m can be customized



Grey/Concealed instation　　**灰色 暗装式**



Q2 Concealed

是生活，亦是艺术

精巧优雅，家居用电美学新生派

It's life, it's also art

Sophisticated and elegant, a new school of home electrical aesthetics



Q2 Surface

诠释工业时尚
演绎“美”一面

增添家居美感，提升用电便利性

Interpretation of industrial fashion
Interpretation of the "beauty" side

Add home aesthetics and improve the convenience of electricity consumption

轨道名称 Track name	Q2 明装轨道(左右接线) Q2 surface mounted track(Left and right wiring)
轨道颜色 Track color	白色、黑色、灰色 White, Black, Grey
安装方式 Installation mode	明装 Surface mounted
工艺材质 Process material	铝合金磨砂 Aluminum alloy frosting
额定功率 Rated power	8000W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	直径80mm / 厚度19mm 长度0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m可定制 Diameter 80mm / Thickness 19mm Length 0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m can be customized



White/surface mounted 白色 明装式



Q2 Surface

插座再多也不用愁

大功率随意插，自由搭配选择，家电再多，有“TA”就够了

No need to worry about more sockets

High power can be plugged in at will, no matter how many household appliances, "TA" is enough



Q3 Concealed

不仅懂生活
且懂你所需

大板电源开关，匠心做好每个细节

Not only understand lifeand understand what you need

Large board power switch, ingenuity to do every detail

轨道名称 Track name	Q3 暗装轨道(带总开关) Q3 Concealed track(With master switch)
轨道颜色 Track color	白色、黑色、灰色 White, Black, Grey
安装方式 Installation mode	暗装 Concealed
工艺材质 Process material	PC 喷漆 PC spray paint
额定功率 Rated power	6500W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	直径85mm / 厚度19mm 长度0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m可定制 Diameter 85mm / Thickness 19mm Length 0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m can be customized



White/Concealed 白色 暗装式

Q3 Concealed



灵活取电
安全护航

即用即加，插座跟着电器走

Easy to get electricity safety protection

Just use and add, the socket follows the appliance



Q3 Surface

轻奢简约
时尚家居新搭档

大板电源开关，匠心做好每个细节

Light luxury and simplicity
The new partner of fashion home

Large board power switch, ingenuity to do every detail

轨道名称 Track name	Q3 明装轨道(带总开关) Q3 surface mounted track(With master switch)
轨道颜色 Track color	白色、黑色、灰色 White, Black, Grey
安装方式 Installation mode	明装 Surface mounted
工艺材质 Process material	PC 喷漆 PC spray paint
额定功率 Rated power	6500W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	直径85mm / 厚度19mm 长度0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m可定制 Diameter 85mm / Thickness 19mm Length 0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m can be customized



White/surface mounted　　白色 明装式

Q3 Surface

新颜值 新体验

多电器使用，用电不用等

New look, new experience

Use multiple electrical appliances
No need to wait for electricity





P2 Concealed

精致生活
简约舒心

把美的定义 诠释在产品里

Exquisite life
Simple and comfortable

Interpret the definition of beauty in the product

轨道名称 Track name	P2 暗装轨道(左右可接线) P2 concealed track(Connectable left and right)
轨道颜色 Track color	陨石黑、香槟金、太空银、深空灰 Meteorite black, champagne gold, space silver, deep space ash
安装方式 Installation mode	暗装 Concealed installation
工艺材质 Process material	喷砂铝合金+小阳极氧化 Sandblasting aluminum alloy + small anodizing
额定功率 Rated power	8000W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	直径82mm / 厚度22mm 长度0.3/0.4/0.6/0.8/1.1/1.2/1.5/3m可定制 Diameter 82mm / Thickness 22mm Length 0.3/0.4/0.6/0.8/1.1/1.2/1.5/3m can be customized



Space silver /Concealed installation 太空银 暗装式

P2 Concealed



诠释空间美学
打造品质生活

打破传统墙壁插座布局
兼具现代美与实用性
与不同家装风格皆相得益彰

Interpreting spatial aesthetics
Create a quality life

Break the traditional wall socket layout
Both modern beauty and practicality
Compatible with different home decoration styles



客厅/living room



办公桌/Desk

P2 Surface

是插座
也是墙面艺术品

当实用家居与前沿设计碰撞出艺术火花，
家就会变得别有风情

It's a socket and a wall art

When practical home furnishing and cutting-edge design collide with artistic sparks,
the home will become unique

轨道名称 Track name	P2 明装轨道(左右可接线) P2 surface mounted track(Connectable left and right)
轨道颜色 Track color	陨石黑、香槟金、太空银、深空灰 Meteorite black, champagne gold, space silver, deep space ash
安装方式 Installation mode	明装 Surface mounted
工艺材质 Process material	喷砂铝合金+小阳极氧化 Sandblasting aluminum alloy + small anodizing
额定功率 Rated power	8000W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	直径82mm / 厚度22mm 长度0.3/0.4/0.6/0.8/1.1/1.2/1.5/3m可定制 Diameter 82mm / Thickness 22mm Length 0.3/0.4/0.6/0.8/1.1/1.2/1.5/3m can be customized



Space silver /Surface mounted　　**太空银　明装式**

P2 Surface



诠释空间美学
打造品质生活

打破传统墙壁插座布局
兼具现代美与实用性
与不同家装风格皆相得益彰

Interpreting spatial aesthetics
Create a quality life

Break the traditional wall socket layout
Both modern beauty and practicality
Compatible with different home decoration styles



卧室/Bedroom



厨房/Kitchen

让美成为
你的生活日常

模块有国标、美标、欧标任意选择、任意组合，
更实用更具美感的轨道插座。

Make beauty your daily routine

We have modules with Chinese standard, American standard,
European standard, you can choose any combination.
More practical, more aesthetic



Space silver /Concealed installation　　**太空银　暗装式**

P1 Concealed

轨道名称 Track name	P1 暗装轨道(开关控制) P1 concealed track(Switch control)
轨道颜色 Track color	陨石黑、香槟金、太空银、深空灰 Meteorite black, champagne gold, space silver, deep space ash
安装方式 Installation mode	暗装 Concealed installation
工艺材质 Process material	喷砂铝合金+小阳极氧化 Sandblasting aluminum alloy + small anodizing
额定功率 Rated power	6250W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	直径82mm / 厚度22mm　长度0.3/0.4/0.6/0.8/1.1/1.2/1.5/3m可定制 Diameter 82mm / Thickness 22mm Length 0.3/0.4/0.6/0.8/1.1/1.2/1.5/3m can be customized

极简是一种态度
颜值是细节的提升

当艺术灵感与科技自然交织，家就会变得别具一格。

Minimalism is an attitude
The level of appearance is the improvement of details

When art and technology interweave, homes become unique.

顺时针旋转90° 即通电
反时针旋转则断电

Turn 90 ° clockwise to energize
Turn counterclockwise to power off



Carbon black /Open installation　　**碳灰黑　明装式**

P1 Surface

轨道名称 Track name	P1暗装轨道(开关控制) P1 concealed track(Switch control)
轨道颜色 Track color	陨石黑、香槟金、太空银、深空灰 Meteorite black, champagne gold, space silver, deep space ash
安装方式 Installation mode	明装 Surface mounted
工艺材质 Process material	喷砂铝合金+小阳极氧化 Sandblasting aluminum alloy + small anodizing
额定功率 Rated power	6250W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	直径82mm / 厚度22mm　长度0.3/0.4/0.6/0.8/1.1/1.2/1.5/3m可定制 Diameter 82mm / Thickness 22mm Length 0.3/0.4/0.6/0.8/1.1/1.2/1.5/3m can be customized



卧室/Bedroom



办公桌/Desk



客厅/Living room



办公室/Office

不着痕迹的美

即用即加，模块化设计，灵活快捷。
小巧身材，圆型外形设计，
手感好，易收纳，随时随地方便使用

Add as you use, modular design,
flexible and fast.Small size,
round shape design,Good feel,
easy to store and use anytime, anywhere



自由移动
用电不受限

Move freely
Unlimited electricity

顺时针旋转90°即通电，反时针旋转刚断电
Rotate 90° clockwise to power on, turn counterclockwise to power off

断电状态下，可沿着轨道平行滑行
When the power is off, it can slide in parallel along the track





家里那么多小家电
用轨道插座一条就购了

One track socket is enough for all
small household appliances



打蛋器
Whisk



榨汁机
Juicer



咖啡机
Coffee



烤箱
oven



烧水壶
Kettle



微波炉
Microwave oven



面包机
Bread machine



冰箱
refrigerator





轨道的安全
我们是认真的


小缝隙设计，提前接地结构，
手持金属物直接插入轨道内部也不会造成触电。

We take the safety of track seriously

Small gap design, ground connection structure
No electric shock even holding metal objects directly
into the interior of the track

Carbon black /Open installation　　**碳灰黑　明装式**



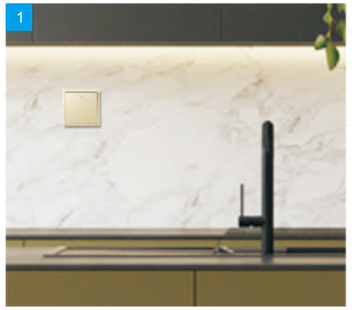


老旧86型开关，外形过时不时尚，
功能单一使用不实用,材质单薄不耐用。

The old 86-type switch has an outdated and unfashionable appearance.
It’s neither multi-functional nor practical.
Its material is vulnerable and not durable.



明装轨道可盖住86底盒，无痕安装更美观。
原先底盒电线接起来就可通用，安装方便、便捷。

The surface-mounted rail can cover the 86 bottom box, looking better with seamless installation.
The original bottom box wire can be just connected for use, featuring easy and convenient installation.

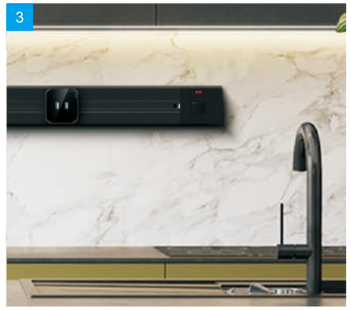

模块化设计，灵活便捷，功能全面，即用即加。

With a modular design, it’s flexible, convenient, full-featured, and ready to use by adding modules.

可覆盖
原有暗盒改造

轻松改装，可覆盖原86、118底盒，
已有开关位置也能直接改造
连接暗盒已有线路即可安装。

Can cover the original cassette for modification

Easy modification, covering the original 86 and 118 bottom boxes,
Existing switch positions can also be retrofitted directly
Connect the original line of the cassette and install it.


轨道内构图
加厚铜件

5根3.5毫米的铜棒相当于8平米的电源线

最大可承受6500W功率

In-track composition
Thickened copper parts


Five 3.5 mm copper rods are equivalent to 8 square meters of power cord
Can withstand up to 6500W power

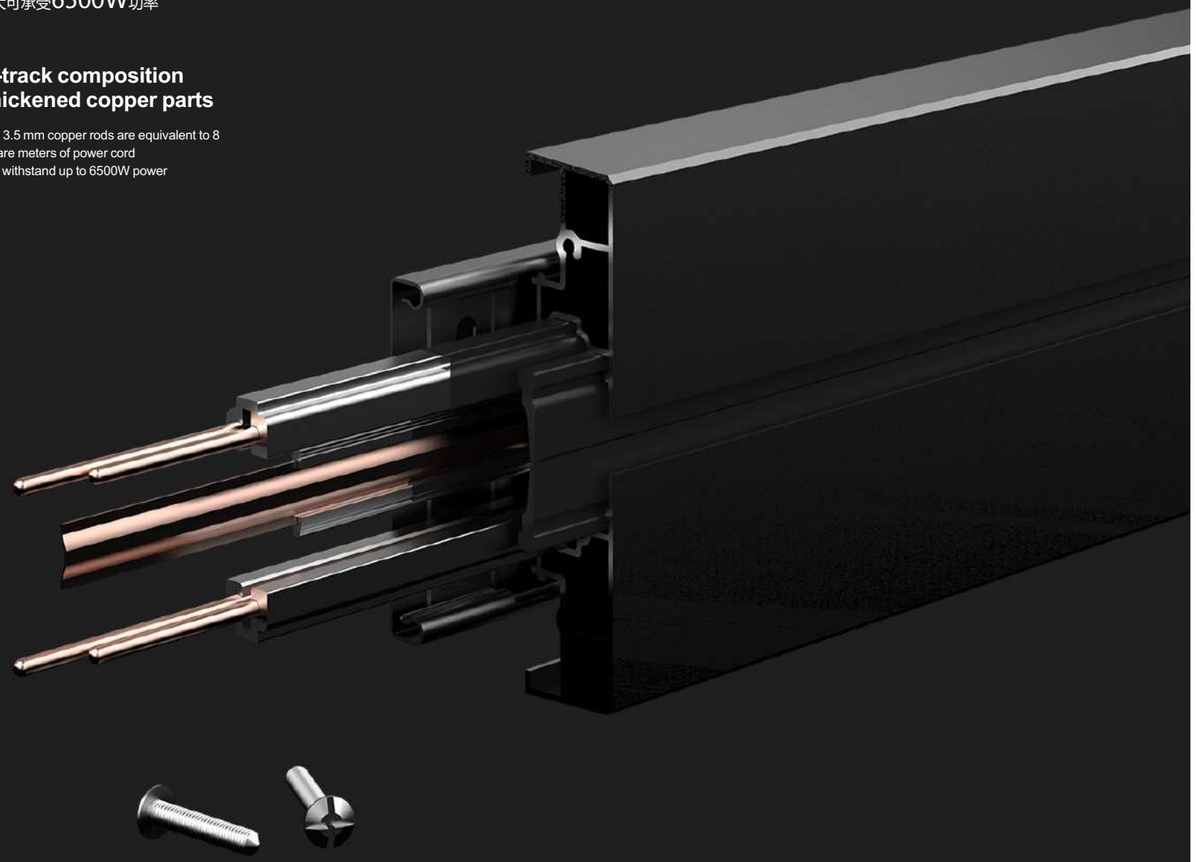


Q1



轨道名称 Track name	Q1 轨道(右侧接线) Q1 track (Right side wiring)
轨道颜色 Track color	白色、黑色、灰色 White, Black, Grey
安装方式 Installation mode	暗装/明装 Concealed / Surface
工艺材质 Process material	聚碳酸酯+铜镀镍 Polycarbonate + Copper Nickel Plating
额定功率 Rated power	8000W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	直径80mm / 厚度19mm 长度0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m可定制 Diameter 80mm / Thickness 19mm Length 0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m can be customized



暗装




明装


Q2



轨道名称 Track name	Q2 轨道(左右接线) Q2 track (left and right can be wired)
轨道颜色 Track color	白色、黑色、灰色 White, Black, Grey
安装方式 Installation mode	暗装/明装 Concealed / Surface
工艺材质 Process material	铝合金磨砂 Aluminum alloy frosting
额定功率 Rated power	8000W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	直径80mm / 厚度19mm 长度0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m可定制 Diameter 80mm / Thickness 19mm Length 0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m can be customized




暗装



明装


Q3

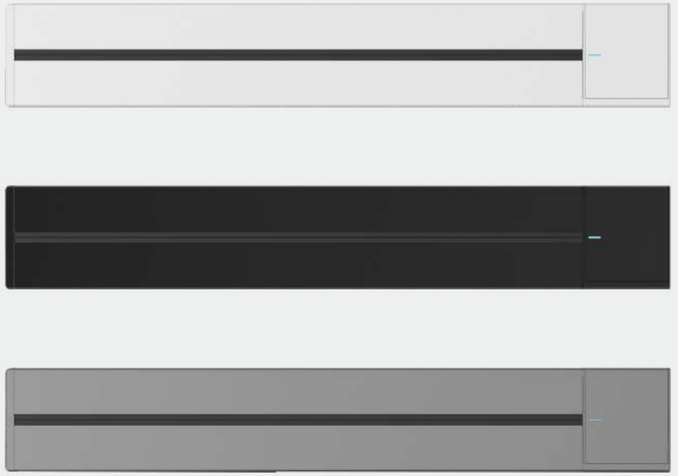

轨道名称 Track name	Q3 轨道(带总开关) Q3 track (with master switch)
轨道颜色 Track color	白色、黑色、灰色 White, Black, Grey
安装方式 Installation mode	暗装/明装 Concealed / Surface
工艺材质 Process material	PC 喷漆 PC spray paint
额定功率 Rated power	6500W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	直径85mm / 厚度19mm 长度0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m可定制 Diameter 85mm / Thickness 19mm Length 0.3/0.4/0.6/0.8/1.0/1.2/1.5/3m can be customized



暗装




明装

P2



轨道名称 Track name	P2 轨道(左右可接线) P2 track (left and right can be wired)
轨道颜色 Track color	陨石黑、香槟金、太空银、深空灰 Meteorite black, champagne gold, space silver, deep space ash
安装方式 Installation mode	暗装/明装 Concealed / Surface
工艺材质 Process material	喷砂铝合金+小阳极氧化 Sandblasting aluminum alloy + small anodizing
额定功率 Rated power	8000W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	直径82mm / 厚度22mm 长度0.3/0.4/0.6/0.8/1.1/1.2/1.5/3m可定制 Diameter 82mm / Thickness 22mm Length 0.3/0.4/0.6/0.8/1.1/1.2/1.5/3m can be customized



暗装




明装

P1



轨道名称 Track name	P1 暗装轨道(开关控制) P1 concealed track(Switch control)
轨道颜色 Track color	陨石黑、香槟金、太空银、深空灰 Meteorite black, champagne gold, space silver, deep space ash
安装方式 Installation mode	暗装/明装 Concealed / Surface
工艺材质 Process material	喷砂铝合金+小阳极氧化 Sandblasting aluminum alloy + small anodizing
额定功率 Rated power	6250W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	直径82mm / 厚度22mm 长度0.3/0.4/0.6/0.8/1.1/1.2/1.5/3m可定制 Diameter 82mm / Thickness 22mm Length 0.3/0.4/0.6/0.8/1.1/1.2/1.5/3m can be customized



暗装



明装

LED环形氛围灯
体验不同氛围

LED ring atmosphere light
Experience different atmosphere



铝环磨砂带氛围灯
Frosted aluminum ring with atmosphere light

产品模块 Product module	轨道插座模块 Track socket module
LED指示灯 LED indicator	红色指示灯、蓝色指示灯 Red indicator light, blue indicator light
模块颜色 Module color	银、金、灰、黑、蓝、红 Silver, gold, gray, black, blue, red
工艺材质 Craft material	铝合金外圈+磨砂面 Aluminum alloy outer ring + matte surface
额定功率 Rated power	2500W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	直径71mm 厚度30mm 71mm diameter and 30mm thickness

方形磨砂亚克力面
Square frosted acrylic surface



产品模块 Product module	轨道插座模块 Track socket module
模块颜色 Module color	银、金、灰、黑、蓝、红 Silver, gold, gray, black, blue, red
工艺材质 Craft material	铝合金外圈+亚克力面 Aluminum alloy outer ring + acrylic surface
额定功率 Rated power	2500W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	68x64x33mm

模块分解图
了解更多

真材实料，耐用耐磨

Module exploded diagram
understand more

Real material, durable and wear-resistant



装饰面 Decorative surface	阻燃材质 Flame retardant material	固板 Solid board	外环 Outer ring	铜件 Copper pieces	接插件基座 Connector base	基座盖 Base cover

铝环亚克力面
Aluminum ring acrylic surface




产品模块 Product module	轨道插座模块 Track socket module
模块颜色 Module color	银、金、灰、黑、蓝、红 Silver, gold, gray, black, blue, red
工艺材质 Craft material	铝合金外圈+亚克力面 Aluminum alloy outer ring + acrylic surface
额定功率 Rated power	2500W
额定电压 Rated voltage	110-250V
外形尺寸 Dimensions	直径71mm 厚度30mm 71mm diameter and 30mm thickness

P2 TRACK



暗装



明装

P2暗装型
P2 Concealed installation

规格/Specifications	宽x厚x长 Width x Thickness x Length	开槽尺寸 Slot size
	8x2x60cm	7.1x2.1x59cm
	8x2x80cm	7.1x2.1x79cm
	8x2x100cm	7.1x2.1x99cm
	8x2x120cm	7.1x2.1x119cm
	8x2x150cm	7.1x2.1x149cm

可特殊定制 /Can customized

P2明装型
P2 Open installation

规格/Specifications	宽x厚x长 Width x Thickness x Length
	8.2x2.2x60cm
	8.2x2.2x80cm
	8.2x2.2x100cm
	8.2x2.2x120cm
	8.2x2.2x150cm

可特殊定制 /Can customized

P1 TRACK



暗装



明装

P1暗装型
P1 Concealed installation

规格/Specifications	宽x厚x长 Width x Thickness x Length	开槽尺寸 Slot size
	8x2.2x60cm	7.1x2.1x59cm
	8x2.2x80cm	7.1x2.1x79cm
	8x2.2x100cm	7.1x2.1x99cm
	8x2.2x120cm	7.1x2.1x119cm
	8x2.2x150cm	7.1x2.1x149cm


可特殊定制 /Can customized

P1明装型
P1 Open installation

规格/Specifications	宽x厚x长 Width x Thickness x Length
	8.2x2.2x60cm
	8.2x2.2x80cm
	8.2x2.2x100cm
	8.2x2.2x120cm
	8.2x2.2x150cm

可特殊定制 /Can customized

Q1 TRACK



暗装



明装

Q1暗装型
Q1 Concealed installation

规格/Specifications	宽x厚x长 Width x Thickness x Length	开槽尺寸 Slot size
	8x1.9x60cm	7.1x1.8x59.5cm
	8x1.9x80cm	7.1x1.8x79.5cm
	8x1.9x100cm	7.1x1.8x99.5cm
	8x1.9x120cm	7.1x1.8x119.5cm
	8x1.9x150cm	7.1x1.8x149.5cm


可特殊定制 /Can customized

Q1明装型
Q1 Open installation


规格/Specifications	宽x厚x长 Width x Thickness x Length
	8.6x1.9x60cm
	8.6x1.9x80cm
	8.6x1.9x100cm
	8.6x1.9x120cm
	8.6x1.9x150cm

可特殊定制 /Can customized

Q2 TRACK



暗装



明装

Q2暗装型
Q2 Concealed installation

规格/Specifications	宽x厚x长 Width x Thickness x Length	开槽尺寸 Slot size
	8x1.9x60cm	7.1x1.8x59.5cm
	8x1.9x80cm	7.1x1.8x79.5cm
	8x1.9x100cm	7.1x1.8x99.5cm
	8x1.9x120cm	7.1x1.8x119.5cm
	8x1.9x150cm	7.1x1.8x149.5cm

可特殊定制 /Can customized

Q2明装型
Q2 Open installation


规格/Specifications	宽x厚x长 Width x Thickness x Length
	8.6x1.9x60cm
	8.6x1.9x80cm
	8.6x1.9x100cm
	8.6x1.9x120cm
	8.6x1.9x150cm

可特殊定制 /Can customized

Q3 TRACK



暗装



明装

Q3暗装型
Q3 Concealed installation

规格/Specifications	宽x厚x长 Width x Thickness x Length	开槽尺寸 Slot size
	8x1.9x60cm	7.1x1.8x59.5cm
	8x1.9x80cm	7.1x1.8x79.5cm
	8x1.9x100cm	7.1x1.8x99.5cm
	8x1.9x120cm	7.1x1.8x119.5cm
	8x1.9x150cm	7.1x1.8x149.5cm

可特殊定制 /Can customized

Q3明装型
Q3 Open installation

规格/Specifications	宽x厚x长 Width x Thickness x Length
	8.6x1.9x60cm
	8.6x1.9x80cm
	8.6x1.9x100cm
	8.6x1.9x120cm
	8.6x1.9x150cm

侧面LED氛围灯
Side LED ambient light

二种侧围灯
Two kinds of side lights



红色LED侧围灯
Red LED side lights



蓝色LED侧围灯
Blue LED side lights

国内插座
Chinese socket



二、三极插座
Two/Three pole socket



双USB插座
Double USB sockets



二、三极插座
Two/Three pole socket



双USB插座
Double USB sockets



二、三极插座
Two/Three pole socket



双USB插座
Double USB sockets

国际插座/功能模块
International socket /Function module



多功能插座
Multi-socket



13A方角插座
13A square socke



多功能插座
Multi-socket



13A方角插座
13A square socke

铝环磨砂带氛围灯
Frosted aluminum ring with atmosphere light

太空银 silver　绚丽红 Red　宝石蓝 blue　深空灰 grey　香槟金 gold　摩卡黑 black

二种指示灯
Two kinds of indicators



红色LED环形灯
Red LED ring light



蓝色LED环形灯
Blue LED ring light

国内插座
Chinese socket



16A空调插座
16A AC SOCKET



二、三极插座
Two/Three pole socket



二、三极插座
Two/Three pole socket



双USB插座
Double USB socket

国际插座/功能模块
International socket /Function module



多功能插座
Multi-socket



13A方角插座
13A square socke



美标三极多功能插座
American three pole multi-socket



美标三极扁插座
American three pole socket



德标插座
Germany socket



法标插座
French socket

铝环亚克力面/方形磨砂亚克力面
Aluminum ring acrylic surface/Square frosted acrylic surface

太空银 silver　绚丽红 Red　宝石蓝 blue　深空灰 grey　香槟金 gold　摩卡黑 black

国内插座
Chinese socket



16A空调插座
16A AC SOCKET



二、三极插座
Two/Three pole socket



二、三极插座
Two/Three pole socket



双USB插座
Double USB socket

国际插座/功能模块
International socket /Function module



多功能插座
Multi-socket



13A方角插座
13A square socke



美标三极多功能插座
American three pole multi-socket



美标三极扁插座
American three pole socket



德标插座
Germany socket



法标插座
French socket

国内插座
Chinese socket



16A空调插座
16A AC SOCKET



二、三极插座
Two/Three pole socket



二、三极插座
Two/Three pole socket



双USB插座
Double USB socket

国际插座/功能模块
International socket /Function module



多功能插座
Multi-socket



13A方角插座
13A square socke



美标三极多功能插座
American three pole multi-socket



美标三极扁插座
American three pole socket



德标插座
Germany socket



法标插座
French socket

Q系列轨道安装方式 /Q series track installation mode

明装型
Open installation




❶ 识别装线位置，根据位置画好平行线(轨道不分左右上下)

Identify the installation position, draw parallel according to the positionLine (the track is not divided into left, right,up and down)




❷ 根据画好的线，按上沿对齐，做好固定螺丝记号

According to the drawn line, press the upper edge to align, and make the fixing screw mark




❸ 根据记号打出膨胀螺丝孔位

Punch out the expansion screw holes according to the marks



❹ 上好螺丝拧紧

Tighten the screws



❺ 电源接线端处有螺丝刀符号，根据提示位置翘起盖板

There is a screwdriver symbol at the power terminal, lift the cover according to the prompt position

三种接方式
Three kinds Connection method

方式一
Method one



❶ 接入对应的接线端

Connect to the corresponding terminal



❷ 电线引出盖板出线口，盖上盖板

Wire lead out of the cover plate outlet, cover the cover plate



❸ 接好轨道与预留的导线，对准卡扣卡上，安装完成

Connect the track and the reserved wire, align it with the buckle card, and the installation is complete

方式二
Way two




❶ 接入对应的接线端，电线沿轨道槽内塞好

Connect to the corresponding terminal, wire along the trackWell plugged



❷ 盖上接线端盖板

Attach the terminal cover



❸ 接好轨道与预留的导线，对准卡扣卡上，安装完成

Connect the track and the reserved wire, align it with the buckle card, and the installation is complete

方式三
Way three



❶ 侧边盖圆孔轻轻敲开，引入电线，接入对应的接线端

Tap the round hole on the side cover gently to introduce the wire,Connect to the corresponding terminal



❷ 盖上接线端盖板

Attach the terminal cover



❸ 对准卡扣卡上，安装完成

Align the buckle card, the installation is complete



❹ 引出来的明线直接插上插座取电

Directly plug the lead out of the open wire into the socket to get electricity

P系列轨道安装方式 /P series track installation mode

暗装型
Concealed installation



❶ 确定好安装位置，根据轨道尺寸开好相应的槽，用水泥把开好槽的表面铺平整。

Determine the installation location, make the appropriate groove according to the size of the track, and smooth the surface of the groove with cement.




❷ 槽内铺平整后，放上轨道标记好打孔位置。

After smooth the groove, mark the hole



❸ 在2个标记打孔位依次打孔。将膨胀螺丝保护套塞入墙体打孔内。

Punch holes in each of the two marked positions, Insert the expansion screw protective sleeve into the hole of the wall




❹ 去掉轨道接线盒盖子。

Remove the track terminal box lid



❺ 按接线示意图接线。

Follow the wiring diagram for wiring



❻ 装回接线盒盖子(注:需将敲落孔去掉)。将电线整理进轨道凹槽，以便安装固定。

Put back the terminal box lid(note:remove the knock hole), arrange the wire into the groove of the track for mounting and securing



❼ 将轨道靠在墙上，对准孔位用螺丝将轨道固定在墙上。

Place the track against the wall and screw the track to the wall at the hole position



❽ 装上模块，完成安装。(此处对应轨道卡槽)

Install the module to finish the installation. (Here corresponds to the slot)

明装型
Open installation



❶ 确定安装位置，标记打孔位。

Determine the installation location，mark the hole



❷ 在2个标记打孔位依次打孔。将膨胀螺丝保护套塞入墙体打孔内。

Punch holes in each of the two marked positions, Insert the expansion screw protective sleeve into the hole of the wall




❸ 去掉轨道接线盒盖子。

Remove the track terminal box lid



❹ 按接线示意图接线。

Follow the wiring diagram for wiring



❺ 装回接线盒盖子(注:需将敲落孔去掉)。将电线整理进轨道凹槽，以便安装固定。

Put back the terminal box lid(note:remove the knock hole), arrange the wire into the groove of the track for mounting and securing



❻ 将轨道靠在墙上，对准孔位用螺丝将轨道固定在墙上。

Place the track against the wall and screw the track to the wall at the hole position



❼ 装上模块，完成安装。(此处对应轨道卡槽)

Install the module to finish the installation. (Here corresponds to the slot)